

Greenhouse Gas Emissions 1990-2024

National Inventory Document



Colophon

Title: Greenhouse Gas Emissions 1990-2024, National Inventory Document

Summary – sammendrag:

Norwegian greenhouse gas emission 1990-2024, report to the UN

Executive institution:

Norwegian Environment Agency

Author(s):

Norwegian Environment Agency

Ingeborg Rønning (editor), Ingvild Byskov, Britta Maria Hoem, Marte Ragnhild Owren, Julien Jabot, Hans H. Kolshus, Elise Grieg, Jakob Sandven, Lucrezia Gorini.

Statistics Norway

Trude Melby Bothner, Mona Irene Andersen Engedal, Eirik Knutsen, Lene Skyrudsmoen, Berit Storbråten, Evan Hart.

Norwegian Institute of Bioeconomy Research

Ana Aza, Christian W. Mohr, Gry Alfredsén, Johannes Breidenbach, Lise Dalsgaard, Rune Eriksen, Katharina Hobrak, Christophe Moni, Gunnhild Sjøgaard.

Contact person in the Norwegian Environment Agency: Ingeborg Rønning

M-no:3138 **Year:** 2026 **Pages:** 654

Publisher: Norwegian Environment Agency

Emneord: Rapportering, klimagasser, utslipp og opptak

Subject words: NID, greenhouse gases, emissions, removals

Preface

This document is Norway's National Inventory Document (NID) for the year 2026 and covers the inventory for the years 1990-2024. It has been prepared in accordance with the modalities, procedures and guidelines in the annex of decision 18/CMA.1 and is structured in line with the annex of decision 5/CMA.3. The reporting of Norway's greenhouse gas inventory also includes the associated Common Reporting Tables (CRT). The reporting of this NID and the CRT tables serve as Norway's reporting both under the Paris Agreement and under the Convention.

The methodologies used in the calculation of emissions are consistent with the 2006 IPCC Guidelines for National Greenhouse Gas Inventories supplemented by aspects of the 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories (2019 IPCC Refinement), and the 2013 Supplement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories: Wetlands (IPCC 2013 Wetlands Supplement). As recommended by the IPCC Guidelines, country specific methods have been used where appropriate.

The Norwegian Environment Agency, a directorate under the Norwegian Ministry of Climate and Environment, is responsible for the reporting. Statistics Norway has been the principal contributor while the Norwegian Institute of Bioeconomy Research is responsible for all information regarding Land Use, Land Use Change and Forestry.

Oslo, March 2026

Anna von Streng Velken
Director, Department of Climate
Norwegian Environment Agency

Executive Summary.....	1
ES.1 Background information on greenhouse gas (GHG) inventories and climate change....	1
ES.2 Summary of trends related to national emissions and removals	1
ES.3 Overview of source and sink category emission estimates and trends	2
ES.4 Other information	9
ES.5 Key category analysis	10
ES.6 Improvements introduced.....	10
 1. National circumstances, institutional arrangements, and cross-cutting information.....	1-1
1.1 Background information on GHG inventories and climate change.....	1-1
1.2 A description of the national circumstances and institutional arrangements.....	1-2
1.2.1 National entity or national focal point	1-2
1.2.2 Inventory preparation process.....	1-3
1.2.3 Archiving of information	1-10
1.2.4 Processes for official consideration and approval of inventory	1-15
1.3 Brief general description of methodologies (including tiers used) and data sources used	1-15
1.3.1 The main emission model.....	1-15
1.3.2 The LULUCF model.....	1-17
1.3.3 Data sources	1-18
1.3.4 Recalculations	1-20
1.4 Brief description of key categories.....	1-21
1.5 Brief general description of QA/QC plan and implementation	1-26
1.6 General uncertainty assessment, including data pertaining to the overall uncertainty of inventory totals	1-27
1.6.1 Approach 1 uncertainty analysis.....	1-27
1.6.2 Approach 2 uncertainty analysis.....	1-28
1.7 General assessment of completeness.....	1-32
1.7.1 Information on completeness (including information on non-reported categories or any methodological or data gaps in the inventory)	1-32
1.7.2 Description of insignificant categories, if applicable	1-32
1.7.3 Total aggregate emissions considered insignificant, if applicable	1-34
1.8 Metrics.....	1-34
 2. Trends in Greenhouse Gas Emissions and removals.....	2-1
2.1 Description of emission and removal trends for aggregated GHG emissions and removals	2-1
2.2 Description of emission and removal trends by sector and gas.....	2-4

2.2.1	Trends by sector	2-4
2.2.2	Trends by gas.....	2-21
2.2.3	Emission trends for indirect greenhouse gases and SO ₂	2-36
3.	Energy (CRT sector 1).....	3-1
3.1	Overview of the sector	3-1
3.1.1	Sources and trends	3-1
3.1.2	Key source categories.....	3-5
3.1.3	Emission allocation	3-5
3.1.4	Mode of presentation	3-6
3.2	Combustion (CRT 1A)	3-7
3.2.1	Comparison of the sectoral approach with the reference approach	3-26
3.2.2	International bunker fuels	3-31
3.2.3	Feedstocks and non-energy use of fuels	3-33
3.2.4	Energy industries, 1A1	3-39
3.2.5	Manufacturing industries and construction, 1A2	3-49
3.2.6	Transport – Civil Aviation, 1A3a.....	3-54
3.2.7	Transport – Road Transportation, 1A3b.....	3-57
3.2.8	Transport – Railways, 1A3c	3-70
3.2.9	Transport – Navigation, 1A3d	3-72
3.2.10	Transport – Other transportation, 1A3e	3-77
3.2.11	Motorized equipment (incl. in 1A2, 1A4 and 1A5)	3-77
3.2.12	Other Sectors, 1A4	3-80
3.2.13	Other emissions from energy combustion, 1A5	3-84
3.3	Fugitive emissions from solid fuels and oil and natural gas and other emissions from energy production (CRT 1.B)	3-87
3.3.1	Fugitive Emissions from Coal Mining and Handling, 1B1	3-87
3.3.2	Fugitive Emissions from Oil and Natural Gas – 1B2	3-93
3.3.3	Fugitive Emissions from Oil, 1.B.2.a.....	3-110
3.3.4	Fugitive Emissions from Natural Gas, 1.B.2.b	3-115
3.3.5	Fugitive Emissions from Venting, 1.B.2.c Venting	3-117
3.3.6	Fugitive Emissions from Flaring, 1.B.2.c Flaring	3-118
3.4	CO ₂ capture and storage at oil and gas production fields, 1C.....	3-124
3.4.1	Category description.....	3-124
3.4.2	CO ₂ capture and storage at the gas-condensate field Sleipner Vest	3-125
3.4.3	CO ₂ capture and storage at Hammerfest LNG/Snøhvit	3-129
4.	Industrial processes and product use (CRT sector 2).....	4-1

4.1	Overview of the sector	4-1
4.2	Mineral industry – 2A	4-3
4.2.1	Cement Production, 2A1	4-5
4.2.2	Lime Production, 2A2	4-7
4.2.3	Glass production, 2A3.....	4-9
4.2.4	Ceramics, 2A4a	4-10
4.2.5	Other uses of soda ash, 2A4b.....	4-11
4.2.6	Non-metallurgical magnesium production, 2A4c	4-13
4.2.7	Other process use of carbonates, 2A4d	4-14
4.3	Chemical industry – 2B	4-16
4.3.1	Ammonia Production, 2B1	4-18
4.3.2	Production of Nitric Acid, 2B2.....	4-22
4.3.3	Silicon carbide, 2B5a.....	4-24
4.3.4	Calcium carbide, 2B5b	4-27
4.3.5	Titanium dioxide production, 2B6	4-27
4.3.6	Methanol, 2B8a	4-29
4.3.7	Ethylene, 2B8b	4-31
4.3.8	Other, plastic, 2B8g.....	4-33
4.3.9	Other, production of fertilizers, 2B10.....	4-35
4.4	Metal industry – 2C.....	4-36
4.4.1	Steel, 2C1a.....	4-37
4.4.2	Production of Ferroalloys, 2C2	4-38
4.4.3	Aluminium production, 2C3.....	4-43
4.4.4	Magnesium production, 2C4	4-50
4.4.5	Zinc production, 2C6.....	4-52
4.4.6	Anode production, 2C7i.....	4-53
4.4.7	Nickel production, 2C7ii	4-54
4.5	Non-energy products from fuels and solvent use – 2D	4-54
4.5.1	Lubricant use, 2D1	4-56
4.5.2	Paraffin wax use, 2D2	4-61
4.5.3	Solvent use, 2D3a	4-63
4.5.4	Road paving with asphalt, 2D3b.....	4-68
4.5.5	Other, 2D3d (use of urea as a reductant)	4-69
4.6	Electronics industry – 2E.....	4-70
4.6.1	Integrated circuit or semiconductor, 2E1	4-71
4.7	Product uses as substitutes for ODS – 2F	4-72
4.7.1	Refrigeration and air conditioning, 2F1	4-74
4.7.2	Other applications, 2F6	4-86

4.8	Other product manufacture and use – 2G	4-88
4.8.1	Electric equipment, 2G1	4-89
4.8.2	SF ₆ and PFC from other product use, 2G2	4-92
4.8.3	Use of N ₂ O in anaesthesia, 2G3a	4-94
4.8.4	Propellant for pressure and aerosol products, 2G3b.1.	4-94
4.8.5	Other use of N ₂ O, 2G3b.2	4-95
4.9	Other – 2H	4-96
4.9.1	Pulp and paper, 2H1	4-97
4.9.2	Food and beverages industry, 2H2	4-98
5.	Agriculture (CRT sector 3)	5-1
5.1	Overview of sector.....	5-1
5.1.1	Livestock population characterisation	5-3
5.1.2	Nitrogen in animal manure as basis for emission estimates.....	5-8
5.1.3	Sector specific QA/QC and verification.....	5-11
5.2	Emissions from enteric fermentation in domestic livestock - 3A.....	5-11
5.2.1	Category description.....	5-11
5.2.2	Uncertainty assessment and time-series consistency	5-21
5.2.3	Category-specific QA/QC and verification.....	5-21
5.2.4	Category-specific recalculations.....	5-22
5.2.5	Category-specific planned improvements	5-22
5.3	Emissions from manure management - 3B	5-22
5.3.1	Category description.....	5-22
5.3.2	Uncertainty assessment and time-series consistency	5-43
5.3.3	Category-specific QA/QC and verification.....	5-44
5.3.4	Category-specific recalculations.....	5-45
5.3.5	Category-specific planned improvements	5-45
5.4	Direct and indirect N ₂ O emissions from agricultural soils - 3D.....	5-45
5.4.1	Category description.....	5-45
5.4.2	Uncertainty assessment and time-series consistency	5-61
5.4.3	Category-specific QA/QC and verification.....	5-62
5.4.4	Category-specific recalculations.....	5-63
5.4.5	Category-specific planned improvements	5-63
5.5	Emissions from field burning of agricultural residues – 3F	5-63
5.5.1	Category description.....	5-63
5.5.2	Methodological issues	5-63
5.5.3	Activity data.....	5-64
5.5.4	Uncertainty assessment and time-series consistency	5-64

5.5.5	Category-specific QA/QC and verification.....	5-64
5.5.6	Category-specific recalculations.....	5-64
5.5.7	Category-specific planned improvements.....	5-64
5.6	Emissions from liming – 3G.....	5-65
5.6.1	Category description.....	5-65
5.6.2	Methodological issues	5-65
5.6.3	Activity data.....	5-65
5.6.4	Emission factors	5-65
5.6.5	Uncertainty assessment and time-series consistency	5-65
5.6.6	Category-specific recalculations.....	5-65
5.6.7	Category-specific planned improvements.....	5-66
5.7	Emissions from urea application – 3H	5-66
5.7.1	Category description.....	5-66
5.7.2	Uncertainty assessment and time-series consistency	5-66
5.7.3	Category-specific recalculations.....	5-66
5.7.4	Category-specific planned improvements.....	5-67
6.	Land-use, land-use change, and forestry (CRT sector 4)	6-1
6.1	Sector Overview	6-1
6.1.1	Emissions and removals in the latest reporting year.....	6-1
6.1.2	Trends.....	6-8
6.1.3	Activity data.....	6-15
6.1.4	Uncertainties.....	6-19
6.1.5	Key categories.....	6-19
6.1.6	Quality assurance and quality control (QA/QC) for LULUCF	6-19
6.2	Land-use definitions and classification system	6-19
6.2.1	Land-use definitions	6-19
6.2.2	Consistency in areas and reporting categories.....	6-24
6.2.3	Sink/source categories	6-25
6.3	Land area representation and the National Forest Inventory	6-28
6.3.1	Current NFI design	6-28
6.3.2	Land stratification to climate	6-32
6.3.3	Land stratification to soil classes	6-33
6.3.4	Changes in the NFI design.....	6-37
6.3.5	Interpolation and extrapolation for the area and living biomass estimates	6-39
6.3.6	Backcasting correction of the area and estimates	6-44
6.3.7	Uncertainties in areas and living biomass estimates	6-45
6.3.8	QA/QC for the NFI data	6-47

6.4	Forest land – 4A	6-48
6.4.1	Forest land remaining forest land, 4A1	6-48
6.4.2	Land converted to forest land, 4A2	6-81
6.5	Cropland – 4B.....	6-89
6.5.1	Cropland remaining cropland, 4B1	6-89
6.5.2	Land converted to cropland, 4B2.....	6-95
6.6	Grassland – 4C	6-99
6.6.1	Grassland remaining grassland, 4C1	6-102
6.6.2	Land converted to grassland, 4C2	6-112
6.7	Wetlands – 4D	6-116
6.7.1	Wetlands remaining wetlands, 4D1	6-117
6.7.2	Land converted to wetlands, 4D2	6-121
6.8	Settlements – 4E	6-125
6.8.1	Settlements remaining settlements, 4E1	6-127
6.8.2	Land converted to settlements, 4E2	6-129
6.9	Other land – 4F.....	6-136
6.9.1	Other land remaining other land, 4F1	6-136
6.9.2	Land converted to other land, 4F2.....	6-136
6.9.3	Methodological issues	6-136
6.9.4	Uncertainties and time-series consistency.....	6-136
6.9.5	QA/QC and verification.....	6-136
6.9.6	Recalculations.....	6-136
6.9.7	Planned improvements	6-136
6.10	Harvested wood products – 4G	6-137
6.10.1	Methodological issues	6-138
6.10.2	Uncertainties and time-series consistency.....	6-139
6.10.3	QA/QC and verification.....	6-139
6.10.4	Recalculations.....	6-139
6.10.5	Planned improvements	6-140
6.11	Direct and Indirect N ₂ O emissions from fertilizers – 4(I).....	6-140
6.11.1	Inorganic fertilizer on forest land	6-141
6.11.2	Organic fertilizer on settlements	6-145
6.11.3	Uncertainties.....	6-147
6.11.4	QA/QC and verification.....	6-147
6.11.5	Recalculations.....	6-147
6.11.6	Planned improvements	6-147
6.12	Emissions and removals from drainage, rewetting, and other management of soils – 4(II)	6-147

6.12.1	N ₂ O emissions from drainage of organic soils.....	6-148
6.12.2	CH ₄ emissions from drainage of organic soils	6-149
6.12.3	Uncertainties.....	6-151
6.12.4	QA/QC and verification.....	6-151
6.12.5	Recalculations	6-151
6.12.6	Planned improvements	6-151
6.13	Direct and Indirect N ₂ O emissions from nitrogen mineralization and immobilization – 4(III)	6-151
6.13.1	Direct emissions.....	6-152
6.13.2	Indirect emissions	6-153
6.13.3	Uncertainties.....	6-154
6.13.4	QA/QC and verification.....	6-154
6.13.5	Recalculations	6-154
6.13.6	Planned improvements	6-154
6.14	Biomass Burning – 4(IV).....	6-154
6.14.1	Wildfires.....	6-155
6.14.2	Controlled Burning.....	6-157
6.14.3	Uncertainties.....	6-158
6.14.4	Recalculations	6-158
6.14.5	Planned improvements	6-158
7.	Waste (CRT sector 5)	7-1
7.1	Overview of the sector	7-1
7.2	Anaerobic managed waste disposal sites, 5A1a	7-2
7.2.1	Category description.....	7-2
7.2.2	Methodological issues	7-4
7.2.3	Activity data.....	7-5
7.2.4	Emission factors	7-9
7.2.5	Uncertainties and time-series consistency	7-9
7.2.6	Source specific QA/QC and verification.....	7-10
7.2.7	Recalculations	7-10
7.2.8	Planned improvements	7-10
7.3	Unmanaged Waste Disposal Sites – 5A2	7-10
7.4	Composting and Anaerobic digestion of organic waste – 5B1 and 5B2	7-11
7.4.1	Category description.....	7-11
7.4.2	Methodological issues	7-11
7.4.3	Activity data.....	7-13
7.4.4	Emission factors	7-16

7.4.5	Uncertainties and time-series consistency	7-17
7.4.6	Source specific QA/QC and verification	7-17
7.4.7	Recalculations	7-17
7.4.8	Planned improvements	7-17
7.5	Waste incineration – 5C	7-17
7.5.1	Category description	7-17
7.5.2	Methodological issues	7-18
7.5.3	Activity data	7-19
7.5.4	Emission factors	7-22
7.5.5	Uncertainties and time-series consistency	7-23
7.5.6	Source specific QA/QC and verification	7-23
7.5.7	Recalculations	7-24
7.5.8	Planned improvements	7-24
7.6	Wastewater treatment and discharge – 5D	7-24
7.6.1	Overview	7-24
7.6.2	Methodological issues	7-26
7.6.3	Activity data	7-28
7.6.4	Emission factors	7-33
7.6.5	Uncertainties and time-series consistency	7-35
7.6.6	Source specific QA/QC and verification	7-35
7.6.7	Recalculations	7-35
7.6.8	Planned improvements	7-35
7.7	Other emissions sources from the waste sector – 5E	7-35
7.7.1	Description	7-35
7.7.2	Recalculations	7-36
7.7.3	Planned improvements	7-36
8.	Other	8-1
9.	Indirect carbon dioxide and nitrous oxide emissions	9-1
9.1	Description of sources of indirect emissions in the GHG inventory	9-1
9.1.1	Indirect carbon dioxide emissions	9-1
9.1.2	Indirect nitrous oxide emissions	9-2
9.2	Methodological issues	9-2
9.2.1	Methodological issues for indirect carbon dioxide emissions	9-2
9.2.2	Methodological issues for indirect nitrous oxide emissions	9-3
9.3	Uncertainty assessment and time-series consistency	9-3
9.4	Category-specific QA/QC and verification	9-3

9.5	Category-specific recalculations	9-4
9.6	Category-specific planned improvements	9-4
10.	Recalculations and improvements	10-1
10.1	Explanations and justifications for recalculations, including in response to the review process.....	10-1
10.1.1	Specific description of the recalculations	10-1
10.2	Implications for emission and removal levels	10-20
10.3	Implications for emission and removal trends, including time-series consistency	10-34
10.4	Areas of improvement and/or capacity building in response to the review process	10-36

Executive Summary

ES.1 Background information on greenhouse gas (GHG) inventories and climate change

This document is Norway's National Inventory Document (NID) for the year 2026 and covers the inventory for the years 1990-2024. It has been prepared in accordance with the modalities, procedures and guidelines in the annex of decision 18/CMA.1 and is structured in line with the annex of decision 5/CMA.3. The reporting of Norway's greenhouse gas inventory also includes the associated Common Reporting Tables (CRT). The reporting of this NID and the CRT tables serve as Norway's reporting both under the Paris Agreement and under the Convention.

The methodologies used in the calculation of emissions are consistent with the 2006 IPCC Guidelines for National Greenhouse Gas Inventories supplemented by aspects of the 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories (IPCC 2019), and the 2013 Supplement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories: Wetlands (IPCC 2014). As recommended by the IPCC Guidelines, country specific methods have been used where appropriate.

Emissions of the following greenhouse gases are covered in this report: carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O), perfluorocarbons (PFCs), hydrofluorocarbons (HFCs) and sulphur hexafluoride (SF₆). Norway does not have any emissions of nitrogen trifluoride (NF₃) to report. In addition, the inventory includes calculations of emissions of the precursors NO_x, NMVOC, and CO, as well as SO₂. Indirect CO₂ emissions originating from the fossil part of CH₄ and NMVOC are calculated and reported.

Aggregated emissions and removals of greenhouse gases expressed in CO₂ equivalents are also reported. We have used Global Warming Potentials (GWP) calculated on a 100-year time horizon, as provided by the IPCC in the Fifth Assessment Report.

ES.2 Summary of trends related to national emissions and removals

In 2024, total greenhouse gas (GHG) emissions in Norway were 44.6 million tonnes of carbon dioxide equivalents, which is a decrease of 1.9 million tonnes compared to 2023. Emissions reached their peak at 56.4 million tonnes in 2007. They have since decreased by 20% and were 6.6 million tonnes, or 13%, lower in 2024 than in 1990.

The net GHG emissions, including all sources and sinks, were 29.2 million tonnes of CO₂ equivalents in 2024, a decrease of 29% since 1990. The net GHG emissions, including all

sources and sinks as well as indirect CO₂, were 29.0 million tonnes of CO₂ equivalents in 2024, a 28% decrease since 1990. This is due to the decline in emissions described above.

The total net removal from the LULUCF sector was 15.5 million tonnes CO₂ equivalents in 2024. The main contributor to the net removals in the LULUCF sector was forest land with 19 million tonnes CO₂ equivalents. On the other hand, there were net emissions from cropland (2.4 million tonnes CO₂ equivalents), and settlements (1.3 million tonnes CO₂ equivalents).

In 2024, CO₂ contributed to 83% of the total emission figures, while methane and nitrous oxide contributed to 10% and 5%, respectively. PFCs, HFCs and SF₆ together accounted for 2% of the total GHG emissions.

ES.3 Overview of source and sink category emission estimates and trends

Figure ES.1 shows the overall trend in the total emissions by gas for the period 1990-2024. The most important sector in Norway, with regards to the emissions of greenhouse gases (GHG), is the energy sector, accounting for 68% of the total Norwegian emissions. The major sources of emissions within the energy sector are oil and gas extraction and transport.

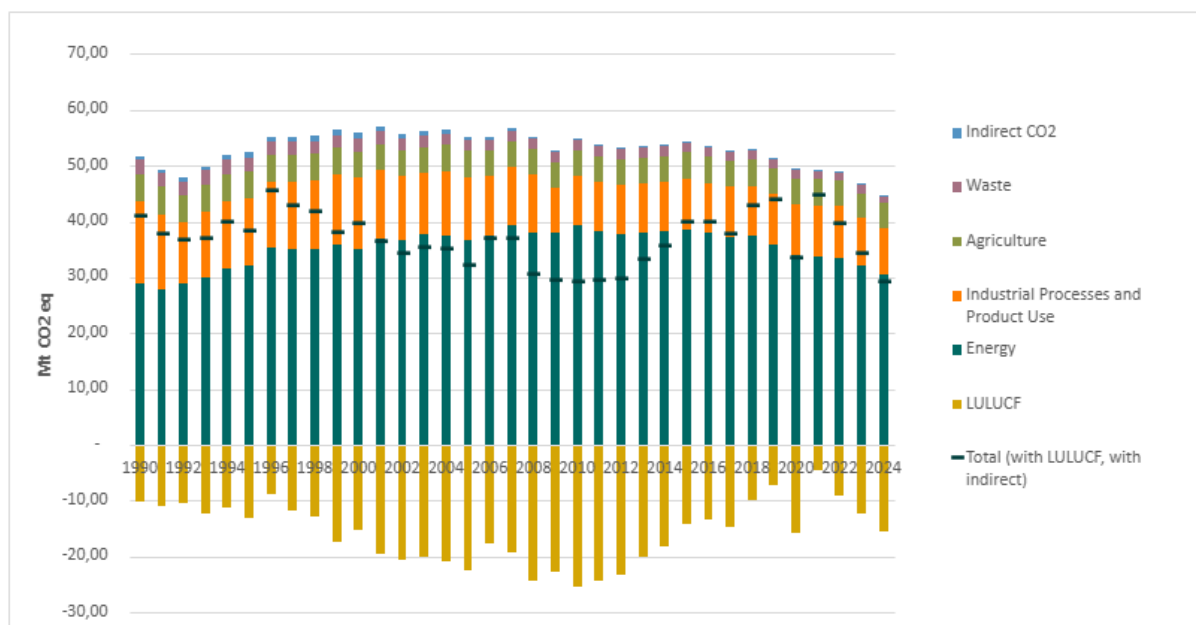


Figure ES.1: Total emissions of greenhouse gases by sources, and removals from LULUCF in Norway, 1990-2024 (Mtonnes CO₂ equivalents). Source: Statistics Norway/Norwegian Environment Agency/Norwegian Institute of Bioeconomy Research.

Figure ES.3 shows the percentage change in emissions of greenhouse gases from 1990 to 2024 for the various IPCC sectors, compared to emissions in 1990. The development for each of the sectors since 1990 with regards to greenhouse gas emissions, and the most important sources, are described briefly in the following.

Norway has experienced economic growth since 1990. In addition, the offshore petroleum sector has expanded significantly. Together this has resulted in higher CO₂ emissions from energy use, both in energy industries and transport. Looking at the overall trend from 1990 to 2024, emissions from the energy sector increased by 7%.

Emissions from transport showed an overall increase of 14% from 1990 to 2024. The share of transport in the total GHG emissions has increased from 19% in 1990 to 25% in 2024. Road transportation accounted for 66% of emissions from the transport sub-sector, while emissions from navigation and civil aviation accounted for 24% and 9%, respectively. Since most railways are electrified in Norway, emissions of GHG from this source are insignificant.

The Industrial processes and other product use sector contributed to 19% of the total national emissions of greenhouse gases in 2024. Production of metals and chemicals are the main sources of process-related industrial emissions of both CO₂ and other greenhouse gases such as N₂O (fertilizer production) and PFCs (aluminium production). Between 1990 and 2024, emissions from industrial processes and other product use decreased by 43%. This is mainly due to reduced PFC emissions from the production of aluminium and SF₆ from the production of magnesium.

The agricultural sector contributed to 10% of the total emissions of greenhouse gases in 2024, with its 4.4 million tonnes CO₂ equivalents. Emissions from agriculture remained stable between 2023 and 2024 and decreased by 10% between 1990 and 2024. The dominant sources of GHGs are enteric fermentation (CH₄) from domestic animals and agricultural soils (N₂O). These sources contributed about 51% and 33% to the sector's emissions, respectively.

In 2024, the LULUCF sector recorded a net removal of 15.5 million tonnes CO₂ equivalents, corresponding to approximately 35% of Norway's greenhouse gas emissions from all other sectors combined. Forest land, harvested wood products, and grasslands contributed to net removals (19.5 million tonnes CO₂ equivalents), while cropland, settlements and wetlands together emitted about 4 million tonnes of CO₂ equivalents. The forest carbon stock has increased over several decades as a result of active forest management implemented after the Second World War. Large areas of forests established during that period entered a phase of strong growth in recent years, leading to substantial biomass accumulation. However, a significant share of these forests is now reaching maturity. As forests approach biological maturity, growth rates decline. Natural mortality has also increased in recent years, both as a result of aging forests and due to abiotic and biotic disturbances such as drought and bark beetle outbreaks. At the same time, harvesting levels have increased. While the sector continues to report net removals, an increasing share of carbon is being transferred from living biomass to dead organic matter following harvest and mortality. Current forest dynamics nevertheless indicate that the long period of biomass accumulation is approaching a turning point. The combination of aging forests, increased natural mortality, and higher harvest levels suggests that forest carbon stocks may decline in the coming years.

The waste sector contributed to 3% of total Norwegian greenhouse gas emissions in 2024. GHG emissions from the waste sector have generally decreased since 1990, and in 2024, they were 52% lower than in 1990. Total waste volumes have increased significantly over the period, but this has been offset by increased recycling and incineration of waste as well as increased flaring of methane from landfills.

Figure ES.2 shows the various IPCC sectors' share of the total greenhouse gas emissions in Norway in 2024.

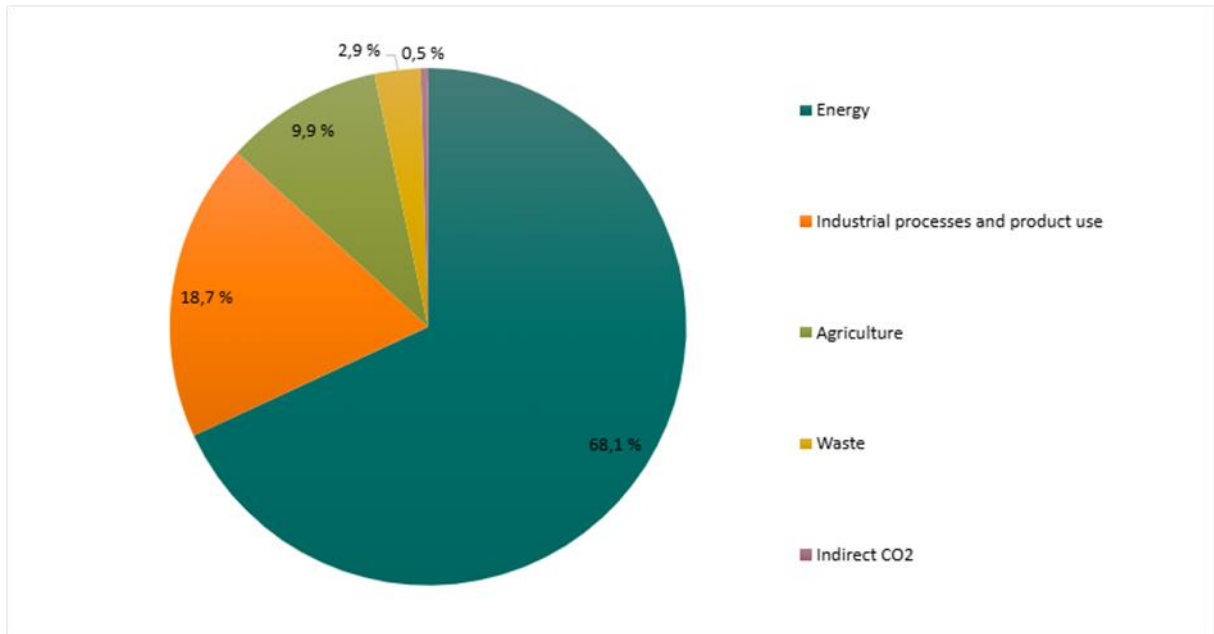


Figure ES.2: Emissions by IPCC sector in 2024, excluding LULUCF. Source: Statistics Norway/Norwegian Environment Agency.

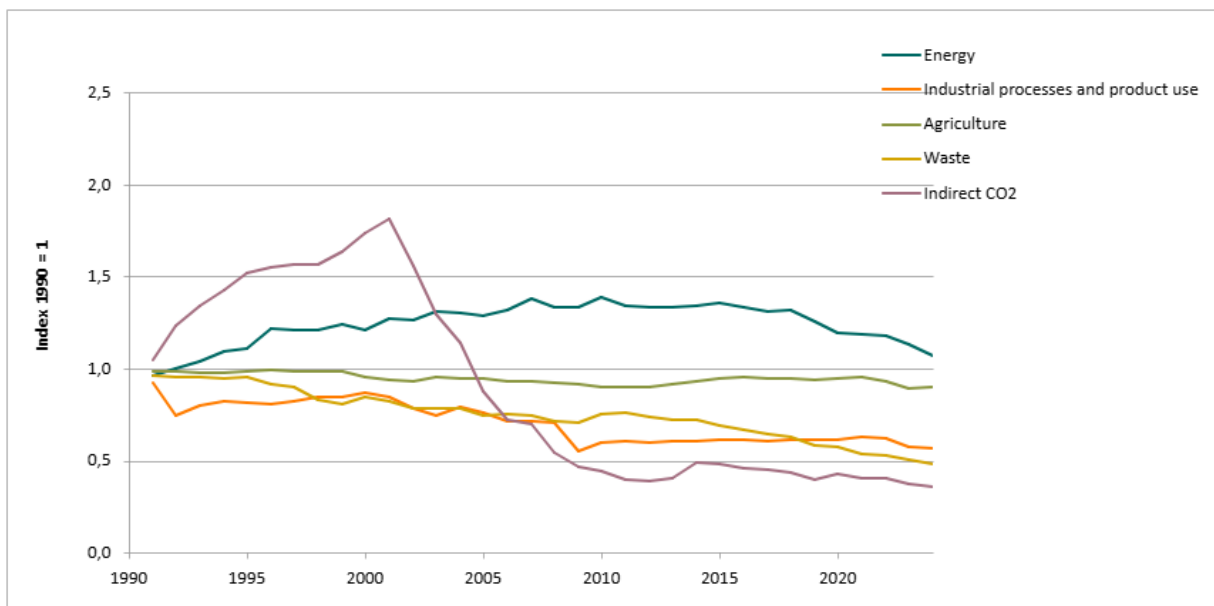


Figure ES.3: Changes in GHG emissions, relative to 1990, by IPCC sector 1990-2024. Index 1990 = 1. Source: Statistics Norway/Norwegian Environment Agency.

The proportion of CO₂ emissions of the national total greenhouse gas emissions has increased from about 68% in 1990 to 83% in 2024. The increased proportion of CO₂ relative to other gases is due to growth in the CO₂ emissions during this period, as well as a reduction in emissions of N₂O, PFCs and SF₆ gases because of implemented environmental measures and/or technological improvements and closures of industrial plants.

Table ES-1: Emissions of greenhouse gases in Norway during the period 1990-2024.

Gas	CO ₂	CH ₄	N ₂ O	PFC	SF ₆	HFC
Year	Mt	kt		kt CO ₂ eq		
1990	35.0	239.3	14.5	3 499.8	2 163.0	0.0
1995	38.4	245.4	13.2	2 078.9	597.6	92.5
2000	42.1	236.0	13.5	1 364.1	918.6	357.1
2005	43.3	214.9	14.3	858.2	305.9	519.9
2010	45.6	204.1	8.7	214.3	70.5	760.6
2011	44.8	196.5	8.8	236.1	55.1	815.5
2012	44.2	194.7	8.8	180.3	54.1	855.5
2013	44.5	192.0	8.7	162.6	56.9	908.8
2014	45.0	190.2	8.8	160.9	50.1	899.4
2015	45.5	189.6	9.0	131.6	69.4	871.8
2016	44.7	188.3	8.7	167.4	62.8	871.3
2017	44.2	185.4	8.6	117.8	57.7	877.5
2018	44.4	182.3	8.5	133.1	55.2	849.5
2019	42.8	174.6	8.6	157.4	69.8	833.5
2020	41.2	174.2	8.4	149.1	75.7	808.2
2021	41.0	174.1	8.5	224.7	66.2	793.2
2022	40.8	172.7	8.5	123.2	59.0	752.9
2023	38.9	166.7	7.9	94.0	51.6	767.6
2024	37.0	163.2	8.4	81.4	61.7	724.9

Source: Statistics Norway/Norwegian Environment Agency

Table ES-2: Emissions in million tonnes CO₂ equivalents, and changes (%) between 1990-2024 and 2023-2024 (without LULUCF).

Year	CO ₂	CH ₄	N ₂ O	PFCs	SF ₆	HFCs	Total with indirect CO ₂ and without LULUCF
1990	35.0	6.7	3.8	3.5	2.2	0.00005	51.2
2023	38.9	4.7	2.1	0.1	0.1	0.8	46.6
2024	37.0	4.6	2.2	0.1	0.1	0.7	44.6
Changes 1990-2024	5.6 %	-31.8 %	-42.1 %	-97.7 %	-97.1 %	1 459 014.7 %	-12.8 %
Changes 2023-2024	-4.9 %	-2.1 %	6.1 %	-13.3 %	19.5 %	-5.6 %	-4.1 %

Source: Statistics Norway/Norwegian Environment Agency

In 2024, 58% of the methane emissions originated from agriculture, 19% from the energy sector and 23% from the waste sector. The total methane emissions decreased by 2% from 2023 to 2024.

In 2024, agriculture contributed 73% of the total N₂O emissions. Industrial processes (almost entirely from fertilizer and nitric acid production) were the second biggest contributor, with 13%. The energy sector accounted for 9.0% of the N₂O emissions in 2024, and the waste sector for 3%. The decrease since 1990 is mainly due to reduced emissions from nitric acid production. The reduced emissions in the early 1990s were due to rebuilding one production line in 1991. The reduced emissions from 2006 onwards are due to the installation of the technology – N₂O decomposition by extension of the reactor chamber

The PFC emissions went down with 0.01 million tonnes CO₂ equivalents from 2023 to 2024. The emissions have, in total, been reduced by 98% since 1990. Aluminium production and commercial refrigeration are the only sources of PFC emissions in 2024. In 2024, the emissions of the perfluorocarbons tetrafluoromethane (CF₄) and hexafluoroethane (C₂F₆) from Norwegian aluminium plants were reported at 10.3 tonnes and 1.2 tonnes respectively, corresponding to a total of 0.08 million tonnes of CO₂ equivalents. There were minor emissions of octafluoropropane (C₃F₈) from refrigeration in 2010-2014 and in 2023 and 2024. In 2024 these emissions amounted to 0.025 tonnes, 4.5 times the emissions from 2023

SF₆ emissions have been reduced by 97% from 1990 to 2024, mainly because of technological improvements and the closure of a magnesium production plant and a magnesium recycling foundry.

From 2023 to 2024 the HFC emissions decreased by %. The recent decline in emissions within industrial and transport refrigeration was mainly a consequence of restrictions from the EU F-gas regulation (implemented in Norway) which includes the restrictions to place on the market refrigeration equipment that contains HFCs with GWP of 2500 or more.

The net removal from the LULUCF sector was 15.5 million tonnes CO₂ equivalents in 2024. This constitutes approximately 35% of the total emissions from all other sectors than LULUCF in the Norwegian GHG accounting.

Forest land is the land-use category responsible for the largest annual variations in CO₂ removals. The increase in carbon stocks is the result of an active forest management policy implemented in the decades after the Second World War, which led to an increase in the area of productive forest and higher productivity in already existing forests. Annual harvesting lower than annual increment also contributed to the increase in carbon stock.

However, a large proportion of these forests are beginning to mature and hence reduce their increment. An increase in natural mortality and harvest intensity over the last decade has also been impacting removals and may lead to a future decline in carbon stocks if the trend continues. In addition, deforestation has been higher than afforestation in the last decades.

Croplands followed closely by settlements were the land-use categories that are responsible for the largest net emissions of the six land use categories in the LULUCF sector in 2024.

Table ES- 3: Total emissions of greenhouse gases by sources and removals in Norway 1990-2024. Million tonnes of CO₂ equivalents.

Year	Energy	Industrial processes and product use	Agriculture	LULUCF	Waste	Indirect CO ₂	Total (without LULUCF, with indirect)	Total (with LULUCF, with indirect)	Total (without LULUCF, without indirect)	Total (with LULUCF, without indirect)
1990	28.3	14.7	4.9	-10.2	2.7	0.6	51.2	41.0	50.6	40.4
1995	31.4	11.9	4.9	-13.2	2.5	0.9	51.6	38.4	50.7	37.5
2000	34.2	12.8	4.7	-15.2	2.3	1.0	54.9	39.8	54.0	38.8
2005	36.4	11.2	4.7	-22.5	2.0	0.5	54.7	32.3	54.3	31.8
2010	39.2	8.8	4.4	-25.4	2.0	0.2	54.7	29.3	54.5	29.0
2011	38.1	8.9	4.4	-24.3	2.0	0.2	53.7	29.4	53.5	29.2

2012	37.7	8.8	4.4	-23.4	2.0	0.2	53.1	29.7	52.9	29.5
2013	37.7	8.9	4.5	-20.0	1.9	0.2	53.3	33.3	53.1	33.1
2014	38.0	9.0	4.6	-18.2	1.9	0.3	53.7	35.6	53.5	35.3
2015	38.5	9.1	4.6	-14.3	1.8	0.3	54.3	40.0	54.0	39.7
2016	37.7	9.0	4.7	-13.5	1.8	0.3	53.4	39.9	53.1	39.6
2017	37.1	8.9	4.7	-14.8	1.7	0.3	52.7	37.9	52.4	37.6
2018	37.3	9.0	4.7	-10.0	1.7	0.2	52.8	42.9	52.6	42.6
2019	35.7	9.0	4.6	-7.2	1.6	0.2	51.1	43.9	50.9	43.7
2020	33.9	9.1	4.6	-15.9	1.5	0.2	49.4	33.5	49.1	33.3
2021	33.6	9.2	4.7	-4.5	1.4	0.2	49.2	44.6	49.0	44.4
2022	33.5	9.2	4.6	-9.1	1.4	0.2	48.8	39.8	48.6	39.5
2023	32.1	8.5	4.4	-12.3	1.4	0.2	46.6	34.2	46.3	34.0
2024	30.4	8.3	4.4	-15.4	1.3	0.2	44.6	29.2	44.4	29.0

ES.4 Other information

Nitrogen oxides (NO_x), non-methane volatile organic compounds (NMVOC) and carbon monoxide (CO) are not greenhouse gases, but they have an indirect effect on the climate through their influence on greenhouse gases, in particular ozone. Sulphur dioxide (SO₂) also has an indirect impact on climate, as it increases the level of aerosols with a subsequent cooling effect. Therefore, emissions of these gases are to some extent included in the inventory.

The overall NO_x emissions have decreased by approximately 40% from 1990 to 2024, primarily because of stricter emission regulations directed towards road traffic, which counteracted increased emissions from oil and gas production and from navigation. From 2023 to 2024, the total NO_x emissions decreased by 6%.

There was an increase in NMVOC emissions in the period from 1990 to 2001, mainly because of the rise in oil production and the loading and storage of oil. However, the emissions decreased by 71% from 2001 to 2024 and were, in 2024, 61% lower than in 1990. From 2023 to 2024, NMVOC emissions decreased by 3%.

Over the period 1990-2024, emissions of CO decreased by 53%. This is primarily explained by the implementation of new emissions standards for motor vehicles.

Emissions of SO₂ were reduced by 76% from 1990 to 2024. This can mainly be explained by a reduction in sulphur content of all oil products and lower process emissions from ferroalloys and aluminium productions, as well as refineries.

ES.5 Key category analysis

According to the IPCC definition, key categories are those that add up to 95% of the total uncertainty in level and/or trend. In the Norwegian greenhouse gas emission inventory, key categories are primarily identified by means of an Approach 2 method. The methods and results from the key category analysis are described in chapter 1 as well as in annex 1.

ES.6 Improvements introduced

The Norwegian Environment Agency co-ordinates the development and improvements of the inventory's different sectors. The recommendations from the UNFCCC review process are recorded in a spread sheet together with the needs recognized by the Norwegian inventory experts to form an annual inventory improvement plan. The overall aim of inventory improvement is to improve the completeness and transparency and reduce uncertainties associated with the national inventory estimates. The issues are prioritized based on the recommendations from the review team and available human and financial resources. The national greenhouse gas inventory has undergone substantial improvements over the years, and the inventory is largely complete and transparent.

The improvements introduced since the latest UNFCCC review report are listed in chapter 10.

1. National circumstances, institutional arrangements, and cross-cutting information

1.1 Background information on GHG inventories and climate change

In compliance with its reporting requirements, Norway has submitted to the UNFCCC national GHG inventories on an annual basis since 1993. The National Inventory Document 2025 together with the associated Common Reporting Tables (CRT) tables are Norway's contribution to the 2026 round of reporting and it covers emissions and removals for the period 1990-2024. Both the National Inventory Document and the CRT tables may be found on the UNFCCC web pages. The reporting of this NID and the CRT tables serve as Norway's reporting both under the Paris Agreement and under the Convention.

The methodologies used in the calculation of emissions and removals are consistent with the *2006 IPCC Guidelines for National Greenhouse Gas Inventories* supplemented by aspects of the 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories (IPCC 2019), and the 2013 Supplement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories: Wetlands (IPCC 2014). As recommended by the IPCC Guidelines, country specific methods have been used where appropriate and where they provide more accurate emission data.

The greenhouse gases or groups of gases included in the national inventory are the following:

- Carbon dioxide (CO₂)
- Methane (CH₄)
- Nitrous oxide (N₂O)
- Hydrofluorocarbons (HFCs)
- Perfluorocarbons (PFCs)
- Sulphur hexafluoride (SF₆)

Norway has examined whether there are activities that would result in emissions of trinitrogenfluoride (NF₃), and our assessment is that there are no emissions of NF₃ in Norway.

When emissions and removals of greenhouse gases are expressed as CO₂ equivalents, Global Warming Potentials over a 100-year time horizon from the IPCC's Fifth Assessment Report have been used.

Indirect CO₂ emissions originating from the fossil part of CH₄ and NMVOC are calculated according to the reporting guidelines to the UNFCCC and are included in the inventory. This includes emissions from fuel combustion and non-combustion sources, such as fugitive emissions from loading of crude oil, oil refineries, distribution of oil products, and from solvents and other product use. See more in chapter 9.

The report also contains calculations of emissions of the precursors and indirect greenhouse gases NO_x, NMVOC, CO and SO₂, which should be included according to the reporting guidelines. Detailed descriptions of the calculation methodologies for these gases are available in Norway's annual report under the Convention on Long-range Transboundary Air Pollution.

Since the introduction of annual technical reviews of the national inventories by independent experts in 2000, Norway has undergone several reviews. The recommendations from these reviews have resulted in many improvements to the inventory. For the latest implemented improvements and planned improvements, see chapter 10.

1.2 A description of the national circumstances and institutional arrangements

The MPGs require Parties to implement and maintain national inventory arrangements.

1.2.1 National entity or national focal point

The Norwegian Environment Agency has been appointed by the Ministry of Climate and Environment as the national entity through the budget proposition to the Norwegian parliament (Stortinget) for 2015, which states that *"The Norwegian system will build on existing organization and cooperation between the Norwegian Environment Agency, Statistics Norway and the Norwegian Institute of Bioeconomy Research. These three institutions are held individually responsible that their own contributions to the national system are in line with the guidelines from the climate convention on the calculation and archiving of emissions and removals of greenhouse gases. The Norwegian Environment Agency is still appointed as a national entity with overall responsibility for the inventory and reporting"*. (St. prop. Nr. 1 (2014-2015)). This point of the proposition was accepted by the Norwegian parliament without any remarks. The Norwegian Environment Agency as the national entity is responsible for:

- Reporting the greenhouse gas inventory to the UNFCCC, including the National Inventory Document and CRT tables
- Completing the National Inventory Document
- Implementation of a QA/QC plan
- Preparing for UNFCCC inventory reviews and coordinating the communication with the expert review team, including responses to review findings

- Coordinating the cooperative work between the institutions of the national system, including the establishment of formal agreements
- Informing the cooperating institutions about relevant decisions and meetings
- Informing national institutions (e.g., ministries and data providers) about the requirements of the national system and ensuring that existing information in national institutions is considered and used in the inventory where appropriate
- Working to secure adequate funding for all parts of the national system in collaboration with the Ministry of Climate and Environment, The Ministry of Agriculture and Food, and the Ministry of Finance.

1.2.2 Inventory preparation process

The Norwegian GHG inventory has been produced for more than three decades and was gradually expanded with other emission components. It started as a collaboration between Statistics Norway and the Norwegian Environment Agency, and the reporting to the UNFCCC has evolved based on this greenhouse gas emission inventory.

Today, Norway has an integrated inventory system for producing inventories of the greenhouse gases and the air pollutants SO₂, NO_x, non-methane volatile organic compounds (NMVOC), ammonia, CO, particulate matter, heavy metals, and persistent organic pollutants reported under the LRTAP Convention. The data flow and QA/QC procedures are largely common for all pollutants.

The institutions in the national greenhouse gas inventory system in Norway are the Norwegian Environment Agency, Statistics Norway, and the Norwegian Institute of Bioeconomy Research (NIBIO). Statistics Norway is responsible for the calculation of emissions from the Energy, Industrial Processes and Product Use (IPPU), Agriculture and Waste source categories. Statistics Norway is responsible for the official statistics on emissions to air, excluding LULUCF. The Norwegian Institute of Bioeconomy Research is responsible for the calculations of emission and removals from Land Use, Land-Use Change and Forestry (LULUCF). The reporting to the UNFCCC is based on the official statistics on emissions to air and the calculations of emissions and removals from LULUCF.

The Norwegian Environment Agency is a government institution. The Norwegian Environment Agency's responsibility for the national system is described in the annual letter from the Ministry of Climate and Environment where the Ministry gives directions on the Norwegian Environment Agency's key priorities and financial resources for the following year. The Section for Emission Inventories and Method holds the main responsibility and coordinating role in the Agency.

Statistics Norway is an independent government institution. Statistics Norway is responsible for the official statistics on emissions to air. Statistics Norway is also responsible for compiling the Norwegian greenhouse gas emission inventory, excluding

LULUCF, based on the official statistics on emissions to air. The expenses for production and development of the official statistics on emissions to air and the emission inventory are partly covered by Statistics Norway through its financing from the government budget, and partly through specific project funding from the Norwegian Environment Agency.

The Norwegian Institute of Bioeconomy Research is owned by the Ministry of Agriculture and Food as an administrative agency with special authorization and its own supervisory board. Several units within the institution are involved in the development and production cycle of the LULUCF inventory. The responsibility for coordination, QA/QC and reporting is placed within one of these units, Department of Forest and Climate. The expenses for production and development of the greenhouse gas inventory are partly covered by the Norwegian Institute of Bioeconomy Research through funding from the Ministry of Agriculture and Food and partly through specific project funding from the Norwegian Environment Agency.

A formalized agreement has been signed between the Norwegian Environment Agency as the national entity and the two other institutions. This ensures the continuation of the institutional arrangements for greenhouse gas inventories and reporting for the period from 2023 – 2032. Through these agreements, each institution is obliged to implement internal procedures to fulfill the requirements of the national system, including implementing the QA/QC and archiving procedures, providing documentation, making information available for review, and delivering data and information in a timely manner to meet the deadline for reporting to the UNFCCC¹. Each institution is also obliged to develop the competence of their staff as required. The obligations of the Norwegian Institute of Bioeconomy Research are also guided by an annual allotment letter from the Ministry of Agriculture and Food.

The Norwegian Environment Agency as a national entity is responsible for preparing, organizing, and reporting meetings between the three institutions. The purpose of the cooperation meetings is to discuss and agree on methodological issues, prioritize resources (e.g., considering the review reports) and generally facilitate the implementation of the national system. Normally, two cooperation meetings between all three institutions are held every year. The cooperation meeting makes decisions collectively. In addition, bilateral cooperation meetings are arranged between the national entity and each of the other institutions in the national system.

The three institutions of the national greenhouse gas inventory system work together to fulfill the requirements for GHG inventory and reporting.

¹ The agreement between the Norwegian Environment Agency and Statistics Norway also includes commitments for data deliveries for reporting under the Convention on Long-range Transboundary Air Pollution (LRTAP).

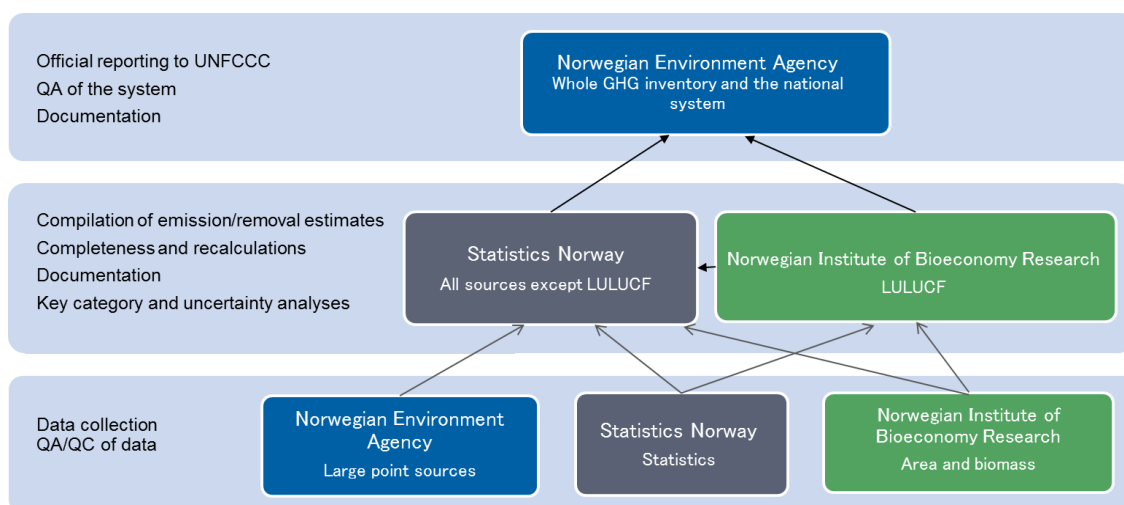


Figure 1.1: Overview of participating institutions, institutional responsibilities, and cooperation.

The three institutions meet regularly to discuss and share experiences with respect to key topics like QA/QC, uncertainty assessment and archiving. These meetings are used to increase the capacity of the project groups in the three institutions. The institutions of the national system may also need to seek partners from other technical authorities or expert institutions to participate in a Tier 2 QA/QC and to improve methodologies and data quality, for example with respect to industrial processes technology, agriculture, soil processes and waste.

The institutions have agreed on a “milestone” production plan (Figure 1.2 and Table 1-1). This production plan reflects national publishing obligations etc. and is supplemented by internal production plans in each of the three institutions.

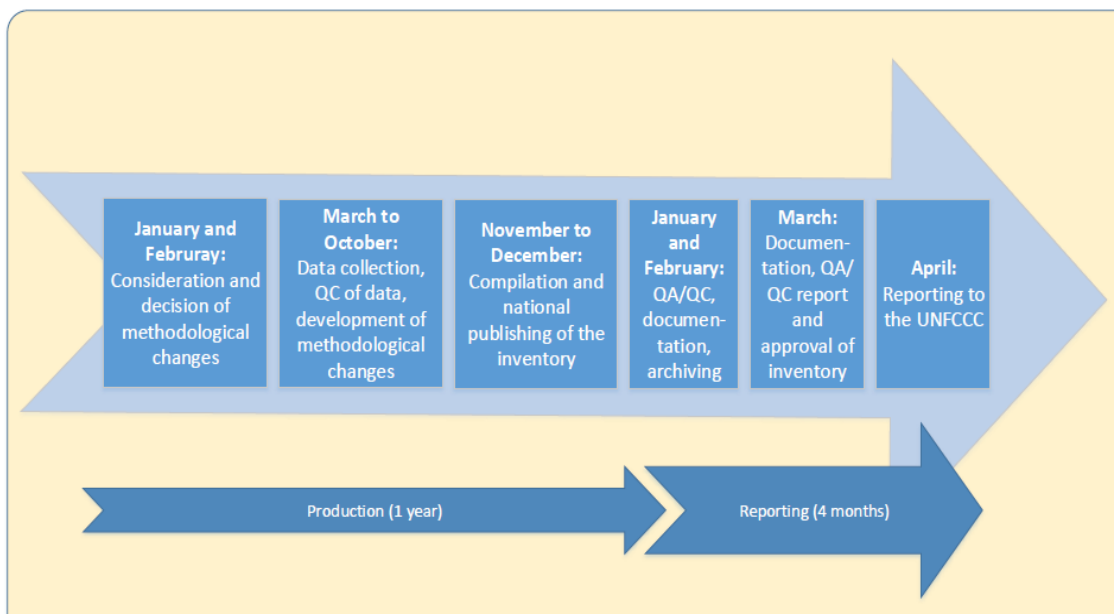


Figure 1.2: The inventory preparation cycle.

Table 1-1: Milestone inventory production plan (indicative dates).

Milestone	Responsible	Deadline
Consideration of methodological changes needed for the next year's reporting, including those based on the review report from last year's reporting cycle	Norwegian Environment Agency	February 1st
Agreement on major methodological changes needed for next year's reporting	All	May 15th
Emission data from large industrial plants sent to Statistics Norway	Norwegian Environment Agency	September 15th
All non-LULUCF data collection completed	Statistics Norway	November 1st
LULUCF area data collection for the previous calendar year completed	Norwegian Institute of Bioeconomy Research	December 1st
National publishing of official statistics on emissions to air¹	Statistics Norway	November
QA/QC of the emission estimates from the official statistics to air for use in the emission inventory	Norwegian Environment Agency	December 11th
All data entered into the ETF GHG inventory reporting tool	Statistics Norway and Norwegian Institute of Bioeconomy Research	January 6th

Milestone	Responsible	Deadline
QA/QC of emission inventory in the ETF GHG inventory reporting tool completed	All	February 3rd
NID first draft	All	February 26th
NID finalized	Norwegian Environment Agency	April 11th
Formal approval of the inventory for the purpose of reporting	Norwegian Environment Agency	March 12th
Reporting	Norwegian Environment Agency	March 15th

¹ The official statistics on emissions to air have a different aggregation of emissions than the greenhouse gas emission inventory reported to the UNFCCC. However, the activity data, emission factors and calculation methodologies are the same.

² This point includes internal documentation in all institutions as well as external documentation in the Norwegian Institute of Bioeconomy Research and Statistics Norway

In the agreements, the three institutions that prepare the inventory have defined areas of responsibility for data collection. An overview of institutional responsibilities and cooperation is shown in Figure 1.1.

Statistics Norway is responsible for the collection and development of activity data and compiling of the data used in the models that produce emission estimates for the source categories Energy, IPPU, Agriculture and Waste. Statistics Norway also operates these models. The Norwegian Environment Agency is responsible for the emission factors, for providing data from specific industries and sources and for considering the quality, and assuring necessary updating, of emissions models like e.g., the road traffic model and calculation of methane emissions from landfills. Emission data are used for a range of national applications and for international reporting.

The Norwegian Institute of Bioeconomy Research is responsible for the estimated emissions and removals from the LULUCF sectors, collects almost all data and calculates the estimates.

The current division of responsibility for the most important data is shown in Table 1-2. The table focuses on data that are updated regularly and not emission factors that are assumed constant over several years. Emission factors are normally collected through dedicated projects. The institutions may agree to reallocate responsibilities through cooperation meetings.

Table 1-2: Main responsibilities for data collection.

Institution	Data type	Data provider
Norwegian Environment Agency	Emissions and activity data from industrial plants (point sources) (around 70 at present, but some of these do not report GHG emissions)	Norwegian Environment Agency
	Emissions from offshore activities, including drilling activities, fugitive emissions, well-testing oil burning and emission factors for crude oil loading	The Norwegian Offshore Directorate and the Norwegian Environment Agency
	Methane recovery from landfills	Norwegian Environment Agency
	Amounts of waste incinerated	Norwegian Environment Agency
	Data on Industrial wastewater	Norwegian Environment Agency
	Import of HFCs, PFCs and SF ₆ by application. Import HFCs, PFCs and SF ₆ in products	Norwegian Environment Agency and Statistics Norway
		The Norwegian Tax Administration
Statistics Norway	Energy balance/account (energy use by sector and application), energy use in point sources. These statistics are building on several primary data sources (surveys, registers, and censuses)	Statistics Norway
	Production data, import and export	Statistics Norway
	Vehicle registrations	Statistics Norway
	Transport statistics	Statistics Norway, Institute for Transport Economics (TØI), Norwegian Road Federation
	Agriculture statistics, including cultivated area, animal population and manure management	Statistics Norway, Cow Recording System at TINE BA, Norwegian Institute of Bioeconomy Research
	Fertilizer use and lime application	Norwegian Food Safety Authority (Mattilsynet)
		Norwegian Environment Agency
	Waste disposal and waste characteristics	Statistics Norway
	Wastewater statistics	Statistics Norway

Institution	Data type	Data provider
	Biological treatment of waste	Statistics Norway
The Norwegian Institute of Bioeconomy Research	Areas of various land categories and their sub-categories, and transitions between these land-use categories	Norwegian Institute of Bioeconomy Research
	Changes in Carbon (C) stocks in tree living biomass	Norwegian Institute of Bioeconomy Research
	Carbon stocks in tree living biomass and mortality for modelling changes in the C stock in Yasso20	Norwegian Institute of Bioeconomy Research
	Forest fertilizers, sludge application, area per crop type, manure statistics, areas of orchards, harvest statistics, proportion of no-till cultivated pastures	Statistics Norway
	Volume of peat and emission factor for calculating emissions (off-site)	Norwegian Food Safety Authority and the Norwegian Institute of Bioeconomy Research
	Number and area of forest fires	Norwegian Directorate for Civil Protection (DSB)
	Meteorological data for IPCC climate zones. Meteorological data for FAO ecological zones. Meteorological data for Yasso20 modelling.	SeNorge; Norwegian Meteorological Institute, The Norwegian Water Resources and Energy Directorate (NVE)
	Activity data for HWP	FAO
	Tree cover loss	Global Forest Change
	Total land area of Norway	Norwegian Mapping Authority

In general, the data contained in the Norwegian emission inventory are available to the public, both emission estimates, activity data and emission factors. Data that are confidential according to the Statistics Act are replaced by non-confidential data collected by the Norwegian Environment Agency for most sources. Confidentiality is still an issue for some of the data collected by Statistics Norway when there are few entities reporting for a source category. To comply with confidentiality issues, emission estimates for these sources are aggregated. This is especially prominent in source category 2F, where emissions from 2F2-5 are aggregated in category 2F6 due to confidentiality.

The data collection and data management are secured on a legal basis through three main acts, the Pollution Control Act, the Greenhouse Gas Emission Trading Act and the Statistics Act.

The *Pollution Control Act*² gives the Norwegian Environment Agency the authority to collect and review emission data from large industrial plants. Emissions of greenhouse gases are part of the Pollution Control Act. The Pollution Control Act is a typical enabling act. This means that the details in each case are outlined in discharge permits and regulations issued by the pollution control authorities. The Act was established for the purpose of preventing and reducing harm and nuisance from pollution. This is reflected in the main rule of the act, which says that pollution is forbidden, unless it is specifically permitted by law, regulations, or individual permits.

Collection and checking of GHG emission data are also covered by the *Greenhouse Gas Emission Trading Act*³. The implementation rules are stipulated in a regulation⁴.

Statistics Norway is a professional independent institution, which through The Statistics Act⁵ has been given “the right to impose upon any person an obligation to provide information necessary for the production of official statistics in so far as any legally prescribed obligation of secrecy is no obstacle thereto”. The Statistics Act gives Statistics Norway access to public administrative data-processing systems and to choose the statistical methods which form the basis for the preparation of official statistics. Statistics Norway is responsible for how and when official statistics are published. The Ministry of Finance is administratively responsible for Statistics Norway, and the fiscal budget for its business is set by the Government and the Norwegian parliament.

The collected data are subjected to the Quality Assessment and Quality Control (QA/QC) routines described in section 1.5 and Annex 4, as well as source specific routines as described under each source chapter. They are all (except data regarding LULUCF) subsequently processed by Statistics Norway into a format appropriate to enter the emission models. The models are designed in a manner that accommodates both the estimation methodologies reflecting Norwegian conditions and those recommended internationally.

1.2.3 Archiving of information

Decision 18/CMA.1 identifies the information that a Party shall archive:

- all disaggregated emission factors and activity data,
- all documentation about generating and aggregating data, including quality assurance/quality control (QA/QC),
- review results and
- planned inventory improvements;

² <https://www.regjeringen.no/en/dokumenter/pollution-control-act/id171893/>

³ <https://www.regjeringen.no/en/dokumenter/greenhouse-gas-emission-trading-act/id172242/>

⁴ <https://lovdata.no/dokument/SF/forskrift/2004-12-23-1851?q=klimakvote>

⁵ <https://lovdata.no/dokument/NL/lov/1989-06-16-54?q=statistikkloven>

All three institutions are responsible for archiving the data they collect and the estimates they calculate with associated methodology documentation and internal documentation on QA/QC. Due to the differences in the character of data collected, Norway has chosen to keep archiving systems in the three institutions, which means that not all information is archived at a single location. These archiving systems are, however, consistent, and operate under the same rules. Although the data are archived separately, all can be accessed efficiently during a review.

All three institutions are responsible for archiving the data they collect and the estimates they calculate with associated methodology documentation and internal documentation on QA/QC, see Table 1-3 for an overview.

The common rules for archiving of data are the following:

- Data and information are archived for each submission year.
- Data and information are archived in a single location within each institution (this may imply double archiving).
- Archiving for a submission year includes:
 - All input data
 - All estimated emissions
 - All partly filled-in or final CRT
 - All technical documentation
 - Recalculations of previous estimates if any
 - The NID (where relevant)
- The file structure is documented.
- The platform at which the data and information is archived undergoes a daily backup and the backup is securely saved.

Table 1-3: Responsibilities for archiving information. Capital, bold X indicates archiving also of datasets sent from the other institutions.

	Norwegian Environment Agency	Statistics Norway	Norwegian Institute of Bioeconomy Research	Comments
Disaggregated emission factors	x	X	x	All EF except LULUCF are archived by Statistics Norway
Activity data	x	X	x	

	Norwegian Environment Agency	Statistics Norway	Norwegian Institute of Bioeconomy Research	Comments
Emission data collected from large plants	X	X		Statistics Norway does not collect these data, but archived as part of the emission model
Documentation of data collection, assumption, and aggregation	X	X	x	Norwegian Environment Agency is developing a library of all important reports (including background reports)
Internal documentation on QA/QC procedures	x	x	x	
External and internal reviews	X	x	x	
Documentation on annual key categories		x		
Planned inventory improvements	X			
Estimated emissions (model output)		X	x	
CRT	X	(x)	x	
NID	X			
Recalculations	X	X	x	

By systematic archiving as described above, all information can be made available to a review team. However, data archived at Statistics Norway are subject to rules of confidentiality, and this must be taken into consideration during reviews. Confidential information from Statistics Norway can be made available to the review team when the revision takes place in Statistics Norway's premises and after a confidentiality declaration is signed. The most relevant documentation is available in the central archive of the Norwegian Environment Agency. Comprehensive documentations for LULUCF and other emission sources are available in English. Additional technical documentation may be in Norwegian only, as will the emission reports from the plants.

The Norwegian Environment Agency, Statistics Norway and The Norwegian Institute of Bioeconomy Research are responsible for having competent personnel on duty during a review to access data if requested.

1.2.3.1 *Statistics Norway*

Archiving of the emission inventory in Statistics Norway takes place at several levels:

- 1) The inventory is a part of Statistics Norway's central data archiving system. All input data to and results from the general emission model from every publication cycle are stored and documented in this system. Archiving is made after each inventory calculation has been finalized.
- 2) Input data received as spreadsheets, mail, etc, are stored in folders for every publication cycle. These folders also include preliminary calculations before data are entered into the general emission model.
- 3) Several input data are used in preliminary calculations before entering the general Norwegian emission inventory model. This includes satellite models such as road traffic and waste, as well as several simpler calculations that do not fit into the framework of the general model. The preliminary calculations are not included in the central archiving system, which is not suited for such a diverse collection of data. For some satellite models there is an established archiving routine where all input data and results from every calculation cycle are stored.
- 4) During improvement projects, adaptation of activity data or calculations of emission factors are often performed. Examples are emission factors for flaring and air traffic. These improvement projects are not archived as part of the annual folder system but are stored in separate folders. They are not overwritten when new methodologies, emission factors or activity data are implemented.

Statistics Norway will improve its archiving system in line with the requirements for the national system. This will include improved archiving of input and output from side models (satellite models). These will be archived in one place and the storage of revised versions due to recalculations will be improved as will the documentation of recalculations.

Recalculations are documented for internal use. This document will receive increased status, and its accessibility will be improved.

1.2.3.2 *The Norwegian Environment Agency*

From 2009 the Norway's official report is uploaded to UNFCCC submission portal and or website. The CRT tables and NID have also since 2020 been uploaded to REPORTNET from 2002. Before 2002 the reports are stored at the Norwegian Environment Agency's server.

Elements is an electronic recordkeeping tool that meets the specifications set by the Noark Standard. The Noark Standard is a specification of functional requirements for electronic recordkeeping systems used in public administration in Norway and has been approved by the Norwegian National Archives.

Reports with emission data and QA control from large industrial plants are submitted to the Norwegian Environment Agency and archived in Elements. The data reported from the

plants are then stored in the Forurensning database⁶ or, in the case of offshore oil and gas extraction, in Footprint⁷. If a plant submits additional information as a result of the QA/QC, this information will also be archived in Elements and Forurensning will be corrected accordingly. After QA/QC as described in chapter 1.5, the data (with supplementary notes) for the large industrial plants are stored and archived in a designated file on the Norwegian Environment Agency's server and submitted to Statistics Norway.

Emission data from the landfill owners are submitted to the County Departments of Environmental Affairs and are then stored in the Forurensning database. After QA/QC, these data (with supplementary notes) are stored and archived in a designated file on the Norwegian Environment Agency's server before being sent to Statistics Norway

Companies that import HFC/PFC and SF₆ in bulk reported this information to the Norwegian Environment Agency annually up to 2009. The reports are archived in Elements. After 2009, Statistics Norway collects the amounts of imported and exported gases from registers at the Norwegian Directorate of Customs and Excise. All import of F-gases is covered in these registers, as Norway taxes the import of F-gases.

1.2.3.3 The Norwegian Institute of Bioeconomy Research

Data and documentation related to the LULUCF inventory are stored on the internal servers of the Norwegian Institute of Bioeconomy Research. The information is organized in structured folders for each inventory cycle, containing input datasets, intermediate calculation files and final outputs. This includes the LULUCF CRT tables at different stages of the reporting process, such as the input tables used to upload data into the ETF reporting system and the reporting tables generated by the system. Information received from external sources, including datasets and any communication provided via e-mail, is also stored together with the documentation for the corresponding inventory cycle.

Several datasets that form the basis of the LULUCF calculations are archived separately to ensure that the estimates can be reproduced. The National Forest Inventory (NFI) database, which provides the main activity data for the LULUCF sector, is archived for each inventory cycle. At the time the calculations are performed, a copy of the database used in the estimates is stored so that the status of the NFI plots at that point in time can be reconstructed, since updates to the NFI database continue throughout the year.

Additional supporting datasets used in the calculations are also archived. These include meteorological data used in soil carbon models and other emission and removal

⁶ The Forurensning database replaced the previous database INKOSYS in 2006. All data in INKOSYS is transferred to Forurensning.

⁷ Footprint is a database operated by the Norwegian Offshore Directorate, the Norwegian Environment Agency, and Offshore Norge

estimation routines, as well as FAOSTAT data used in the calculation of harvested wood products (HWP).

Some input data are obtained through automated downloads from Statistics Norway (e.g. via API access), such as data on forest fertilization and sludge application, etc. The original datasets retrieved through the API are not stored locally. Instead, the processed datasets resulting from the filtering and aggregation applied for inventory calculations are stored together with the inventory files. The original data is archived by Statistics Norway as part of their central data management routines.

All files stored on the Norwegian Institute of Bioeconomy Research servers are backed up automatically. Backup copies are created daily and stored off-site to safeguard against data loss due to technical failure. If files are deleted or modified, earlier versions remain available through the backup system for approximately two to three months before being overwritten.

1.2.4 Processes for official consideration and approval of inventory

The Norwegian Environment Agency as the national entity approves the inventory before official submission to the UNFCCC. As a basis for approving the inventory, the Norwegian Environment Agency will consider the completion of the inventory and the National Inventory Document. The Norwegian Environment Agency will also review:

- Methodological changes and recalculations
- Minutes from the cooperation meetings between the institutions
- Other matters of relevance for the approval of the inventory

1.3 Brief general description of methodologies (including tiers used) and data sources used

1.3.1 The main emission model

The main emission model was developed by Statistics Norway (Daasvatn et al. 1992; 1994). It was redesigned in 2003 to improve reporting to the UNFCCC and LRTAP, and to improve QA/QC procedures. The model receives periodic updates and maintenance which improves its functionality – in 2024 it was updated to output more disaggregated data from the Energy sector for years 2010 and later, further improving QA/QC procedures.

The model is programmed in SAS system software and is flexible with respect to output, i.e., it can produce tables (input and output) in accordance with different aggregation levels and parameters. Furthermore, it has been designed to fit the availability and aggregation of input data and is flexible with respect to changes. Emission factors can be entered for groups of years.

Several emission sources – e.g., road traffic, agriculture, air traffic and solvents – are covered by more detailed side models. Aggregated results from these side models are used as input to the general model.

The general emission model is based on the following equation:

$$\text{Emissions (E)} = \text{Activity level (A)} \times \text{Emission Factor (EF)}$$

For emissions from *combustion*, the activity data is use of energy products. In the Norwegian energy accounts, the use of energy products is allocated to industries (economic sectors). To calculate emissions to air, energy use must also be allocated to technical sources (e.g., equipment). This makes it possible to match activity data with relevant emission factors. After energy use has been allocated in this way, the energy accounts may be viewed as a cube in which the three axes are fuels, industries, and sources.

The energy use data are combined with a corresponding matrix of emission factors. In principle, there should be one emission factor for each combination of fuel, industry, source, and pollutant. Thus, the factors may be viewed as a four-dimensional “cube” with pollutants as the additional dimension. However, in a matrix with a cell for each combination, most of the cells would be empty (no consumption), while on the other hand, the same emission factor would apply to many cells. There are more than 30 fuels and about 30 technical sources used for energy combustion.

Emissions of some pollutants from major manufacturing plants (point sources) are available from measurements or other plant-specific calculations (collected by the Norwegian Environment Agency). When such measured data are available, they are normally considered to give better representation of the actual emission, and the estimated values are replaced by the measured ones:

$$\text{Emissions (E)} = [(A - A_{PS}) \times EF] + E_{PS}$$

where A_{PS} and E_{PS} are the activity and the measured emissions at the point sources, respectively. Emissions from activities for which no point source estimate is available ($A - A_{PS}$) are still estimated with the standard emission factor.

Non-combustion emissions are generally calculated in the same way, by combining appropriate activity data with emission factors. Some emissions are measured directly and reported to the Norwegian Environment Agency from the plants, and some may be obtained from current reports and investigations. The emissions are fitted into the general model using the parameters industry, technical source, and pollutant. The fuel parameter is not relevant here. The source for non-combustion emissions and for combustion without energy use are based on EMEP/NFR and UNFCCC/CRT categories, with further subdivisions where more detailed methods are available.

The model uses approximately 220 industries (economic sectors). The classification is common with the basis data in the energy balance/accounts and is almost identical to that used in the national accounts, which is aggregated from the European NACE classification (Statistics Norway 2008). The large number of sectors is an advantage in dealing with important emissions from manufacturing industries. The disadvantage is an unnecessary disaggregation of sectors with very small emissions. To make the standard sectors more appropriate for calculation of emissions, a few changes have been made, e.g., "Private households" is defined as a sector. Information about the geographical distribution of emissions is useful for modelling and control purposes and constitutes a fifth axis.

1.3.2 The LULUCF model

The Norwegian Institute of Bioeconomy Research is in charge of estimating emissions and removals from Land use, Land-Use Change and Forestry (LULUCF) for all categories where area statistics and living biomass are used for activity data. A software-based calculation system has been developed to implement the IPCC (2006), the IPCC (2014), and, where applicable, the IPCC (2019). The system primarily uses the statistical software R (R Core Team 2015), and operates within a version controlled environment (Gitlab), with Microsoft excel used for selected input and reporting tables. It integrates input data from multiple sources and generates final output datasets. These datasets contain all information required for the tables reported under the Climate Convention and the Paris Agreement.

The National Forest Inventory (NFI) database contains data on areas for all land uses and land-use conversions as well as carbon stocks in harvested/dead and living tree biomass and field observations necessary to apply a range of estimation methods based on the IPCC guidelines. The NFI is used to estimate total areas of forest land, cropland, grassland, wetlands, settlements, other land, and land-use transitions between these categories. The data from the NFI are complemented with other data (e.g., timber harvest, horticulture, crop types, fertilizer use, and forest fires) collected by Statistics Norway, The Norwegian Food Safety Authority, The Directorate for Civil Protection, FAO forestry statistics, Global Forest Change, Norwegian Mapping Authority, and SeNorge. These combined datasets are used to estimate emissions and removals across all relevant land use categories (Table 1-2). Details on all methods and datasets in use are provided in the annual NID and references therein.

The sampling design of the NFI is based on a systematic grid of geo-referenced sample plots covering the entire country. The NFI is a continuous forest inventory in which 1/5th of the sample plots are revisited each year. This results in a 5-year cycle based on a re-sampling method of the permanent plots (interpenetrating panel design). Up to 2010 the estimates were based on detailed information from sample plots in lowlands outside Finnmark county. To confirm the land use and the extent of the area of forest and other wooded land at higher altitudes and in Finnmark County, the NFI conducted a complete forest inventory during 2005–2010 for these areas. Since 2010 the NFI has been expanded

to include mountainous areas and Finnmark county, to monitor the land use, land-use changes, and forestry activities in the whole country. All areas were included for the first time in the estimates for the LULUCF sector in the 2012 submission. Area estimates have been bridged in a consistent manner. The estimates of land use, land-use change, and carbon stock change above the coniferous limit and in Finnmark County, have been back-casted to close the gap from the start of the National Forest Inventory (1986-1993) to the beginning of the supplementary inventories (Finnmark, forest above the coniferous limit) (see detail in the annual NID).

The estimates of carbon stocks and their changes in living biomass are based on single tree measurements of trees larger than 50 mm at 1.3 m height (DBH) on sample plots within forest and other wooded land. Biomass is calculated using single tree allometric biomass models developed in Sweden for Norway spruce and Scots pine (Marklund 1988; Petersson & Ståhl 2006) and Norwegian models for birch (Smith 2016; Smith 2014). These models provide biomass estimates for various tree biomass components: stem, bark, living branches, dead branches, foliage, stumps, and roots. These components are used to calculate above- and belowground biomass.

The dynamic soil model Yasso20 is used to calculate changes in carbon stock in dead organic matter and in the mineral soil for forest land remaining forest land (Tuomi et al. 2009; Viskari et al. 2022). Estimates are made for individual NFI plots for the entire time-series. The Yasso20 model provides an aggregated estimate of carbon stock change for the total of litter, dead wood, and soil organic matter. The primary input data for the model comes from the NFI, along with climate data from SeNorge. Auxiliary data for estimating carbon emissions from cropland, grassland, wetlands, and settlements are provided by Statistics Norway, SeNorge, and other data sources at the Norwegian Institute of Bioeconomy Research.

1.3.3 Data sources

The data sources used in the Norwegian inventory are outlined in the following.

Activity levels: These normally originate from official statistical sources available internally in Statistics Norway and other material available from external sources. When such information is not available, research reports are used, or extrapolations are made from expert judgments.

Emission factors: These originate from reports on Norwegian conditions and are either estimated from measurements or elaborated in special investigations. However, international default data are used in cases where national emission factors are highly uncertain or lacking (e.g., N₂O from agriculture, CH₄ and N₂O from stationary combustion) or when the source is insignificant in relation to other sources.

Aggregated results from the side models: The operation of the side models in the inventory requires various sets of additional parameters pertinent to the emission source at hand. These data sets are as far as possible defined in official registers, public statistics, and surveys, but some are based on assumptions.

Emission figures for point sources: For large industrial plants these are figures reported to the Norwegian Environment Agency by the plants' responsible (based on measurements or calculations at the plants).

Table 1-4: Data providers and sources for the emission inventory.

	Very important	Important	Less important
1. Data from Statistics Norway			
Energy statistics	X		
Consumer surveys			X
Living condition survey			X
Foreign trade statistics		X	
Production statistics			X
Petroleum statistics	X		
Agriculture statistics	X		
Waste statistics		X	
Wastewater statistics			X
Vehicle registry		X	
Transport statistics		X	
2. Other institutions			
The Norwegian Institute of Bioeconomy Research	X		
Norwegian Environment Agency	X		
Forurensning/Tilde (pollution)	X		
Footprint	X		
FAOSTAT (Food and Agriculture Organization of the United Nations, Statistics division)	X		
Norwegian Meteorological Institute	X		
Norwegian Petroleum Industry Association			X

	Very important	Important	Less important
Norwegian Offshore Directorate		X	
Institute of Transport Economics			X
Norwegian Road Federation (Opplysningsrådet for veitrafikk)		X	
Norwegian Food Safety Authority			X
The Directorate for Civil Protection		X	
Directorate of Customs and Excise		X	
Stiftelsen Returgass			X

1.3.4 Recalculations

In accordance with the 2006 IPCC Guidelines for National Greenhouse Gas Inventories Volume 1, chapter 5 (IPCC 2006) Norway routinely evaluates whether recalculations of historical data are needed. Recalculations are made if there have been methodological changes influencing emissions in previous years or changes in data due to correction of errors or changes in preferred data sources.

When data sources are not available for the whole time series since 1990, one of the proposed methods from the 2006 IPCC Guidelines for National Greenhouse Gas Inventories Volume 1, chapter 5 (IPCC 2006) is used to splice data (or more sophisticated methods if relevant). Normally extrapolations using drivers correlated with emissions or the overlap method is used. Smaller emission sources may be linearly extrapolated (or kept constant). The method is chosen based on available data and suitability of drivers.

Data from the National Forest Inventory is collected over a period of five years. Each year provides a statistically representative coverage of Norwegian forests, but with only 1/5 of the statistical support of the full inventory. Annual reports can be issued based on the annual data but are known to result in large inter-annual variations. Plotwise interpolation is used to gap-fill the area for the missing years between two observations. And plot wise extrapolation of the area based on the trend for the last 10 years, is used to gap-fill the last years of the time series (only required for 4/5ths of the plots). All carbon stock change (CSC) estimates based on area estimates use the full plot wise interpolated-extrapolated area dataset to provide yearly CSC estimates for each plot.

1.4 Brief description of key categories

According to the IPCC definition, key categories in a national inventory should be identified to determine which areas need priority for improving estimates. Key categories are defined as sources and/or sinks that have “a significant influence on a country’s total inventory of direct greenhouse gases in terms of the absolute level, the trend, or the uncertainty in emissions and removals”. The identification of level and trend key categories is done using two different approaches.

Approach 1 (Tier 1) ranks categories according to their contribution to the absolute emission level and to the trend and selects those that together account for 95% of total national emissions. Approach 2 (Tier 2) applies the same level and trend assessments but additionally incorporates category-specific uncertainty, ranking categories by their uncertainty-weighted contribution and identifying those that together represent 90% of the total.

The key category assessment Approach 2 includes uncertainty estimates. The assessment is updated annually and is made for the level and trend since 1990. Statistics Norway also considers the qualitative criteria for identification of key categories. In accordance with the IPCC good practice guidance for LULUCF IPCC (2006) the analysis is made in two parts, one excluding LULUCF emissions and removals and another integrating LULUCF with the rest of the inventory. Due to the large LULUCF sink in Norway, the results of these two parts are quite different.

In the Norwegian greenhouse gas emission inventory key categories are primarily identified by means of an Approach 2 method. A description of the methodology as well as background tables and the result from the analyses is presented in Annex 1. In this chapter a summary of the analysis and the results are described.

The results from the key category analyses are summarized in Table 1-5 (excluding LULUCF). In addition, we have also included a category identified on qualitative criteria. Altogether there are 41 key categories. Key categories in LULUCF were identified in separate analyses and are summarized in Table 1-6, with 38 key categories for this sector.

The complete analyses are included in Annex 1 together with background data and the complete analysis including LULUCF.

The Approach 1 analysis included in the NID uses a different aggregation level for some source categories than in the Approach 1 analysis generated in the ETF GHG inventory reporting tool.

The trend assessment approach 1 is performed according to the 2019 refinements, equation 4.2.

Table 1-5: Summary of identified emission key categories. Excluding LULUCF.

IPCC Category code	IPCC Category	Greenhouse Gas	Identification criteria ¹				Method
			L1	T1	L2	T2	
1A1,1A2,1A4	Fuel Combustion Activities (Sectoral Approach) Biomass	CH ₄	L1	T1	L2	T2	Tier 2
1A1,1A2,1A4	Fuel Combustion Activities (Sectoral Approach) Gaseous Fuels	CO ₂	L1	T1	L2	T2	Tier 2
1A1,1A2,1A4	Fuel Combustion Activities (Sectoral Approach) Liquid Fuels	CO ₂	L1	T1	L2	T2	Tier 2
1A1,1A2,1A4	Fuel Combustion Activities (Sectoral Approach) Other Fuels	CO ₂	L1	T1	L2	T2	Tier 2
1A1,1A2,1A4	Fuel Combustion Activities (Sectoral Approach) Solid Fuels	CO ₂	L1	T1	L2	T2	Tier 2
1A3A	Domestic Aviation	CO ₂	L1	T1	L2	T2	Tier 3
1A3B	Road Transportation	CO ₂	L1	T1	L2		Tier 2
1A3B	Road Transportation	CH ₄				T2	Tier 2
1A3B	Road Transportation	N ₂ O			L2		Tier 2
1A3D	Domestic Navigation	CO ₂	L1	T1	L2	T2	Tier 2
1A3D	Domestic Navigation	CH ₄		T1	L2	T2	Tier 2
1A4	Other sectors- Mobile Fuel Combustion	CO ₂	L1	T1	L2	T2	Tier 2
1A5B	Mobile	CO ₂	L1	T1			Tier 2
1B1A	Coal Mining	CH ₄		T1	L2	T2	Tier 1
1B2A	Oil (incl. oil refineries, gasoline distribution)	CO ₂	L1	T1	L2	T2	Tier 2
1B2A	Oil (incl. oil refineries, gasoline distribution)	CH ₄	L1	T1	L2	T2	Tier 2
1B2C	Venting and Flaring	CO ₂	L1	T1	L2	T2	Tier 3
1B2C	Venting and Flaring	CH ₄	L1		L2		Tier 3
2A1	Cement Production	CO ₂	L1				Tier 3
2A2	Lime Production	CO ₂	L1	T1			Tier 3

IPCC Category code	IPCC Category	Greenhouse Gas	Identification criteria ¹				Method
			L1	T1	L2	T2	
2B1	Ammonia Production	CO ₂	L1	T1	L2		Tier 2
2B10	Other	N ₂ O	L1	T1			
2B2	Nitric Acid Production	N ₂ O	L1	T1	L2	T2	Tier 3
2B5	Carbide Production	CO ₂	L1	T1		T2	Tier 2
2B6	Titanium dioxide production	CO ₂	L1				Tier 2
2B8	Petrochemical and carbon black production	CO ₂	L1	T1	L2		Tier 2
2C2	Ferroalloys production	CO ₂	L1		L2		Tier 2/3
2C3	Aluminium production	CO ₂	L1	T1	L2	T2	Tier 2/3
2C3	Aluminium production	PFC	L1	T1	L2	T2	Tier 2
2C4	Magnesium production	SF ₆	L1				Tier 2
2D1	Lubricant use	CO ₂		T1			Tier 2
2F	Product uses as substitutes for ODS	HFC	L1	T1	L2	T2	Tier 2
2H2	Food and beverages industry	CO ₂		T1			Tier 2
3A1	Cattle	CH ₄	L1	T1	L2	T2	Tier 2
3A2	Sheep	CH ₄	L1		L2		Tier 2
3A4	Other	CH ₄			L2		Tier 1
3B1	Manure Management - Cattle	CH ₄	L1		L2		Tier 2
3B5	Manure Management	N ₂ O	L1		L2		Tier 2
3D1A	Synthetic Fertilizers	N ₂ O	L1	T1	L2	T2	Tier 1
3D1B	Organic N fertilizer	N ₂ O			L2		Tier 1
3D1D	Crop Residue	N ₂ O			L2	T2	Tier 1
3D1F	Cultivation of Histosols	N ₂ O	L1		L2		Tier 1
3D2B	Nitrogen Leaching and Run-off	N ₂ O	L1		L2	T2	Tier 1
3G	Liming	CO ₂	L1	T1			Tier 1
5A1A	Managed Waste Disposal sites. Anaerobic	CH ₄	L1	T1	L2	T2	Tier 2
5C	Incineration and open burning of waste	CO ₂	L1	T1	L2	T2	Tier 1
5D1	Domestic Wastewater	CH ₄	L1		L2		Tier 1

¹ "L" refers to level and "T" to trend analyses. Numbers refer to approaches. "Q" refers to qualitative criteria.

² The 2D3 category covers 2D3a Solvent use, 2D3b Road paving and asphalt and 2D3d Other (use of urea).

The Approach 1 level analysis (excluding LULUCF) for 2024 did identify four new sources: CO₂ from Fuel combustion, solid fuels, CO₂ from Road transportation, CO₂ from Titanium dioxide production and CO₂ from Liming.

The Approach 1 trend analysis (excluding LULUCF) did identify three new sources: CO₂ from 1A5A Stationary, N₂O from 2B10 Other and CO₂ from Lubricant use.

The Approach 2 level analysis (excluding LULUCF) did not identify any new sources.

The Approach 2 trend analyses (excluding LULUCF) did not identify any new sources.

One source is no longer key category: CH₄ from Biological treatment of Solid Waste did not qualify in neither of the level- and trend approaches.

Table 1-6: Summary of identified LULUCF key categories.

IPCC Category code	IPCC Category	Greenhouse Gas	Identification criteria ¹				Method
4(II)Crop	Cropland - drained organic soil	CH ₄			L2		Tier 1
4(II)Forest	Forest land - drained organic soils	N ₂ O	L1		L2		Tier 1
4.A.1	Forest remaining forest - Litter + dead wood + Mineral soil	CO ₂	L1	T1	L2	T2	Tier 3
4.A.1	Forest remaining forest - Living biomass	CO ₂	L1	T1	L2	T2	Tier 3
4.A.1	Forest remaining forest, drained organic soils - Organic soil	CO ₂	L1		L2		Tier 1
4.A.2.a	Cropland to Forest - Litter	CO ₂			L2		Tier 1
4.A.2.b.Ext	Extensive Grassland to Forest - Litter	CO ₂	L1	T1	L2	T2	Tier 1
4.A.2.b.Int	Intensive Grassland to Forest - Living biomass	CO ₂			L2	T2	Tier 1 / 3
4.A.2.b.Int	Intensive Grassland to Forest - Litter	CO ₂	L1	T1	L2	T2	Tier 1
4.A.2.c.Unm	Unmanaged Wetland to Forest - Living biomass	CO ₂				T2	Tier 3

IPCC Category code	IPCC Category	Greenhouse Gas	Identification criteria ¹				Method
4.A.2.c.Unm	Unmanaged Wetland to Forest - Litter	CO ₂			L2	T2	Tier 1
4.A.2.d	Settlement to Forest - Living biomass	CO ₂		T1	L2	T2	Tier 1 / 3
4.A.2.d	Settlement to Forest - Litter	CO ₂	L1		L2	T2	Tier 1
4.B.1	Cropland remaining cropland - Organic soil	CO ₂	L1	T1	L2	T2	Tier 1
4.B.2.a	Forest to Cropland - DOM	CO ₂	L1	T1	L2	T2	Tier 1 / 2
4.B.2.a	Forest to Cropland - Living biomass	CO ₂			L2		Tier 1 / 3
4.B.2.a	Forest to Cropland - Mineral soil	CO ₂			L2		Tier 1
4.B.2.a	Forest to Cropland - Organic soil	CO ₂			L2	T2	Tier 1
4.B.2.c	Unmanaged Wetland to Cropland - Organic soil	CO ₂		T1	L2	T2	Tier 1
4.C.1.Ext	Extensive Grassland remaining extensive grassland - Living biomass	CO ₂	L1	T1	L2	T2	Tier 3
4.C.1.Int	Intensive Grassland remaining intensive grassland - Living biomass	CO ₂	L1		L2		Tier 2 / 3
4.C.1.Int	Intensive Grassland remaining intensive grassland - Mineral soil	CO ₂				T2	Tier 1
4.C.1.Int	Intensive Grassland remaining intensive grassland - Organic soil	CO ₂			L2		Tier 1
4.C.2.a	Forest to Intensive Grassland - DOM	CO ₂	L1	T1	L2	T2	Tier 1 / 2
4.C.2.a	Forest to Intensive Grassland - Living biomass	CO ₂		T1	L2	T2	Tier 1 / 3
4.D.1.a	Wetland Peat extraction - on+off-site - Organic soil	CO ₂			L2		Tier 1 / 2
4.D.1.c.Man	Managed Wetlands remaining managed wetlands - Organic soil	CO ₂	L1		L2		Tier 1
4.D.2.c.i	Forest to Managed Wetland - DOM	CO ₂			L2		Tier 1 / 2
4.E.1	Settlements remaining settlements - Organic soil	CO ₂	L1	T1	L2	T2	Tier 1

IPCC Category code	IPCC Category	Greenhouse Gas	Identification criteria ¹				Method
			L1	T1	L2	T2	
4.E.2.a	Forest to Settlement - DOM	CO ₂	L1	T1	L2	T2	Tier 1 / 2
4.E.2.a	Forest to Settlement - Living biomass	CO ₂	L1	T1	L2	T2	Tier 1 / 3
4.E.2.a	Forest to Settlement - Mineral soil	CO ₂			L2	T2	Tier 1
4.E.2.a	Forest to Settlement - Organic soil	CO ₂	L1		L2	T2	Tier 1
4.E.2.b	Cropland to Settlement - Mineral soil	CO ₂			L2	T2	Tier 1
4.G	Harvested wood Products - HWP	CO ₂	L1	T1	L2	T2	Tier 1

¹ "L" refers to level and "T" to trend analyses. Numbers refer to approaches.

1.5 Brief general description of QA/QC plan and implementation

Good practice defines the data quality objectives to be *transparency, completeness, consistency, comparability, and accuracy*. These objectives are used as a foundation of the QA/QC system implemented in Norway. In addition, we consider *timeliness* as part of the data quality objectives.

Several quality assurance and quality control procedures for the preparation of the national emission inventory have been established in Norway during the past years. Statistics Norway made its first emission inventory for some gases in 1983 for the calculation year 1973. The emission estimation methodologies and the QA-procedures have been developed continuously since then.

Norway has implemented a formal quality assurance/quality control plan. The institutions of the national system have implemented the QA/QC plans by establishing internal procedures. These procedures assign internal responsibilities for the QA/QC checks. The QA/QC procedures are under continuous development, and inventory compilers in all institutions of the national system are informed about the data quality objectives of the national system, as well as any priority areas related to the development of the QA/QC procedures.

The QA/QC work has several dimensions, of which accuracy and timeliness are the most essential. As these two aspects may be in conflict, the QA/QC improvements in recent years

have focused on how to implement an effective QA/QC procedure and how to obtain a more efficient dataflow in the inventory system. Transparency is also an important issue that steadily receives more attention.

See Annex 4 for more details on the QA/QC plan and QA/QC procedures.

1.6 General uncertainty assessment, including data pertaining to the overall uncertainty of inventory totals

Norway has quantified uncertainties in input data (activity data and emission factors) and in total emissions and its trend. The uncertainties in input data have been made in consultation with sector experts, combining expert judgments by source experts, information in the IPCC 2006 Guidelines (IPCC 2006) with other sources of information. The uncertainties are combined using the IPCC approach 2 method (bootstrap techniques). The uncertainty analysis of the total inventory is performed annually on emission data for 1990 and the last year of the emission inventory. Uncertainty estimates for sources are also updated annually when the estimation methods or data sources are being changed.

Uncertainty estimates in the LULUCF sector are derived from the uncertainty associated with activity data and emission/removal factors. Activity data typically refers to land areas, while emission or removal factors typically represent carbon stock changes per unit area. Uncertainty in activity data is primarily related to sampling errors in area estimates. Uncertainty in emission and removal factors varies depending on the pool and methodological approach applied. For tree living biomass, which is the largest sink or source category in the sector, uncertainties are derived from sampling methodologies used in the NFI. For other pools and land-use categories, uncertainty estimates are based on default values, peer-reviewed studies, expert judgment, depending on data availability. Uncertainty propagation is carried out following the methods described in the IPCC 2006 Guidelines. In cases where the methodology for calculating uncertainties is too complex for standard error propagation methods (Approach 1), Monte Carlo simulation (Approach 2) is instead performed. This section provides a general description of the uncertainty estimation approach applied in the LULUCF sector. Specific assumptions and methodological details are described in the uncertainty sections under each land-use category in Chapter 6.

1.6.1 Approach 1 uncertainty analysis

The uncertainties in the emission levels for 2024 have been investigated by an approach 1 analysis. The results are given in Table 1-7 and Table 1-8.

Table 1-7: Approach 1 uncertainties in emission levels, excluding LULUCF.

2024	m (mean)	Uncertainty 2s (% of mean)
Total	44.6 mill. tonnes	3
CO₂	36.9 mill. tonnes	3
CH₄	4.6 mill. tonnes	11
N₂O	2.2 mill. tonnes	20
HFC	721 ktonnes	51
PFC	81 ktonnes	20
SF₆	62 ktonnes	43

Table 1-8: Approach 1 uncertainties in emission levels, including LULUCF.

2024	m (mean)	Uncertainty 2s (% of mean)
Total	29.1 mill. tonnes	17
CO₂	21.1 mill. tonnes	23
CH₄	4.8 mill. tonnes	11
N₂O	2.5 mill. tonnes	19
HFC	721 ktonnes	51
PFC	81 ktonnes	20
SF₆	62 ktonnes	43

1.6.2 Approach 2 uncertainty analysis

The uncertainty in the Norwegian greenhouse gas emission inventory has been investigated by an approach 2 analysis and the results are given in Table 1-9 to Table 1-12. The approach 2 analysis is also further described in Annex 2.

The uncertainty in the Norwegian emission inventory was initially investigated systematically in three reports (Kvingedal et al. 2000; Rypdal 1999; Rypdal & Flugsrud 2001). The first two reports focused on the uncertainty in the greenhouse gas emissions, based on approach 2 analyses, and the last report investigated the uncertainty in the emission estimates of long-range air pollutants. The analysis of greenhouse gases was repeated in Statistics Norway (2010) and more thoroughly in (Flugsrud & Hoem 2011). The report *Uncertainties in the Norwegian Greenhouse Gas Emission Inventory* (Rypdal & Zhang 2000) includes more detailed documentation of the analysis method used in all analyses. Both approach 1 and 2 uncertainty analyses are now performed annually.

The national greenhouse gas (GHG) emission inventory is compiled from estimates based on emission factors and activity data and direct measurements by plants. All these data and parameters will contribute to the overall inventory uncertainty. The uncertainties and probability distributions of the inventory input parameters have been assessed based on available data and expert judgements. Finally, the level and trend uncertainties of the national GHG emission inventory have been estimated using Monte Carlo simulation. The methods used in the analysis correspond to an IPCC Approach 2 method, as described in the IPCC guidelines (IPCC 2006). Analyses have been made both excluding and including the LULUCF-sector (Land Use, Land-Use Change and Forestry).

Table 6.2 from the IPCC good practice guidance is included in Annex 2. Column G in table 6.2 is estimated as uncertainty for source category divided by total GHG emissions.

1.6.2.1 Uncertainty in emission levels

The estimated uncertainties of the levels of total emissions and in each gas are shown in Table 1-9 and Table 1-10.

Table 1-9: Uncertainties in emission levels. Each gas and total GWP weighted emissions. Excluding the LULUCF sector.

1990	m (mean)	Fraction of total emissions	Uncertainty 2s (% of mean)
Total	51.2 mill. tonnes	1	3
CO₂	35.0 mill. tonnes	0.68	3
CH₄	6.7 mill. tonnes	0.13	15
N₂O	3.8 mill. tonnes	0.08	10
HFC	50 tonnes	0.00	51
PFC	3.5 mill. tonnes	0.07	20
SF₆	2.2 mill. tonnes	0.04	2
2024	m (mean)	Fraction of total emissions	Uncertainty 2s (% of mean)
Total	44.6 mill. tonnes	1	3
CO₂	37.0 mill. tonnes	0.83	3
CH₄	4.6 mill. tonnes	0.10	11
N₂O	2.2 mill. tonnes	0.05	15
HFC	721.1 ktonnes	0.02	51
PFC	81.4 ktonnes	0.00	20
SF₆	61.8 ktonnes	0.00	43

Table 1-10: Uncertainties in emission levels. Each gas and total GWP weighted emissions. Including the LULUCF sector.

1990	m (mean)	Fraction of total emissions	Uncertainty 2s (% of mean)
Total	41.0mill. tonnes	1	10
CO₂	24.4 mill. tonnes	0.59	16
CH₄	6.9 mill. tonnes	0.17	15
N₂O	4.01mill. tonnes	0.10	10
HFC	50 tonnes	0.00	52
PFC	3.5 mill. tonnes	0.09	20
SF₆	2.2 mill. tonnes	0.05	1
2024	m (mean)	Fraction of total emissions	Uncertainty 2s (% of mean)
Total	29.2 mill. tonnes	1	17
CO₂	21.1 mill. tonnes	0.72	23
CH₄	4.8 mill. tonnes	0.16	11
N₂O	2.5 mill. tonnes	0.08	16
HFC	771.1.3 ktonnes	0.02	51
PFC	94.0 ktonnes	0.00	20
SF₆	51.5 ktonnes	0.00	43

The total national emissions of GHG (LULUCF sector excluded) in 1990 are estimated with an uncertainty of 3% of the mean. The main emission component CO₂ is known with an uncertainty of 3% of the mean. The total uncertainty level was 3% of the mean in 2024.

There have been major changes in uncertainty level for the different emission components between the two years. The highest uncertainty change between 1990 and 2024 is in the uncertainty estimates for the SF₆ emissions, which has increased from 1 to 43% of the mean. However, the SF₆ emissions are strongly reduced because magnesium production was closed. The figures for the emission of SF₆ from magnesium production were quite well known, but now a larger part of the SF₆ emissions comes from sources with higher uncertainty. For N₂O there is also an increase in uncertainty between the years. One reason for the change can be found in that N₂O from the production of synthetic fertilizer with a quite low uncertainty contributes to a smaller part of the total N₂O emissions in 2024 than in 1990.

By including the LULUCF sector the results from the analysis show a total uncertainty of 10% of the mean in 1990 and 17% in 2024. This is because the uncertainty in the LULUCF sector in general is higher than in most other sectors.

1.6.2.2 Uncertainty in emission trend

The estimated uncertainties of the trends of total emissions and each gas are shown in Table 1-11 and Table 1-12.

Table 1-11: Uncertainty of emission trends. 1990-2024. Excluding the LULUCF sector.

	% change ((m2024-m1990) * 100/m1990)	Uncertainty (2*s*100/m1990)
Total	-13	3
CO₂	6	3
CH₄	-32	11
N₂O	-42	4
HFC¹	..	..
PFC	-98	20
SF₆	-97	1

Table 1-12: Uncertainty of emission trends. 1990-2024. Including the LULUCF sector.

	% change ((m2024-m1990)*100/m1990)	Uncertainty (2*s*100/m1990)
Total	-29	6
CO₂	-14	8
CH₄	-31	11
N₂O	-39	4
HFC1	..	..
PFC	-98	20
SF₆	-97	1

¹ The base year emissions of HFCs are so close to zero that figures for % change and uncertainty are meaningless.

The result shows that the decrease in the total GHG emissions from 1990 to 2024 is 13%, with an uncertainty in the trend of ± 3 percentage points, when the LULUCF sector is not included. This means that the 2024 emissions are likely between 0 and 6% below the 1990 emissions (a 95 percent confidence interval).

With the sector LULUCF included in the calculations there has been a decrease in the total emissions figures on -29%, with a trend uncertainty of ± 6 percentage points.

1.7 General assessment of completeness

1.7.1 Information on completeness (including information on non-reported categories or any methodological or data gaps in the inventory)

An assessment of the completeness of the emission inventory should, according to the IPCC Good Practice Guidance, address the issues of spatial, temporal, and sectoral coverage along with all underlying source categories and activities. Confidentiality is an additional element of relevance, which has been addressed in section 1.2.3.6.

Except for the LULUCF sector, the inventory includes emissions on the archipelago Svalbard as well as on mainland Norway. In particular, emissions from coal mining on Svalbard are included.

1.7.2 Description of insignificant categories, if applicable

The modalities, procedures and guidelines in decision 18/CMA.1 specify that a Party may use the notation key NE (not estimated) when the estimates would be insignificant in terms of the level. An emission should only be considered insignificant if the likely level of emissions is below 0.05% of the national total GHG emissions, excluding LULUCF, and does not exceed 500 kt CO₂ equivalents. The total national aggregate of estimated emissions for all gases and categories considered insignificant shall remain below 0.1% of the national total GHG emissions, excluding LULUCF.

Norway has used the national total GHG emissions for 2024 as reported in this NID to assess whether emissions may be considered insignificant. The national total GHG emissions without LULUCF in 2024 is reported to be 44 424 715 tonnes CO₂ equivalents. The threshold for an individual emission to be considered insignificant is therefore 22 212 tonnes CO₂ equivalents while the total threshold to be considered insignificant is 44 425 tonnes CO₂ equivalents.

The emissions that Norway has considered as insignificant or because they were non-mandatory, and their likely level of emissions are presented in Table 1-13.

The individual emissions excluded are all below the individual threshold and the total emissions excluded are also below the total threshold.

Table 1-13: Emissions considered insignificant and reported as NE.

CRT code	Description of emission source	Gases	Likely level of emissions (tonnes CO ₂ equivalents)
1B1a2/1B1a3	Fugitive emissions, underground mines	CO ₂	No methodology available.
1B2ai	Fugitive emissions, oil exploration	CO ₂	No methodology available.
1B2ci2	Fugitive emissions, venting gas	CO ₂	No methodology available.
1C1a	CO ₂ transport and storage; Pipelines	CO ₂	Less than 200 tonnes. See chapter 3.4.3.2.
3D	Agricultural soils	CH ₄	No methodology, see note to CRT Table3s2.
4D1b	Wetlands – flooded land remaining flooded land	CO ₂	It is not mandatory because there is no default method for estimating carbon stock changes for this source.
4D2b	Wetlands – land converted to flooded land	CO ₂	It is not mandatory because there is no default method for estimating carbon stock changes for this source.
4D2a	Wetlands – land converted to peat extraction	CO ₂	Estimated to less than 10 000 t CO ₂ eq and hence considered to be a negligible source. See below details on the methodology used for the estimation.
4(II)X1	All land uses (X) - Emissions from drainage and rewetting in mineral soils (remaining categories)	CO ₂ , CH ₄ and N ₂ O	It is not mandatory to estimate emissions from rewetting organic or mineral soils.
4(II)X2	All land uses (X) - Emissions from drainage and rewetting in mineral soils (conversion categories)	CO ₂ , CH ₄ and N ₂ O	It is not mandatory to estimate emissions from rewetting organic or mineral soils.
4(IV)A1	Forest land - Biomass burning – controlled burning (remaining category)	CH ₄ and N ₂ O	We assume emission from controlled forest fires are negligible because very few fire drills are performed. Emissions are estimated to less than 50 t CO ₂ eq. See below details on the methodology used for the estimation.
4(IV)C1	Grassland remaining grassland - Biomass burning- wildfires (remaining category)	CH ₄ and N ₂ O	We assume emission from wildfires on grasslands are negligible because these very rarely occur. Emissions are estimated to be in the range of 800 - 7000 t CO ₂ eq. See below details on the methodology used for the estimation.
5C1	Cremation	CH ₄ , N ₂ O	No methodology. NO _x emissions from cremation is reported in 5C as 10-15 tonnes/year. CH ₄ and N ₂ O emission factors for combustion are generally lower than NO _x factors, so the NO _x emission is likely an upper bound. Biogenic CO ₂ is also reported as NE.
5C2	Open burning of waste	CO ₂ , CH ₄ , N ₂ O	The total GHG emissions is in the order of 1 200 t CO ₂ eq. by estimate from 1999 (including non-biogenic)

CRT code	Description of emission source	Gases	Likely level of emissions (tonnes CO ₂ equivalents)
	Total		Estimated emissions less than 19 000 t CO ₂ eq.

For emissions from the LULUCF sector considered negligible, see below for details on the assessment of approximate emission levels based on limited data sources. Additional information is provided under the relevant category in Chapter 6.

Peat extraction: The likely level of emissions of CO₂ is 9.1 kt yr⁻¹ (range 7.4 - 11.3 kt yr⁻¹). For CH₄, the likely emissions are 0.4 kt CO₂ eq yr⁻¹, and for N₂O, it is 0.1 kt CO₂ eq yr⁻¹. For both CH₄ and N₂O, the likely level of emissions makes up less than the threshold calculated at the beginning of this section. We conclude that these emissions qualify as being non-significant.

Forest land controlled fires: The likely level of emissions of CH₄ is 0.043 kt CO₂ eq yr⁻¹, and for N₂O, it is 0.022 kt CO₂ eq yr⁻¹. For both CH₄ and N₂O, the likely level of emissions makes up less than the threshold calculated at the beginning of this section. We conclude that these emissions qualify as being non-significant.

Grassland wildfires: The likely level of emissions of CH₄ range from 0.5 to 4.6 kt CO₂ eq yr⁻¹; for N₂O, they range from 0.3 to 2.4 kt CO₂ eq yr⁻¹. For both CH₄ and N₂O, the likely level of emissions makes up less than the threshold calculated at the beginning of this section. We conclude that these emissions qualify as being non-significant.

1.7.3 Total aggregate emissions considered insignificant, if applicable

The total aggregate emissions considered insignificant are less than 19 000 t CO₂ eq.

1.8 Metrics

In accordance with decisions 18/CMA.1 and 5/CMA.3, the emissions and removals are expressed in CO₂ equivalents by using the global warming potential values, excluding the value for fossil methane, over a 100-year time horizon listed in table 8.A.1 of the contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change.

2. Trends in Greenhouse Gas Emissions and removals

2.1 Description of emission and removal trends for aggregated GHG emissions and removals

In 2024, total greenhouse gas (GHG) emissions in Norway were 44.6 million tonnes of carbon dioxide equivalents, which is a decrease of 1.9 million tonnes compared to 2023. Emissions reached their peak at 56.4 million tonnes in 2007. They have since decreased by 20% and were 6.6 million tonnes, or 13%, lower in 2024 than in 1990. The net GHG emissions, including all sources and sinks, were 29.8 million tonnes of CO₂ equivalents in 2024. The total emissions distribution among the CRT sectors from 1990 to 2024, as well as net removals in the LULUCF sector, are illustrated in Figure 2.1.

In this NID, if not specified otherwise, total emission figures include indirect CO₂ emissions⁸ but not emissions and removals from land use, land-use change and forestry (LULUCF). The indirect CO₂ emissions are further described in chapter 9.

⁸ Non-CO₂, carbon-containing gases (methane (CH₄), CO or NMVOC) will eventually be oxidised to CO₂ in the atmosphere. The CO₂ emissions formed are termed "indirect CO₂ emissions".

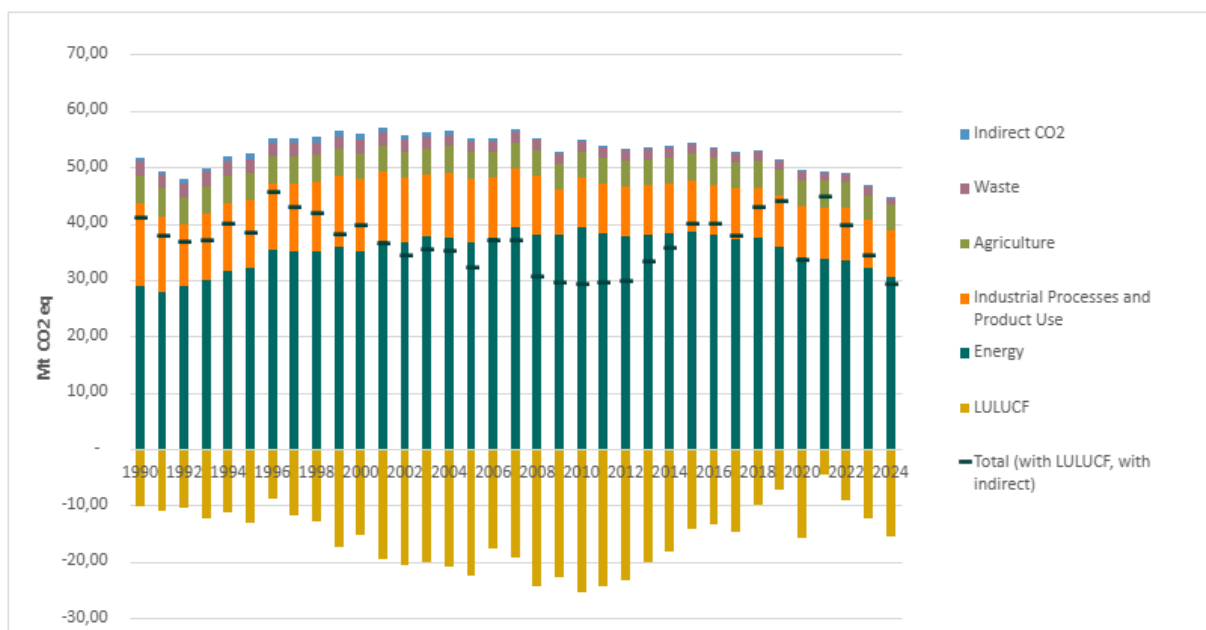


Figure 2.1: Total emissions of greenhouse gases by sources and removals from LULUCF in Norway, 1990-2024 (Mtonnes CO₂ equivalents). Source: Statistics Norway/Norwegian Environment Agency/Norwegian Institute of Bioeconomy Research.

Table 2-1: Total emissions of greenhouse gases by sources and removals in Norway 1990-2024. Million tonnes of CO₂ equivalents.

Year	Energy	Industrial processes and product use	Agriculture	LULUCF	Waste	Indirect CO ₂	Total (without LULUCF, with indirect)	Total (with LULUCF, with indirect)	Total (without LULUCF, without indirect)	Total (with LULUCF, without indirect)
1990	28.3	14.7	4.9	-10.2	2.7	0.6	51.2	41.0	50.6	40.4
1995	31.4	11.9	4.9	-13.2	2.5	0.9	51.6	38.4	50.7	37.5
2000	34.2	12.8	4.7	-15.2	2.3	1.0	54.9	39.8	54.0	38.8
2005	36.4	11.2	4.7	-22.5	2.0	0.5	54.7	32.3	54.3	31.8
2010	39.2	8.8	4.4	-25.4	2.0	0.2	54.7	29.3	54.5	29.0
2011	38.1	8.9	4.4	-24.3	2.0	0.2	53.7	29.4	53.5	29.2
2012	37.7	8.8	4.4	-23.4	2.0	0.2	53.1	29.7	52.9	29.5
2013	37.7	8.9	4.5	-20.0	1.9	0.2	53.3	33.3	53.1	33.1
2014	38.0	9.0	4.6	-18.2	1.9	0.3	53.7	35.6	53.5	35.3
2015	38.5	9.1	4.6	-14.3	1.8	0.3	54.3	40.0	54.0	39.7

2016	37.7	9.0	4.7	-13.5	1.8	0.3	53.4	39.9	53.1	39.6
2017	37.1	8.9	4.7	-14.8	1.7	0.3	52.7	37.9	52.4	37.6
2018	37.3	9.0	4.7	-10.0	1.7	0.2	52.8	42.9	52.6	42.6
2019	35.7	9.0	4.6	-7.2	1.6	0.2	51.1	43.9	50.9	43.7
2020	33.9	9.1	4.6	-15.9	1.5	0.2	49.4	33.5	49.1	33.3
2021	33.6	9.2	4.7	-4.5	1.4	0.2	49.2	44.6	49.0	44.4
2022	33.5	9.2	4.6	-9.1	1.4	0.2	48.8	39.8	48.6	39.5
2023	32.1	8.5	4.4	-12.3	1.4	0.2	46.6	34.2	46.3	34.0
2024	30.4	8.3	4.4	-15.4	1.3	0.2	44.6	29.2	44.4	29.0

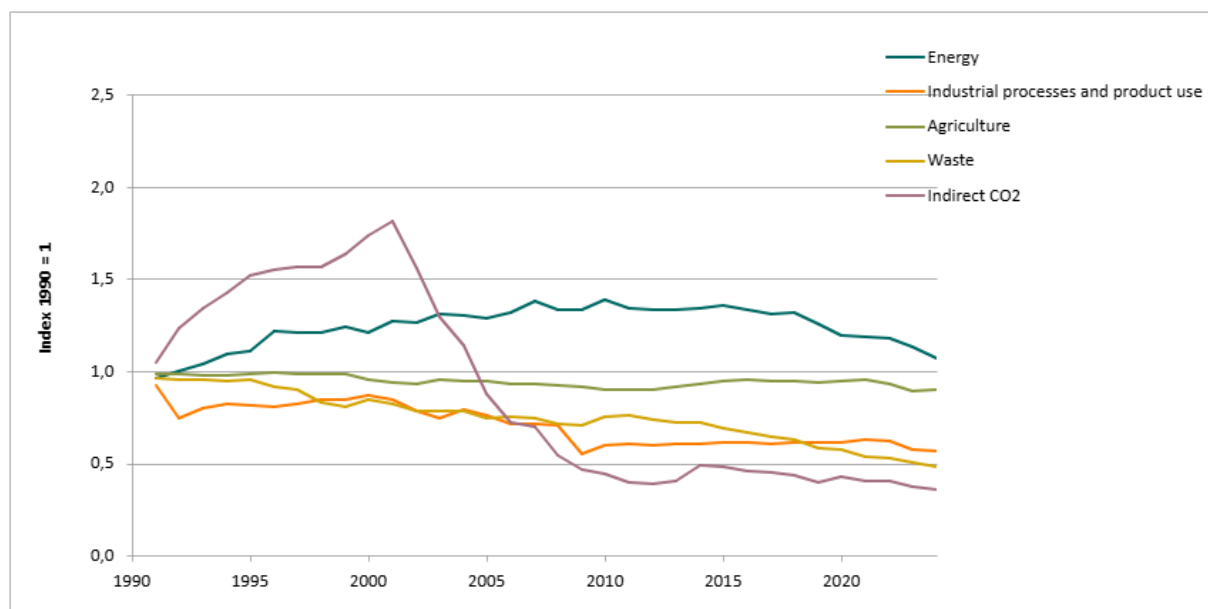


Figure 2.2: Changes in emissions of greenhouse gases, relative to 1990, by sectors, 1990-2024. The development in indirect CO₂ emissions is also shown. Index 1990 = 1. Source: Statistics Norway/Norwegian Environment Agency.

Norway has experienced economic growth since 1990. In addition, the offshore petroleum sector has expanded significantly since then, reaching a peak in production in the early 2000s. Together this has resulted in higher CO₂ emissions from energy use, both in energy industries and transport. Emissions from the energy sector have increased by 7% from 1990 to 2024.

The downward trend in GHG emissions from the sector "Industrial processes and product use" in the early 1990s, can be explained by the implementation of policies and measures in the metal

industry, resulting in less emission intensive production methods. Later, in the 2000s, the decrease was largely caused by close-downs and production reductions, this also mainly in the metal industry.

Emissions from agriculture have decreased by 10% since 1990 mainly due to reduction of activity in the agriculture sector. The downward trend in GHG emissions from the waste sector continues and is due to reductions of waste amounts disposed at disposal sites.

In chapter 2.2, emission trends are explained both by sector and by gas for the period 1990-2024.

2.2 Description of emission and removal trends by sector and gas

2.2.1 Trends by sector

The energy sector is by far the most important source of GHG emissions in Norway, contributing to 68% of the national GHG emissions in 2024, see Figure 2.3.

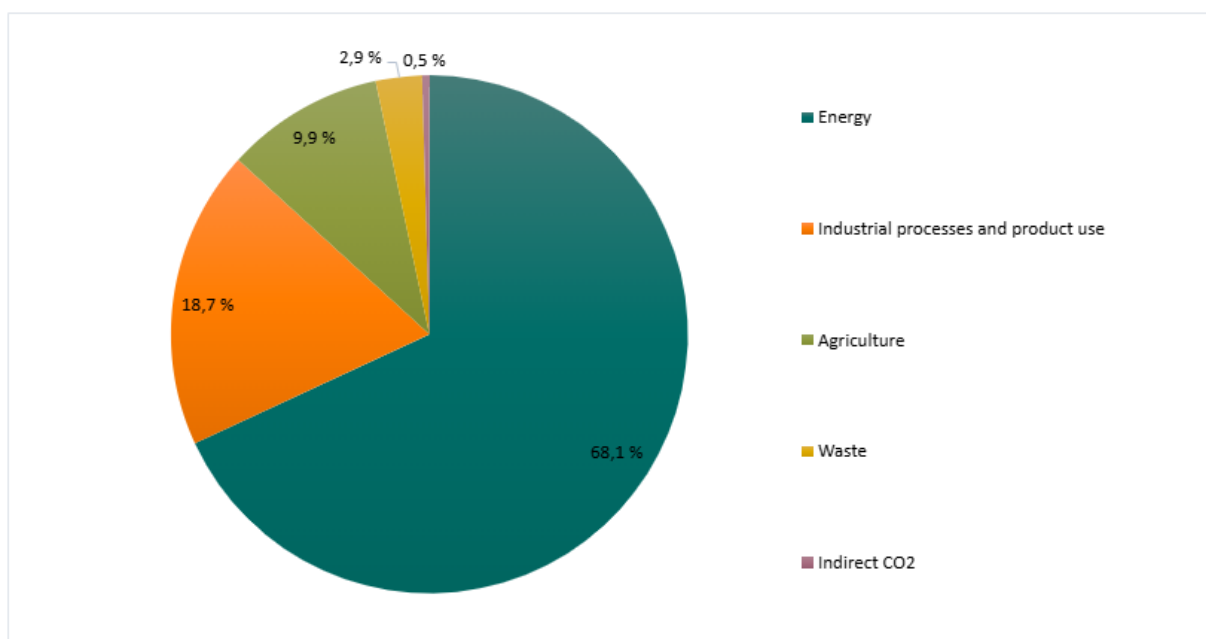


Figure 2.3: Distribution of GHG emissions (without LULUCF) in Norway in 2024 by sector. Indirect CO₂ emissions is also shown. Source: Statistics Norway/Norwegian Environment Agency.

Figure 2.4 displays GHG emissions trends by sectors between 1990 and 2024. The energy sector is divided into five categories: fuel combustion in energy industries, fuel combustion in

manufacturing industries and construction, fuel combustion in transport, fuel combustion in other sectors⁹, and fugitive emissions from fuels.

While emissions have decreased for most of the sectors, emissions from energy industries and transport have increased considerably since 1990.

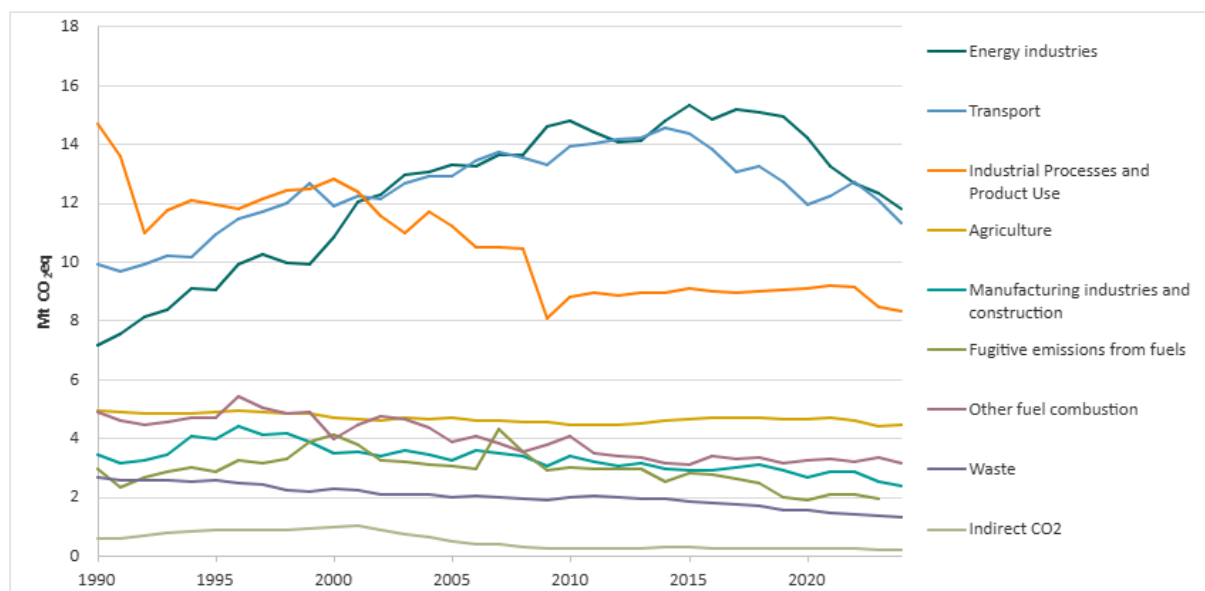


Figure 2.4: Development of emissions of all GHG (Mtonnes CO₂ eq.) from the different sectors (without LULUCF) 1990-2024. Indirect CO₂ emissions is also shown. Source: Statistics Norway/Norwegian Environment Agency.

2.2.1.1 Energy

The major sources of emissions within the energy sector are energy industries and transport, which contributed to 39% and 37% of emissions from the energy sector in 2024, respectively, see Figure 2.5. The remaining emissions are shared between the categories other fuel combustion, energy use in manufacturing industries and construction and fugitive emissions from fuels.

⁹ Includes CRTkey categories 1A4 (stationary combustion in agriculture, forestry, fishing, commercial and institutional sectors and households, motorized equipment and snow scooters in agriculture and forestry, and ships and boats in fishing) and 1A5 (fuel used in stationary and mobile military activities).

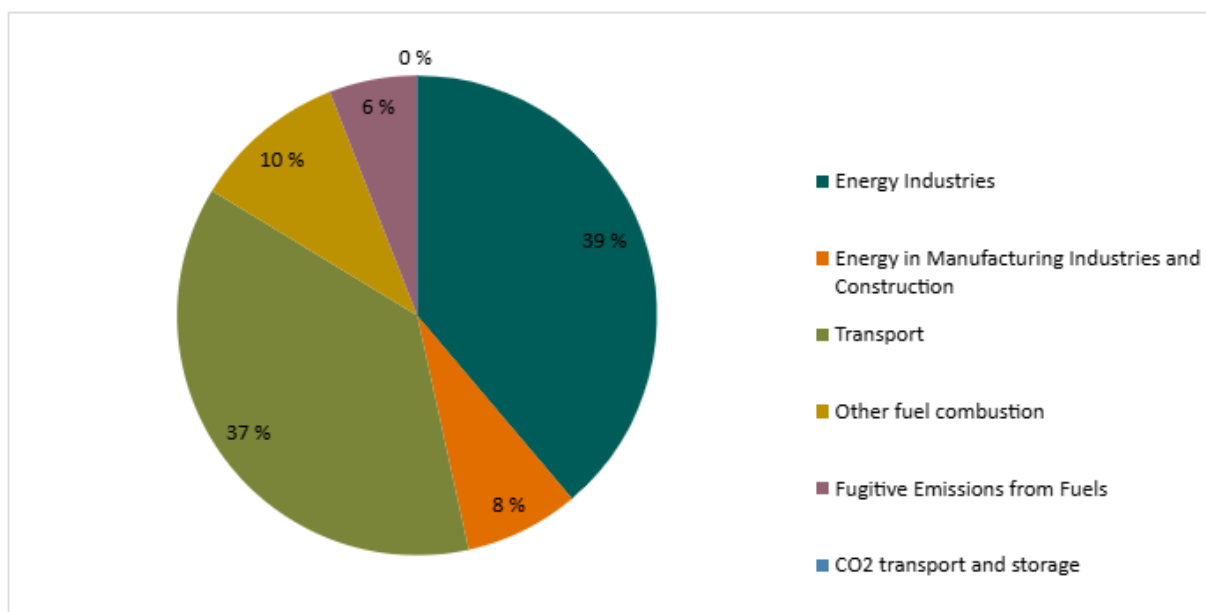


Figure 2.5: Greenhouse gas emissions in 2024 from the energy sector distributed among the different main source categories. Source: Statistics Norway/Norwegian Environment Agency.

Table 2.-2-2: Emissions of greenhouse gases (Mtonnes CO₂ eq.) from the energy sector in Norway, 1990-2024.

Year	Energy Industries	Energy in Manufacturing Industries and Construction	Transport	Other fuel combustion	Fugitive Emissions from Fuels	CO2 transport and storage	Total
1990	7.2	3.4	9.9	4.9	3.0	0.0	28.3
1995	9.0	3.9	10.9	4.7	2.8	0.0	31.4
2000	10.8	3.5	11.9	4.0	4.1	0.0	34.2
2005	13.3	3.2	12.9	3.9	3.0	0.0	36.4
2010	14.8	3.4	13.9	4.1	3.0	0.1	39.2
2011	14.4	3.2	14.0	3.5	2.9	0.1	38.1
2012	14.0	3.1	14.1	3.4	3.0	0.1	37.7
2013	14.1	3.1	14.2	3.3	2.9	0.0	37.7
2014	14.8	2.9	14.6	3.1	2.5	0.0	38.0
2015	15.3	2.9	14.3	3.1	2.8	0.0	38.5

2016	14.8	2.9	13.8	3.4	2.8	0.0	37.7
2017	15.2	3.0	13.0	3.3	2.6	0.0	37.1
2018	15.1	3.1	13.3	3.3	2.5	0.0	37.3
2019	14.9	2.9	12.7	3.1	2.0	0.0	35.7
2020	14.2	2.7	11.9	3.2	1.9	0.0	33.9
2021	13.2	2.9	12.2	3.3	2.1	0.0	33.6
2022	12.7	2.8	12.7	3.2	2.1	0.0	33.5
2023	12.3	2.5	12.1	3.3	1.9	0.0	32.1
2024	11.8	2.3	11.3	3.2	1.8	0.0	30.4

Source: Statistics Norway/Norwegian Environment Agency

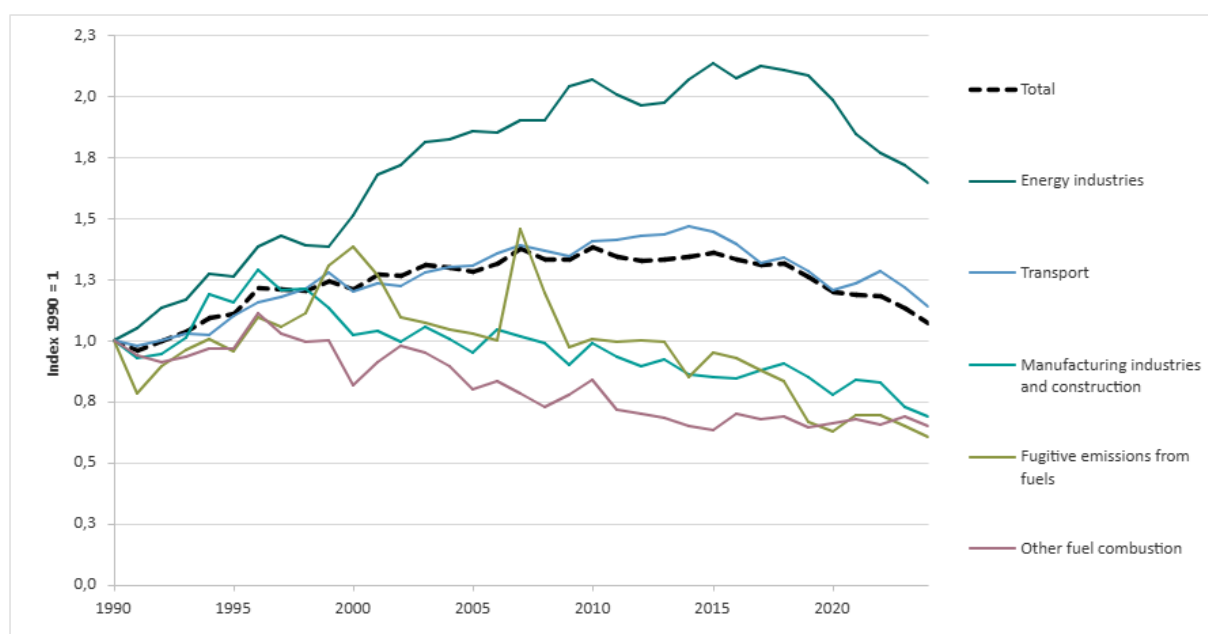


Figure 2.6: Development in emissions of greenhouse gases, relative to 1990, for the main sub-sectors within the energy sector, 1990-2024. Index 1990 = 1. Source: Statistics Norway/Norwegian Environment Agency.

The GHG emissions from the energy sector increased by 7% from 1990 to 2024, as shown in Figure 2.6. This was primarily due to increased activity within oil and gas extraction and transport, specifically road transportation. Since a peak in 2010, emissions have decreased by 23%. From 2023 to 2024, emissions decreased by 5%, especially due to reduced emissions from oil and gas extraction and transport.

The Norwegian electricity production is dominated by hydroelectric power. Thus, emissions from the category energy industries origin almost completely from fuel combustion in oil and gas extraction and related activities. Electricity is normally used in manufacturing processes and for heating purposes.

Emissions from fuel combustion within energy industries reached a peak in 2015, and for the last seven years emissions have been declining. The growth until 2015 can be explained by the increase of oil and gas production and the increase of energy demand in extraction, due to aging of oil fields and transition from oil to gas. The reduction in emissions over the latest years can be explained by several factors, including the closure of a petroleum refining plant, an LNG plant being out of operation in 2021 and partly in 2020 and 2022, as well as the electrification of offshore platforms and an increased share of electric vehicles. Emissions were still 65% higher in 2024 than in 1990.

In 2024, emissions from energy combustion in oil and gas extraction contributed to 33% of the national GHG emissions within the Energy sector. In 1990, the corresponding contribution was 12%.

Emissions from energy use in manufacturing industries and construction reported in the energy sector originate mainly from the less energy intensive industries. It should be noted that the largest emissions from energy consumption in manufacturing are reported in the IPPU sector, due to the reporting requirements in the IPCC guidelines¹⁰. This applies particularly to production of metals, ammonia and petrochemicals. Off-road vehicles and other machinery accounted for 38% of the overall emissions from energy use in manufacturing and construction in 2024, which makes it the biggest emission category within this source. Other major contributing categories are non-metallic mineral production, food processing and beverages, as well as non-ferrous metals. Their contributions to total emissions from the category energy use in manufacturing industries and construction amounted to 24, 12 and 9% respectively.

Emissions from the manufacturing industries and construction in the energy sector decreased by 31% from 1990 to 2024, and by 6% from 2023 to 2024. In 2024, the emissions from this source category contributed to 8% of national GHG emissions within the Energy sector.

Emissions from the transport category increased by 14% from 1990 to 2024 and declined by 5% from 2023 to 2024. The emissions reached a peak of 14.5 million tonnes in 2014. The share of transport in the national total GHG emissions has increased from 19% in 1990 to 25% in 2024. In 2024, road transportation accounted for 66% of emissions from the total transport emissions, while emissions from navigation and civil aviation accounted for 24% and 9%, respectively. Since most railways are electrified in Norway, emissions of GHG from this source are insignificant.

¹⁰ According to the IPCC Guidelines, emissions from all use of energy commodities such as coal, coke, LPG, and natural gas should be reported in the IPPU sector when some of the fuel is used as feedstock, reducing agent or other non-energy purposes. This is to avoid double counting or omissions.

GHG emissions from road transportation increased by 1% from 1990 to 2024, mainly due to the increase of activity in goods transport, as a response to increased population and higher economic activity. Emissions from road transport went up considerably from 1990 until 2007. They then were relatively stable until 2015 and have since plunged by 27% from 2015 to 2024. In 2024 they contributed to 17% of the national GHG emissions. The downward trend from 2015 is primarily a result of increased sales of electric vehicles due to economic incentives, and a blending requirement of biofuels has led to increased consumption of bio diesel and bio ethanol and hence reduced CO₂ emissions. In 2024, 89% of new passenger cars sold but only about 30% of new light duty vehicles sold were electric. From 2023 to 2024, emissions from road transport declined by 7%.

Navigation contributed to the national total GHG emissions by 7% in 2024. During the period 1990-2024, emissions have increased by 60%. Emissions from navigation increased mainly due to an increased activity related to the oil and gas extraction sector.

Civil aviation contributed to 2% of the national GHG emissions in 2024. Emissions from civil aviation have increased by 49% since 1990. The substitution of older planes by new and more energy efficient planes has played an important role in limiting the emission growth. The emissions decreased by 3% from 2023 to 2024.

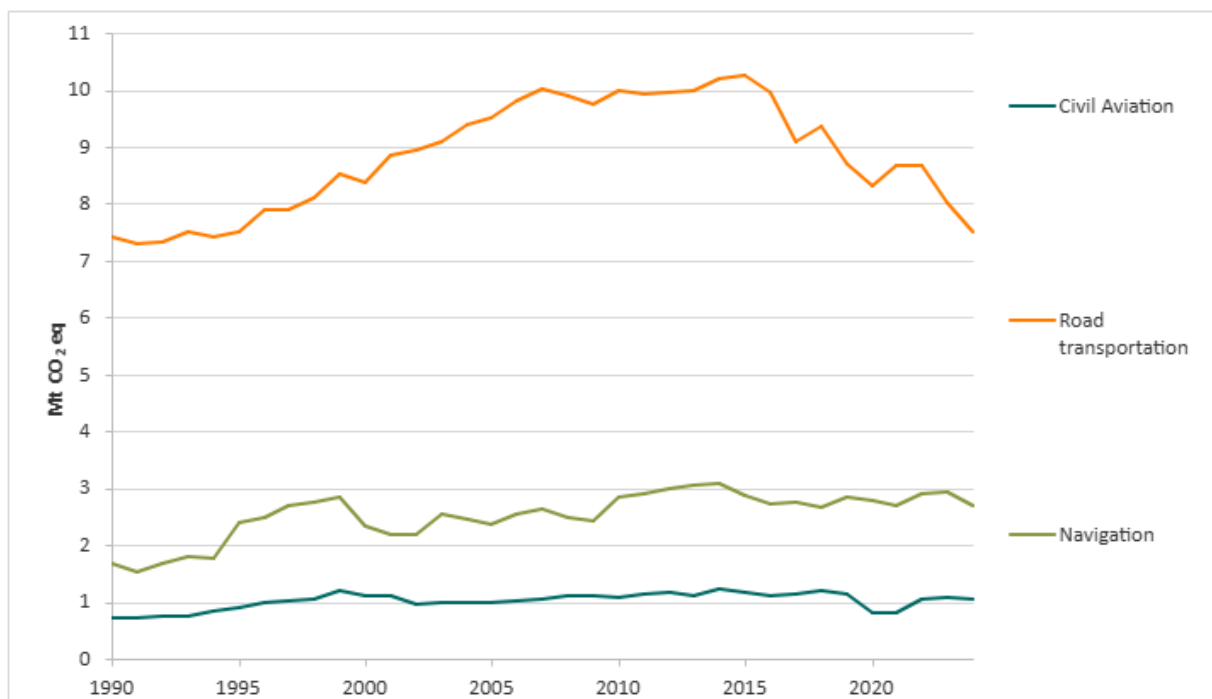


Figure 2.7: Emissions in million tonnes CO₂ equivalents from the most important modes of transport, 1990-2024. Source: Statistics Norway/Norwegian Environment Agency.

Table 2.-2-3: Total emissions of greenhouse gases from the transport sector in Norway, 1990-2024. Million tonnes CO₂ equivalents.

Year	Civil Aviation	Navigation	Railways	Road Transportation	Total Transport
1990	0.7	1.7	0.1	7.4	9.9
1995	0.9	2.4	0.1	7.5	10.9
2000	1.1	2.3	0.1	8.4	11.9
2005	1.0	2.4	0.1	9.5	12.9
2010	1.1	2.8	0.0	10.0	13.9
2011	1.1	2.9	0.0	9.9	14.0
2012	1.2	3.0	0.0	9.9	14.1
2013	1.1	3.0	0.0	10.0	14.2
2014	1.2	3.1	0.0	10.2	14.6
2015	1.2	2.9	0.1	10.2	14.3
2016	1.1	2.7	0.0	10.0	13.8
2017	1.1	2.8	0.1	9.1	13.0
2018	1.2	2.7	0.1	9.3	13.3
2019	1.1	2.8	0.0	8.7	12.7
2020	0.8	2.8	0.0	8.3	11.9
2021	0.8	2.7	0.0	8.7	12.2
2022	1.1	2.9	0.1	8.7	12.7
2023	1.1	2.9	0.1	8.0	12.1
2024	1.0	2.7	0.1	7.5	11.3

The category “Other fuel combustion” includes, in particular, fuel combustion in agriculture, forestry and fisheries, residential sector and commercial/institutional sectors. The total emissions from this category were 3.1 million tonnes of CO₂ equivalents in 2024. Emissions decreased by 35% from 1990 to 2024 and decreased by 6% from 2023 to 2024.

In 2024, GHG emissions from residential sources (stationary and mobile) accounted for 17% of emissions from the “Other fuel combustion” category. Emissions from the residential subsector have been reduced by 72% since 1990.

Emissions from stationary combustion in the residential subsector are climate dependent. A mild winter can lead to relatively lower consumption of fuels and thus reduced emissions, whereas dry and cold winter can lead to relatively higher emissions. Between 1990 and 2024, emissions from stationary combustion in the residential sector have decreased by 84%, mainly due to the electrification of heating infrastructure. Phasing out of oil and gas heating (mostly now banned) and the use of heat pumps in households has also contributed to the decline. Emissions from mobile combustion have declined by 16% in the same period.

Emissions from commercial/institutional sources (mobile and stationary) have decreased by 9% since 1990. Emissions from commercial/institutional stationary sources decreased by 79% from 1990 to 2024, whereas emissions from commercial/institutional mobile sources increased by 136% between 1990 and 2024.

The sub-sector Fugitive emissions from fuels in Table 2.-2-2 refers to emissions from oil and gas activities such as flaring of natural gas, leakages and venting of methane. Indirect CO₂ emissions from NMVOC emitted during the loading and unloading of oil tankers are also accounted for in this sub-sector. Fugitive emissions from fuels contributed to 4% of the national GHG emissions in 2024 and to 6% of the GHG emissions within the energy sector. Fugitive emissions from fuels have decreased by 39% since 1990 and by 6% between 2023 and 2024.

Reduced emissions from flaring since 1990 are partly explained by the introduction of tax on gas flared offshore from 1991 and implemented technical measures. The amount of gas flared may fluctuate from year to year due to variation of start-ups, maintenance, and interruption in operation.

2.2.1.2 Industrial processes and product use

The industrial processes and other product use (IPPU) sector accounted for 19% of the national GHG emissions in 2024 (Figure 2.3). The emissions from this sector decreased by 43% from 1990 to 2024 and by 1% between 2023 and 2024.

Metal industry is the main source of emissions within the IPPU sector in the period 1990-2024. It contributed to 57% of the GHG emissions from the IPPU sector in 2024. The other main contributing sources in 2024 were chemical industry, mineral industry and product uses as substitutes for ODS (ozone depleting substances). They contributed to 21%, 10% and 9% of the GHG emissions from the IPPU sector, respectively.

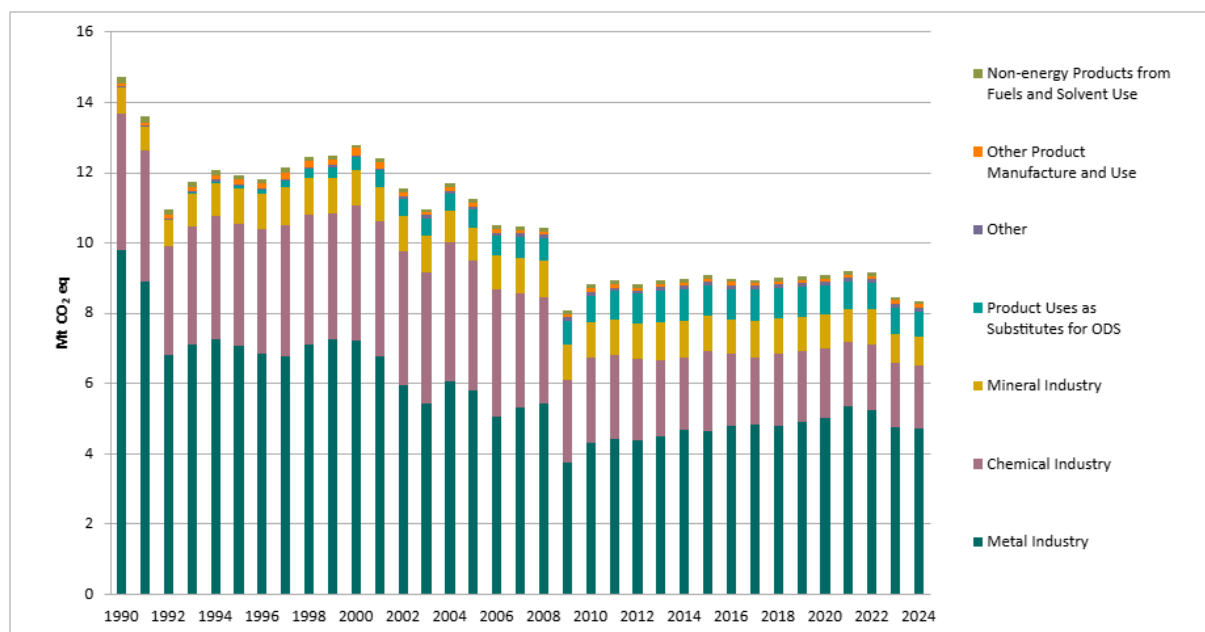


Figure 2.8: Total greenhouse gas emissions (Mtonnes CO₂ eq.) in the IPPU sub-sector in Norway, 1990-2024¹¹. Source: Statistics Norway/Norwegian Environment Agency.

During the first half of the 20th century, a large-scale industrialization took place in Norway. Many industrial communities appeared around the large hydroelectric resources, particularly in the western parts of the country. Typical products were raw materials and semi-manufactured goods such as aluminium and ferroalloys. The main source of energy has always been hydroelectricity. However, fossil fuels have been used as reducing agents or raw materials. Greenhouse gases are then emitted as process related gases.

Emissions from the metal industry in the IPPU sector decreased by 6% from 2023 to 2024. The largest contributors to the GHG emissions from metal production in 2024 are productions of ferroalloys and aluminium. Emissions from those productions constituted 97% of emissions from the metal industry in 2024. The large decrease in emissions in 2009 reflects low production levels of ferroalloys, due to lower economic activity and economic recession.

In 1990, PFC emissions from aluminium production contributed to 7% of the national GHG emissions, while in 2024, it has been reduced to 0.2%. Emissions of PFCs from aluminium production have decreased by 98% since 1990, and between 2023 and 2024 emissions decreased by 14%.

¹¹ Under Other production, Norway reports the two source categories: pulp and paper and food and drink.

Since 2010, production of ferroalloys has been the most important source of GHG emissions within the metal production category. The GHG emissions from ferroalloys production amounted to 2.5 million tonnes of CO₂ equivalents in 2024 and accounted for 5.5% of the national total GHG emissions. Emissions from production of ferroalloys decreased by 3% from 1990 to 2024, with a 2% decrease from 2023. The large increase in emissions from 2009 to 2010 (50%) is due to the low production level in 2009.

Table 2.-2-4: Total greenhouse gas emissions (Mtonnes CO₂ eq.) from the IPPU sub-sectors in Norway, 1990-2024.

Year	Mineral industry	Chemical industry	Metal industry	Non-energy products from fuels and solvent use	Electronics Industry	Product Uses as Substitutes for ODS	Other product manufacture and use	Other	Total
1990	0.7	3.9	9.8	0.2	-	0.0	0.1	0.0	14.7
1995	1.0	3.5	7.1	0.1	-	0.1	0.1	0.0	11.9
2000	1.0	3.8	7.2	0.1	-	0.4	0.2	0.1	12.8
2005	0.9	3.7	5.8	0.1	-	0.5	0.1	0.1	11.2
2010	1.0	2.4	4.3	0.1	-	0.8	0.1	0.1	8.8
2011	1.0	2.4	4.4	0.1	-	0.8	0.1	0.1	8.9
2012	1.0	2.3	4.4	0.1	-	0.9	0.1	0.1	8.8
2013	1.1	2.2	4.5	0.1	-	0.9	0.1	0.1	8.9
2014	1.1	2.1	4.6	0.1	-	0.9	0.1	0.1	9.0
2015	1.0	2.3	4.6	0.1	-	0.9	0.1	0.1	9.1
2016	1.0	2.0	4.8	0.1	-	0.9	0.1	0.1	9.0
2017	1.0	1.9	4.8	0.1	-	0.9	0.1	0.1	8.9
2018	1.0	2.1	4.8	0.1	-	0.8	0.1	0.1	9.0
2019	1.0	2.0	4.9	0.1	-	0.8	0.1	0.1	9.0
2020	1.0	2.0	5.0	0.1	-	0.8	0.1	0.1	9.1
2021	0.9	1.8	5.3	0.1	-	0.8	0.1	0.1	9.2
2022	1.0	1.9	5.2	0.1	-	0.8	0.1	0.1	9.2
2023	0.8	1.8	4.7	0.1	-	0.8	0.1	0.1	8.5
2024	0.8	1.8	4.7	0.1	-	0.7	0.1	0.1	8.3

In 1990, SF₆ from magnesium foundries accounted for 4.1% of the national total GHG emissions. Emissions decreased until the closure of all plants in 2007. Reductions in SF₆ emissions over the period are, in the early 90s, mainly due to improvements in the production processes, in 2002, due to the closing down of production of cast magnesium and in 2006, due to the closing down of secondary magnesium production.

The chemical industry includes primarily N₂O from nitric acid production and CO₂ from production of ammonia and carbides. The GHG emissions from this sub-sector amounted to 1.7 million tonnes of CO₂ equivalents in 2024, which represented 4% of the national GHG emissions. Emissions have decreased by 55% since 1990, mainly due to the reduction of emissions from the production of nitric acid, ammonia, and carbides. Emissions have decreased by 3% from 2023 to 2024.

The emissions from mineral industry were 0.8 million tonnes in 2024, which accounted for 2% of the national GHG emissions. Emissions increased by 12% from 1990 to 2024, mainly due to the increase of lime production. The emissions from the mineral industry remained stable between 2023 and 2024, decreasing only by 1%.

In 2024, the CO₂ process emissions from cement production were 1% of the national GHG emissions. They have decreased by 12% since 1990. From 2023 to 2024 emissions from cement production decreased by 6%, due to reduced production of clinker.

2.2.1.3 Agriculture

In 2024, 10% of the national GHG emissions originated from agriculture, corresponding to 4.4 million tonnes of CO₂ equivalents. Emissions from agriculture have decreased by 10% since 1990 and have remained relatively stable between 2023 and 2024.

The largest sources of GHGs within the agriculture sector are enteric fermentation (CH₄) and agricultural soils (N₂O). In 2024, these categories represented 51% and 33% of the emissions from the agriculture sector, respectively, while manure management represented 12%.

The main driver behind the emission trend in agriculture is the development of the number of animals in the dominant animal groups. Important reasons for the decreasing trend in GHG emissions are use of more concentrate and more effective milk production, which have led to a reduction of the number of dairy cows. For beef cows there has instead been an increase in the animal numbers since 1990.

Enteric fermentation contributed to 2.3 million tonnes CO₂ equivalents in 2024, corresponding to 5% of the national GHG emissions. This category constituted 85% of the overall CH₄ emissions from agriculture in 2024.

The emissions of N₂O from agricultural soils amounted to 1.4 million tonnes CO₂ equivalents in 2024. This accounted for 66% of the national N₂O emissions in 2024, and 3% of the national GHG emissions.

In 2024, emissions of CH₄ from manure management amounted to 0.4 million tonnes CO₂ equivalents and emissions of N₂O from manure management amounted to 0.2 million tonnes CO₂ equivalents. Together this accounted for 1% of the Norwegian GHG emissions.

Liming of agricultural soils and lakes is a source of emissions of CO₂ and corresponded to 3% of the agricultural GHG emissions in 2024. These emissions have decreased with 43% since 1990, mainly because less liming occurs on agricultural lands.

Table 2.-2-5: Greenhouse gas emissions (Mtonnes CO₂ eq.) from the agricultural sub-sectors in Norway, 1990-2024. Urea application is in ktonnes CO₂ eq.

Year	Enteric Fermentation	Manure management	Agricultural Soils	Field burning of agricultural residues	Liming	Urea application (kt)	Total
1990	2.5	0.5	1.6	0.0	0.2	0.6	4.9
1995	2.5	0.5	1.6	0.0	0.2	0.6	4.9
2000	2.4	0.5	1.6	0.0	0.1	0.1	4.7
2005	2.4	0.6	1.6	0.0	0.1	0.1	4.7
2010	2.3	0.6	1.4	0.0	0.1	0.3	4.4
2011	2.3	0.6	1.5	0.0	0.1	0.3	4.4
2012	2.3	0.6	1.5	0.0	0.1	0.2	4.4
2013	2.3	0.6	1.5	0.0	0.1	0.2	4.5
2014	2.3	0.6	1.6	0.0	0.1	0.2	4.6
2015	2.4	0.6	1.6	0.0	0.1	0.2	4.6
2016	2.4	0.6	1.6	0.0	0.1	0.2	4.7
2017	2.4	0.6	1.6	0.0	0.1	0.1	4.7
2018	2.4	0.6	1.6	0.0	0.1	0.1	4.7
2019	2.3	0.6	1.6	0.0	0.1	0.1	4.6
2020	2.3	0.6	1.6	0.0	0.1	0.1	4.6
2021	2.4	0.6	1.6	0.0	0.1	0.1	4.7

2022	2.3	0.6	1.5	0.0	0.1	0.2	4.6
2023	2.3	0.6	1.4	0.0	0.1	0.3	4.4
2024	2.3	0.6	1.5	0.0	0.1	0.2	4.4

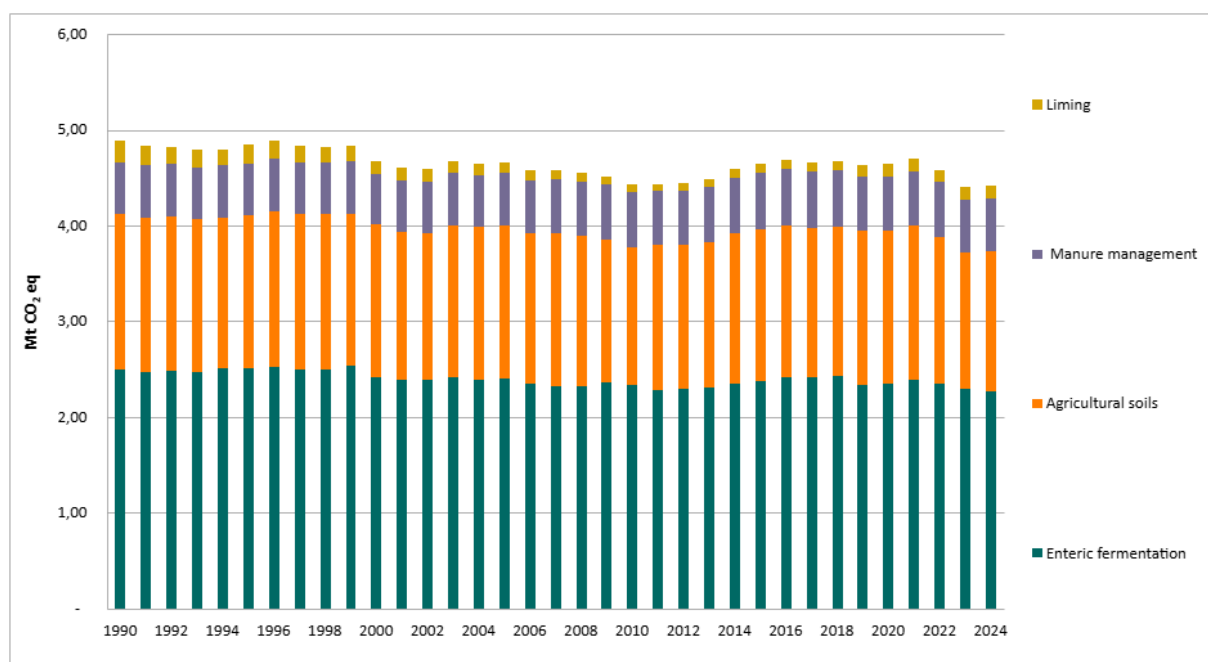


Figure 2.9: Total greenhouse gas emissions (Mtonnes CO₂ eq.) in the agriculture sub-sectors in Norway, 1990-2024. Source: Statistics Norway/Norwegian Environment Agency.

2.2.1.4 Land Use, Land-Use Change and Forestry (LULUCF)

The LULUCF sector includes both emissions of greenhouse gases (GHG) CO₂, N₂O and CH₄ to the atmosphere, and removal of atmospheric CO₂. The balance of the two is the net emissions or removals in the LULUCF sector.

The changes in carbon stocks depend upon several factors such as growing conditions, harvest levels, management practices and land use changes (area distribution).

The area distribution of the land-use categories for Norway in 1990 and 2024 is illustrated in Figure 2.10. The figure shows that the net changes in land-area distribution in Norway during the reporting period have been relatively small compared to the total area. Details on gross changes between the respective categories may be found in the land-use change matrix in chapter 6.

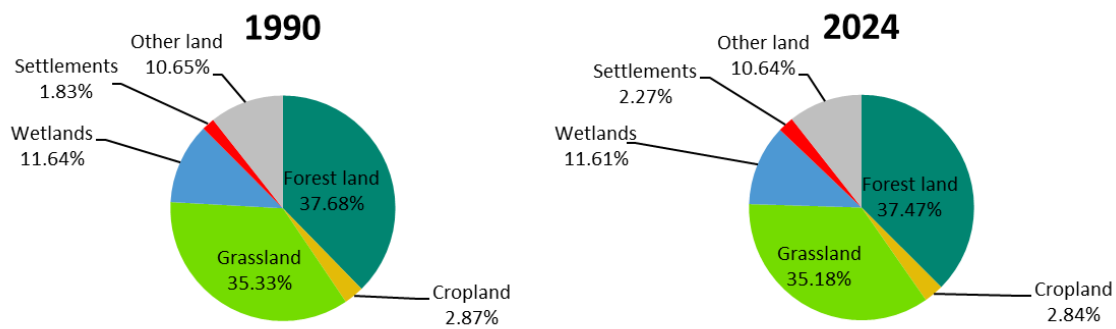


Figure 2.10: Area (%) distribution between the IPCC land-use categories, 1990 and 2024. Source: The Norwegian Institute of Bioeconomy Research.

In 2024, the net removal in the LULUCF sector was 15.5 million tonnes CO₂ equivalents, which corresponds to about 35% of the national GHG emissions (from all other sectors than LULUCF) that year. Figure 2.11 illustrates net emissions and removals of CO₂ equivalents by land-use category. Forest land, harvested wood products and grasslands had net removals (19.5 million tonnes CO₂ equivalents), while emissions came from cropland, settlements and wetlands (about 4 million tonnes of CO₂ equivalents). Forest land was the major contributor to the net sequestration of CO₂ in the sector, with total net removals of 19 million tonnes of CO₂.

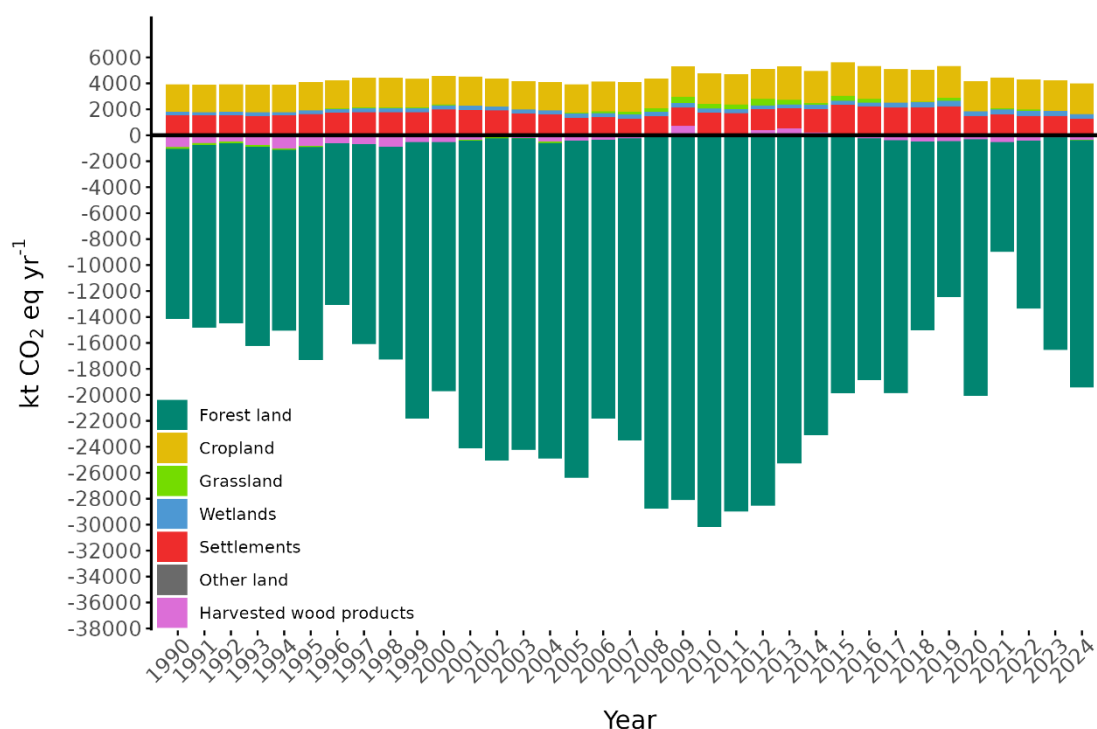


Figure 2.11: Net CO₂ emissions and removals (kt CO₂ equivalents per year) from the LULUCF sector by land-use category from 1990 to 2024, including emissions of N₂O and CH₄. Negative values are net removals, positive values are net emissions. Source: Norwegian Institute of Bioeconomy Research.

Over the years, the LULUCF sector has undergone significant changes. A simple comparison between 1990 and the latest reporting year does not fully reflect the substantial interannual variability in net emissions and removals (Figure 2.11). To distinguish underlying long-term trends from short-term fluctuations, a linear regression was applied to each land-use category.

Removals from forest land show an increasing trend over the full time series. This trend is largely driven by the increase in living biomass increment observed during the earlier part of the time series (Figure 2.11). In more recent years, however, a shift can be observed in the distribution of carbon removals among pools, with litter and dead wood pools increasing their share. This pattern reflects higher harvesting levels and increasing natural mortality, which transfers carbon from living biomass to dead organic matter pools. If this trend continues, together with the decline in living biomass increment observed towards the end of the series, a decline in total living biomass stocks can be expected in the coming years.

Emissions in cropland and grassland have increased over time. Drained organic soil in Cropland remaining cropland is the largest emission source, and its area has continued to rise since 1990. Additionally, emissions caused by deforestation to these two land-use categories have also increased. On a positive note, woody living biomass stocks in grassland remaining grassland have

shown an upward trend, becoming more evident following the implementation of a Tier 3 method for living biomass in extensive grasslands.

Emissions from wetlands have shown an increase, primarily due to emissions from organic soils, and conversions from forest land to managed wetlands.

Settlements are another source of emissions within the LULUCF sector. While emissions from the loss of living biomass and dead organic matter due to deforestation have reduced over time, a notable trend is the increase in organic soils emissions over the past decade. This rise is linked to the conversion of other land uses into settlements.

Harvested wood products remain a carbon sink, although reduced removals are observed over time, in the wood-based panels category. The declining trend in wood-based panels is likely due to production variability caused by the limited number of manufacturing facilities.

More details on trends in the LULUCF sector, explained by carbon pool and land-use category (remaining and conversion), are available in Chapter 6.

2.2.1.5 Waste

The waste sector, with emissions of 1.3 million tonnes of CO₂ equivalents in 2024, accounted for 3% of the national GHG emissions. This sector includes emissions from landfills (CH₄), wastewater handling (CH₄ and N₂O), biological treatment of solid waste and small-scale waste incineration (CO₂ and CH₄). Waste incineration with utilization of energy is included in the Energy sector.

Solid waste disposal on land (landfills) is the main source category within the waste sector. It accounted for 62% of the sector's total emissions in 2024. Wastewater handling accounted for 21%, waste incineration for 13%, and biological treatment of solid waste accounted for 4%.

GHG emissions from the waste sector have generally decreased since 1990, see Figure 2.12.

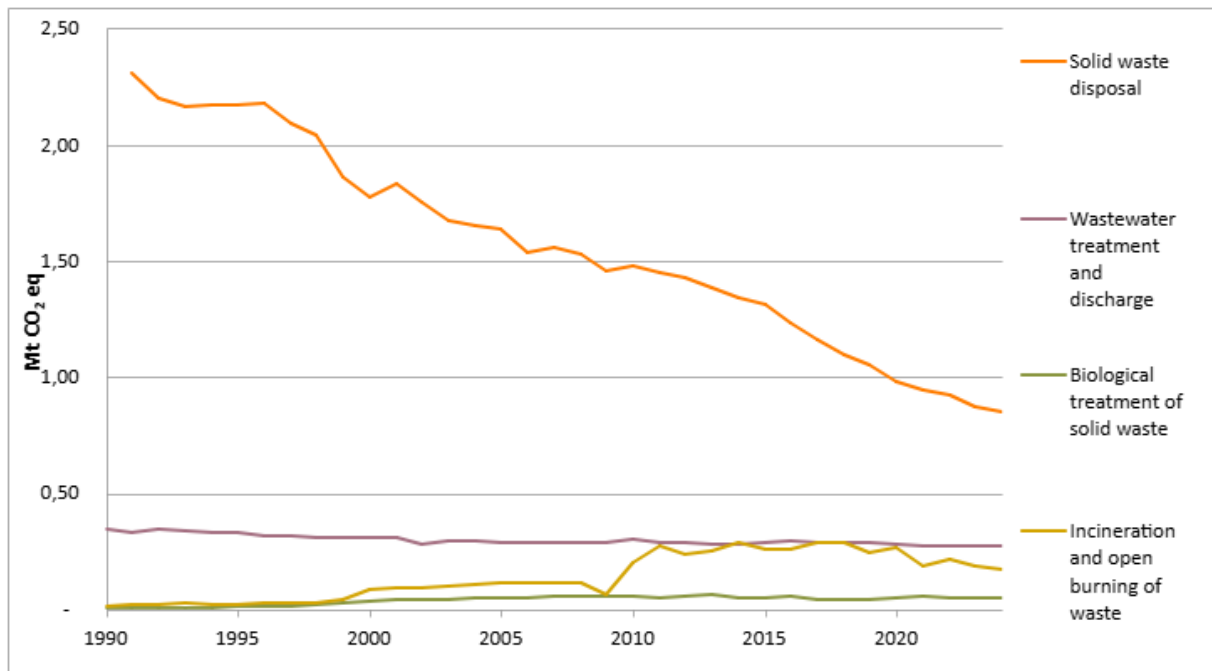


Figure 2.12: Total emissions of greenhouse gases (Mtonnes CO₂ eq.) in Norway from the waste categories, 1990-2024. Source: Statistics Norway/Norwegian Environment Agency.

Table 2.-2-6: Emissions (Mtonnes CO₂ eq.) from the waste sub-sectors in Norway, 1990-2024. Incineration and open burning of waste is presented in ktonnes CO₂ eq.

Year	Solid waste disposal	Biological treatment of solid waste	Incineration and open burning of waste	Wastewater treatment and discharge	Total
1990	2.3	0.0	0.0	0.3	2.7
1995	2.2	0.0	0.0	0.3	2.5
2000	1.8	0.0	0.1	0.3	2.3
2005	1.5	0.0	0.1	0.3	2.0
2010	1.4	0.1	0.2	0.3	2.0
2011	1.4	0.0	0.3	0.3	2.0
2012	1.4	0.1	0.2	0.3	2.0
2013	1.3	0.1	0.3	0.3	1.9
2014	1.3	0.1	0.3	0.3	1.9
2015	1.2	0.1	0.3	0.3	1.8

2016	1.2	0.1	0.3	0.3	1.8
2017	1.1	0.0	0.3	0.3	1.7
2018	1.1	0.0	0.3	0.3	1.7
2019	1.0	0.0	0.2	0.3	1.6
2020	0.9	0.1	0.3	0.3	1.5
2021	0.9	0.1	0.2	0.3	1.4
2022	0.9	0.0	0.2	0.3	1.4
2023	0.8	0.0	0.2	0.3	1.4
2024	0.8	0.0	0.2	0.3	1.3

In 2024, emissions were 52% lower than in 1990 and 4.9% lower than in 2023. Methane emissions from solid waste disposal (landfills) decreased by 65% since 1990.

The total amount of waste generated increased by 56% from 1995 to 2023, but due to the increase in material recycling and a ban against disposing biodegradable waste to landfills, methane emissions have decreased, leading to a decrease in total emissions of greenhouse gases from the waste sector. Since 2002 landfilling of easy degradable organic waste was prohibited. This prohibition was replaced by the wider prohibition of depositing from 2009 that applies to all biodegradable waste.

2.2.2 Trends by gas

As shown in Figure 2.13, CO₂ is by far the largest contributor to the total GHG emissions, followed by CH₄, N₂O, and the fluorinated gases (PFCs, SF₆ and HFCs). The relative share of the gases has been quite stable since 2010. The relative share of CO₂ increased steadily from 68% in 1990 up to 83% in 2010 and has remained relatively stable since.

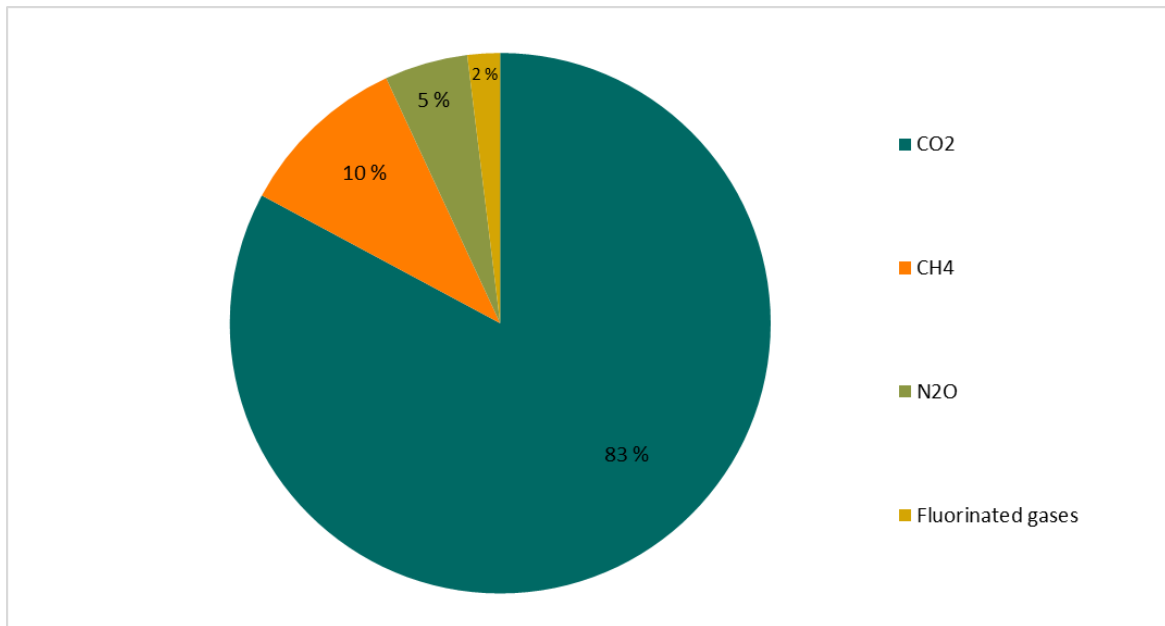


Figure 2.13: Distribution of emissions of greenhouse gases in Norway by gas (in CO₂ equivalents), 2024.
Source: Statistics Norway/Norwegian Environment Agency.

Table 2-7: Emissions of greenhouse gases in Norway 1990-2024.

Gas	CO ₂	CH ₄	N ₂ O	PFC	SF ₆	HFC
Year	Mt	kt		kt CO ₂ eq		
1990	35.0	239.3	14.5	3 499.8	2 163.0	0.0
1995	38.4	245.4	13.2	2 078.9	597.6	92.5
2000	42.1	236.0	13.5	1 364.1	918.6	357.1
2005	43.3	214.9	14.3	858.2	305.9	519.9
2010	45.6	204.1	8.7	214.3	70.5	760.6
2011	44.8	196.5	8.8	236.1	55.1	815.5
2012	44.2	194.7	8.8	180.3	54.1	855.5
2013	44.5	192.0	8.7	162.6	56.9	908.8
2014	45.0	190.2	8.8	160.9	50.1	899.4
2015	45.5	189.6	9.0	131.6	69.4	871.8
2016	44.7	188.3	8.7	167.4	62.8	871.3
2017	44.2	185.4	8.6	117.8	57.7	877.5
2018	44.4	182.3	8.5	133.1	55.2	849.5
2019	42.8	174.6	8.6	157.4	69.8	833.5
2020	41.2	174.2	8.4	149.1	75.7	808.2
2021	41.0	174.1	8.5	224.7	66.2	793.2

Gas	CO ₂	CH ₄	N ₂ O	PFC	SF ₆	HFC
Year	Mt	kt		kt CO ₂ eq		
2022	40.8	172.7	8.5	123.2	59.0	752.9
2023	38.9	166.7	7.9	94.0	51.6	767.6
2024	37.0	163.2	8.4	81.4	61.7	724.9

Source: Statistics Norway/Norwegian Environment Agency

Table 2-8: Emissions in Mtonnes CO₂ equivalents and changes in per cent for each greenhouse gas.

Year	CO ₂	CH ₄	N ₂ O	PFCs	SF ₆	HFCs	Total with indirect CO ₂ and without LULUCF
1990	35.0	6.7	3.8	3.5	2.2	0.00005	51.2
2023	38.9	4.7	2.1	0.1	0.1	0.8	46.6
2024	37.0	4.6	2.2	0.1	0.1	0.7	44.6
Changes 1990-2024	5.6 %	-31.8 %	-42.1 %	-97.7 %	-97.1 %	1 459 014.7 %	-12.8 %
Changes 2023-2024	-4.9 %	-2.1 %	6.1 %	-13.3 %	19.5 %	-5.6 %	-4.1 %

Source: Statistics Norway/Norwegian Environment Agency

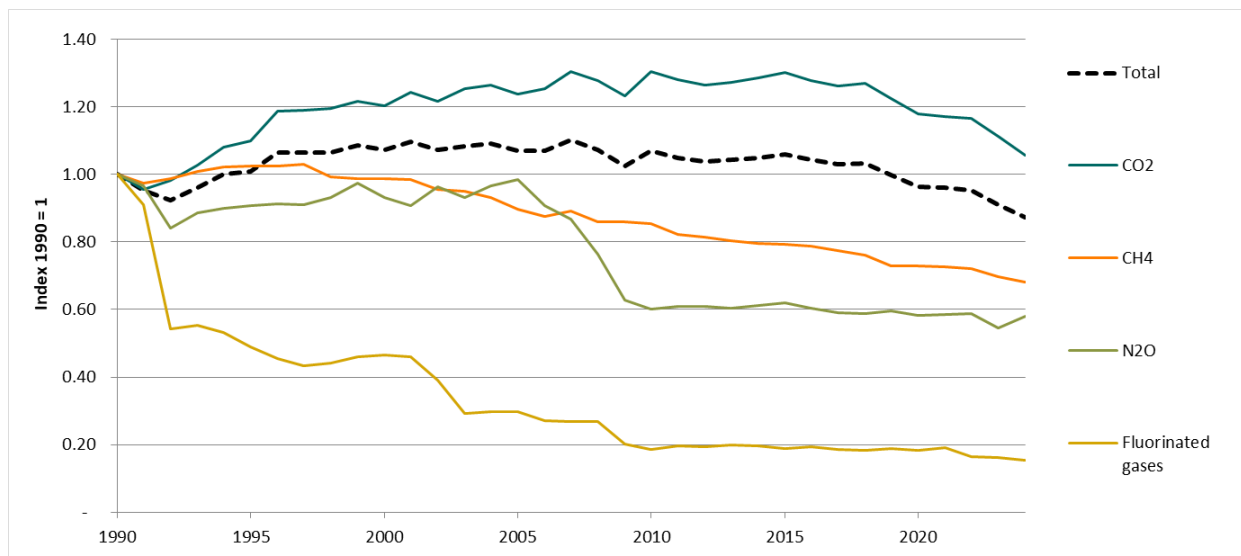


Figure 2.14: Changes in emissions of greenhouse gases, relative to 1990, by gas, 1990-2024. 'CO₂' and 'Total' includes indirect CO₂. Index 1990 = 1. Source: Statistics Norway/Norwegian Environment Agency.

As presented in Table 2-8, CO₂ emissions increased by 1.97 million tonnes from 1990 to 2024. Emissions of CH₄ and N₂O decreased by 2.1 and 1.6 million tonnes CO₂ equivalents each. During the same period, PFCs and SF₆ emissions significantly decreased with 3.4 and 2.1 million tonnes CO₂ equivalents, respectively, while HFCs have increased considerably from almost 0 to 0.7 million tonnes CO₂ equivalents.

The fluorocarbons constituted a larger share of the total GHG emissions in the early 1990s than in 2024, with a share of 11% in 1990 and 2% in 2024, while CO₂ represented a smaller share in 1990 than in 2024, 68% and 83% respectively.

Figure 2.14 shows that the overall increasing emission trend of CO₂ has been offset by decreased emissions of the other GHG gases, CH₄, N₂O, and fluorinated gases (SF₆ and PFCs).

2.2.2.1 Carbon dioxide (CO₂)

The Norwegian CO₂ emissions originate primarily from energy industries, transport, and industrial processes. Since generation of electricity is almost exclusively hydroelectric in Norway, emissions from stationary combustion are dominated by industrial sources and energy use.

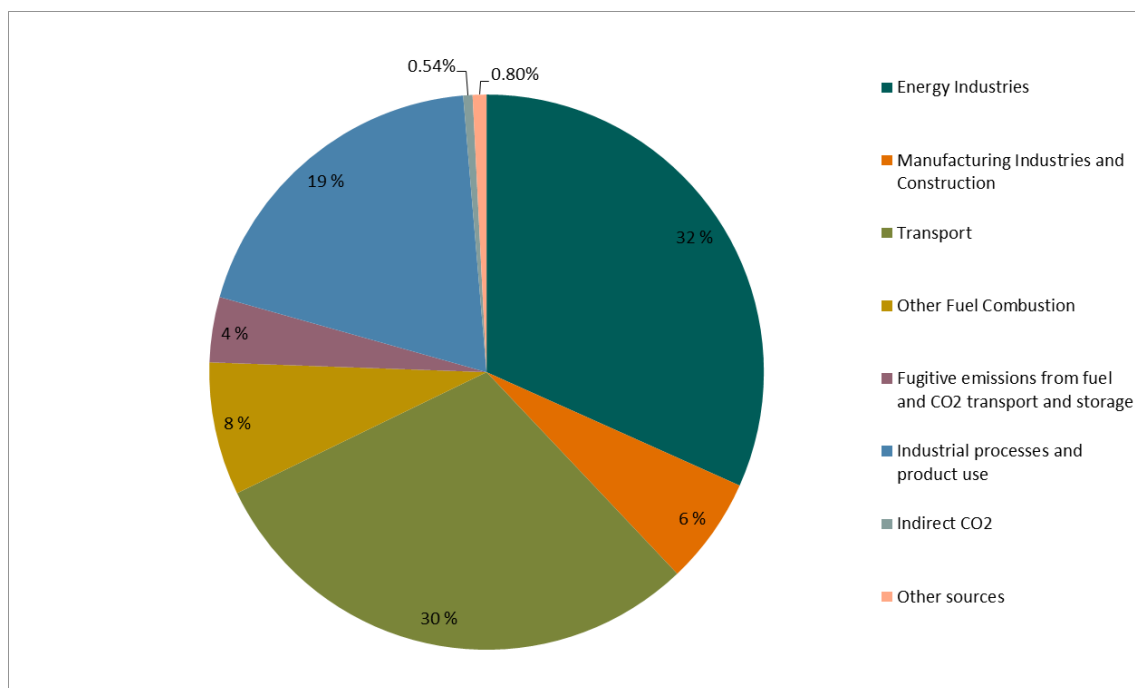


Figure 2.15: Distribution of CO₂ emissions in Norway by various source categories in 2024 (by mass).
Source: Statistics Norway/Norwegian Environment Agency.

Table 2-9: CO₂ emissions (million tonnes) from different source categories, 1990-2024.

Year	Energy Industries	Manufacturing Industries and Construction	Transport	Other Fuel Combustion	Fugitive emissions from fuel and CO ₂ transport and storage	Industrial processes and product use	Indirect CO ₂	Other sources	Total with indirect CO ₂ and without LULUCF
1990	7.1	3.4	9.8	4.4	2.4	7.1	0.6	0.2	35.0
1995	9.0	3.9	10.7	4.2	2.0	7.6	0.9	0.2	38.4
2000	10.8	3.4	11.7	3.4	3.1	8.5	1.0	0.2	42.1
2005	13.2	3.2	12.8	3.4	2.3	7.7	0.5	0.2	43.3
2010	14.7	3.3	13.7	3.6	2.4	7.3	0.2	0.3	45.6
2011	14.3	3.1	13.8	3.1	2.5	7.4	0.2	0.3	44.8
2012	14.0	3.0	13.9	3.0	2.5	7.3	0.2	0.3	44.2
2013	14.0	3.1	14.0	3.0	2.5	7.4	0.2	0.3	44.5
2014	14.7	2.9	14.3	2.8	2.1	7.5	0.3	0.4	45.0
2015	15.2	2.9	14.1	2.8	2.3	7.6	0.3	0.3	45.5
2016	14.8	2.8	13.6	2.9	2.3	7.5	0.3	0.3	44.7
2017	15.1	2.9	12.8	3.0	2.1	7.6	0.3	0.4	44.2
2018	15.0	3.0	13.0	3.0	2.0	7.7	0.2	0.4	44.4
2019	14.8	2.8	12.5	2.9	1.5	7.7	0.2	0.4	42.8
2020	14.1	2.6	11.7	2.9	1.4	7.8	0.2	0.4	41.2
2021	13.1	2.8	12.0	3.0	1.6	7.9	0.2	0.3	41.0
2022	12.6	2.8	12.4	2.9	1.6	7.9	0.2	0.3	40.8
2023	12.2	2.4	11.8	3.0	1.5	7.3	0.2	0.3	38.9
2024	11.7	2.3	11.0	2.9	1.4	7.1	0.2	0.3	37.0

Source: Statistics Norway/Norwegian Environment Agency

Since 1990, the total emissions of CO₂ have increased by 6%, equaling 2.0 million tonnes. More use of natural gas in gas turbines in the oil and gas extraction industry has been the most important contributor to the overall increased emissions.

In 2024, the total Norwegian emissions of CO₂ were 37.0 million tonnes. Emissions reached the highest value in 2010 and remained relatively stable for 5 years, after 2015 there has been a downward trend in emissions, with a decrease of 19%, or 8.6 million tonnes, by 2024. Between 2023 and 2024, CO₂ emissions decreased by 5% or 1.9 million tonnes.

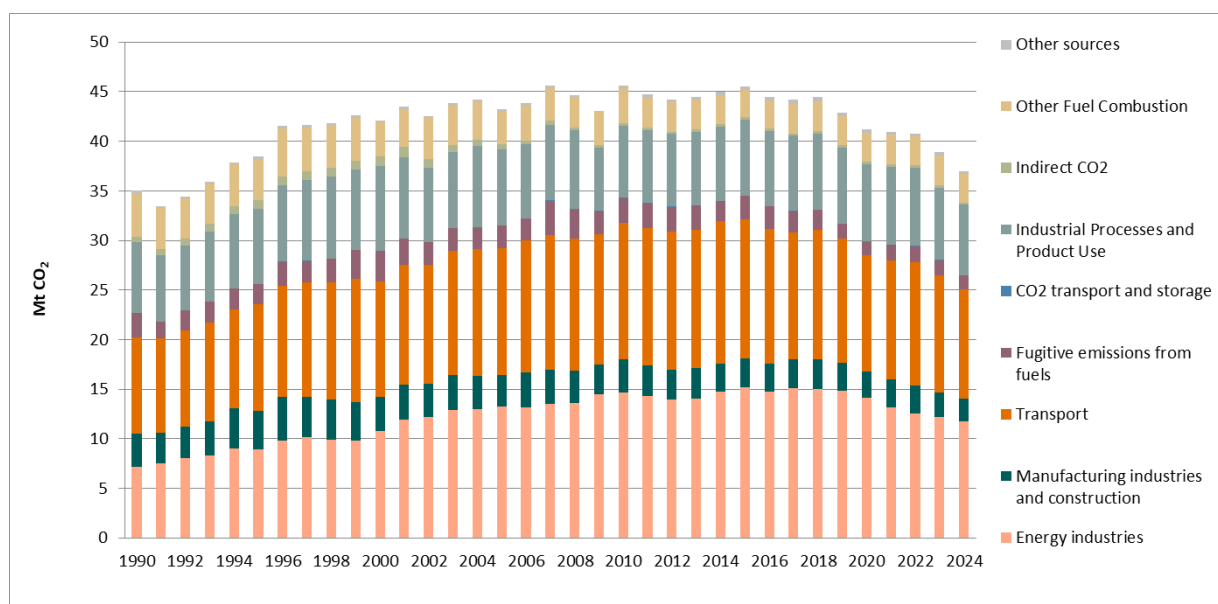


Figure 2.16: CO₂ emissions (Mtonnes) in Norway, 1990-2024. Source: Statistics Norway/Norwegian Environment Agency.

CO₂ emissions from energy industries have increased by 64% since 1990 as a result of large increases in production volume of oil and gas and the export of natural gas in pipelines. In 2024, emissions from energy industries decreased by 0.5 million tonnes, or 4%, compared to 2023.

CO₂ emissions from transport have increased by 13% since 1990 and contributed to 30% of the total CO₂ emissions in 2024. CO₂ emissions from this sector are dominated by road transportation, which in 2024 accounted for 67% of the CO₂ emissions from transport.

CO₂ emissions from road transportation increased by 1.5% between 1990 and 2024, although emissions from personal cars decreased by 34%, CO₂ emissions from light duty trucks, heavy duty truck, buses and motorcycles increased by 25% together. CO₂ emissions from road transportation declined by 7% from 2023 to 2024.

CO₂ emissions from industrial processes decreased by 0.3% since 1990 and contributed to 19% of total CO₂ emissions in 2024. Metal production is the biggest source and accounted for 63% of the CO₂ emissions from industrial processes in 2024.

2.2.2.2 Methane (CH₄)

In 2024, 58% of methane emissions originated from agriculture, 19% from the energy sector and 23% from the waste sector. Methane emissions are dominated by releases from enteric fermentation in the agriculture sector, by fugitive emissions from oil and gas extraction in the energy sector and by landfills in the waste sector.

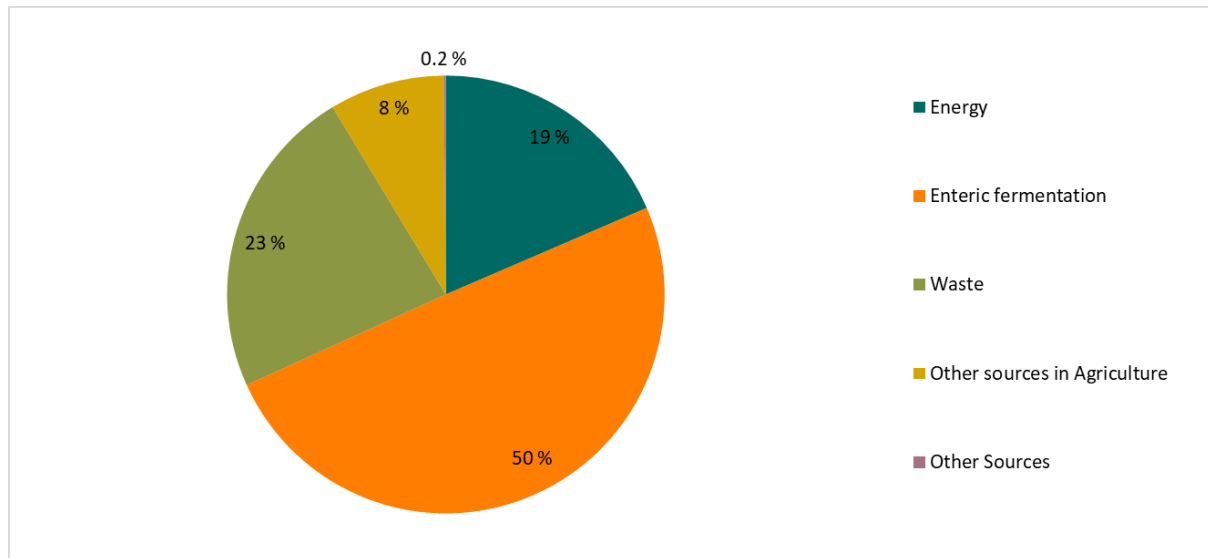


Figure 2.17: Distribution of Norwegian CH₄ emissions by major sources in 2024. Source: Statistics Norway/Norwegian Environment Agency.

Table 2-10: Emissions of CH₄ (ktonnes) in Norway, 1990-2024.

Years	Energy	Enteric fermentation	Other sources in Agriculture	Waste	Other Sources	Total without LULUCF
1990	41.2	89.1	14.5	93.5	1.1	239.3
1995	52.2	89.4	14.1	88.6	1.1	245.4
2000	59.1	86.3	13.3	75.9	1.3	236.0
2005	49.2	85.6	14.0	65.0	1.1	214.9
2010	42.7	83.6	14.7	62.2	0.9	204.1
2011	38.5	81.6	14.4	61.1	0.9	196.5
2012	38.1	81.8	14.5	59.5	0.8	194.7
2013	36.0	82.6	14.6	58.0	0.8	192.0
2014	34.4	83.7	14.9	56.4	0.8	190.2
2015	35.0	84.6	15.0	54.1	0.9	189.6
2016	34.0	86.3	15.2	52.0	0.8	188.3
2017	34.3	86.4	15.0	48.8	0.9	185.4
2018	32.5	86.6	15.0	47.3	0.9	182.3
2019	31.1	83.6	14.5	44.6	0.9	174.6
2020	32.0	83.9	14.3	43.1	0.8	174.2
2021	31.3	85.2	14.5	42.3	0.7	174.1
2022	33.8	83.7	14.2	40.4	0.7	172.7

Years	Energy	Enteric fermentation	Other sources in Agriculture	Waste	Other Sources	Total without LULUCF
2023	30.8	81.9	13.9	39.5	0.5	166.7
2024	30.2	81.1	13.9	37.7	0.3	163.2

Source: Statistics Norway/Norwegian Environment Agency

The total methane emissions decreased by 2% from 2023 to 2024. Since 1990, CH₄ emissions have decreased by 32%.

Table 2-10 and Figure 2.18 show that this decrease is primarily due to the reduction of emissions from waste treatment.

The waste volumes have grown since 1990, but this effect has been more than offset by the increase of recycling, incineration of waste and burning of methane from landfills.

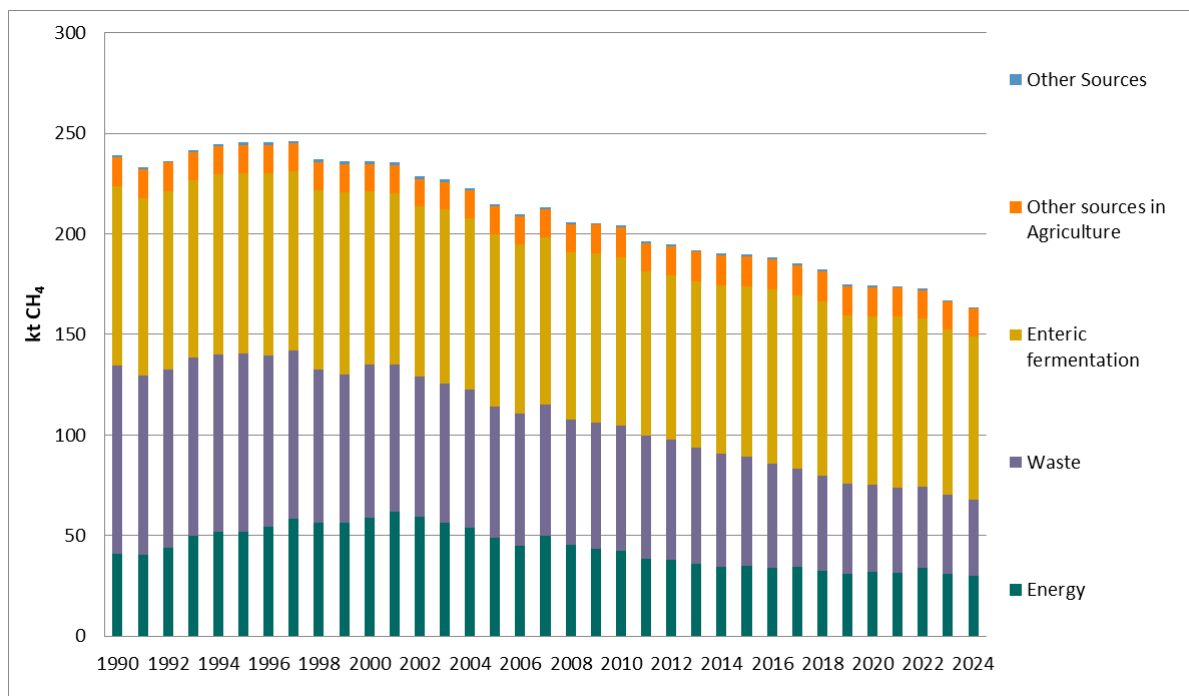


Figure 2.18: CH₄ emissions (ktonnes) in Norway, 1990-2024, without LULUCF. Source: Statistics Norway/Norwegian Environment Agency.

2.2.2.3 Nitrous oxide (N₂O)

Figure 2.19 shows that in 2024 73% of the Norwegian N₂O emissions are of agricultural origin, agricultural soils being the most prominent contributor within the agriculture sector contributing with 90% of the emissions in this category. Industrial processes (almost entirely fertilizer and nitric acid production) were the second biggest contributor, accounting for 13% of the N₂O emissions in 2024. The energy sector, with transport being the largest contributor, accounted for 9%, while the waste sector accounted for 3%, with wastewater treatment and discharge dominating N₂O emissions in this sector.

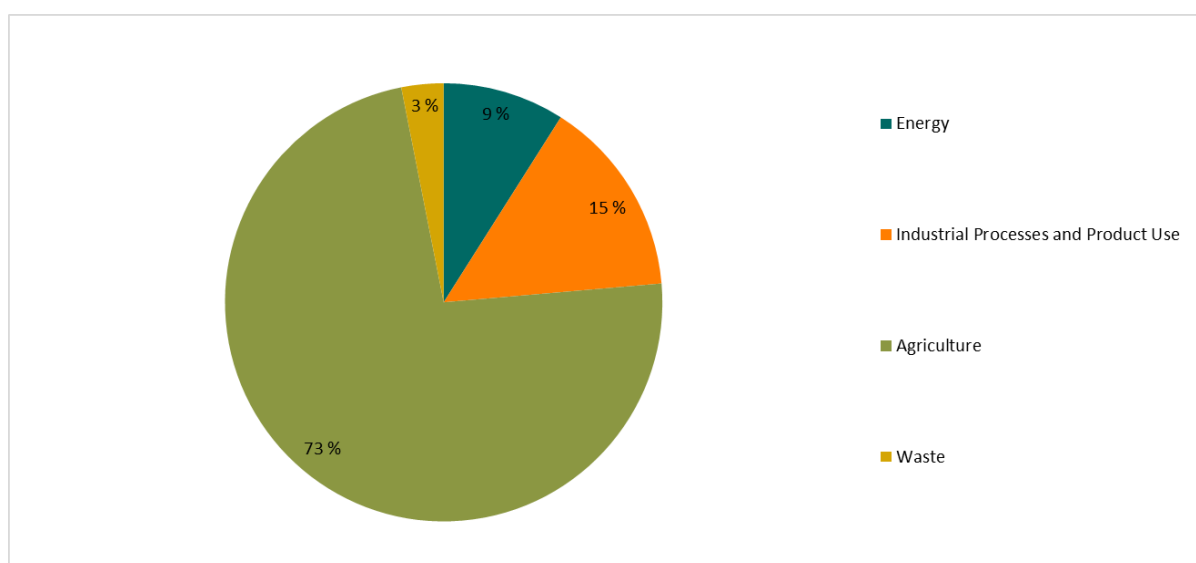


Figure 2.19: Distribution of Norwegian N₂O emissions by major sources in 2024. Source: Statistics Norway/Norwegian Environment Agency.

During the period 1990–2024 the total N₂O emissions decreased by 42%. From 2023 to 2024, the emissions decreased by 6%. The decrease since 1990 is mainly due to reduced emissions from nitric acid production. The reduced emissions in the early 1990s were due to rebuilding one production line in 1991. The reduced emissions from 2006 onwards are due to the installation of the technology – N₂O decomposition by extension of the reactor chamber.

Table 2-11: Emissions of N₂O (ktonnes) in Norway, 1990-2024.

Years	Energy	Industrial processes and product use	Agriculture	Waste	Total without LULUCF
1990	0.6	7.0	6.8	0.1	14.5

Years	Energy	Industrial processes and product use	Agriculture	Waste	Total without LULUCF
1995	0.7	5.7	6.7	0.2	13.2
2000	0.7	6.0	6.6	0.2	13.5
2005	0.6	6.8	6.7	0.2	14.3
2010	0.7	1.8	6.0	0.2	8.7
2011	0.7	1.6	6.3	0.2	8.8
2012	0.7	1.6	6.3	0.2	8.8
2013	0.7	1.4	6.4	0.3	8.7
2014	0.7	1.3	6.6	0.2	8.8
2015	0.7	1.4	6.7	0.3	9.0
2016	0.7	1.1	6.6	0.3	8.7
2017	0.8	1.0	6.5	0.3	8.6
2018	0.8	1.0	6.5	0.3	8.5
2019	0.8	0.9	6.7	0.3	8.6
2020	0.7	0.8	6.7	0.3	8.4
2021	0.8	0.7	6.7	0.3	8.5
2022	0.8	1.0	6.5	0.3	8.5
2023	0.8	0.9	6.0	0.3	7.9
2024	0.8	1.2	6.1	0.3	8.4

Source: Statistics Norway/Norwegian Environment Agency

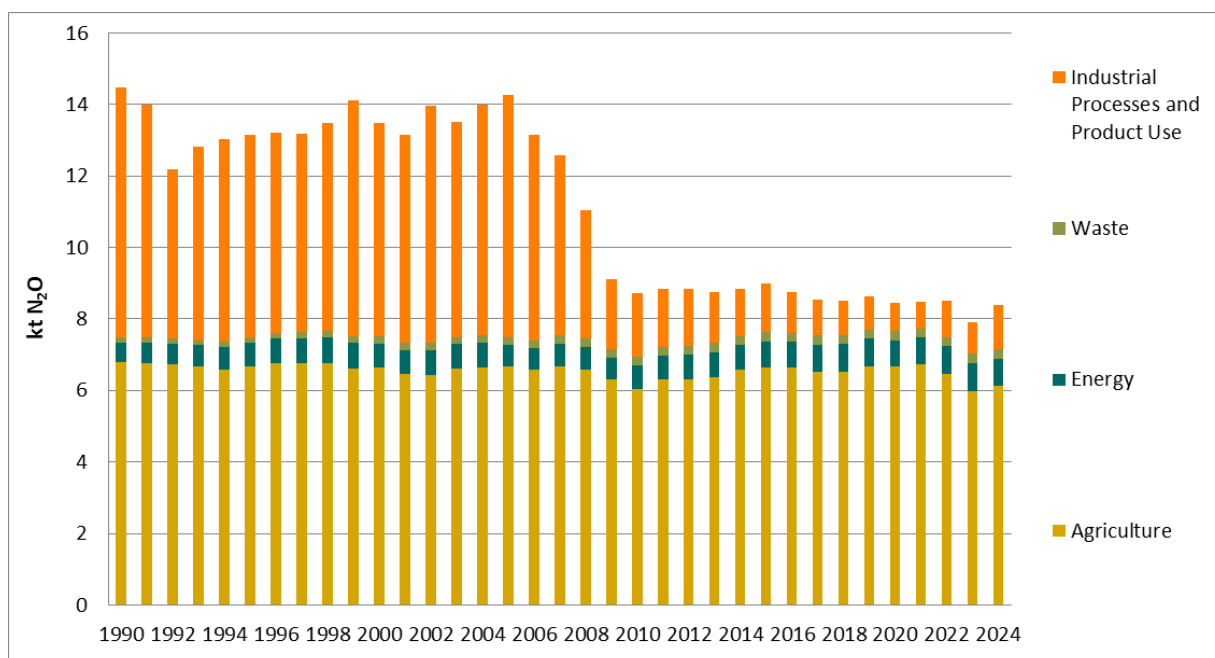


Figure 2.20: N₂O emissions in Norway, 1990-2024, without LULUCF. Source: Statistics Norway/Norwegian Environment Agency.

2.2.2.4 Perfluorocarbons (PFCs)

Aluminum production and commercial refrigeration are the only sources of PFC emissions in 2024. In 2024, the emissions of the perfluorocarbons tetrafluoromethane (CF₄) and hexafluoroethane (C₂F₆) from Norwegian aluminium plants were reported at 10.3 tonnes and 1.2 tonnes respectively, corresponding to a total of 0.08 million tonnes of CO₂ equivalents. There were minor emissions of octafluoropropane (C₃F₈) from refrigeration in 2010-2014 and in 2023 and 2024. In 2024 these emissions amounted to 0.025 tonnes, 4.5 times the emissions from 2023.

Total PFCs emissions have decreased by 98% since 1990 following a steady downward trend as illustrated in

Figure 2.21. Since 1990, emissions of CF₄ decreased by 98%, while the emissions of C₂F₆ have gone down by 97%.

Improvement of technology and process control in aluminium production led to a significant reduction in emissions. The PFC emissions per tonne aluminium produced in Norway was 4.02 kg CO₂ equivalents in 1990 and 0.06 kg CO₂ equivalents in 2024. Total PFCs emissions decreased by 0.01 million tonnes of CO₂ equivalents between 2023 and 2024.

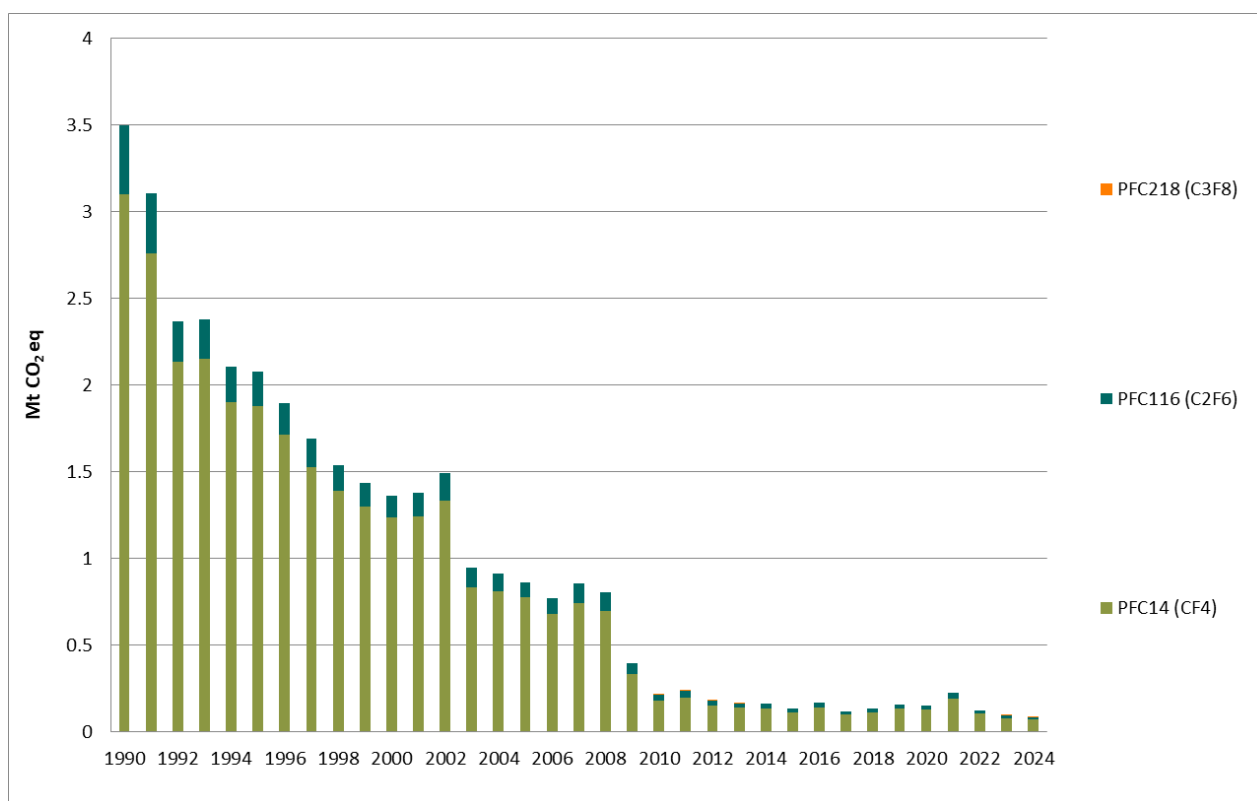


Figure 2.21: Emissions (million tonnes CO₂ eq.) of PFCs in Norway, 1990-2024. Source: Statistics Norway/Norwegian Environment Agency.

Table 2-12: Emissions of PFCs in Norway in 1990-2024. Individual PFCs in tonnes, and totals in million tonnes of CO₂ eq.

Year	PFC14 (CF ₄) (t)	PFC116 (C ₂ F ₆) (t)	PFC218 (C ₃ F ₈) (t)	Total CO ₂ eq. (Mt)
1990	467.36	36.15	-	3.50
1995	283.32	18.06	-	2.08
2000	186.37	11.57	-	1.36
2005	116.70	7.62	-	0.86
2010	27.35	2.97	0.00	0.21
2011	29.90	3.41	0.00	0.24
2012	22.90	2.56	0.00	0.18
2013	20.62	2.33	0.00	0.16
2014	20.32	2.36	0.00	0.16
2015	16.67	1.90	-	0.13
2016	21.15	2.45	-	0.17
2017	14.93	1.69	-	0.12

Year	PFC14 (CF4) (t)	PFC116 (C2F6) (t)	PFC218 (C3F8) (t)	Total CO ₂ eq. (Mt)
2018	16.90	1.90	-	0.13
2019	19.99	2.24	-	0.16
2020	18.81	2.20	-	0.15
2021	28.35	3.30	-	0.22
2022	15.66	1.75	-	0.12
2023	11.85	1.38	0.01	0.09
2024	10.30	1.17	0.02	0.08

Source: Statistics Norway/Norwegian Environment Agency

2.2.2.5 Sulphur hexafluoride (SF₆)

In 2024, the SF₆ emissions were 97% lower than in 1990. Until 2006, the largest source of SF₆ emissions in Norway was magnesium production. The use of SF₆ was reduced through the 1990s due to improvements in technology and process management, and to reductions in production levels. Until 2002, SF₆ emission reductions were mainly due to improved technology and process control within the metal industries. In 2002, production of cast magnesium closed, while production of secondary magnesium closed in 2006.

The main other use of SF₆ is in gas insulated switchgears (GIS) and other high-voltage applications. In 2002, a voluntary agreement was signed between the government and the business organizations representing most users of gas-insulated switchgear (GIS) as well as the single producer nationally. The agreement resulted in decreased emissions from these sources.


The increase in emissions in 2015 was due to decommissioning of sound insulated windows that was produced in Norway in the 1980s and 1990s.

Table 2-13: SF₆ emissions (tonnes), in Norway 1990-2024.

Year	Electrical equipment (t)	Magnesium and Aluminium Industry (t)	Other (t)	Total (t)
1990	2.2	89.7	0.1	92.0
1995	3.7	21.3	0.5	25.4
2000	4.5	32.4	2.2	39.1
2005	2.4	10.0	0.6	13.0
2010	2.5	-	0.5	3.0
2011	2.0	-	0.4	2.3
2012	1.9	-	0.4	2.3

Year	Electrical equipment (t)	Magnesium and Aluminium Industry (t)	Other (t)	Total (t)
2013	2.1	-	0.4	2.4
2014	1.8	-	0.4	2.1
2015	1.7	-	1.2	3.0
2016	1.5	-	1.2	2.7
2017	1.0	-	1.4	2.5
2018	1.2	-	1.2	2.3
2019	1.8	-	1.2	3.0
2020	2.1	-	1.2	3.2
2021	1.7	-	1.2	2.8
2022	1.4	-	1.2	2.5
2023	1.1	-	1.1	2.2
2024	1.3	-	1.3	2.6

Source: Statistics Norway/Norwegian Environment Agency

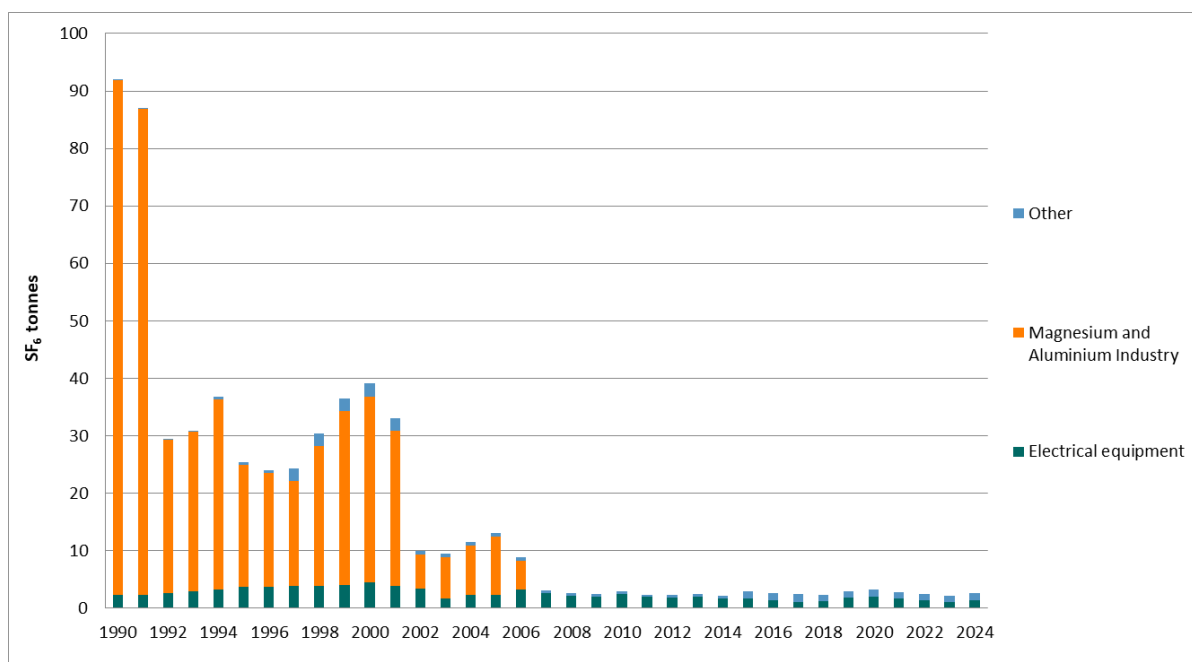

2.22: Emissions of SF₆ (tonnes) in Norway 1990-2024. Source: Statistics Norway/Norwegian Environment Agency.

2.2.2.6 Hydrofluorocarbons (HFCs)

The total emissions from HFCs used as substitutes for ozone depleting substances amounted to 0.7 million tonnes of CO₂ equivalents in 2024. The emissions in 1990 were insignificant (49 tonnes CO₂ equivalents) but have increased substantially over the years reaching a peak in 2013 (0.91 million tonnes of CO₂ equivalents), and since then showing a slow downward trend. In 2024, HFC emissions were 5.6% lower than in 2023. The biggest share was due to the use of HFC-134a (43%), followed by HFC-125 (28%) and HFC-143a (14%). HFC-134a is used in all sectors in 2F1 Refrigeration and air conditioning. The largest emissions in 2024 came from mobile air-conditioning, followed by stationary air-conditioning and commercial refrigeration.

In general, mobile air-conditioning, stationary air conditioning and refrigeration are the application categories with the largest contribution to emissions from HFC gases, accounting together for 88% of the emissions in 2024. The emissions from industrial and transport refrigeration have decreased rapidly from 2013 and in 2024 they constitute 4% each of HFC emissions. The recent and rapid decline of emissions in industrial and transport refrigeration sectors was mainly a consequence of restrictions from the EU F-gas regulation (implemented in Norway) which includes restrictions to place on the market refrigeration equipment that contains HFCs with GWP of 2500 and restricts the use of HFC refrigerants with GWP of 2500 or more for servicing and maintenance of refrigeration equipment.

Table 2-14: Emissions of different specific HFCs (Mtonnes CO₂ eq.), unspecified mix of HFCs (Mtonnes CO₂ eq.) and total (Mtonnes CO₂ eq.) in Norway, 1990-2024.

Year	HFC23	HFC32	HFC125	HFC134a	HFC143a	HFC152a	HFC227ea	Unspecified mix of HFCs	Total (Mtonnes CO ₂ eq.)
1990	-	-	-	-	-	0.00	-	-	0.00
1995	0.00	-	0.02	0.05	0.02	0.00	-	0.00	0.09
2000	0.00	0.00	0.11	0.09	0.14	0.00	-	0.02	0.36
2005	0.00	0.00	0.15	0.16	0.19	0.00	-	0.03	0.52
2010	0.00	0.01	0.21	0.29	0.22	0.00	-	0.03	0.76
2011	0.00	0.01	0.22	0.32	0.22	0.00	-	0.04	0.82
2012	0.00	0.02	0.23	0.34	0.22	0.00	0.00	0.05	0.86
2013	0.00	0.02	0.25	0.36	0.24	0.00	0.00	0.04	0.91
2014	0.00	0.02	0.24	0.38	0.22	0.00	0.00	0.04	0.90
2015	0.00	0.02	0.24	0.38	0.19	0.00	0.00	0.04	0.87
2016	0.00	0.02	0.23	0.40	0.18	0.00	0.00	0.04	0.87
2017	0.01	0.02	0.23	0.39	0.19	0.00	0.00	0.04	0.88
2018	0.00	0.02	0.24	0.37	0.17	0.00	0.00	0.04	0.85
2019	0.00	0.03	0.24	0.37	0.16	0.00	0.00	0.04	0.83

2020	0.00	0.03	0.22	0.40	0.13	0.00	0.00	0.03	0.81
2021	0.00	0.03	0.21	0.41	0.11	0.00	0.00	0.03	0.79
2022	0.00	0.04	0.21	0.36	0.12	0.00	0.00	0.03	0.75
2023	0.00	0.04	0.21	0.36	0.12	0.00	0.00	0.03	0.77
2024	0.00	0.04	0.21	0.34	0.10	0.00	-	0.03	0.72

Source: Statistics Norway/Norwegian Environment Agency

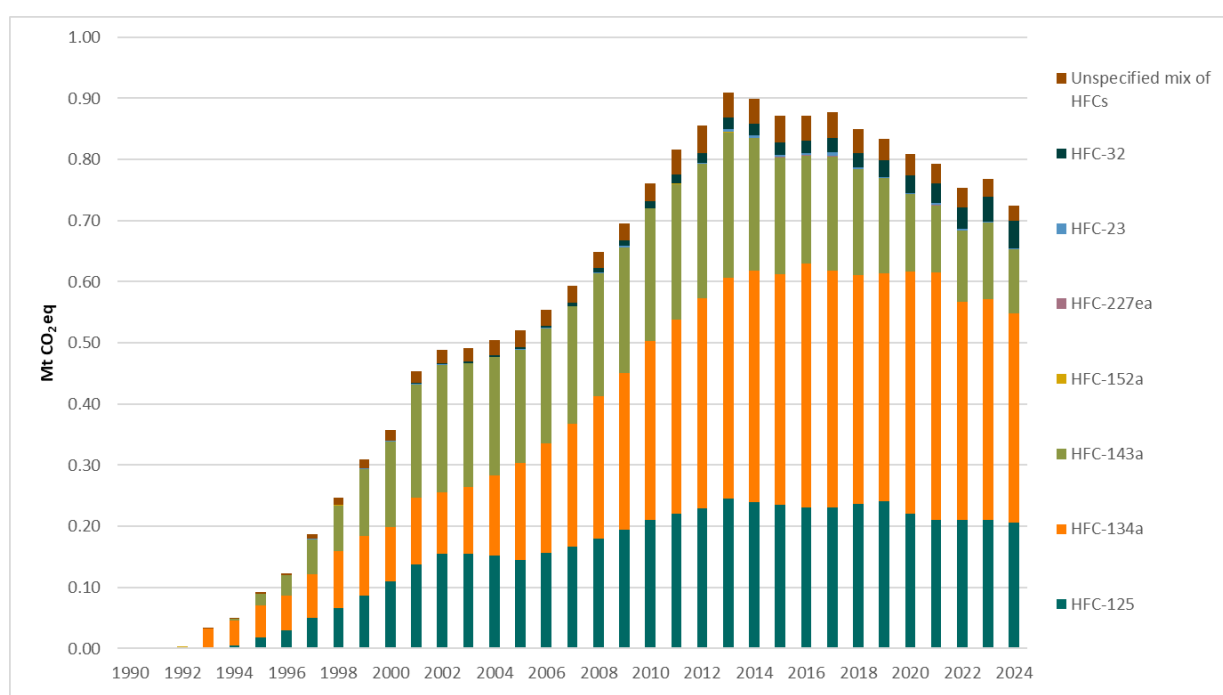


Figure 2.23: Emissions of HFCs (Mtonnes CO₂ eq.) in Norway, 1990-2024. Source: Statistics Norway/Norwegian Environment Agency.

2.2.3 Emission trends for indirect greenhouse gases and SO₂

Nitrogen oxides (NO_x), non-methane volatile organic compounds (NMVOC) and carbon monoxide (CO) are not greenhouse gases but have an indirect effect on the climate through their influence on greenhouse gases and (in particular) ozone. Sulphur dioxide (SO₂) also has an indirect impact on climate, as it increases the level of aerosols with a subsequent cooling effect. Therefore, emission trends of these gases are to some extent included in the inventory.

The overall NO_x emissions decreased approximately 40% from 1990 to 2024. This can primarily be explained by stricter emission regulations for road traffic, which has led to a 70% and 58% reduction of NO_x emissions from road transport and overall transport, respectively, since 1990. These reductions counteracted increasing emissions from e.g., oil and gas production. From 2023 to 2024, the total NO_x emissions decreased by 6.2%.

There was an increase in NMVOC emissions in the period from 1990 to 2001, mainly because of the rise in oil production. However, NMVOC emissions decreased by 71% from 2001 to 2024 and were in 2024, 61% lower than in 1990. This reduction has been achieved through the implementation of measures to increase the recycling of oil vapour at loading and storage units in the oil and gas industry. From 2023 to 2024, the emissions of NMVOC decreased by 2.6%.

CO emissions have decreased by 53% over the period 1990-2024. This is explained primarily by the implementation of new emission standards for motor vehicles.

SO₂ emissions were reduced by 76% from 1990 to 2024. This can mainly be explained by a reduction in sulphur content of all oil products and lower process emissions from ferroalloys and aluminium productions as well as refineries.

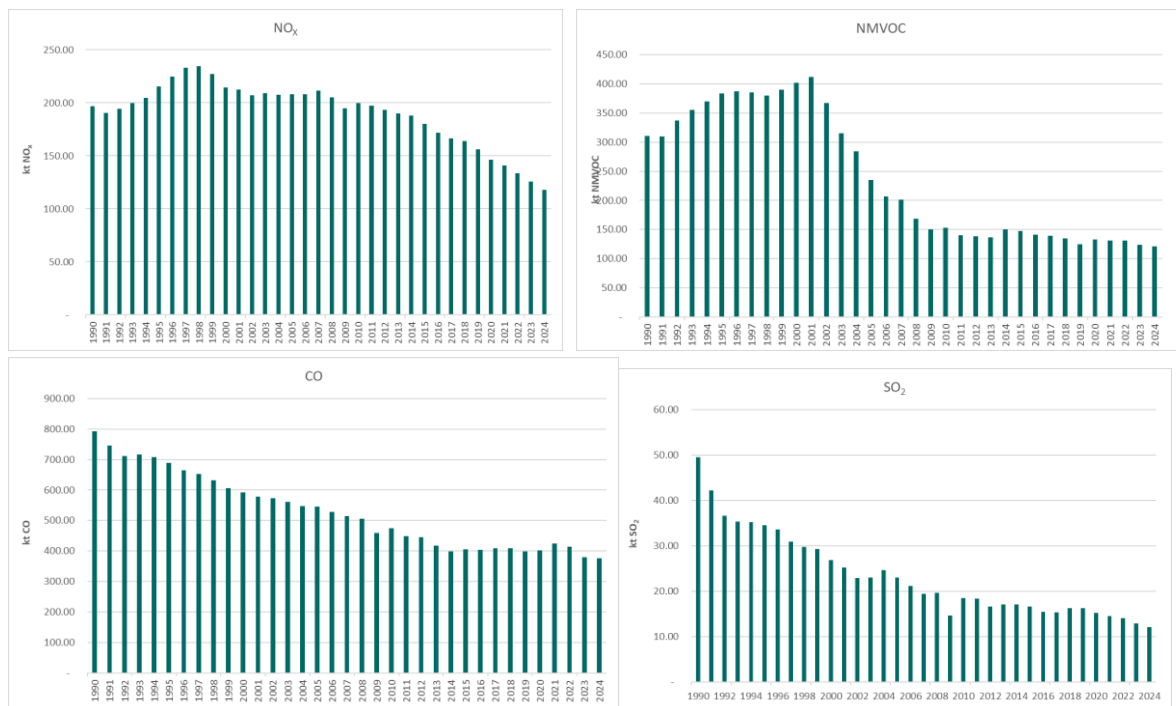


Figure 2.24: Emissions (ktonnes) of NO_x, NMVOC, SO₂, and CO in Norway, 1990-2024. Source: Statistics Norway/ Norwegian Environment Agency.

3. Energy (CRT sector 1)

3.1 Overview of the sector

3.1.1 Sources and trends

The Energy sector, including fugitive emissions, accounted for nearly 70% of the Norwegian greenhouse gas emissions in 2024. In 1990, the Energy sector's share of the total greenhouse gas emissions was 55%.

Road traffic and offshore gas turbines (electricity generation and pumping of natural gas in pipelines) are the largest single contributors to the sector's emissions, and the latter is the sector that has increased the most since 1990. Other important sources in the Energy sector are navigation and manufacturing industries, as well as oil and gas operations. The latter also gives rise to significant amounts of fugitive emissions.

GHG emissions in the Energy sector have increased by 7% from 1990 to 2024, primarily due to increased activity in the sectors of oil and gas extraction and transport, specifically road transport. The Energy sector emissions generally increased over 20 years to a peak in 2010, when emissions were 39% higher than in 1990.

Since 2010, emissions have decreased by 23%. The reduction is mainly due to reduced emissions from oil and gas extraction, including flaring. Reductions in transport are also prominent, particularly from road transport. In 2024 emissions decreased by 5% compared to 2023. The largest reductions result from the electrification of offshore oil and gas installations, an increased share of battery electric vehicles, and reduced activity at some industrial plants.

Total sales of gasoline and auto diesel including biofuels reached a peak in 2016 and have since decreased by 20% in volume terms, mostly due to an increased share of battery electric vehicles. The use of biofuels reached a level of 15% in 2017 and has since then varied between 12 and 16% of total road fuels by volume. The biofuel fraction in 2024 was 16%.

Figure 3.1 and Figure 3.2 show respectively the trend and the relative changes to 1990 in GHG emissions for the different Energy sectors. The main emitting sectors are the energy industries sector (combustion in oil and gas production, refineries, electricity production and district heating) and the transport sector (civil aviation, road transportation, railways, navigation). Emissions from both sectors have increased since 1990, especially from the energy industries sector, in which emissions are currently 65% higher than in 1990.

Emissions from the Manufacturing industries and construction sector, the “Other fuel combustion sector¹²” and the Fugitive emissions from fuels sector have all decreased between 1990 and 2024.

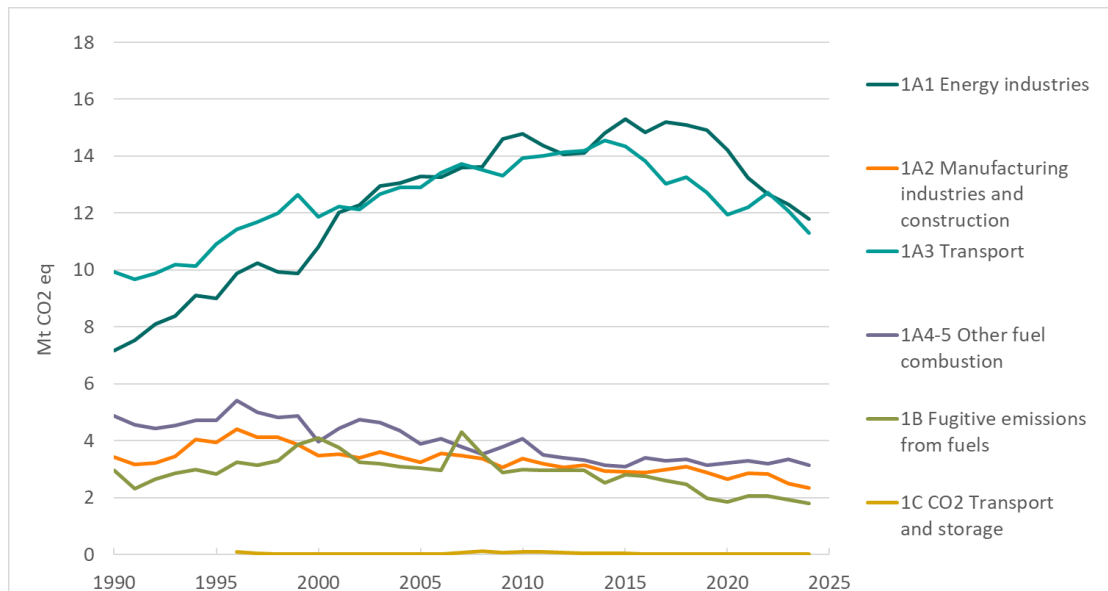


Figure 3.1: Greenhouse gas emissions from energy sectors and fugitive emissions. Million tonne CO₂ equivalents. Source: Statistics Norway/Norwegian Environment Agency.

¹² "Other fuel combustion sector" includes both the sectors Other Combustion (CRT1A4) and Other (CRT1A5)

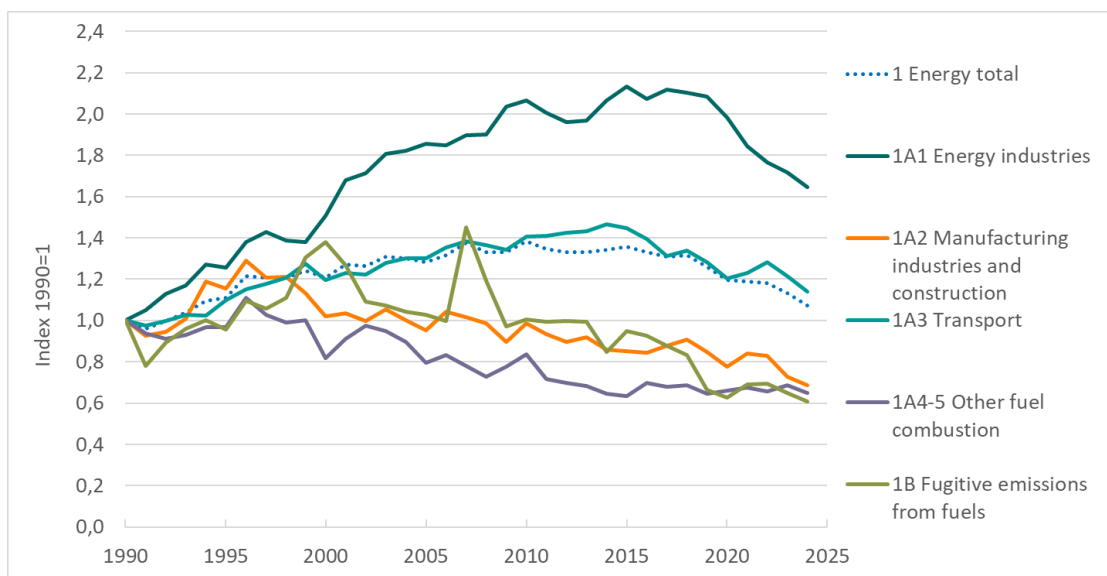


Figure 3.2: Relative changes to 1990 in GHG emissions for energy combustion. Index 1990=1.
Source: Statistics Norway/Norwegian Environment Agency.

Figure 3.3 and Figure 3.4 show respectively the trend and the relative changes of transport emissions since 1990. In 2024, the total GHG emissions in the transport sector were 11.3 million tonnes CO₂ equivalents, of which road transportation contributed to 66%, navigation to 24%, civil aviation to 9%, and railways to less than 1%.

Emissions from road transportation, navigation and aviation have increased during this period, while emissions from railways have decreased. Since 1990, emissions from civil aviation have increased by 49%, navigation by 60%, and road transportation by 1%. Emissions from road transport have decreased significantly since 2015, mainly due to the use of biofuels and increased use of electric vehicles. Emissions from railways have decreased by 52% compared with 1990.

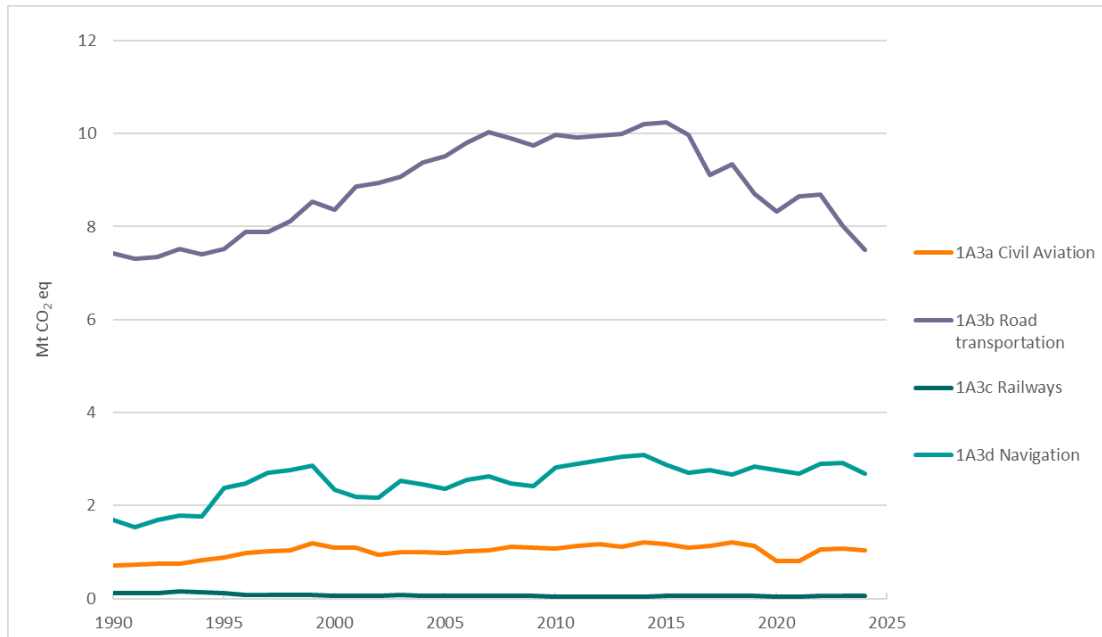


Figure 3.3: Greenhouse gas emissions from the most important transport sectors. Million tonnes CO₂ equivalents. Source: Statistics Norway/ Norwegian Environment Agency.

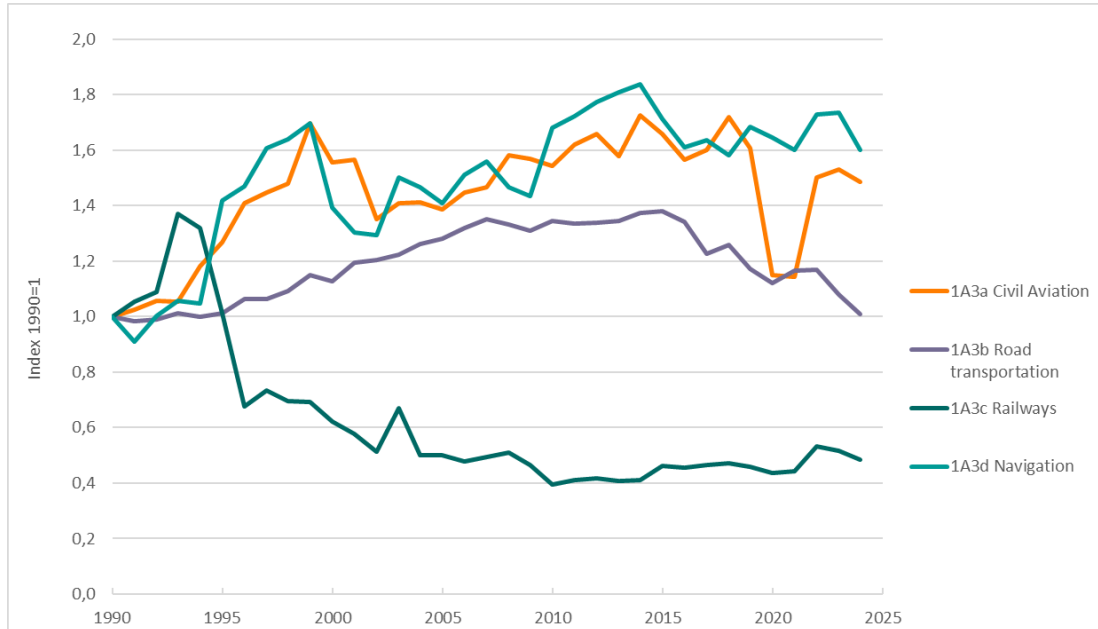


Figure 3.4: Relative changes to 1990 in GHG emissions for the most important transport sectors. Civil aviation, road transportation, navigation, and other transportation. Index 1990=1.

3.1.2 Key source categories

Section 1.4 describes the overall results of the approach 2 key category analysis performed for the years 1990 and 2024. Table 3-1 gives the key categories in the energy sector in terms of total level and/or trend uncertainty for 1990 and/or latest submission year in CRT order.

Table 3-1: Key categories in the Energy sector.

CRT code	Source Category	Gas	Method
1A1, 1A2, 1A4	Fuel Combustion Activities (Sectoral Approach) Biomass	CH ₄	Tier 2
	Fuel Combustion Activities (Sectoral Approach) Gaseous Fuels	CO ₂	Tier 2
	Fuel Combustion Activities (Sectoral Approach) Liquid Fuels	CO ₂	Tier 2
	Fuel Combustion Activities (Sectoral Approach) Other Fuels	CO ₂	Tier 2
	Fuel Combustion Activities (Sectoral Approach) Solid Fuels	CO ₂	Tier 2
1A3A	Domestic Aviation	CO ₂	Tier 3
1A3B	Road Transportation	CO ₂	Tier 2
		CH ₄	Tier 3
		N ₂ O	Tier 3
1A3D	Domestic Navigation	CO ₂	Tier 2
		CH ₄	Tier 2
1A4	Other sectors – Mobile fuel combustion	CO ₂	Tier 2
1A5A	Other (not specified elsewhere) - Stationary	CO ₂	Tier 2
1A5B	Other (not specified elsewhere) - Mobile	CO ₂	Tier 2
1B1A	Coal Mining	CH ₄	Tier 1
1B2A	Oil (incl. oil refineries, gasoline distribution)	CO ₂	Tier 2
		CH ₄	Tier 2
1B2C	Venting and Flaring	CO ₂	Tier 3
		CH ₄	Tier 3

An important issue, which is also elaborated in this sector, concerns the capture, transport and storage of CO₂ from natural gas produced at the gas-condensate field Sleipner Vest, including gas from the Gudrun field, and the gas field Snøhvit. 1C is therefore qualitatively identified as a key category for CO₂. These unique operations are discussed in detail in section 3.4. The emissions are quantified using tier 3 methods.

3.1.3 Emission allocation

Generally, energy combustion for energy purposes is reported in 1A Fuel Combustion Activities, while flaring and other fugitive emissions are reported in 1.B Fugitive Emissions

from Fuels. Emissions from the share of waste incinerated with utilization of the energy at district heating plants are accounted for under the energy sector. Methane from landfills and other biogas used for energy purposes is also accounted for in this sector. Emissions from flaring in the energy sectors are reported in 1.B.2c Flaring and described in section 3.3, as this energy combustion is not for energy purposes. Emissions from burn-off of coke as catalysts in refineries are reported in 1.B.2.a.iv for the same reason as for flaring.

Some emissions from energy products and combustion are reported in other sectors than 1 Energy. For plants that use coal and coke as reducing agents, emissions are accounted for in sector 2 IPPU (chapter 4). The same applies to fuels and feedstocks used in ammonia production and petrochemical industry, except for minor emissions from the combustion of diesel and propane, which are reported under 1A2C. Flaring in manufacturing industries is also reported in 2 IPPU. Flaring of landfill gas and other biogas is reported in sector 5 Waste (chapter 7). The same applies to emissions from accidental fires, etc. Emissions from burning of crop residues and agricultural waste are accounted for in sector 3 Agriculture (chapter 5).

A more detailed description of the delimitation of energy combustion is given in section 3.2.

3.1.4 Mode of presentation

The elaboration of the energy sector in the following starts with a general description of emissions from the energy combustion sources (section 3.2). Then followed by a description of fugitive emissions (section 3.3) and a discussion on the capture, transport, and storage of CO₂ from natural gas produced at the gas-condensate field Sleipner Vest and the gas field Snøhvit (section 3.4).

A comparison between the sectoral and reference approach is provided in section 3.2.1. The memo item of international bunker fuels is addressed in section 3.2.23.2.2. Feedstock and non-energy use of fuels is described in section 3.2.33.2.3.

Indirect CO₂ emissions from CH₄ and NMVOC (from energy as well as other sources) are addressed in chapter 9.

In the case of energy combustion, emissions from the individual combustion sources are discussed after a comprehensive presentation of the energy combustion sector as a whole (section 3.2). The purpose for such an arrangement is to avoid repetition of methodological issues which are common among underlying source categories, and to enable easier cross-reference.

3.2 Combustion (CRT 1A)

This section describes the general methodology for calculation of GHG emissions from the combustion of fossil fuels and biomass. All known combustion activities within energy utilisation in various industries and private households are included.

The GHG emissions from fuel combustion (1A) accounted for 64% of national total emissions in 2024, and 94% of the total emissions from the energy sector. The emissions increased by 13% between 1990 and 2024. The increase is primarily due to activity growth in oil and gas extraction, which comprises the greater part of the energy industries sector, and in transport, mainly road transport.

The fuel combustion sector is dominated by emissions of CO₂, which in 2024 contributed 97% to the totals of this sector (CRT 1A).

This sector hosts several source categories defined as key according to approach 2 and approach 1 key category analyses (Table 3-1).

Table 3-3 presents the shares of estimated and reported emissions used in the inventory for the different sectors and for the different greenhouse gases in 2024. It shows that a large share of GHG emissions from Energy industries and Manufacturing Industries and Construction included in the Norwegian GHG Inventory are taken from annual reports sent by each plant to the Norwegian Environment Agency.

Reporting obligations are a part of the plants permits granted by the authorities pursuant to the Pollution Control Act and, since 2005, the emission trading system. The ETS was first a voluntary system, 2005-2007, and then a part of EU ETS, since 2008. Annex 4 includes references to documents that in detail describe requirements for measuring and reporting, specifically for the EU ETS and the voluntary agreement.

Methodological issues

Emissions from fuel combustion are estimated at the sectoral level in accordance with the IPCC sectoral approach Tier 1/Tier 2/Tier 3. Total fuel consumption is, in many cases, more reliable than the breakdown in sectoral consumption.

The general methodology for estimating emissions from fuel combustion is the multiplication of fuel consumption by source and sector by an appropriate emission factor, as shown in equation 1. Exceptions are road traffic and aviation, where more detailed estimation models are used; involving additional activity data (see sections 3.2.7 and 3.2.6, respectively). The total amounts of fuel consumption are taken from the Norwegian energy balance¹³.

¹³ [11561: Energy balance. Supply and consumption, by energy product](#)

The mean theoretical energy contents of fuels and their densities are listed in Table 3-2. Note that the data from the energy balance used in the emission inventory are in mass (or volume) terms. The energy contents in the table are not used in emission calculations. They are used in providing energy data in TJ terms in the reported inventory, and for converting emission factors from kg emissions per tonne fuel, etc., to emissions per TJ.

Table 3-2: Average energy content (Net calorific value, NCV) and density of fuels*.

Energy product	Theoretical energy	Unit	Density	Unit
Coal	28.1	GJ/tonne	:	:
Coke	28.5	GJ/tonne	:	:
Petrol coke	35	GJ/tonne	:	:
Crude oil	42.3-42.7	GJ/tonne	0.85	tonne/m ³
Motor gasoline	43.9	GJ/tonne	0.74	tonne/m ³
Aviation gasoline	43.9	GJ/tonne	0.74	tonne/m ³
Kerosene (heating)	43.1	GJ/tonne	0.81	tonne/m ³
Jet kerosene	43.1	GJ/tonne	0.81	tonne/m ³
Diesel	43.1	GJ/tonne	0.84	tonne/m ³
Marine gas oil/diesel	43.1	GJ/tonne	0.84	tonne/m ³
Light fuel oils	43.1	GJ/tonne	0.84	tonne/m ³
Heavy distillate	43.1	GJ/tonne	0.88	tonne/m ³
Heavy fuel oil	40.6	GJ/tonne	0.98	tonne/m ³
Bitumen	40.2	GJ/tonne	1.1	tonne/m ³
Lubricants	40.2	GJ/tonne	0.9	tonne/m ³
Natural gas (dry gas) (land) ¹	35.3	GJ/1000 Sm ³	0.741	tonne/kSm ³
Natural gas (rich gas) (offshore) ¹	40.3	GJ/1000 Sm ³	0.851	tonne/kSm ³
LPG	46.1	GJ/tonne	0.53	tonne/m ³
Refinery gas	47.7	GJ/tonne	:	:
Blast furnace gas ¹	7.5-11	GJ/1000 Sm ³	0.0012	ktonn/kSm ³
Fuel gas ³	57	GJ/tonne	:	:
Landfill gas ^{2,4}	50.4	GJ/tonne	0.717	tonne/kNm ³
Biogas ^{2,4}	50.4	GJ/tonne	0.68	tonne/kSm ³
Fuel wood ^{2,5}	15.48	GJ/tonne	0.5	tonne/fm ³
Biogasoline ²	26.8-38.1	GJ/tonne	0.79	tonne/m ³
Biodiesel ²	36.8-42.0	GJ/tonne	0.88	tonne/m ³
Wood waste ²	13.1-18.2	GJ/tonne	0.4	tonne/fm ³
Black liquor ^{2,5}	7.2 - 9.2	GJ/tonne	:	:

Energy product	Theoretical energy	Unit	Density	Unit
Wood pellets ²	17.3	GJ/tonne	:	:
Municipal waste	11.5	GJ/tonne	:	:
Special waste	11.5 - 40.6	GJ/tonne	0.98	tonne/m ³

Source: Statistics Norway/Norwegian Environment Agency

*The theoretical energy content of a particular energy commodity may vary; Figures indicate mean values.

¹kg/Sm³. Sm³ = standard cubicmeter (at 15 °C and 1 atmospheric pressure).

² Non-fossil emissions, not included in the inventory CO₂ totals..

³ In this inventory, fuel gas is a hydrogen-rich excess gas from petrochemical industry.

⁴ Landfill gas and other types of biogases are reported as methane content in the energy balance

⁵ Value for wood is including a water content of 18%, wood waste 8%, and pellets 8%. Values for black liquor are given not including water content

The general method for calculating emissions from energy consumption is:

$$1. \text{ Emissions}(E) = \text{Activity level}(A) \times \text{Emission Factor (EF)}$$

Emissions of pollutants from major manufacturing plants (point sources) are available from measurements or other plant-specific calculations. When such measured data are available it is possible to replace the estimated values by the measured ones:

$$2. \text{ Emissions}(E) = [(A - A_{PS}) \times EF] + E_{PS}$$

Where A_{PS} and E_{PS} are the activity and the measured emissions at the point sources, respectively. Emissions from activity for which no point source estimate is available ($A - A_{PS}$) are still estimated with the default emission factor. See section 1.3.1 for more information about the main emission model.

For offshore activities and some major manufacturing plants (in particular refineries, gas terminals, cement industry, production of plastics, ammonia production, and methanol production), emissions of one or more compounds reported by the plants to the Norwegian Environment Agency are used, as described in equation 2. In these cases, the energy consumption of the plants in question is subtracted from the total energy use before the general method is used to calculate the remaining emissions of the compound in question, to prevent double counting. This means that the figures for these compounds will be a mixture of reported and estimated emissions.

Emissions are reported to the Norwegian Environment Agency under several different reporting obligations. Most of the CO₂ emissions are reported as part of the Emissions Trading System (ETS).

In the general equation 1, E_{PS} represents the reported emission data, while A_{PS} represents the energy consumption at the plants. Note that for most plants, reported emissions are

used only for some of the substances. For the remaining substances in the inventory, the general method with standard emission factors is used.

Reported figures are used for a relatively small number of plants, but as they contribute to a large share of the total energy use, a major part of the total emissions is based on such reported figures. Table 3-3 gives an overview of the shares of estimated and reported emissions used in the inventory for the different sectors for the greenhouse gases CO₂, CH₄ and N₂O in 2024.

In 2024, 91% of the CO₂ emissions from Energy Industries and 23% of the CO₂ emissions from Manufacturing Industries and Construction were based on reported emissions.

Table 3-3: Share of total CO₂, CH₄ and N₂O emissions in the energy sector based on estimated and reported emission estimates for 2024.

	CO ₂		CH ₄		N ₂ O	
	Estimated	Reported	Estimated	Reported	Estimated	Reported
A. Fuel Combustion Activities (Sectoral Approach)	60%	40%	93%	7%	96%	4%
1. Energy Industries	9%	91%	42%	58%	78%	22%
a. Public Electricity and Heat Production	98%	2%	100%	0%	70%	30%
b. Petroleum Refining	0%	100%	10%	90%	100%	0%
c. Manufacture of Solid Fuels and Other Energy Industries	0%	100%	0%	100%	100%	0%
2. Manufacturing Industries and Construction	77%	23%	100%	0%	96%	4%
a. Iron and Steel	9%	91%	100%	0%	100%	0%
b. Non-Ferrous Metals	100%	0%	100%	0%	100%	0%
c. Chemicals	50%	50%	96%	4%	49%	51%
d. Pulp, Paper and Print	100%	0%	100%	0%	100%	0%
e. Food Processing, Beverages and Tobacco	100%	0%	100%	0%	100%	0%
f. Non-metallic minerals	29%	71%	100%	0%	100%	0%
g. Other (Oil drilling, construction, other manufacturing)	100%	0%	100%	0%	100%	0%
3. Transport	100%		100%		100%	
a. Civil Aviation	100%		100%		100%	
b. Road Transportation	100%		100%		100%	
c. Railways	100%		100%		100%	

	CO ₂		CH ₄		N ₂ O	
	Estimated	Reported	Estimated	Reported	Estimated	Reported
d. Navigation	100%		100%		100%	
e. Other Transportation (pipeline transport)	(IE)		(IE)		(IE)	
4. Other Sectors	100%		100%		100%	
a. Commercial/Institutional	100%		100%		100%	
b. Residential	100%		100%		100%	
c. Agriculture/Forestry/Fisheries	100%		100%		100%	
5. Other (Military)	100%		100%		100%	

Source: Statistics Norway/Norwegian Environment Agency

Delimitation toward industrial processes etc.

The energy combustion sector borders several other source categories. This section presents a more detailed description of the demarcation with other sectors used in the inventory, compared to section 3.1.3.

Energy consumption reported as activity data in the emission inventories is generally delimited in the same way as emissions. In cases where different substances are handled differently, the delimitation of energy consumption follows the delimitation of CO₂ emissions. Flaring is not reported as energy use under energy combustion (CRT 1A). Instead, flaring is reported under the following source categories:

- Flaring of oil and gas in refineries and in exploration/extraction is reported under fugitive emissions (CRT 1B).
- Flaring of oil and gas in manufacturing industries is reported under industrial processes (CRT 2), particularly under chemical industry (CRT 2B). (In the energy balance, flaring in manufacturing is reported as "losses".)
- Flaring of landfill gas is reported under waste incineration (CRT 5C).

Emissions from reducing agents are reported under industrial processes (CRT 2). This contrasts with the delimitation in the energy balance, where use as reducing agents is reported as energy consumption. In some special cases, CO₂ emissions from combustion are reported under other source categories, while emissions of other substances are reported in energy combustion (CRT 1A):

- CO₂ from CO-rich excess gas from metallurgical plants burnt on-site is reported under industrial processes (CRT 2C), according to IPCC guidelines (IPCC 2006). (Gas which is sold to other plants is reported under energy combustion (CRT 1A)).
- CO₂ from coal used as fuel in some metallurgical plants which also use coal as a reducing agent is reported under industrial processes (CRT 2C).

- CO₂ from combustion at petrochemical and ammonia plants is reported under industrial processes (CRT 2B).
- CO₂ from coke that is burnt off from catalytic crackers in refineries is reported under fugitive emissions (CRT 1B). This also applies to CO₂ from coke calcining kilns. In the energy balance, production, and energy consumption of non-commercial gases from coke burn-off in refineries, is recorded as "petroleum coke burn-off" and is included in "Other oil products". In these cases, energy consumption reported in the inventory follows the delimitation of the CO₂ emissions. This gives meaningful implied emission factors for CO₂, while IEFs for other substances may be skewed.

At a small number of plants in the chemical industry, CO₂ emissions are reported in the ETS system from secondary fuels which are not included as energy use in the energy balance. The carbon in the fuels is likely reported as feedstock in the energy balance. Emissions from these plants are reported in their entirety as process emissions in 2B1 (ammonia) and 2B8 (petrochemical).

Emissions from paraffin wax are reported under Other Industrial processes (CRT 2D).

Combustion of solid waste and hazardous waste is reported under the energy section (district heating (CRT 1A1a) and in several manufacturing industries (CRT 1A2). No significant combustion of solid or hazardous waste occurs without energy recovery.

Combustion of landfill gas with energy recovery is reported under the energy section (mainly in Commercial/Institutional (CRT 1A4a)). Flaring is reported under waste incineration (CRT 5C), as mentioned above.

Emissions reported by plants: Energy data

Energy data for plants with reported emissions (APS in equation (2)) should be consistent both with the energy balance that is used for activity total A and with the reported emission data. Consistency with emission data means that the energy data should correspond to the same activity as the reported emissions.

Figures on plant energy used in the inventory are based on data reported from the plants to Statistics Norway. This ensures consistency with the energy balance.

In the emission trading system (ETS), emissions are, in most cases, reported together with data on the corresponding energy use. Usually, the energy data reported in the ETS are the same as those reported by the plants to Statistics Norway. However, for some plants, some of the energy data differ between reports to Statistics Norway and to the ETS. This leads to problems of consistency and deviations in implied emission factors. Statistics Norway will investigate large discrepancies between the energy reported under the ETS and the

statistical surveys and make corrections where needed. However, the deviations are usually small, and generally, this should not be regarded as an important issue.

Emissions reported by plants: Allocation to fuels

The following discussion is relevant for cases where emissions are reported with a fuel split. This applies to greenhouse gases reported to the UNFCCC, and to emission statistics in Statistics Norway's Statbank. In other reporting, emissions are aggregated over fuels.

For some plants and substances, emissions are reported by fuel, but in most cases reported combustion emissions are entered as a plant total. Emissions are then allocated to fuels based on standard EFs using equation (3):

$$E_{PS,f} = E_{PS} \times \frac{A_{PS,f} \times EF_f}{\sum_f A_{PS,f} \times EF_f}$$

where the subscript f denotes the fuel type.

This means that any deviations in data will be distributed across all fuels at the plant.

Typical situations include:

- Plants with atypical fuels which differ from standard emission factors
- Plants with errors or other inconsistencies in energy data

In such cases, implied emission factors may deviate from the standard range also for other fuels than the one really affected.

Plants/substances which are entered by fuel currently include among others:

- CO₂ emissions from natural gas in almost all activities
- CO₂ emissions from cement production, 2008 and later
- CO₂ emissions from iron and steel production, 2008 and later
- CO₂ and several other substances from oil and gas production, offshore and onshore

Except for the cases listed above, fuel specific CO₂ emissions from the emission trading system reports (ETS) are not entered into the inventory, only the total plant emission is used.

Activity data

The energy balance defines the total energy consumption for which emissions are accounted for. However, as explained above, a large part of the total emissions is based on reports from plants that use much energy, i.e., offshore oil and gas activities and energy-intensive industries onshore. Energy consumption from these plants is included in the energy balance. These consumptions are then subtracted from the energy balance before

calculating the remaining emissions. Emissions are estimated using the standard method of multiplying energy use by emission factors described in equation (2).

The energy consumption data used in the emission calculations are, with few exceptions, taken from the annual energy balance compiled by Statistics Norway. The energy balance surveys the flow of the different energy carriers within Norwegian territory. These accounts include energy carriers used as raw materials and reducing agents, which are subtracted from the energy balance and are not included in the data used to estimate emissions from combustion.

As some emissions vary with combustion technology, a distribution between different sources is required. The total use of the different oil products is based on the Norwegian sales statistics for petroleum products. For other energy carriers, the total use of each energy carrier is determined by summing up reported/estimated consumption within the different sectors.

A short summary of the determination of amounts used by the main groups of energy carriers and of the distribution between emission sources is given below. The following paragraphs also explain the differences between energy accounts and the energy balance sheets, including the differences involved in Norway's submissions to international organizations. The energy balance for all years in the reporting period is published in Statistics Norway's Statbank¹⁴.

The independent collection of different energy carriers conducted by Statistics Norway, as described below, enables a thorough verification of the emission data reported by the entities to the Norwegian Environment Agency that are included in the inventory.

Natural gas

Most of the combustion of natural gas is related to extraction of oil and gas on the Norwegian continental shelf. The data source for the amounts of gas combusted, distributed between gas turbines and flaring, is data reported to the Norwegian Environment agency from the operators, in addition to the Norwegian Offshore Directorate. These figures include natural gas combusted in gas turbines on the various oil and gas fields as well as on Norway's four gas terminals onshore. However, as explained above, emission figures of CO₂ from the largest gas consumers, e.g., offshore activities, gas terminals, and petrochemical industry, are figures reported by the plants. The data are of high quality, due to the Norwegian system of CO₂ taxation on fuel combustion.

The remaining combustion of natural gas is given by Statistics Norway's annual survey on energy use in manufacturing industries and by sales figures from distributors. Some

¹⁴ [11561: Energy balance. Supply and consumption, by energy product. Statbank Norway \(ssb.no\)](https://statbank.ssb.no/)

manufacturing industries use natural gas in direct-fired furnaces; the rest is burnt in boilers and, in some cases, flared. In addition, Statistics Norway's District heating statistics gives data for natural gas and other fuels used in production of district heating. Some natural gas is also used for auto producers' electricity production. This is mainly calculated on the basis of the plant's electricity production. In cases where for instance gas terminals produced their own electricity, the estimated gas used for electricity production is deducted from their total gas consumption.

Liquid fuels: LPG and secondary gases

Consumption of LPG in manufacturing industries is reported by the plants to Statistics Norway in the annual survey on energy use¹⁵. Figures on use of LPG in households, services and construction are based on sales figures, collected annually from the oil companies. Use in agriculture is taken from agriculture statistics (Gundersen 2005) prior to 2005. From 2005 and onwards, total consumption is given by the annual sales statistics for petroleum products and distributed to the agriculture industry using the share of direct sales in 2009-2012. The same distribution formula is applied to all these years.

Use of refinery gas is reported to Statistics Norway from the refineries. The distribution between direct-fired furnaces, flaring and boilers for the years prior to 2009, is based on information collected from the refineries in the early 1990's. From 2009, the energy consumption is reported according to the energy use at each plant. Since June 2021, there is only one refinery left in Norway, which implies a somewhat lower consumption of refinery gas since then.

Emissions from combustion for energy purposes are reported under Petroleum refining (CRT 1A1b), emissions from flaring under fugitive emissions from Flaring (CRT 1B2c2) and emissions from cracker coke burn-off are reported under Refining/Storage (CRT 1B2a4).

Section 3.3 (CRT 1B2a4) describes the methodology for estimating emissions from crackers. The same distribution of emissions among different categories from combustion at the refineries is assumed for the whole time series. Comparisons made and previously reported to ERTs shows consistency with what has been reported by the plants.

At some industrial plants, excess gas from chemical processes is burned, partly in direct-fired furnaces and partly in boilers. These amounts of gases are reported to Statistics Norway. A petrochemical plant generates fuel gas derived from ethane and LPG. Most of the gas is burned on-site, but some fuel gas is also sold to several other plants. All use of fuel gas is reported as energy consumption in the inventory. Almost all fuel gas is used at petrochemical and ammonia plants for which all emissions are reported as industrial processes in 2B1/2B8.

¹⁵ <https://www.ssb.no/en/energi-og-industri/statistikker/indenergi>

One of the petroleum refineries is also generating CO-rich gas as a by-product from coke burn-off in catalytic crackers. The gas is partly utilised as energy. In the energy balance, production and energy consumption of gases from coke burn-off in refineries, is recorded as "petroleum coke burn-off" and is included in "Other oil products". In international reporting however, this is reported as petroleum coke used as refinery fuels.

Liquid fuels: Oil products

The total use of the different oil products is based on Statistics Norway's annual sales statistics for petroleum products¹⁶. The statistics are based on annual reports from the oil companies and import data from the external trade statistics at Statistics Norway. This is also the data source for consumption in industries that do not collect their own data. For the time series from 1990 to 2009, monthly sales data are used in the energy balance. These data are also reported to Statistics Norway by the oil companies, but they do not contain as much information as the annual reports. In the monthly sales data, industrial distribution is specified by the oil companies but there is no information on individual buyers, such as organisation number, name, or address.

The annual sales data are considered reliable since all major oil companies selling oil products report to these statistics and have an interest in the quality of the data. The statistics are corrected for direct import by other importers or companies.

The use of sales statistics provides a total for the use of oil products used for combustion. The use in the different sectors must sum up to this total. This is not the case for the other energy carriers, except for instance for blast furnace gas and refinery gas, where Statistics Norway collect already balanced figures for production and consumption from the same respondents. The method used for oil products defines use as identical to sales. Nevertheless, in practice, there will be annual changes in consumer stocks, which are not accounted for.

In the statistics on sales of petroleum products there is a breakdown of sales by industry. Direct sales to end users are linked to industries or households using the organisation number or other identifiers in the data from the oil companies, while sales to distributors of solid, liquid, and gaseous fuels remain attributed to the distributors. However, in energy balance all consumption must be broken down, including that which is sold via distributors. Thus, the breakdown by industry is therefore different in energy balance and in the statistics on sales of petroleum products. The method for this breakdown is described in Kittilsen et al. (2018).

Stationary combustion takes place in boilers and, in some manufacturing industries, in direct-fired furnaces. Small ovens can also be used, mainly in private households. Since 1.

¹⁶ <https://www.ssb.no/en/energi-og-industri/statistikker/petroleumsalg/aar>

January 2020 the use of kerosene or heating oil for heating purposes in households is prohibited, except for cottages which are not connected to the electricity grid.

Mobile combustion is distributed among different sources, described in more detail under the transport sector (sections 3.2.6 to 3.2.11).

In addition to oil products included in the sales statistics, figures on use of *waste oil* are given in Statistics Norway's industry statistics. Statistics Norway also collects additional information directly from a few companies using waste oil as fuel.

Petroleum coke is not included in the sales statistics. Consumption data are collected as part of the coal and coke statistics, see below.

Coal, coke, and petroleum coke

Use of coal, coke and petrol coke in manufacturing industries is annually reported from the plants to Statistics Norway. The statistics cover all main consumers and are considered to be of high quality. More than 90% of the coal and coke consumption in Norway is used as a reductant, so only a small part is used for combustion. Combustion of coal and coke takes place partly in direct-fired furnaces, partly in boilers. The minor quantities burned in small ovens in private households were estimated based on sales figures from coal/coke retailers until 2008. After 2008 this has not been recorded in the energy balance because of very small amounts. In addition, an insignificant figure of coal use in the agricultural sector has formerly been collected from the farmers. Since 2002, coal has not been used in Norwegian agriculture. In addition, there is a small amount of coal used in a few veteran trains in Norway. This figure is assumed to be on about the same every year and is not collected annually.

Several metallurgical plants generate blast furnace gas that is either burnt on-site or sold to adjacent plants. The gas is generated as a by-product from using coal or coke as a reductant in metal production. Some plants utilise the gas for energy purposes either directly on-site, for electricity production, or they sell it to other companies. Two ferroalloy plants sell parts of their blast furnace gas to other plants (an ammonia producer, a district heating plant, iron and steel producers and mineral industries), where it is used for energy purposes. Thus, these amounts are reported as energy consumption in the inventory.

Biofuels

Use of wood waste and black liquor in manufacturing industries is taken from Statistics Norway's annual survey on energy use in these sectors.

For the years before 2005 and for 2012, the use of wood in households is based on the annual survey on consumer expenditure which gives the amount of wood burnt. The

statistics cover purchase in physical units and estimates for self-harvest of wood. The survey figures refer to quantities acquired, which do not necessarily correspond to use. The survey gathers monthly data that covers the preceding twelve months; the figure used in the emission calculations (taken from the energy balance), is the average of the survey figures from the year in question and the following year. For the period 2005-2011, the figures are based on responses to questions relating to wood-burning in Statistics Norway's Travel and Holiday Survey. The figures from the survey refer to quantities of wood used. The survey gathers quarterly data that covers the preceding twelve months. The figure used in the emission calculations is the average of 5 quarterly surveys. Since 2013 the figure used in the emission calculations is the average of 3 quarterly surveys. Figures for some minor use in agriculture and construction have been derived from earlier surveys for these sectors.

Combustion of wood products takes place in boilers and in small ovens in private households. Consumption figures for wood pellets and wood briquettes are estimated based on annual information from producers and distributors. Data on use of peat for energy purposes are not available, but according to the Energy Farm, the centre for Bioenergy in Norway, such use is very limited (Hohle 2005).

The figures of biofuels (biodiesel, bioethanol, bio-gasoline and bio-naphtha) for road transportation are reported separately in the CRT tables. Table 3-15 shows the consumption of biofuels in the transport sector. The amounts of fuel sold are collected from the fuel marketing companies.

Sewage treatment plants and waste disposal sites utilize biogas extracted at the plants, and reports quantities combusted (in turbines) and calculated CO₂ emissions. Other emissions are estimated by Statistics Norway, using the same emission factors as for combustion of natural gas in turbines.

Other fossil fuels: Waste and waste oil

District heating plants and incineration plants annually report combusted amounts of waste (boilers) to Statistics Norway and the Norwegian Environment Agency. Amounts used in manufacturing industries are also reported to Statistics Norway.

Data on the use of waste oil are given in Statistics Norway's statistics on energy use in the manufacturing industries. Statistics Norway also collects additional information directly from a few companies on the use of waste oil as a fuel source. Activity data for waste oil is reported together with waste in the category "other fossil fuels".

Energy balance sheets vs energy accounts

There are two different ways of presenting energy balances: Energy balance sheets (EBS) and energy accounts. The energy figures used in the emission calculations are mainly

based on the energy balance sheets. The energy balance for Norway is published in Statistics Norway's Statbank¹⁷.

The energy accounts follow the energy consumption in Norwegian economic activity in the same way as the National accounts. All energy used by Norwegian enterprises and households is to be included. The main consequence of this is that energy used by Norwegian transport trades and tourists abroad is included, while the energy used by foreign transport industries and tourists in Norway is excluded.

The energy balance sheet follows the flow of energy within Norway. This means that the figures only include energy sold in Norway, regardless of the users' nationality. This leads to different figures between the energy balance sheet and the energy account, especially for international shipping and aviation.

The energy balance sheet has a separate item for energy sources consumed for transportation purposes. The energy accounts place the consumption of all energy under the relevant consumer sector, regardless of whether the consumption refers to transportation, heating, or processing.

Figures from the energy balance sheet are reported to international organizations such as the OECD, IEA and the UN. The energy balance sheet should therefore usually be comparable with international energy statistics.

An important difference between figures presented in the energy balance sheet (EBS) and figures used in the emission calculations is that coal/coke used for non-energy purposes as a reductant: Non-energy consumption of coal/coke is specified in the EBS and included in "final consumption", while coal/coke use as a reductant is included in final energy consumption together with coal/coke combustion. The emission calculations include only energy used for combustion in the calculation of emissions from energy.

Emission factors

The standard emission factors used in the absence of more specific ones are addressed as "general".

CO₂

Emission factors for CO₂ are independent of technology and are based on the average carbon content of fuels used in Norway. The general emission factors for CO₂ used in the emission inventory are listed in Table 3-4 For standard fuels such as refined petroleum products, these factors are used throughout the inventory. For other, more variable fuels,

¹⁷ [11561: Energy balance. Supply and consumption, by energy product. Statbank Norway \(ssb.no\).](https://www.ssb.no/en/statbank/table/11561)
<https://www.ssb.no/en/statbank/table/11561>

such as refinery gas and natural gas in the oil and gas industry, the table shows default factors that are used where more detailed data are unavailable. Thus, factors shown are not average factors across the inventory. Information on industry- and plant-specific factors are given in the category chapters.

As the primary energy data from the energy balance are provided in mass (or volume) terms, the factors per tonne or Sm³ fuel are the ones that are used in the inventory.

Table 3-4: General emission factors for CO₂.

Energy product	Emission factors	
	Tonne CO ₂ /tonne fuel	Tonne CO ₂ /TJ fuel
Coal	2.52	89.68
Coke	3.19	111.93
Petrol coke	3.59	102.57
Crude oil	3.2	75.65
Motor gasoline	3.13	71.3
Aviation gasoline	3.13	71.3
Kerosene (heating)	3.15	73.09
Jet kerosene	3.15	73.09
Diesel	3.17	73.55
Marine gas oil/diesel	3.17	73.55
Light fuel oils	3.17	73.55
Heavy distillate	3.17	73.55
Heavy fuel oil	3.2	78.82
Natural gas (dry gas) (kg/Sm ³) (land)	1.99	56.08
Natural gas (rich gas) (kg/Sm ³) (offshore) ¹	2.34	58.09
LPG	3	65.08
Refinery gas	2.8	57.61
Blast furnace gas	1.571	109.93-213.16
Fuel gas ³	3.0	50
Landfill gas ^{2,4}	2.75	54.56
Biogas ^{2,4}	2.75	54.56
Fuel wood ²	1.8	116.28
Ethanol ²	1.91	71.27
Biodiesel ²	2.85	77.45
Wood waste ²	1.8	100-110.77
Black liquor ²	1.8	195.65-250
Charcoal	3.299	111.83
Municipal waste	0.558	48.49

Energy product	Emission factors	
	Tonne CO ₂ /tonne fuel	Tonne CO ₂ /TJ fuel
Special waste	3.2	78.82

Source: Statistics Norway, Norwegian Petroleum Industry Association, SFT (1990), SFT (1996), Norwegian Climate and Pollution Agency (2011)

¹The emission factor for natural gas used in the emission inventory varies as indicated in tables Table 3-5 and Table 3-6.

²Non-fossil emissions, not included in the inventory CO₂ totals. Emission factor for wood includes water content.

³In this inventory, fuel gas is a hydrogen-rich excess gas from petrochemical industry.

⁴Landfill gas and other types of biogases are reported as methane content in the energy balance.

⁵Emission factors per tonne blast furnace gas are not available. Emissions from off-site use of blast furnace gas are either measured or estimated from volume or energy use. Emissions from on-site use are covered in the IPPU section.

CH₄ and N₂O

For CH₄ and N₂O, information on emission factors is generally very limited, because, unlike the CO₂ emission factors, they depend on the source of the emissions and the sector where the emissions take place. CH₄ and N₂O emission factors for stationary combustion are default factors from IPCC (2006). Net calorific values from the energy balance have been used to combine the factors to primary energy data in physical units. Methane emission factors from fuel wood are taken from SINTEF (1995), Morten Seljeskog et al. (2017) and Øyvind Skreiberg (2023). Due to lack of data, some emission factors are used for sector/source combinations different from those they have been estimated for.

The general CH₄ and N₂O emission factors used in the emission inventory for this source are listed in Table 3-5 and Table 3-7, respectively. Table 3-6 and Table 3-8 display the cases where emission factors other than the general ones have been used in the calculations.

Table 3-5: General emission factors for CH₄, stationary combustion. Unit: kg CH₄ / TJ.

Energy product	Direct-fired furnaces	Gas turbines	Boilers	Small stoves	Flares
Coal	1		300	300	
Coke	10		300	300	
Petrol coke	3		10		
Kerosene (heating)			10*	10	
Marine gas oil/diesel	10		10		
Light fuel oils			10	10	

Energy product	Direct-fired furnaces	Gas turbines	Boilers	Small stoves	Flares
Heavy distillate	10		10	10	
Heavy fuel oil	10*		10*		
Natural gas (dry gas) (land)	5	25.63	5		6.76
Natural gas (rich gas) (offshore)	4.4*	22.58	4*		5.96
LPG			5	5	
Refinery gas	1		1		5.76
Blast furnace gas	0.67		0.67*		
Fuel gas	1		1		1.08
Landfill gas	5		5		7.3
Fuel wood				228-959*	
Wood pellets			11	300	
Wood briquettes			11*		
Wood waste			11*		
Black liquor			3		
Charcoal	200			203	
Municipal waste			30		
Special waste	30		30		

Source: IPCC (2006), SFT (1996), SINTEF (1995) Morten Seljeskog et al. (2017), Øyvind Skreiberg (2023) and OLF (1994)

*Numbers have exceptions for some sectors, see Table 3-6

Table 3-6: Exceptions from the general factors for CH₄, stationary combustion. Unit: kg CH₄/TJ.

Emission factor	Fuel	Source	Sectors
3	Kerosene (heating), marine diesel; light fuel oil, heavy distillate	Direct fired furnaces	Energy industry and manufacturing of product
3	Heavy fuel oil	Direct fired furnaces, boilers	Energy industry and manufacturing of product
1	LPG	Boilers	Energy industry and manufacturing of product
1.14	Natural gas	Direct fired furnaces, boilers	Extraction of oil and gas
1	Natural gas	Direct fired furnaces, boilers	Energy industry and manufacturing of product
0	Blast furnace gas	Boilers	Refinery
1	Landfill gas, Biogas	Gas turbines, boilers	Energy industry and manufacturing of product
30	Wood waste	Boilers	Energy industry and manufacturing of product

Emission factor	Fuel	Source	Sectors
300	Wood briquettes	Boilers	Private households
959	Wood	Stoves (Pre-1998 technology)	Private households
475-247	Wood	Stoves (Post-1998 technology)	Private households
315	Wood	Open fireplaces	Private households

Source: IPCC (2006), SFT (1996), SINTEF (1995), (Morten Seljeskog et al. 2017), Øyvind Skreiberg (2023) OLF (1994). The emission factor for newer stoves in residential wood burning is used increasingly as time goes on due to older stoves being phased out in Norwegian households.

Table 3-7: General emission factors for N₂O, stationary combustion. Unit: kg N₂O/TJ.

Energy product	Direct-fired furnaces	Gas turbines	Boilers	Small stoves	Flares
Coal	1.50		1.50	1.50	
Coke	1.50		1.50	1.50	
Petrol coke	0.60		0.60		
Kerosene (heating)			0.60	0.60	
Marine gas oil/diesel	0.60	0.60	0.60		
Light fuel oils			0.60	0.60	
Heavy distillate	0.60		0.60	0.60	
Heavy fuel oil	0.60		0.60		
Natural gas (dry gas) (land)	0.10*	0.10*	0.10*		0.56
Natural gas (rich gas) (offshore)	0.09*	0.09*	0.09*		0.50
LPG			0.10	0.10	
Refinery gas	0.10		0.10		0.49
Blast furnace gas	0.07		0.07		
Fuel gas	0.10		0.10		0.48
Landfill gas	0.10	0.10	0.10		0.03
Fuel wood				4	
Wood pellets			4	4	
Wood briquettes			4		
Wood waste			4		
Black liquor			2		
Charcoal	4			1	
Municipal waste			4		
Special waste	4		4		

Source: IPCC (2006), SFT (1996), SINTEF (1995), Øyvind Skreiberg (2023) and OLF (1994)

Energy product	Direct-fired furnaces	Gas turbines	Boilers	Small stoves	Flares
----------------	-----------------------	--------------	---------	--------------	--------

**Numbers have exceptions for some sectors, see Table 3-8*

Table 3-8: Exceptions from the general factors for N₂O, stationary combustion. Unit: kg N₂O/TJ.

Emission factor	Fuel	Source	Sectors
0.11	Natural gas	Direct-fired furnaces, gas turbines, boilers	Extraction of oil and gas

Source: Statistics Norway

Uncertainties and time series consistency

Uncertainty estimates for greenhouse gases are presented and discussed in Annex 2, as well as under the individual underlying source categories described in the following.

In general, the total energy use is less uncertain than the energy use in each sector. For some sectors, (e.g., the energy and manufacturing industries) the energy use is well known. However, in the case of households and service sectors energy use is more uncertain. The energy use in the most uncertain sectors has been adjusted in the official energy statistics, so that the sum of the energy use in all sectors equals the total sales.

The current method is based on uncertainty estimates for the individual source categories. The main categories are:

- Use of oil products: Total amounts are given by the petroleum sales statistics. The uncertainty for total sales is considered to be low due to reliable and complete sales statistics, CO₂ tax and other taxes. The project undertaken for the RA/SA comparison also underlines that this statistic is reliable (See Norway's NIR 2023, annex XI). However, the allocation of the total consumption to individual sources is more uncertain.
- Reported emissions from other fuels, primarily natural gas: Uncertainty data for emissions and energy use are provided in ETS reports. A comparison undertaken as part of the RA/SA project shows that there is good correspondence between the energy consumption by plants covered by the EU ETS and the voluntary agreement and Statistics Norway's own statistics (See Norway's NIR 2023, annex XI). This also indicates that the energy use in manufacturing industry in the inventory is reliable.

The analyses have not uncovered any major completeness problems in the consumption data. Thus, we have chosen to use the within-source uncertainties in the uncertainty analysis. The RA/SA problems are discussed in a separate section.

Time series consistency is obtained by the continuous effort to recalculate the entire time series whenever a new source is included in the inventory or new information, or methodologies are obtained. However, data availability both for activity data and reported emissions have generally improved over time and new data are included in the emission estimates when deemed of better quality. This causes a degree of time series inconsistency, but the entire time series is considered when new data are included, and efforts made to take the new information into account for all years.

When it comes to activity data, the statistics that form the basis for the energy consumption are not always complete from 1990 onwards. For instance, the waste statistics that form the basis for the waste incineration started in 1995. For the years prior to this, activity data have been backwards extrapolated to ensure consistency in emission estimates.

Emissions reported from the plants are in most cases of good quality, but it may be unfeasible to obtain the estimates for the entire time series. In cases where the reported emissions are deemed to add to accuracy or level of detail in the emission inventory, and the reported figures are unavailable for parts of the time series, reported figures are used although this introduces a certain level of inconsistency. However, emissions for the rest of the time series are calculated based on fuel consumption and standard emission factors, and checks have been made to ensure that the two methodologies give comparable emission estimates. Times series consistency is thus considered to be met.

Category-specific QA/QC and verification

Emission sources in the energy sector are subjected to the QA/QC procedures described in Section 1.5 and in Annex 4 QAQC. Several documentation reports have been published describing the methodologies used for road traffic (Holmengen & Fedoryshyn 2015) and navigation (Flugsrud et al. 2010; Tornsjø 2001). The methodology for aviation is described in two internal documents from Statistics Norway (Skullerud 2014; Thovsen 2017).

The energy statistics that form the basis for the energy balance and energy accounts are subject to individual QA/QC procedures which are not directly linked to the emission inventory system. For the survey on energy use in manufacturing industries, data are edited in a top-down manner, where large units are edited first. The responses from the plants are subject to a set of automated controls that flag outliers and other possible errors (Statistics Norway Annually-a). The statistics on sales of petroleum products are checked by comparing total sales for each company with additional information from the company. In addition, the companies check that the complete statistics correspond with their own figures. The companies receive tables containing their sales figures, total sales and market shares (Statistics Norway Annually-f).

Plant specific emission data included in the greenhouse gas inventory are based on three different reports. Firstly, the annual report submitted from each plant to the Norwegian Environment Agency pursuant to the Pollution Control Act. This report covers all activity at the plant. Emissions data from the largest plants are included in the national greenhouse gas inventory. Secondly, since 2005, annual reports from entities included in the ETS. In connection with establishing the ETS the plants estimates were quality checked for the time series and specific emphasis on the years 1998-2001. During this process a consistent time series was established from 1990. Thirdly, up until 2013, the Norwegian Environment Agency received emission data through a voluntary agreement established in 1997 between the authority and several industrial agents. Data received by the Norwegian Environment Agency through the different reporting channels described above are controlled by the Norwegian Environment Agency and Statistics Norway. See Annex 4 QAQC.

3.2.1 Comparison of the sectoral approach with the reference approach

This chapter describes the current status of the comparison between the Reference approach (RA) and the Sectoral approach (SA). It also includes a comparison of the RA supply data with the data reported to the IEA/Eurostat.

3.2.1.1 Comparison of the Reference Approach with the Sectoral Approach

The difference in fuel consumption between the RA and SA ranges from about -9 to + 51%. The differences for CO₂ emissions ranges between -4 and +57%. The highest discrepancy for CO₂ is in 1991, 1999-2001 and in 2004-2006, and there are generally lower deviations in the years since 2011. For 2024, the difference for fuel consumption is 5.9%.

The reference approach is an important tool for verification of the sectoral approach used in the inventory. Analyses conducted for the present and the previous inventory submissions under the UNFCCC show that the differences between the RA and SA are mainly explained by the statistical difference in the energy balance. They also indicate that the key parts of the consumption block in the energy balance are unlikely to have major completeness issues.

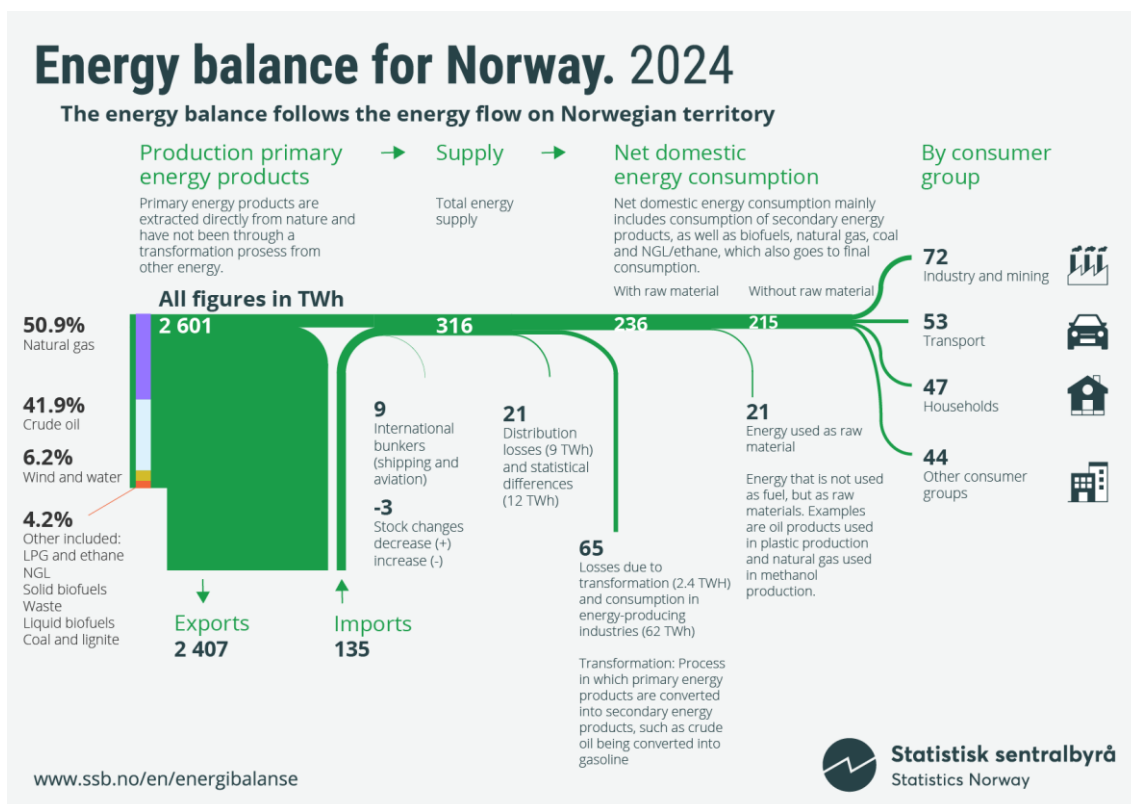


Figure 3.5: Energy balance for Norway.

A large statistical difference relative to national consumption is not unexpected in Norway, given the substantial fuel production and high export share. With reference to the IPCC Guidelines 2006, Volume 2 Energy, chapter 6.8 "It should be noted that for countries that produce and export large amounts of fuel, the uncertainty on the residual supply may be significant and could affect the Reference Approach".

In 2024 the production of primary energy products amounted to 2 601 TWh. Exports totaled 2 407 TWh, meaning that more than 92% of the production was exported. The total national energy supply was 316 TWh, corresponding to 12% of the primary energy production. This implies that even moderate statistical differences compared with primary energy production, will appear large relative to the total energy supply.

The main results of the RA/SA comparison are presented in the tableTable 3-9 below. The differences in fuel consumption between the RA and the SA were largest in 2000, when the statistical differences amounted to almost 51% relative to the SA. Despite this, the statistical differences were no more than 2.5% compared to the total production of primary energy products. For the differences between the RA and SA to be below 2% or 5% in 2000,

the statistical differences would have to be no more than 0.3 or 0,6%, respectively, relative to the total production of primary energy products.

For Other Fossil Fuels (waste), SA estimates are higher than those from the RA, resulting in a RA-SA difference ranging from -20 to -49%. The figures for waste in the Sectoral approach include the non-fossil fraction of the waste, which is not included in the reference approach. When adjusting for the non-fossil fraction, the remaining difference between the RA and SA are not higher than 5% in any year.

Table 3-9: Comparison of fuel consumption and CO₂ emission data between the Reference Approach¹ (RA) and the Sectoral Approach (SA).

Year	Fuel consumption			CO ₂ emissions		
	RA, Apparent energy consumption (PJ)	SA (PJ)	Difference RA-SA (%)	RA, Apparent energy consumption (PJ)	SA (PJ)	Difference RA-SA (%)
1990	342	358	-4.6	25 302	24 623	2.8
1995	412	408	1.1	29 097	27 769	4.8
2000	649	431	50.5	46 158	29 326	57.4
2005	621	479	29.8	43 551	32 565	33.7
2010	624	537	16.2	42 492	35 321	20.3
2011	493	518	-4.8	33 620	34 276	-1.9
2012	534	513	4.2	35 988	33 850	6.3
2013	576	522	10.3	39 377	34 046	15.7
2014	573	530	8.1	38 807	34 745	11.7
2015	573	532	7.8	38 849	34 910	11.3
2016	498	523	-4.8	33 036	34 264	-3.6
2017	577	517	11.6	39 393	33 814	16.5
2018	551	513	7.4	37 282	34 103	9.3
2019	488	499	-2.2	32 732	33 041	-0.9
2020	504	476	5.9	33 621	31 384	7.1
2021	480	470	2.2	32 524	30 934	5.1
2022	462	464	-0.4	31 357	30 684	2.2
2023	457	449	1.8	30 808	29 541	4.3
2024	438	414	5.9	29 528	27 931	5.7

Source: Statistics Norway/Norwegian Environment Agency

¹ Apparent energy consumption (excluding non-energy use, reductants, and feedstocks)

The difference between the RA and the SA is larger for CO₂ emissions than for fuel consumption. This pattern is primarily due to how liquid fuels, and in particular crude oil, are counted in the Reference Approach. Crude oil is a major component of the RA, since Norway is a large producer and exporter. Consequently, the emission factor applied to crude oil has a substantial influence on the CO₂ emissions calculated under the RA, even though very little crude oil is combusted.

In contrast, crude oil plays only a minor role in the Sectoral Approach. The SA is based on actual fuel combustion, and almost none of this combustion is crude oil. Instead, emissions arise from a range of refined petroleum products, such as gasoline, diesel, marine fuels and jet kerosene. These fuels have lower average carbon content per unit of energy than crude oil. As a result, the emission factor applied in the SA reflects the fuel mix used for domestic combustion, not the fuel mix present in the national energy supply and therefore also the RA.

In the Reference Approach an emission factor of 20.33 tonnes C/TJ is applied to crude oil. This factor is highly influential because crude oil constitutes a large share of the total net supply in the RA. By contrast, a representative mix of liquid fuels actually combusted in the SA in 2024 yields an average carbon emission factor of 19.39 tonnes C/TJ (based on figures from CRT: 1A). This explains why the discrepancy between the RA and SA is larger for CO₂ emissions than for energy consumption.

When comparing the RA and SA in energy terms, the main source of divergence is the statistical difference in the energy balance. However, when CO₂ is calculated, the RA multiplies a substantial crude-oil component by a relatively high emission factor, while the SA multiplies mainly refined products by a lower factor. The RA therefore produces higher CO₂ estimates even in years where the underlying energy difference between the two approaches is small.

3.2.1.2 Comparison of the Reference Approach with international data

Results from the new energy balance were published in 2017, including revisions of the time series back to 2010. In 2018, the revision was further extended back to 1990, and the results were incorporated into the emission inventory. Revised emission data were first used in reporting to the UNFCCC in the 2019 submission. Energy supply data in the Reference Approach have been revised in the current submission. RA data are now generally consistent with the published energy balance. However, a few exceptions (LNG bunkers and waste) as described below.

Reporting to the IEA/Eurostat using the Joint Questionnaires relies on the same data extraction methods and the same underlying database as the national energy balance as published by Statistics Norway and the energy data supplied to the emission inventory. However, some discrepancies still arise due to different definitions and delimitations. In

addition, some differences can occur because data are extracted at different times for different purposes.

Differences in updating: Due to continuous improvement of the new energy balance, many data have been revised after the first publication in 2017. For several reasons, not all revisions have been reported to the IEA and Eurostat. Revisions for the period 1990-2010 were carried out mainly to maintain consistent time series in the emission reporting, and for these years, the revised data do not have the level of details required for IEA/Eurostat reporting. Consequently, only revised data for 2010 onwards have been resubmitted to these agencies.

IEA and Eurostat receive the same reporting tables from Norway. However, when the agencies present Norwegian data in energy terms (TJ, ktoe, etc.), the results may differ due to different principles for the use of conversion factors (net calorific values, NCVs). Eurostat generally uses the NCVs supplied by Norway, while the IEA uses a separate data set. Hence, we first present a comparison between the CRT Reference Approach and the Eurostat energy balance. Table 3-10 shows energy supply data for 2024 from the RA and Eurostat grouped by fuel.

Table 3-10: Comparison of energy data in the CRT Reference Approach to data published by Eurostat. 2024.

	CRT Reference Approach, PJ					
	Prod.	Imp.	Exp.	Bun- kers	Stock change	App. cons.
Liquid	4 116	376	4 089	31	17	355
Solid	4	29	3	-	-	30
Gaseous	4 616	3	4 454	2	-4	168
Other fossil	11	-	-	-	-	11
Total	8 747	405	8 546	33	12	564

Eurostat, PJ					
Prod.	Imp.	Exp.	Bun- kers	Stock change	App. cons.
4 102	372	4 085	31	16	342
3	29	3	-	-	30
4 615	3	4 452	2	-4	168
11	-	-	-	-	11
8 731	404	8 541	33	12	550

	Difference, PJ					
	Prod.	Imp.	Exp.	Bun- kers	Stock change	App. cons.
Liquid	14.2	3.8	4.0	0.0	0.4	13.7
Solid	0.5	0.0	0.0	-	0.0	0.5
Gaseous	1.1	0.0	1.1	-	0.0	0.0
Other fossil	-0.1	-	-	-	-	-0.1

Difference, % (base: Eurostat)					
Prod.	Imp.	Exp.	Bun- kers	Stock change	App. cons.
0.3	1.0	0.1	0.0	2.6	4.0
16.3	0.0	0.0	.	0.0	1.8
0.0	0.0	0.0	.	0.0	0.0
-1.0	.	.	.	.	-1.0

Total	15.8	3.8	5.0	-0.0	0.4	14.1	0.2	0.9	0.1	0.0	3.7	2.6
--------------	------	-----	-----	------	-----	------	-----	-----	-----	-----	-----	-----

Sources: CRT Reference Approach. Eurostat data in ktoe downloaded from <https://ec.europa.eu/eurostat/web/energy/data/energy-balances>

The table shows that apparent consumption (primary energy supply) was 14.2 PJ or 3% higher in the RA than by Eurostat. The main reasons are NCV differences for NGL production and NGL/naphtha export, and data for refinery feedstocks. Some issues raised by the table:

- For *liquid* fuels, the main difference relates to production data for NGL. Production according to the RA was approximately 15 PJ higher than by Eurostat. This is due to inconsistent NCV values. In the RA and the published energy balance, an NCV value of 46.1 TJ/kt is used for NGL (akin to the LPG value). In IEA/Eurostat reporting, a value of 43.8 TJ/kt is used.
- In addition, there were smaller differences in foreign trade data for several fuels, leading to larger apparent consumption in the RA.
- For *solid* fuels coal production is 0.5 PJ (16%) higher in the RA because production at Svalbard by Russian companies were included. This production is not included in the energy balance.

Note on NCVs: The NCV given in CRT table 1.A(b) is valid for apparent consumption only and is not valid for production/export. Domestic consumption of natural gas is dominated by rich gas used in the offshore oil and gas sector which has an NCV significantly higher than the value for exported gas. Thus, using the RA NCV for production/export is misleading and would show discrepancies to IEA/Eurostat that are not actual. The proper NCVs are shown in annex 3a, table A3a-1, and the TJ data especially in Table 3-10 were prepared using these values.

3.2.2 International bunker fuels

3.2.2.1 Description

Emissions from international marine and aviation bunker fuels are excluded from the national totals, as required by the IPCC Guidelines (IPCC 2006). The estimated emission figures are reported separately and are presented in Table 3-11.

In 2024 emissions from ships and aircrafts in international traffic bunkered in Norway amounted to a total of 2.5 million tonnes CO₂ equivalents, which corresponds to 5.6% of the total Norwegian emissions in CO₂ equivalents.

The emissions from international navigation bunkered in Norway was 0.8 million tonnes CO₂- equivalents in 2024. During the period 1990-2024, the amount of CO₂ equivalents from marine bunkers decreased by 69%. The emissions reached a peak in 1997. Thereafter there has been a descending trend in emissions.

The emissions from international air traffic bunkered in Norway was 1.7 million tonnes CO₂ equivalents in 2024. The emissions were 168% higher in 2024 than in 1990 due to a higher activity level and 236% higher than 2021 due to the covid-19 pandemic.

Table 3-11: Emissions from ships and aircraft in international traffic bunkered in Norway. 1000 tonne.

	Aviation			Marine		
	CO ₂	CH ₄	N ₂ O	CO ₂	CH ₄	N ₂ O
1990	643	0.008	0.039	2 302	0.166	0.328
1995	563	0.006	0.034	2 294	0.166	0.326
2000	886	0.009	0.054	2 831	0.205	0.409
2005	910	0.008	0.055	2 597	0.188	0.365
2010	1 289	0.01	0.078	1 682	0.122	0.219
2015	1 623	0.012	0.102	1 093	1.399	0.123
2016	1 587	0.012	0.099	889	1.867	0.093
2017	1 669	0.012	0.106	981	1.725	0.100
2018	1 822	0.013	0.116	1 100	1.998	0.107
2019	1 751	0.012	0.112	1 030	2.143	0.095
2020	585	0.005	0.038	955	2.322	0.084
2021	512	0.005	0.032	986	2.481	0.082
2022	1 369	0.010	0.087	1 023	1.690	0.083
2023	1 593	0.011	0.100	777	1.710	0.059
2024	1 748	0.012	0.108	684	1.916	0.048

Source: Statistics Norway/Norwegian Environment Agency.

3.2.2.2 Shipping

3.2.2.2.1 Methodological issues

Emissions are calculated by multiplying activity data with emission factors. Sales figures are used as activity data. The sales statistics for petroleum products, which is based on reports

from the oil companies to Statistics Norway, has figures on sales for bunkers of marine gas oil, heavy distillates, and heavy fuel oil.

3.2.2.2.2 Activity data

Sales figures for international sea transport from Statistics Norway's sales statistics for petroleum products are used for marine gas oil, heavy distillates, and heavy fuel oil. Sales figures for international sea transport from Statistics Norway's natural gas survey are used for natural gas. See chapter 3.1.9 for more information on the distribution of sales figures.

3.2.2.2.3 Emission factors

Emission factors used for shipping are described under *Navigation* in Section 3.2.9.4.

3.2.2.3 Aviation

3.2.2.3.1 Methodological issues

The calculation method for aviation is based on a "bottom up" calculation of aviation fuel consumption and emissions based on traffic data, and emission factors and energy use factors for aircraft types (kg / km). The traffic data includes foreign flights, and it is possible to link calculations of foreign and domestic aviation directly to activity data. These calculations make a distribution basis for the majority (> 95%) of total sales of jet kerosene. The remaining jet kerosene and aviation gasoline is distributed based on assumptions about place of use and nationality.

Figures included in international aviation (bunker) is emissions from jet kerosene and aviation gasoline consumption from flights departing from a Norwegian airport and arriving in a different country.

3.2.2.3.2 Activity data

Statistics Norway annually collects data on sales of jet kerosene and aviation gasoline in the sales statistics of petroleum products.

Activity data on flight movements are collected annually from Avinor (Norway's largest owner of airports). Helicopter data is collected from several Norwegian airline companies as the data on aircraft movements has incomplete helicopter data.

3.2.2.3.3 Emission factors

Emission factors used for *Aviation* are described under *Aviation* in Section 3.2.6.4.

3.2.3 Feedstocks and non-energy use of fuels

Emissions from the use of feedstock are, in accordance with the IPCC guidelines, generally accounted for in the industrial processes sector in the Norwegian inventory. By-products from processes like blast furnace gas and fuel gas from ethylene cracking that are sold and combusted in other sectors are accounted for and reported under the energy sector.

3.2.3.1 Fuel quantity for Non-Energy Use (NEU)

In CRT table 1A(d), "Fuel quantity for NEU" is generally filled in with data for item "11 *Non-energy consumption*" according to the energy balance. These amounts are shown in blue colour in the figures below.

The non-energy consumption is adjusted with respect to reducing agents that are considered as *final energy consumption* in the energy balance but accounted as IPPU emissions in the inventory. This mainly concerns coal and coke, which are mostly accounted as energy use in the energy balance. Note that these adjustments are also obtained from the energy balance. The primary data includes information on whether the fuels are used for regular combustion or for metallurgical or other processes, even if the utilization of the heat means that it is accounted as "energy use".

The non-energy consumption is also adjusted with respect to combustion emissions that are accounted under IPPU, in accordance with the IPCC guidelines. This applies to emissions from petrochemical and ammonia plants reported in sectors 2.B.1 and 2.B.8. In these cases, all consumption of the relevant fuels (LPG, natural gas) at the plants are reported as NEU, not only the amount that is recorded as feedstock in the energy balance.

Fuel quantities for non-energy use that correspond to final energy consumption are shown in yellow colour in the figures below.

Some fuels are aggregated in the same manner as in CRT table 1A(b). In particular, ethane is reported with LPG and anthracite is reported with other bituminous coal.

3.2.3.2 Carbon excluded

CRT table 1A(d) also includes information of the amount of carbon excluded. The excluded amount corresponds to the fuel quantity (using the same factors for carbon content as in table 1A(b)), except for emissions from petroleum products that are included as energy combustion in 1A as described in the following paragraph.

3.2.3.3 CO₂ emissions from non-fuel use reported in 1A Fuel combustion

These emissions comprise the following categories, which are further described in section 3.2.13:

- A fraction of non-fuel use of gasoline, gas/diesel oil and residual fuel oil is assumed to be emitted to air. The emissions are reported under 1A5a *Non-fuel use*.
- Emissions from use of lubricants in 2-stroke engines are reported under 1A5b. Emissions from other lubricants are on the other hand reported in IPPU under 2D2 *Lubricants* and are as such accounted as carbon excluded.

3.2.3.4 CO₂ emissions from non-fuel use reported in the IPPU sector

Emissions reported in IPPU source categories that correspond to the carbon excluded are listed in CRT table 1A(d). Many industries use several fuels, and an aggregate level of

reporting is shown. For transparency, emissions from IPPU sectors are entered exactly as reported. Balances for the major fuels are shown in the figures below, and possible discrepancies between the reported emissions and the CO₂ excluded from the reference approach are described in more detail.

Liquefied petroleum gases (LPG), including ethane, are used as a feedstock in ammonia and ethylene production. Products and secondary fuels¹⁸ from ethylene cracking are used as feedstock and fuel in adjacent petrochemical plants. All emissions derived from LPG in ammonia production and ethylene cracking are reported in IPPU, including combustion emissions and emissions at adjacent plants that use secondary fuels from the cracking.

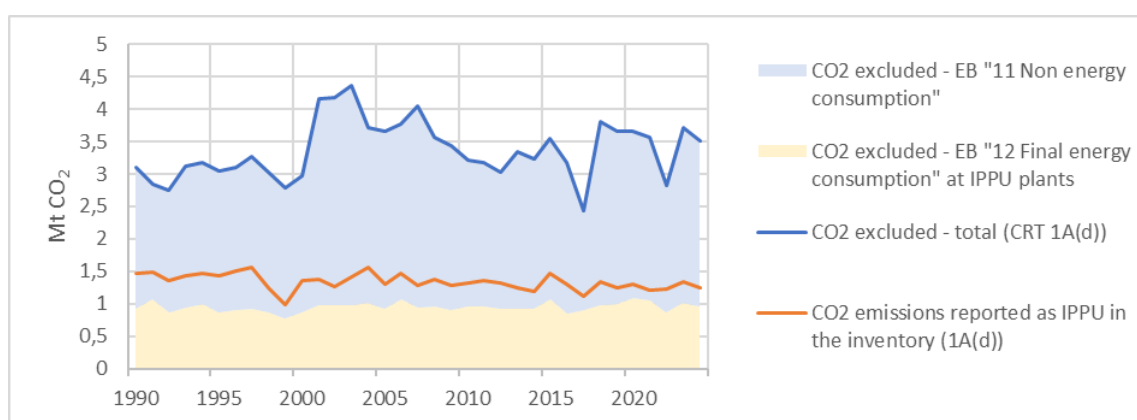


Figure 3.6: LPG. CO₂ amounts excluded from the reference approach (shaded areas, blue line) and reported as IPPU emissions (orange line). IPPU sectors reported in the inventory include:

- 2B1 Ammonia
- 2B8b Ethylene (including vinyl chloride reallocated from 2Bc)
- 2B8g Plastics (PE/PP production)
- 2H2 Food and beverage (CO₂ as product from ammonia production)

Figure 3.6 shows CO₂ excluded from the reference approach and CO₂ reported in IPPU. Non-fuel consumption according to the energy balance is shown in blue shading. CO₂ from fuels reported as energy use in the balance is shown in yellow shading. This corresponds to most of the emissions in 2B8. The area between the yellow shading and the orange line corresponds to emissions at ammonia plants from fuels recorded as non-fuel use in the energy balance, and to small emissions from flaring and derived fuels in petrochemical plants. The area above the orange line corresponds to carbon sequestered in products. Recovered CO₂ emissions from ammonia production, which are reported in 2H2 *Food and beverage production*, are included here. However, emissions in 2H2 are adjusted for export

¹⁸ Including "fuel gas" which is reported as "Other oil products n.e.c." in the energy balance.

and import of bulk CO₂. Thus, the emissions do not correspond precisely to the energy balance data.

Secondary fuels (fuel gas) that are sold to plants in other sectors are excluded from both NEU quantity and IPPU emissions. These fuel amounts and their emissions are accounted for in sector 1A.

Petroleum coke is used as a feedstock primarily in production of aluminium and carbides, and of electrodes for use in the metallurgical industry.

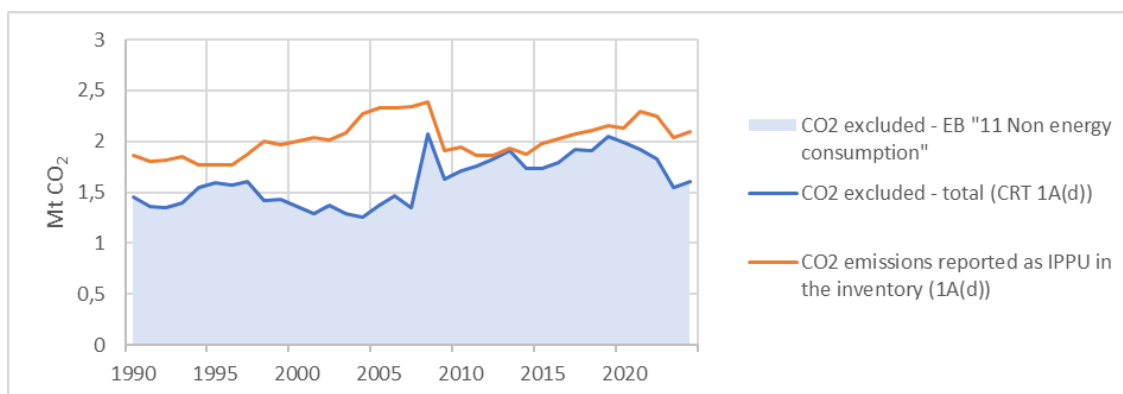


Figure 3.7: Petroleum coke. CO₂ amounts excluded from the reference approach (shaded areas, blue line) and reported as IPPU emissions (orange line). IPPU sectors reported in the inventory include:

- 2B5 Carbide production
- 2C3 Aluminium production
- 2C7 (part) Anodes

The emissions from the included sectors are higher than the total non-fuel consumption of petrol coke (Figure 3.7). This is partly due to foreign trade in electrodes and electrode materials. This foreign trade is not included in the energy balance. Norway was a net importer of electrodes until 2008, when a new plant for prebaked anodes to aluminium production opened. Since then, imports and exports of electrodes have been relatively balanced.

The decrease in difference between reported emissions and CO₂ excluded in the last two decades is partly offset by an increase in the same difference for coal and coke (see below). Other discrepancies between the NEU quantity and the IPPU emissions as shown include:

- Small amounts of petroleum coke and electrode materials are used for non-energy purposes in other metal production, particularly in ferroalloy plants.

- Some of the emissions from anode productions are actually from coal, coke or pitch.

Coal and coke products are presented jointly. Many metallurgical plants use several products in large amounts. In CRT table 1A(d), IPPU emissions from categories that predominantly use coal and coke are aggregated under "Other bituminous coal". Note that all metallurgical industry in Norway is electricity intensive. There are no primary iron or steel plants that use coal and coke as their main energy source.

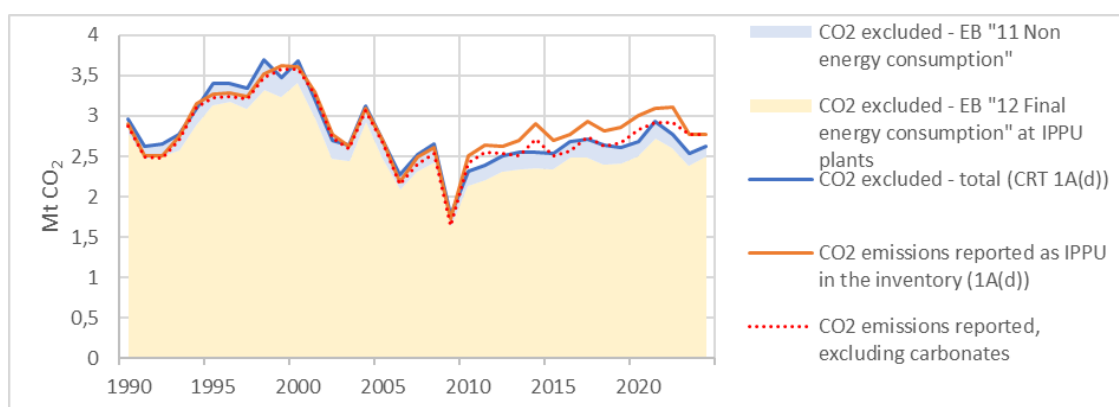


Figure 3.8: Coal and coke products. CO₂ amounts excluded from the reference approach (shaded areas, blue line) and reported as IPPU emissions (orange line). IPPU sectors reported in the inventory include:

- 2B6 Titanium dioxide
- 2C Metal production, excluding 2C3 and 2C7-anodes (petroleum coke) and 2C7-nickel (carbonates only)

Figure 3.8 shows CO₂ excluded from the reference approach and CO₂ reported in IPPU. In the energy balance, all coke and most of the coal are recorded as energy use. This is shown in yellow shading. Only a small fraction of coal consumption is recorded as non-fuel consumption into the energy balance, as shown in blue shading.

An increasing amount of the CO₂ reported from ferroalloy production is from carbonates, partly from lime and dolomite and partly from carbonate ores. The dotted line in the figure shows IPPU emissions excluding carbonate CO₂. When adjusted for carbonate CO₂, there is a close correspondence between the NEU quantity from the energy balance and the emissions throughout the reporting period.

The discrepancies mentioned for petroleum coke above apply also to coal and coke, in the reverse way. A small fraction of the IPPU emissions is actually from petrol coke. On the

other hand, some emissions originating from coal and coke in anode production are excluded from the figure.

Secondary fuels (blast furnace gas) that are sold to plants in other sectors are excluded from both NEU quantity and IPPU emissions. These fuel amounts and their emissions are accounted for in sector 1A.

Natural gas is used as feedstock at a methanol plant. There are no other significant uses of natural gas as feedstock.

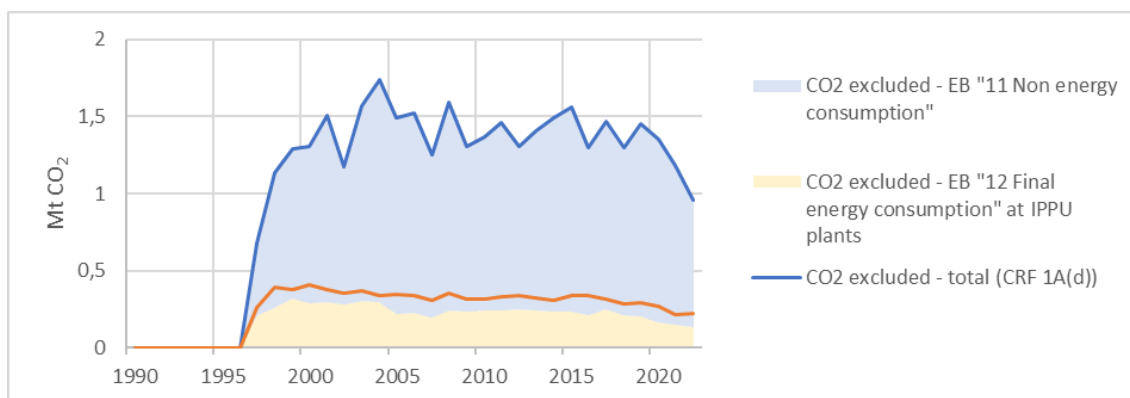


Figure 3.9: *Natural gas*. CO₂ amounts excluded from the reference approach (shaded areas, blue line) and reported as IPPU emissions (orange line). IPPU sectors reported in the inventory include:

- 2B8a Methanol

Figure 3.9 shows CO₂ excluded from the reference approach and CO₂ reported in IPPU. The picture is similar to that for LPG, but emissions from fuel recorded as feedstock in the energy balance are much smaller.

Non-fuel consumption according to the energy balance is shown in blue shading. CO₂ from fuels reported as energy use in the balance is shown in yellow shading. This corresponds to emissions in 2B8a. The area between the yellow shading and the orange line corresponds to emissions from flaring and fuels derived from the feedstock. The area above the orange line corresponds to carbon sequestered in products.

Paraffin wax and *white spirits* and related products have not been included in table 1A(d). Paraffin wax is not included in the Norwegian energy balance. White spirits etc. is only included in the supply side of the balance, and only in small amounts. No final use is recorded. Emissions from these products are reported in the IPPU sector as 2D2 "Paraffin

wax use" and 2.D.3.a Solvent use. These emissions are based on activity data from other sources than the energy balance.

As a *summary*, the balances for LPG and natural gas show how emissions from both energy use and feedstocks are reported in the IPPU sectors. Most of the feedstocks are sequestered in products. For petroleum coke, coal and coke used in the metallurgical industry, reported emissions are slightly higher than the CO₂ excluded from the reference approach. Several causes for this gap are discussed. The gap for these three fuels combined is more stable over the inventory period than shown in the individual balances.

3.2.4 Energy industries, 1A1

3.2.4.1 Category description

Energy industries include emissions from electricity and heat generation and distribution, extraction and production of oil and natural gas, coal production, gas terminals and oil refineries. Norway produces electricity mainly from hydropower and therefore emissions from electricity production are small compared to most other countries. Due to the large production of oil and gas, emissions from combustion in energy production are nevertheless high.

It is important to specify that only emissions from energy combustion for energy purposes are included in section 3.2 Fuel Combustion and in the source category Energy industries (CRT 1A1). Emissions from combustion not for energy purposes, e.g., flaring, are included in sections 3.3 and 7.5.

Emissions from drilling at moveable offshore installations are included in section 3.2. Emissions from these installations, while not in operation (during transport, etc.), are included with 1A3d Navigation.

Figures on natural gas used in turbines for pipeline transport at onshore facilities are reported annually to the Norwegian Environment Agency . However, energy generation for pipeline transport also takes place at the offshore production facilities. Specific data on consumption for transport offshore are not available. Thus, the consumption at the two pipeline facilities does not give a correct picture of the activity in this sector. For the integrated facilities, the total CO₂ emissions from each facility are reported under the ETS system and are of high quality. The emissions might be split into production and transport using surrogate data, but the accuracy for the two fractions would be much lower than for the total. Consequently, all emissions from pipelines are reported under 1A1, rather than under 1A3e.

In 2024, GHG emissions from the energy industries accounted for 39% of the energy sector's total emissions and 26% of the total emissions in Norway. Emissions increased by

67% during the period 1990-2024, primarily due to the increased activity in the oil and gas extraction sector. However, the emissions reached a peak in 2015 and have since declined by 23%.

According to the approach 2 key category analysis for 1990 and 2024, this sector is, in conjunction with stationary combustion in sectors 1A2 and 1A4, a key category with respect to:

- Emissions of CO₂ from the combustion of liquid fuels and gaseous fuels in level in 1990 and 2024, and in trend
- Emissions of CO₂ from the combustion of other fuels in level in 1990 and 2024, and in trend
- Emissions of CO₂ from the combustion of solid fuels in level in 1990 and in trend
- Emissions of CH₄ from the combustion of biomass in level in 1990 and 2024 and in trend

3.2.4.2 Methodological issues

A description of the general method used for estimating emissions from fuel combustion is given in section 3.2. However, most of the reported emissions in this source category are from the annual report from the entities to the Norwegian Environment Agency. The guidelines for estimating and reporting emissions are lengthy and in Norwegian, so instead of attaching these to the NID, URLs are provided in Annex 4.

In the case of oil refineries and waste incineration, further specifications on the methodology are given below.

Oil refineries

The emissions from oil refineries are based on annual reports from each refinery to the Norwegian Environment Agency. The data are taken from the mandatory reporting obligation that is a part of the plants permits given by the authorities up until 2004, however and from 2005 and onwards, emission data are taken from the emission trading system. The distribution of emissions between flaring and energy utilisation of refinery gas in the whole period from 1990 is based on plant and year specific figures. Emissions from energy utilization are reported in petroleum refining (CRT 1A1b) and from flaring in fugitive emissions from flaring (CRT 1B2c).

As per 2025, there is one oil refinery in operation in Norway. This refinery has a catalytic cracker. Emissions from coke burn off on the catalyst at the cracker are, since they are not for energy purposes, reported in Fugitive Emissions from Oil (CRT 1B2a).

Waste incineration – N₂O

Emissions of N₂O are derived from the emissions of NO_x, which are reported from each plant to the Norwegian Environment Agency. More specifically, an estimated amount of 2.5% of this NO_x is subtracted and reported to UNFCCC as N₂O (SFT 1996). Accordingly, the net NO_x emissions constitute 97.5% of the emissions reported by the plants. For some years, emissions of NO_x have not been reported for a number of plants. In these cases, specific emission factors for the plants have been made, based upon earlier emissions and amounts of waste incinerated. These new factors have been used to estimate the missing figures.

3.2.4.3 Activity data

Electricity and heat generation and distribution

The energy producers annually report their use of different energy carriers to Statistics Norway. There is only minor use of oil products at plants producing electricity from hydropower. Combustion of coal at Norway's only dual-purpose power plant at Svalbard/Spitsbergen was of a somewhat larger size. Coal fired operations ended in October 2023, and the power plant is currently running on diesel. The amount of waste combusted at district heating plants is reported annually both to Statistics Norway and the Norwegian Environment Agency, see Table 3-12. Data are considered to be of high quality.

Table 3-12: Amount of waste combusted at waste incineration plants. Unit: 1000 tonnes.

Year	Amount of waste incinerated (1000 tonnes)
1990	225
1995	367
2000	524
2005	626
2010	1 044
2015	1 618
2016	1 562
2017	1 645
2018	1 677
2019	1 608
2020	1 643
2021	1 560

Year	Amount of waste incinerated (1000 tonnes)
2022	1 596
2023	1 585
2024	1 548

Source: Statistics Norway and Norwegian Environment Agency

Oil refineries

The oil refineries annually report their use of different energy carriers to Statistics Norway. Refinery gas is the most important, but there is also some use of LPG and oil products. Emissions included in the inventory for this category are from the refineries annual report to the Norwegian Environment Agency. Emissions from the catalytic cracker at one refinery are reported in Refining/Storage (CRT 1B2a4).

Coal production

Norway's coal production takes place on Svalbard. The only coal producing company reports its coal consumption and some minor use of oil products annually. In addition to emissions related to Norway's own coal production, emissions from Russian activities are also included in the Norwegian emission inventory. As Russian activity data are scarce, emissions from an estimated quantity of coal combusted in Russian power plants are calculated. Since 1999, there has been only one such plant; in earlier years there were two.

Extraction of oil and natural gas

Production of oil and natural gas is the dominating sector for emissions from combustion in the energy industries in Norway. The Norwegian Offshore Directorate reports annually the amounts of gas combusted in turbines and diesel burnt in turbines and direct-fired furnaces on the oil and gas fields. The data are considered of high quality due to the CO₂ tax on fuel combustion. The activity data are used for 1990-2002. From 2003 onwards, reported emission figures from the field operators are reported into the Footprint reporting tool.

The guidelines for estimating and reporting emissions are lengthy and in Norwegian, so instead of attaching these to the NID URLs are provided in annex 4. Annex 4 also describes QA/QC performed for plant specific emission data use in the inventory.

The reporting for offshore activities is described in guidance documents (Miljødirektoratet 2021; Offshore Norge 2023).

Combusted amounts are generally reported in volume or mass terms, with little or incomplete information on energy content. Conversion of reported data to energy terms is discussed below in the section on emission factors.

Gas terminals

Natural gas from the Norwegian continental shelf is landed, treated, and distributed at gas terminals on shore. There are four gas terminals in Norway. The first opened in 1985, one in 1996 and two in 2007.

Annual figures on natural gas combusted in turbines and flared are reported to the Norwegian Environment Agency and the Norwegian Offshore Directorate. Emissions included in inventory for this category are from the gas terminals' annual reports to the Norwegian Environment Agency.

Some of the terminals use electricity from the grid as their main energy source, while others use gas derived from the natural gas feed.

In addition, emissions from two LNG plants and oil terminals are reported in the extraction category, with data sources as for the gas terminals.

3.2.4.4 Emission factors

The emission factors used for energy industries are presented in section 3.2. For some industries and components, more information about the derivation of the emission factors is given below.

Liquid fuels in electricity generation

The CO₂ implied emission factor for liquid fuels in electricity generation varies significantly over the period, from a regular factor around 73-74 t/TJ down to around 46 t/TJ around 2021. In 2023 and 2024, the IEF is again at about 73 t/TJ.

The drop in IEF was due to the use of refinery gas at a heat and power plant adjacent to a refinery. The NCV for refinery gas is about 11% higher than that for other liquid fuelsTable 3-2, and the emission factor (Tonne CO₂/TJ fuel) is 20% lowerTable 3-4. This change in energy mix explains the reduction in the IEF for liquid fuels used in this source category around 2010. In 2022 the heat and power plant was closed.

Emissions from consumption of refinery gas included in the inventory are taken from the ETS reports and adjusted for the backflow of fuel gas to refinery. The removed amount of CO₂ is included in Petroleum refining (CRT 1A1b). The adjustment for backflow is because the amount and composition of the gas are measured before a separation facility that removes excess hydrogen together with some hydrocarbons.

Gas in electricity generation

The CO₂ implied emission factor for use of natural gas in electricity generation varies somewhat over the period, from 55.1 t/TJ to 57.5 t/TJ. The variation is primarily a result of the economics of gas power production. Thus, the relative contributions of plants with different plant-specific factors (as based on reports to the Emissions Trading System) also vary significantly. This accounts for the changes in the time series.

Coal in electricity and heat production

The CO₂ factor for solid fuels in electricity generation is low, at 89.7 t/TJ. The emissions in this category are from coal use on Svalbard. The coal mined at Svalbard has a low carbon emission factor.

The CO₂ factor for solid fuels in heat generation is high and variable, ranging from 164 to 203 t/TJ. The emissions in this category are from blast furnace gas which is sold from a ferroalloy plant to heat distributors. The emissions are based on reports from the plants, from 2008 onwards as part of the Emissions Trading System.

Waste incineration

The emission factors for CH₄ and N₂O from combustion of waste (fossil part only) are displayed in Table 3-4, Table 3-5 and Table 3-7, respectively.

The CO₂ emission factor for the fossil part of waste combusted in waste incineration plants in Norway was revised in 2014 (Fedoryshyn 2015), 2023 (MEPEX 2020) and 2025 (MEPEX 2025). The revisions of the factor in 2023 and 2025 continue to build on the results from 2014. The amount of CO₂ per tonne plastic that is combusted varies with the type of plastic. It is assumed that mixed plastic contains 2 580 tonnes CO₂ per tonne plastic (Nielsen et al. 2010) and that 22.1% of the combusted waste was fossil in 2018, an increase from 20% in the 2014 review (Norwegian Climate and Pollution Agency 2011). The emission factor is a time series that is based on the mean annual change in the fossil share of combusted waste. This change is calculated using the data from Waste accounts Statistics (Statistics Norway Annually-h) in the period of 1995-2009 and it is used linear interpolation in 2010-2013. In the years prior to 1995, the 1995 emission factor is used. The 2025 report has added updated emission factors for the years 2020 and 2025. Hence, linear interpolation is used to fill the gaps in 2019 and 2021-2024. The CO₂ emission factor for the fossil part of incinerated waste in total is given in Table 3-13.

It is assumed that the energy content of waste is 11.5 GJ per tonne waste. This is based on a report from Avfall Norge (Marthinsen et al. 2010).

Table 3-13: Emission factors for waste incineration, fossil part, kg CO₂/tonnes incinerated waste.

Year	kg CO ₂ /tonnes waste
1990	487.4
1995	487.4
2000	506.1
2005	525.5
2010	545.5
2015	561.0
2016	572.0
2017	572.0
2018	592.0
2019	586.0
2020	580.0
2021	574.4
2022	568.8
2023	563.2
2024	557.6

Emissions of biogenic CO₂ are included in IPCC sector 5C.

Oil refineries

The CO₂ emission factor for combustion of refinery gas is based on daily or weekly plant-specific measurements. The refinery gas consists of hydrogen and various hydrocarbons. The composition is variable, leading to changing emissions factors measured as tonne CO₂/tonne fuel or tonne CO₂/TJ. High hydrogen content leads to low emission factors as measured in tonne CO₂/TJ. As an example, a gas with 40% hydrogen and 60% hydrocarbons with an average carbon number of 2 gives an emission factor of 50 tonne CO₂/TJ. In the Norwegian inventory, the emission factor varies in the range 45-62 tonne CO₂/TJ.

Extraction of oil and natural gas

Offshore operations

For all years up to 2002, emissions of CO₂ from gas combustion offshore are calculated by Statistics Norway based on activity data reported by the oil companies to the Norwegian Offshore Directorate and the Norwegian Environment Agency and the emission factors

shown in Table 3-5. For the years 2003 and onwards, the data used in the inventory are emissions reported by the field operators to the Norwegian Environment Agency annually.

The CO₂ emission factor used for all years leading up to 1998 and for all fields except one is an average (standard) factor based upon a survey carried out in the early 1990s (OLF 1993). From 1999 and onwards, the employed emission factors reflect increasingly field specific conditions, as individual emission factors have been reported directly from fields. The measurement frequency varies among the installations. Table 3-14 displays the time series of such emission factors, expressed as averages, and based on data reported in Footprint. Footprint is the reporting system in which field operators report emissions data.

Since 2008, offshore gas combustion has been included in the European emission trading system (ETS).

The carbon content of gas burnt varies between the various oil and gas fields. These changes are reflected in the reported emissions.

Activity data are reported in either volume or mass terms, as noted in the AD section above. The preparation of the CO₂ inventory for the CRT reporting is calculated as a total without referring to the energy content. Following the model update in 2024, activity data—both in tonnes and in energy terms—are now carried through the entire calculation model. This improvement has strengthened the alignment between activity data and emission calculations and has enhanced the quality and transparency of the implied emission factors.

Emission factors for the offshore part of the extraction industry are shown in Table 3-14. The table shows factors both in kg CO₂/Sm³ and kg CO₂/GJ. The factors fCO_{2_vol} in kg CO₂/Sm³ are annual averages from total emission and consumption data as reported in Footprint. The factors fCO_{2_E} in kg CO₂/GJ are back-calculated from the fCO_{2_V} values using a formula from the reporting guidance document (Offshore Norge 2023):

$$fCO_{2_vol} = 0.0724 \cdot NCV_{vol} + 0.5771$$

where fCO_{2_vol} is given in kg CO₂/Sm³ and NCV_{vol} in MJ/Sm³.

The formula is originally meant to estimate CO₂ emissions when only NCV values is known. Here, the expression is used in reverse to convert the emission factors to MJ terms. Using the fact that $fCO_{2_E} = fCO_{2_vol} / NCV_{vol}$ and inserting the expression above, solved for NCV_{vol} , one gets

$$fCO_{2_E} = 0.0724 / (1 + 0.5771 / fCO_{2_vol})$$

This formula is used to obtain the data for kg CO₂/GJ in the table.

Table 3-14: Average emission factors of CO₂ from the combustion of natural gas in turbines at offshore gas and oil fields.

Year	kg CO ₂ /Sm ³	kg CO ₂ /GJ
1990	2.40	60.82
1995	2.38	59.10
2000	2.49	58.77
2005	2.45	58.58
2010	2.36	58.19
2015	2.34	58.07
2016	2.34	58.10
2017	2.33	58.05
2018	2.33	58.01
2019	2.30	57.85
2020	2.30	57.90
2021	2.32	57.95
2022	2.31	57.94
2023	2.31	57.91
2024	2.31	57.94

Gas terminals

There are four gas terminals in Norway. The CO₂ emission factors for combustion of natural gas on the terminals are based on continuous or daily plant-specific measurements.

Since 2005, the terminals have been included in the emission trading system (ETS). The average CO₂ emission factors for fuel gas varies between terminals.

At the two terminals that account for most of the CO₂ emissions, some CO₂ derived from the natural gas feed is entered into the fuel gas. This leads to low CO₂ emissions per tonne gas and high emissions per MJ. In Table 3-15, emission factors in t CO₂/t fuel gas are given for these two terminals for some years for which data were readily available. Information on energy content and gas volume was not available.

Table 3-15: Average emission factors of CO₂ from two major natural gas terminals. t CO₂/t fuel gas.

Year	Kårstø	Hammerfest
2013	2.26	2.49
2014	2.18	2.46
2015	2.20	2.46
2016	2.24	2.45
2017	2.23	2.45
2018	2.25	2.45
2019	2.28	2.45
2020	2.36	2.47
2021	2.55	2.67
2022	2.62	2.48
2023	2.62	2.48
2024	2.63	2.47

3.2.4.5 Uncertainty assessment and time-series consistency

The uncertainty analysis performed for the energy industries (Annex 2) has shown that the uncertainty in the activity data is $\pm 3\%$ of the mean for oil, $\pm 4\%$ for gas and $\pm 5\%$ of the mean for coal/coke and waste.

In the case of the emission factors for CO₂, the uncertainty is $\pm 3\%$ of the mean for oil, $\pm 3.5\%$ for gas, $\pm 7\%$ for coal/coke and gas and $\pm 30\%$ of the mean for waste.

Emission factors for CH₄ and N₂O are very uncertain. Distributions are strongly skewed with uncertainties which lie below and above the mean by a factor of 2 and 3, respectively.

The EU ETS emission estimates are available for all years since 2005. The information included in the ETS cannot reasonably be obtained for the time series 1990-2004. Thus, the use of this relatively new data source introduces a degree of inconsistency in the time-series. However, the energy consumption reported under the ETS system is consistent with the energy consumption reported to Statistics Norway for individual plants. In addition, the CO₂ emission estimates are consistent with the emissions reported into Footprint for offshore activities and into Altinn for land-based industries. These are the data sources used for emissions, for the years prior to the introduction of the EU ETS scheme. It has thus

been assumed that time-series consistency is not significantly affected, and that the emission trend is reliable.

3.2.4.6 Category-specific QA/QC and verification

The energy industries are subjected to the general QA/QC procedures described in section 1.5 and in Annex 4 QA/QC. The category-specific QA/QC described in section 3.2 is also valid for Energy Industries.

Some category-specific QA/QC activities has been conducted in the following industries:

Extraction of oil and natural gas

From 2003 onwards, field specific emission data reported by the companies hve been used directly in the emission model. These reported figures are then compared with emissions calculated using field specific activity data and corresponding emission factors.

Oil refineries

The CO₂ emissions reported by the refineries are compared against the emissions estimated by Statistics Norway using activity data and corresponding emission factors for the different energy carriers used.

Results from the above studies have so far shown that emission estimates are consistent with the reported figures.

3.2.4.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

3.2.4.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.2.5 Manufacturing industries and construction, 1A2

3.2.5.1 Category description

Emissions from the sector of manufacturing industries and construction include industrial emissions originating largely from the production of raw materials and semi-manufactured goods. The largest sources are Non-metallic industries and Other industries. Emissions from this sector are related to fuel combustion only, i.e. emissions from use of oil or gas for heating purposes. Consumption of coal as feedstock and reduction medium is not included in this sector but is accounted for under the industrial processes sector (CRT 2).

CO₂ from combustion at petrochemical and ammonia plants are reported under industrial processes (CRT 2B). All CO₂ emissions from ammonia production are reported under 2B1. The emissions reported in CRT 2B8 includes all CO₂ emissions from flaring and combustion

of fuels derived from the natural gas feedstock. Minor CO₂ emissions from other energy combustion (diesel and propane) are included under 1A2c.

Emissions from this sector contributed to 5% of the national GHG total in 2024, and 8% of the total emissions from the energy sector. Emissions from the sector decreased by 31% from 1990 to 2024.

According to the approach 2 key category analysis for 1990 and 2024, this sector is, in conjunction with stationary combustion in sectors 1A1 and 1A4, a key category with respect to:

- Emissions of CO₂ from the combustion of liquid fuels and gaseous fuels in level in 1990 and 2024, and in trend
- Emissions of CO₂ from the combustion of other fuels in level in 1990 and 2024, and in trend
- Emissions of CO₂ from the combustion of solid fuels in level in 1990 and in trend
- Emissions of CH₄ from the combustion of biomass in level in 1990 and 2024 and in trend

3.2.5.2 *Methodological issues*

A description of the general method used for estimating emissions from fuel combustion is given in section 3.2. For many plants the emission figures are based on reported figures from the plants to the Norwegian Environment Agency (see chapter 3.2). Indeed, in 2024, these plants accounted for 23% of the CO₂ emissions from the sector (Table 3-3). The general calculation method, amount of fuel combusted multiplied with a fuel specific emissions factor, is valid for both estimates performed by Statistics Norway and emissions reported by the plants to the Norwegian Environment Agency in this sector.

Figures on energy use are based on data reported from the plants to Statistics Norway. Some of the energy figures used to calculate reported emissions may deviate from the figures in the energy balance. This may, in some cases, cause inaccuracies in IEFs, but generally, this should not be regarded as an important issue.

The guidelines for estimating and reporting emissions are lengthy and in Norwegian, so instead of attaching these to the NID, URLs are provided in Annex 4. Annex 4 also describes QA/QC performed for plant specific emission data use in the inventory.

EU ETS

The guidelines for the EU ETS emission reports (Norwegian Environment Agency 2024) are consistent with the European Union's guidance documents (European Commission). A description of annual permit and reporting to the Norwegian Environment Agency is

available at the Miljødirektoratet webpage ([Veiledning til egenkontrollrapportering - Miljødirektoratet \(miljodirektoratet.no\)](https://miljodirektoratet.no/veiledning-til-egenkontrollrapportering)).

Motorized equipment

Motorized equipment used in manufacturing and construction have been included in this category (CRT 1A2g). Methodologies, activity data and emissions factors are detailed in section 3.2.11.

1A2a Iron and steel

The iron and steel industry is a relatively small emission source in Norway, with emissions in the range of 54–130 kilo tonnes CO₂ equivalents per year. There is no domestic pig iron production. Most of the emissions are from an electro-steel plant and steel product plants. Emissions from the iron and steel industry are mainly energy emissions reported in 1A2a, originating from liquid fuels and from excess gas purchased from adjacent plants. Smaller amounts are from feedstocks as reported in IPPU sector 2C1.

As described in 3.2, emissions of pollutants from major manufacturing plants (point sources) are available from measurements or other plant-specific calculations. This section describes some specific issues for source category 1A2a Iron and steel that cause variability in the CO₂ IEF time series.

In the Iron and steel industry, the share of directly reported CO₂ emissions ranges from 30% to 90% in the period 1990 to 2004. From 2005 onwards, approximately 90% of CO₂ emissions are directly reported. There are two plants that have reported emissions to the Norwegian Environment Agency. One plant reported emissions from 1997 until 2010, when it closed. The second plant has reported emissions from 1990 and onwards. This plant has also reported emissions under the ETS system from 2013. On average, around 65% of CO₂ energy emissions from the Iron and steel industry arise from combustion of solid fuels - almost exclusively blast furnace gas. Around 30% of emissions arise from liquid fuels.

Concerning reported CO₂ emissions per fuel type, the Iron and steel industry follows the general method from 1990 to 2007. Total CO₂ per plant is entered and then allocated to fuel type based on the fuel share of the plants calculated emissions (see 3.2, Eq. 3). From 2008 onwards, reported fuel-specific CO₂ emissions are entered. The general method for previous years is associated with a higher degree of uncertainty, and so there is higher degree of uncertainty around fuel specific emissions and larger variability in IEF's in the Iron and steel industry before 2008.

To secure a complete and consistent time series Statistics Norway subtracts the energy figures from the energy balance that are linked to the directly reported CO₂ emissions from the Norwegian Environment Agency. Sometimes there are inconsistencies between the energy data from the Norwegian Environment Agency and the energy data from Statistics

Norway's energy balance. They are usually small or zero in the later part of the time series but may be larger for some earlier years. In the earlier years there may also have been inconsistencies within reportings to Statistics Norway, e.g. between energy data in physical and energy terms. Such inconsistencies can give rise to variable IEFs. Large inconsistencies in the IEFs are currently controlled during the QA/QC- work in the production cycle and erroneous figures are corrected.

3.2.5.3 Activity data

Statistics Norway carries out annual surveys on energy use in manufacturing industries, which supply most of the data material for the calculation of combustion emissions in these sectors. The energy use survey covers 95% of the energy use in this sector. For the remaining companies, figures are estimated based on data from the sample together with data on economic turnover, accounting for the use of different energy carriers in the same industries and size groups. A change in methodology from 1998 has had minor consequences for the time series, since the energy use is mainly concentrated in a few major plants, from which data were collected both in the current and in the earlier method. The data on energy use in manufacturing industries are of high quality.

Information on use of waste oil and other hazardous waste is also collected through the energy use statistics.

For the construction industry, the figures on use of the different energy carriers are partly taken from the annual sales statistics for petroleum products and are partly projected from earlier surveys; energy data are considered rather uncertain.

In some sectors, diesel is mainly used in machinery and off-road vehicles, particularly in mining and construction. This amount of fuel is based on reported consumption of duty-free diesel in the manufacturing industries and on reported sales of duty-free diesel to construction. The methods for calculating emissions are discussed in section 3.2.11.

3.2.5.4 Emission factors

Emission factors used in this source category are presented in detail section 3.2. This section provides information on sectors with variable or deviating implied emission factors in the CRT tables.

Iron and steel (1A2a) – solid fuels

The CO₂ IEF for solid fuels in the iron and steel industry shows some variability. Variation in the period with ETS reporting (2013 onwards) is due to measured variation. Variations in the early part of the time series (up to 2005) is generally within $\pm 10\%$ of the average IEF, but with some outlying years. This is likely due to inconsistencies between reported data in physical and energy terms. Variations in the time series for the CO₂ IEFs for solid and liquid fuels are discussed in the methodology section (3.2).

Pulp and paper (1A2d) – biomass

The CO₂ IEF for biomass in the pulp and paper industry varies significantly due to changes in the relative amounts of different fuels. The emissions are primarily from black liquor with plant-specific emission factors in the range of 200-250 t CO₂/TJ and from wood waste with an emission factor of 111 t CO₂/TJ. In 2013, a large plant using black liquor closed. This led to a large shift to wood waste in the fuel composition, with a corresponding drop in the IEF.

Non-metallic minerals (1A2f) – biomass

The CH₄ IEF for biomass in the minerals industry varies significantly due to changes in the relative amounts of different fuels. The emissions are primarily from charcoal with an emission factor of 200 kg CH₄/TJ (Table 3-5) and from wood waste with an emission factor of 30 kg CH₄/TJ (Table 3-6). Most of the fuel consumption is wood waste, but in some years the use of charcoal leads to strong increases in the average IEF, in particular for 2003. Emissions of CO₂ and N₂O are similar for the fuels, and the IEFs for these gases vary little among years.

3.2.5.5 Uncertainty assessment and time series consistency

Uncertainties in the activity data and the emission factors in the manufacturing industries and construction are as presented in section 3.2. A more detailed description is presented in Annex 2.

The EU ETS emission estimates are available for all years from 2005. For the time period 1990-2004 there are no data from ETS, and instead two other data sources are used: Energy consumption reported to Statistic Norway and emissions data reported through regular permits for land-based industries. This introduces a degree of inconsistency in the time-series. However, the energy consumption reported under the ETS system is consistent with the energy consumption reported to Statistics Norway for individual plants. In addition, the CO₂ emission estimates are consistent with the emissions reported through the regular permits for land-based industries. It is thus assumed that time-series consistency is not significantly affected, and that the emission trend is reliable.

3.2.5.6 Category-specific QA/QC and verification

QC of plant specific data performed by the inventory compilers in the Norwegian Environment Agency before handing over the data to Statistics Norway to be included in the inventory is quite extensive. The QC is described in Annex 4.

3.2.5.7 Category-specific recalculations

There are recalculations in this source category this year. See chapter 10.1.1 for details.

3.2.5.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.2.6 Transport – Civil Aviation, 1A3a

3.2.6.1 Category description

In 2024, emissions from domestic civil aviation amounted to 9% of the total emissions from transport and 2.3% of the GHG national total. From 1990 to 2024 emissions from civil aviation have increased by 49% due to activity growth. Emission fluctuations over time follow the activity level.

Emissions have generally increased over the period. However, from 1999 to 2002 emissions decreased due to a decrease in activity and several domestic flight routes were closed.

In 2020, aviation activity decreased due to the covid-19 pandemic and the emissions sank by approximately 28% compared to 2019. Emissions from civil aviation were at their lowest since 1993. Emissions have since rebounded but are still 7% lower in 2024 compared to 2019.

Civil aviation is a key category with respect to CO₂ emissions in level both in 1990 and in 2024 and in trend. Emissions of CH₄ and N₂O from this source category are insignificant.

3.2.6.2 Methodological issues

The calculation methodology applied is described in an internal document at Statistics Norway (Thovsen 2017). The methodology used is Tier 2/Tier3. The method is based on Eurocontrol's "Advanced Emission Model"- AEM, combined with data from all aircraft movements to and from Norwegian airports. The method is a "bottom up" calculation of jet kerosene consumption and emissions from aviation based on traffic data, and emission factors and energy use factors for aircraft types (kg/km).

These calculations make a distribution basis for the majority (> 95%) of total sales of jet kerosene within the categories of use (domestic/foreign), nationality (Norwegian/foreign companies) and flight phase (LTO/Cruise). The remaining jet kerosene and aviation gasoline is distributed based on assumptions about place of use and nationality in invoice information in sales data from the oil companies. The invoice information also contains information that forms the basis for the economic distribution of all consumption. There is also a distribution of consumption on the type of aircraft (helicopter, jet engine, small aircraft), which is needed to calculate emissions.

All movements below 1000 metres are included in the "Landing Take Off" (LTO) cycle. Movements over 1000 metres are included in the cruise phase. All emissions from

international aviation are excluded from national totals and are reported separate (see section 3.2.2).

The calculation method described is only valid from 2010 onwards due to missing traffic data for previous years. The methodology used for the time series 1990 to 2009 is Tier 2 (Skullerud 2014), adjusted by adding some industries that have previously been missing in the activity data, where there is sufficient information to rewrite consumption within these industries. This will have a small effect on the overall distribution between domestic and foreign aviation. No further adjustments have been made to the domestic/foreign distribution.

3.2.6.3 Activity data

Activity data on flight movements are collected annually from Avinor (Norway's largest owner of airports). Helicopter data is collected from several Norwegian airline companies as the data on aircraft movements has incomplete helicopter data.

The types of fuels used in aircraft are both jet kerosene, bio-jet kerosene and aviation gasoline. The latter is used mostly in small aircraft. The total sales of jet kerosene, bio-jet kerosene and aviation gasoline are retrieved from the sales statistics of petroleum products and are believed to cover the actual sales of fuel at Norwegian airports. Domestic consumption prior to 1995 is estimated by extrapolation based on domestic kilometres flown and is more uncertain.

3.2.6.4 Emission factors

The N₂O and CH₄ emission factors used in the emission inventory for civil aviation are presented in Table 3-16 and Table 3-17.

The Norwegian Petroleum Industry Association provides CO₂ emission factors for the combustion of jet kerosene and aviation gasoline (Finstad et al. 2002). The CO₂ emission factor used for aviation gasoline is 71.3 tonne CO₂ per TJ (Table 3-4) and has been applied to small aircraft and helicopters. Jet and bio-jet kerosene have an emission factor of 73.09 tonne CO₂ per TJ (Table 3-4).

For N₂O, a default emission factor is used for all aircraft (IPCC) and is valid for both LTO and the cruise phase.

For CH₄ only aggregated emission factors (kg/tonne fuel used) are used in the Norwegian inventory. The emission factors are calculated using total emission divided by total fuel consumption from a bottom-up analysis based on EEA data. From 2010 onwards, the LTO emission factors for CH₄ are calculated annually in the aviation model. Emission factors prior to 2010 are constant, equal to the emission factor in 2010. Studies indicate that only insignificant amounts of methane are emitted during the cruise phase, therefore no methane is calculated for the cruise phase.

Table 3-16: CH₄ and N₂O emission factors (kg/Tj) in aviation. 2024.

Source	CH ₄ kg/TJ		N ₂ O kg/TJ
	Aviation gasoline	Jet kerosene/bio-jet kerosene	Aviation gasoline / Jet Kerosene/bio-jet kerosene
Charter/scheduled flights			
LTO (0-1000 m)		3.8	2.3
Cruise (> 1000 m)			2.3
Helicopters			
LTO (0-1000 m)	43.1	74.2	2.3
Cruise (> 1000 m)			2.3
Small aircraft			
LTO (0-1000 m)	15.9	16.2	2.3
Cruise (> 1000 m)			2.3

Source: EEA (2019), Statistics Norway. Bold figures vary, see

Table 3-17: CH₄ emission factors (kg/Tj) from jet kerosene and aviation gasoline in aviation, LTO. 1990-2024.

	Charter/ scheduled flights	Small aircraft	
Year	Jet kerosene	Aviation gasoline	Jet kerosene
1990-2010	4.34	9.8	9.9
2015	4.39	11.9	12.2
2016	4.31	11.4	11.6
2017	4.12	10.7	10.9
2018	3.96	10.7	10.9
2019	3.85	10.7	9.3
2020	5.0	9.8	10.0
2021	5.1	8.9	9.1
2022	3.9	16.6	16.9
2023	3.9	16.6	14.6
2024	3.8	16.2	16.2

Source: **EEA (2019)**, Statistics Norway

3.2.6.5 *Uncertainty assessment and time series consistency*

The uncertainty in the activity data for civil aviation is estimated to be $\pm 20\%$ of the mean primarily due to the difficulty in separating domestic emissions from emissions from fuel used in international transport (Rypdal & Zhang 2000). However, the emission model used from 2010 onwards is assumed to have lower uncertainty because of more accurate activity data. As described above, data before 1995 are more uncertain than for later years. This may also, to a certain degree, affect the time series consistency.

The uncertainty in the CO₂ emission factors is $\pm 3\%$. The uncertainty in the CH₄ and N₂O emission factors lie below and above the mean by a factor of 2 and 3, respectively.

3.2.6.6 *Category-specific QA/QC and verification*

The data are annually updated with emission factors and fuel consumption factors for new aircraft in domestic and international traffic. The trend in CO₂ emissions is compared to the trend in domestic and international flights. If available, the consumption data is annually compared to the reported sales of jet kerosene to the Norwegian Tax Administration.

Annex 4 has a description of the general QA/QC procedure.

3.2.6.7 *Category-specific recalculations*

There are recalculations in this source category this year. See chapter 10.1.1 for details.

3.2.6.8 *Category-specific planned improvements*

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.2.7 **Transport – Road Transportation, 1A3b**

3.2.7.1 *Category description*

Road traffic accounted for 66% of the total GHG emissions from transport and for 17% of the national GHG total in 2024.

Emissions from road traffic reached a maximum in 2015, with an increase of 38% since 1990. Since 2015, the emissions have been reduced by 27%, due to use of biofuels and the introduction of electric vehicles. Net increase for the inventory period 1990-2024 was 1%.

According to the approach 2 key category analysis, this sector is a key category with respect to emissions of CO₂ in level in 1990 and 2024, and trend. For CH₄ the sector is a key category with respect to trend and for N₂O for level in 2024.

Since 1990, emissions from **passenger cars** (PCs) have decreased by 34%, while vehicle kilometres for PCs have increased by 55% and the number of PCs has grown by 79%.

During this period, vehicles have become more fuel efficient. There was a strong shift from gasoline to diesel driven passenger cars after 2000, with diesel levels over 70% from 2007 due to the CO₂ differentiated tax on new personnel cars implemented that year. However, from 2011 the shift in sales has been to electric vehicles. In addition, the consumption of biofuels such as biodiesel and bio-gasoline has increased since 2006 reaching a peak in 2017, see Figure 3.15, and hence contributed to the CO₂ emission decrease. Since then, the biofuel fraction has varied between 12 and 16% of total road fuels by volume. The biofuel fraction in 2024 was 16%.

Emissions from **light commercial vehicles** (LCV) and **heavy-duty vehicles** (HDV) increased by 84% and 70% respectively, during the period 1990-2024.

PCs' contribution to total CO₂ emissions from road traffic decreased from 68% in 1990 to 44% in 2024. LCVs and HDVs increased their contribution to total emissions from road traffic from 10 to 18%, and 21 to 36%, respectively, from 1990 to 2024.

Since 1990, economic growth has led to increased trade and consumption of goods. LCVs are used as private vehicles, goods transport and other business activities, and their share of the total emissions from road transport have increased. HDVs consist of trucks and buses but it is specifically goods transport with trucks that are responsible for the increase in emissions.

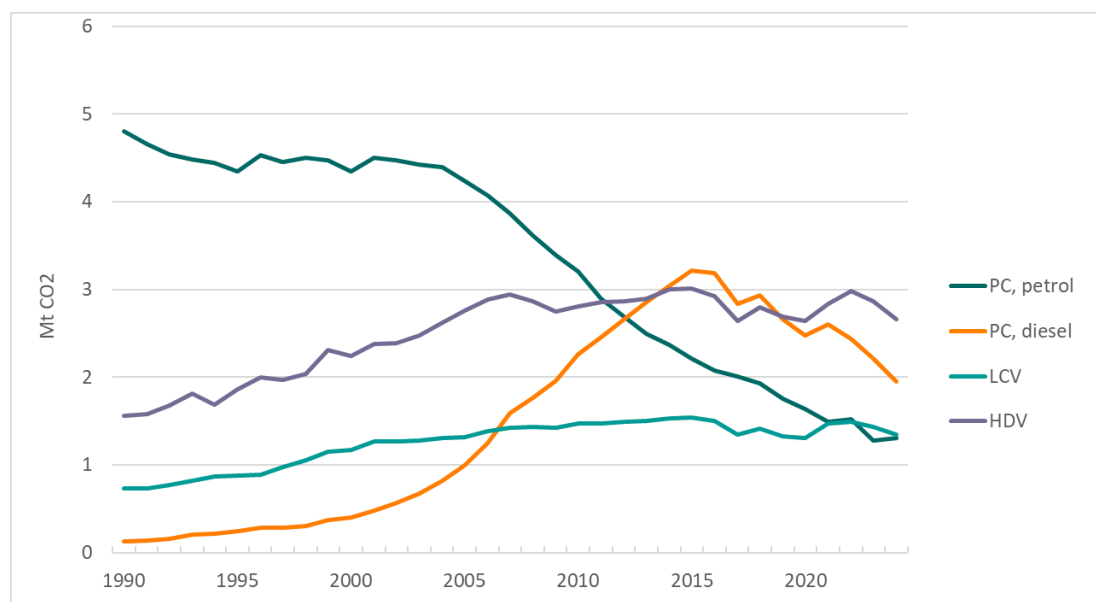


Figure 3.10: Emissions of CO₂. PC gasoline and diesel, LCV and HDV. Million tonnes. Source: Statistics Norway/Norwegian Environment Agency.

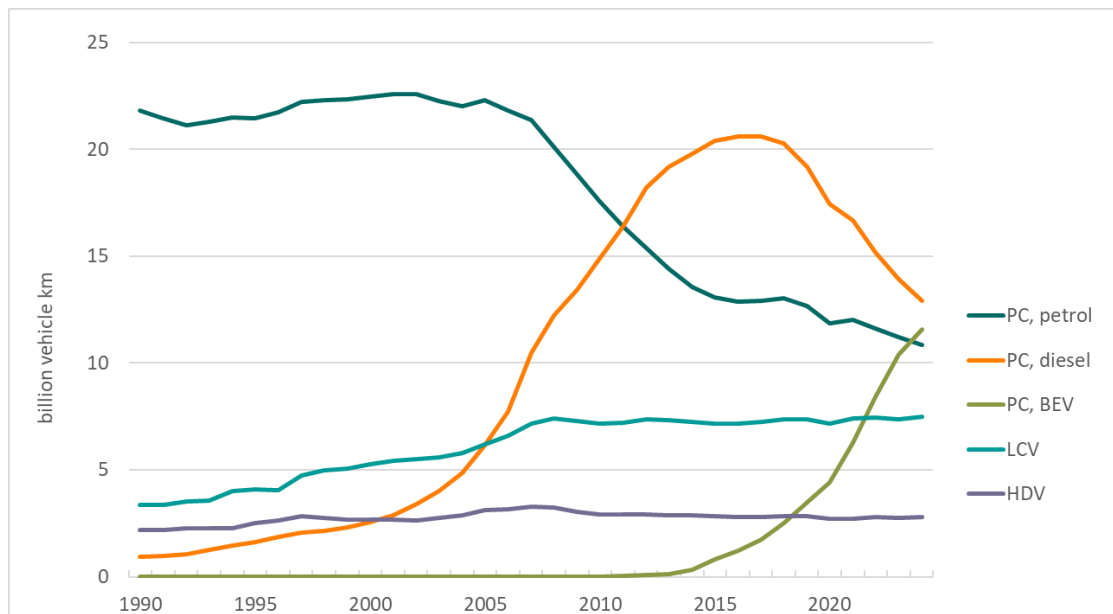


Figure 3.11: Vehicle kilometres. PC gasoline and diesel, LCV and HDV. BEV = Battery electric vehicles. Billion vehicle km. Source: Statistics Norway/Norwegian Environment Agency.

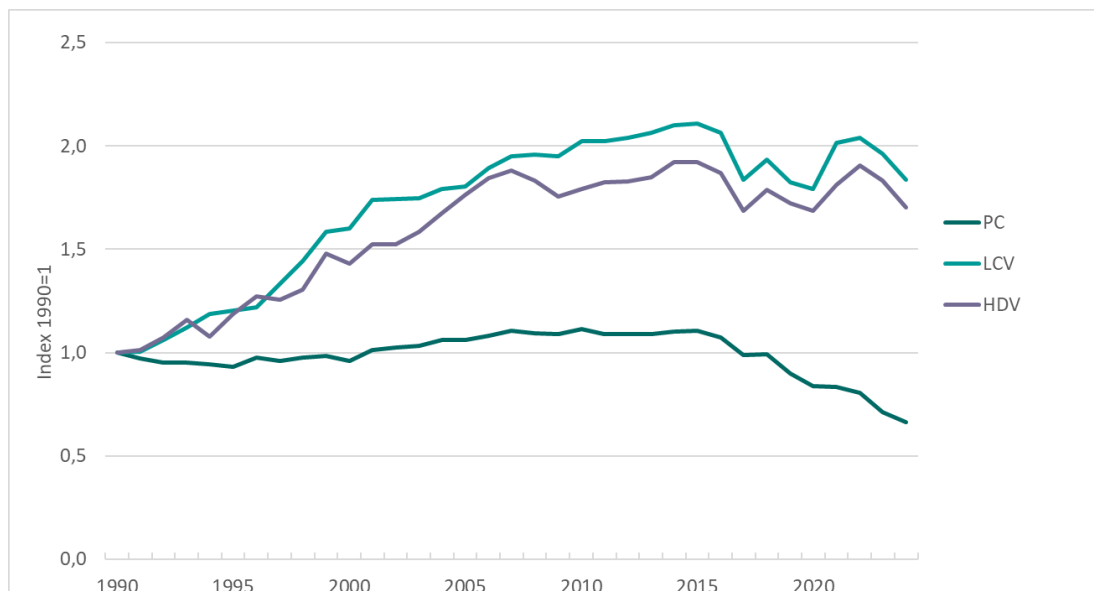


Figure 3.12: Relative change to 1990 in total CO₂ emissions from PC, LCV and HDV. Index 1990=1. Source: Statistics Norway/Norwegian Environment Agency.

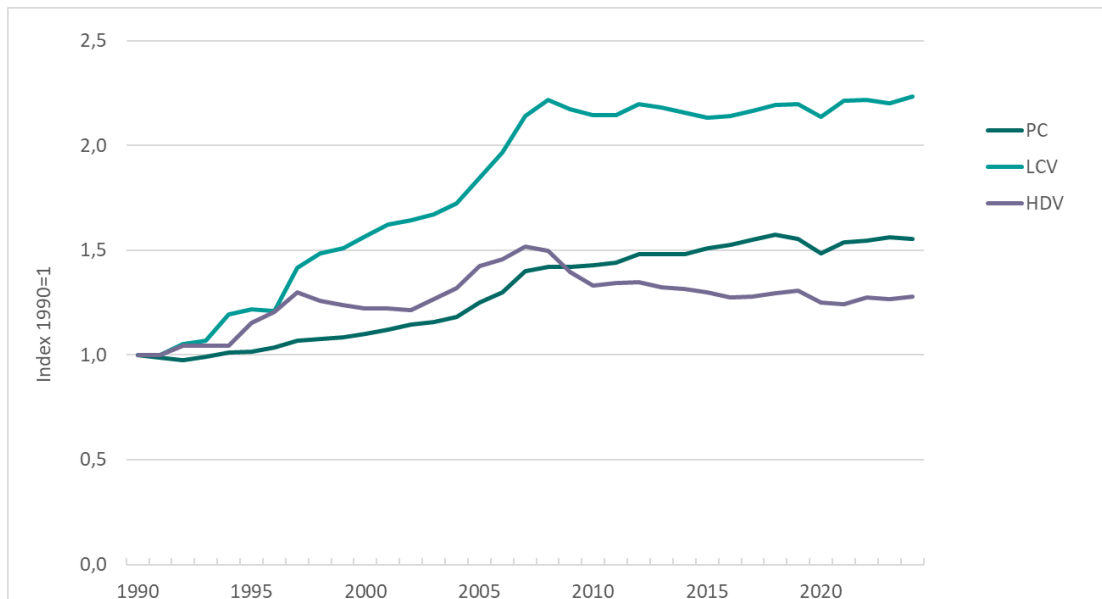


Figure 3.13: Relative change to 1990 in total vehicle kilometres. PC, LCV, HDV. Index 1990=1. Source: Statistics Norway/Norwegian Environment Agency.

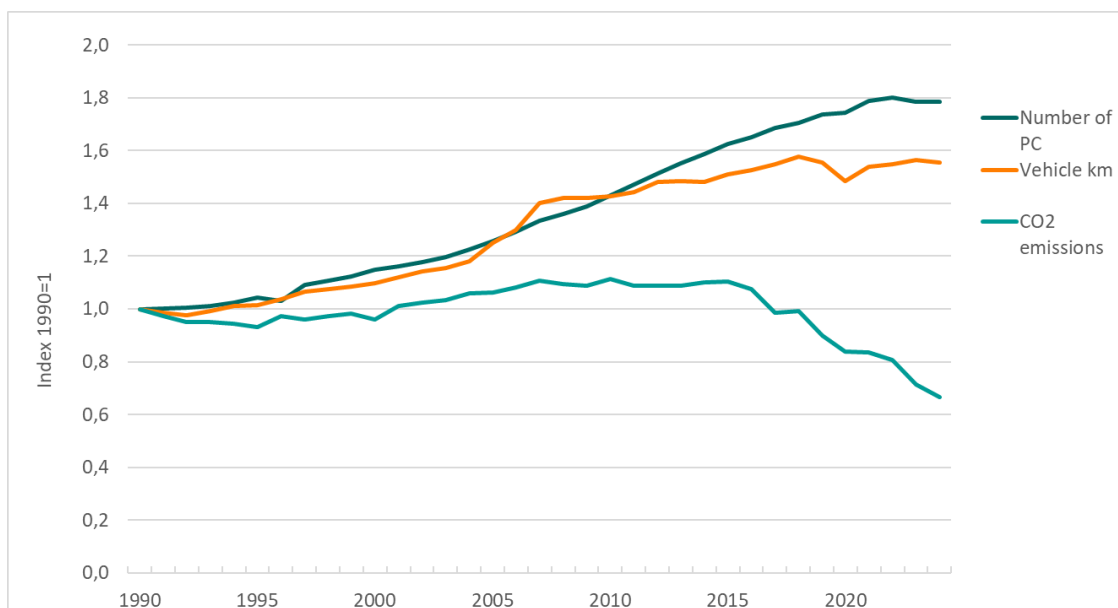


Figure 3.14: Relative change to 1990 in number of passenger cars, CO₂ emissions and vehicle kilometres. Index 1990=1. Source: Statistics Norway/Norwegian Environment Agency.

3.2.7.2 Methodological issues

Total emissions of CO₂ have been estimated directly from total consumption of each fuel. The consumption of gasoline, including bioethanol, for road traffic has been estimated as total sales minus consumption for other uses, i.e., a top-down approach. Other uses for gasoline are e.g. leisure boats, snowmobiles and motorized equipment. For diesel, the total consumption in road traffic is calculated as total sales of auto diesel, including biodiesel, charged with auto diesel tax. Other use of diesel, without diesel tax, is e.g. motorized equipment in agriculture and construction. Consumption of compressed natural gas (CNG) is based on a survey reported by suppliers of CNG. Consumption of LPG is estimated based on figures from the sales statistics on petroleum products and figures from “Drivkraft Norge”, a Norwegian association for the fuel and energy sector in Norway. Emissions of CH₄ and N₂O are estimated by the HBEFA model (INFRAS 2022). The model uses a mileage approach:

$$\text{Emissions} = \text{mileage} * \text{emission per km}$$

The model results are used directly, without any adjustment for discrepancies between estimated consumption in the model and registered fuel sale.

The HBEFA model provides emission factors and possibilities for calculating emissions for segments and sub-segments for six vehicle classes: passenger cars, light commercial vehicles, heavy commercial vehicles, urban buses, coaches and motorcycles (including mopeds). The segments are based on technology. Segments for motorcycles also include engine volumes, while segments for heavy commercial vehicles, urban buses and coaches include total weight, and light commercial vehicles include gross weight. The segments are further disaggregated into sub segments based on emission concepts (e.g., Euro-1 – Euro-6). The segments used for Norway in the HBEFA model are presented in Table 3-18.

The model combines the number of vehicles within each segment with driving lengths for the same segments to produce annual national mileage per sub segment. For heavy goods vehicles, the vehicle number is corrected for vehicles driving with trailers, and the driving is split into three load classes (empty, half loaded and fully loaded).

The annual national mileage is split between shares driven in different traffic situations. The traffic situations are a combination of area (urban/rural), road type (e.g., trunk road and access road), speed limit and level of service (free flow, heavy, saturated, stop and go, stop and go gridlock). The traffic situations are further disaggregated by gradients, where the amount of driving on roads with slopes ranging from -6% to 6% is specified for each traffic situation.

Hot emission factors are provided on the disaggregated level of sub segments and traffic situations with different gradients, and emissions are estimated after these steps of disaggregation.

The HBEFA model provides emission factors for cold start emissions and evaporative emissions (soak, running losses and diurnal), in addition to hot emission factors. To calculate cold start and evaporative emissions, information on diurnal variation in curves of traffic, trip length distributions, parking time distributions and driving behaviour distributions must be provided, in addition to variation in mean air temperature and humidity.

Table 3-18: Segments used for Norway in the HBEFA.

Vehicle class	Segment	Fuel type	Segment split based on	Engine volume/weight class
Passenger car	PC petrol	Petrol	-	All engine volumes
	PC PHEV petrol	Petrol	-	All engine volumes
	PC diesel	Diesel	-	All engine volumes
	PC PHEV diesel	Diesel	-	All engine volumes
	PC LPG	LPG	-	All engine volumes
	PC BEV	Electric	-	All engine volumes
Light commercial vehicles	LCV petrol M+N1-I	Petrol	Tare weight	< 1 305 kilos
	LCV petrol N1-II	Petrol	Tare weight	>= 1 305-1 760 kilos
	LCV petrol N1-III	Petrol	Tare weight	>= 1 760-3 859 kilos
	LCV diesel M+N1-I	Diesel	Tare weight	< 1 305 kilos
	LCV diesel N1-II	Diesel	Tare weight	>= 1 305-1 760 kilos
	LCV diesel N1-III	Diesel	Tare weight	>= 1 760-3 859 kilos
	LCV BEV M+N1-I	Electric	Tare weight	< 1 305 kilos
	LCV BEV N1-II	Electric	Tare weight	>= 1 305-1 760 kilos
	LCV BEV N1-III	Electric	Tare weight	>= 1 760-3 859 kilos
Heavy goods vehicles	RT petrol	Petrol	-	All gross weights
	RigidTruck <7,5t	Diesel	Gross weight	<= 7.5 tonnes
	RigidTruck 7,5-12t	Diesel	Gross weight	> 7.5 - 12 tonnes
	RigidTruck >12-14t	Diesel	Gross weight	> 12 - 14 tonnes
	RigidTruck >14-20t	Diesel	Gross weight	> 14 - 20 tonnes
	RigidTruck >20-26t	Diesel	Gross weight	> 20 - 26 tonnes
	RigidTruck >26-28t	Diesel	Gross weight	> 26 - 28 tonnes
	RigidTruck >28-32t	Diesel	Gross weight	> 28 - 32 tonnes
	RigidTruck >32t	Diesel	Gross weight	> 32 tonnes
	RigidTruck BEV <7,5t	Electric	Gross weight	<= 7.5 tonnes
	RigidTruck BEV 7,5-12t	Electric	Gross weight	> 7.5 - 12 tonnes
	RigidTruck BEV >12	Electric	Gross weight	> 12 tonnes

Vehicle class	Segment	Fuel type	Segment split based on	Engine volume/weight class
	Tractor for AT <=7,5t	Diesel	Gross weight	<= 7.5 tonnes
	Tractor for AT>7,5-14t	Diesel	Gross weight	> 7,5 - 14 tonnes
	Tractor for AT>14-20t	Diesel	Gross weight	> 14 - 20 tonnes
	Tractor for AT>20-28t	Diesel	Gross weight	> 20 - 28 tonnes
	Tractor for AT >34-40t	Diesel	Gross weight	> 34 - 40 tonnes
	Tractor for AT >40-50t	Diesel	Gross weight	> 40 - 50 tonnes
	Tractor for AT >50-60t	Diesel	Gross weight	> 50 - 60 tonnes
	Tractor for AT BEV	Electric	-	All gross weights
Coach	Coach Std <=18t	Diesel	Gross weight	<= 18 tonnes
	Coach 3-Axes >18t	Diesel	Gross weight	> 18 tonnes
	Coach Electric Std <=18t	Electric	Gross weight	<= 18 tonnes
	Coach Electric 3-Axes >18t	Electric	Gross weight	> 18 tonnes
Urban bus	Ubus Midi <=15t	Diesel	Gross weight	<= 15 tonnes
	Ubus Std >15-18t	Diesel	Gross weight	>15 - 18 tonnes
	Ubus Artic >18t	Diesel	Gross weight	> 18 tonnes
	Ubus CNG Std >15-18t	CNG	Gross weight	>15 - 18 tonnes
	Ubus CNG Artic >18t	CNG	Gross weight	> 18 tonnes
	Ubus Electric Midi <=15t	Electric	Gross weight	<= 15 tonnes
	Ubus Electric Std >15-18t	Electric	Gross weight	>15 - 18 tonnes
	Ubus Electric Artic >18t	Electric	Gross weight	> 18 tonnes
Motorcycles and mopeds	Moped <=50cc (v<50kmh)	Petrol	Engine volume	<= 50 cc
	MC 2S <=250cc	Petrol	Engine volume	<= 250 cc
	MC 4S <=250cc	Petrol	Engine volume	<= 250 cc
	MC 4S > 250cc	Petrol	Engine volume	> 250 cc

Source: Statistics Norway

3.2.7.3 Activity data

All activity data are, as far as possible, updated for every year of the inventory. The data are taken primarily from official registers, public statistics, and surveys. However, some of the data are based on assumptions. Many of the data sources are less comprehensive for the earliest years in the inventory. The sources of activity data are listed below:

- *Total fuel consumption:* the total amounts of fuel consumed are corrected for off-road use (in railways, leisure boats, snow scooters and motorized equipment). These corrections are estimated either from assumptions about the number of units, annual operation time, and specific fuel consumption, or from assumptions about and investigations of the fraction of consumption used off-road in each sector. Statistics Norway's sales statistics for petroleum products supplies the data for total fuel

consumption (Statistics Norway Annually-g). See *Figure 3.15*, which shows the fuel consumption split between fossil petrol, diesel, and biofuels (biodiesel and bio-gasoline). Consumption of biofuels is included in the inventory from 2004.

- *Number of vehicles*: the number of vehicles in the various categories and age groups is taken from the statistics on registered vehicles, which receives data from the official register of the Norwegian Directorate of Public Roads. The model input is number of vehicles per vehicle class for each inventory year, and the share of vehicles for any given combination of segment. This data is combined with information on the introduction of technology classes to provide number of vehicles within each sub segment. The information on introduction of technology classes is, for recent years, based on information from the official register of the Norwegian Directorate of Public Roads and on legislation for the years in which the information in the register is insufficient.
 - The HBEFA model distinguishes between two types of buses: urban buses mainly used for urban driving, and coaches, mainly used for rural and motorway driving. Due to lack of specific information to make this split in the national vehicle register, the distinction between urban buses and coaches are based on a methodology used in Sweden (Swedish Environmental Protection Agency 2011), where the split is made based on the ratio p/w . Here, p is equal to the maximum allowed number of passengers (number of seats plus number of allowed standing passengers), and w is equal to the gross vehicle weight. These data are available in the national vehicle register. Buses with a p/w -value above 3.75 are classified as urban buses, whereas buses with a p/w -value below 3.75 are classified as coaches.
- *Average annual mileage*: Mileages for passenger cars, light commercial vehicles, heavy goods vehicles, coaches, and urban buses are, from 2005 onwards, based on odometer readings taken during annual or biannual roadworthiness tests. The readings are collected by the Directorate of Public Roads and further processed by Statistics Norway. For earlier years, most figures are determined from surveys by Statistics Norway or the Institute of Transport Economics. In some instances, assumptions are needed.
- The statistics on number of vehicles depict the vehicle fleet per December 31st of the inventory year, while the statistics on mileages represents annual driving for the entire year, including vehicles that have been scrapped or in other ways been in the vehicle fleet for only parts of the inventory year. To adjust for this discrepancy, mean annual driving lengths for each vehicle category have been adjusted upwards in such a way that the totals correspond to the total annual traffic activity from the statistics on annual driving lengths.
 - The average annual mileages vary as a function of age, with older vehicles generally driving shorter annual distances than newer vehicles. The correction of driving as a function of vehicle age is based on odometer readings taken during the roadworthiness test. The functions are calculated as the mean of several years, and the same correction curve is used for all years.

- Motorcycles and mopeds are not subject to roadworthiness tests in Norway. Average annual mileages are collected from an annual report on transport volumes in Norway from the Institute of Transport Economics. Due to lack of data, corrections of annual mileage as a function of age for motorcycles and mopeds are taken from a Swedish survey (Björketun & Nilsson 2007) under the assumption that annual mileage as a function of age are comparable in Norway and Sweden.
- *Load data* are taken from the Road goods transport survey (Statistics Norway Annually-b).
- *Transformation patterns* are calculated using information from Statistics Norway' Road goods transport survey on use of trailers and trailer size (Statistics Norway Annually-b).
- *Traffic situations*: The Directorate of Public Roads has data on the annual number of vehicle kilometres driven on national and county roads. The data are allocated by speed limits, road type, area type (urban/ rural), road gradients and vehicle size (small/ large). Traffic on municipal roads is estimated by Statistics Norway based on road lengths, detailed population data, traffic on adjoining roads, etc. The HBEFA model has emission factors for different situations of traffic flow (free flow, heavy traffic, saturated traffic, stop and go and heavy stop and go). Assumptions have been made as to this distribution for the different combinations of area type, road type and speed limits for Norway.
- *Ambient conditions* (air temperature and humidity) are included in the model to calculate cold and evaporative emissions. An average of five larger Norwegian cities has been used for spring, summer, autumn, and winter separately. Data are based on measurements from the Norwegian meteorological institute.
- *Trip length and parking time distributions* are calculated from the Norwegian Travel survey (Vibe 1993). The distributions are given on hourly basis.

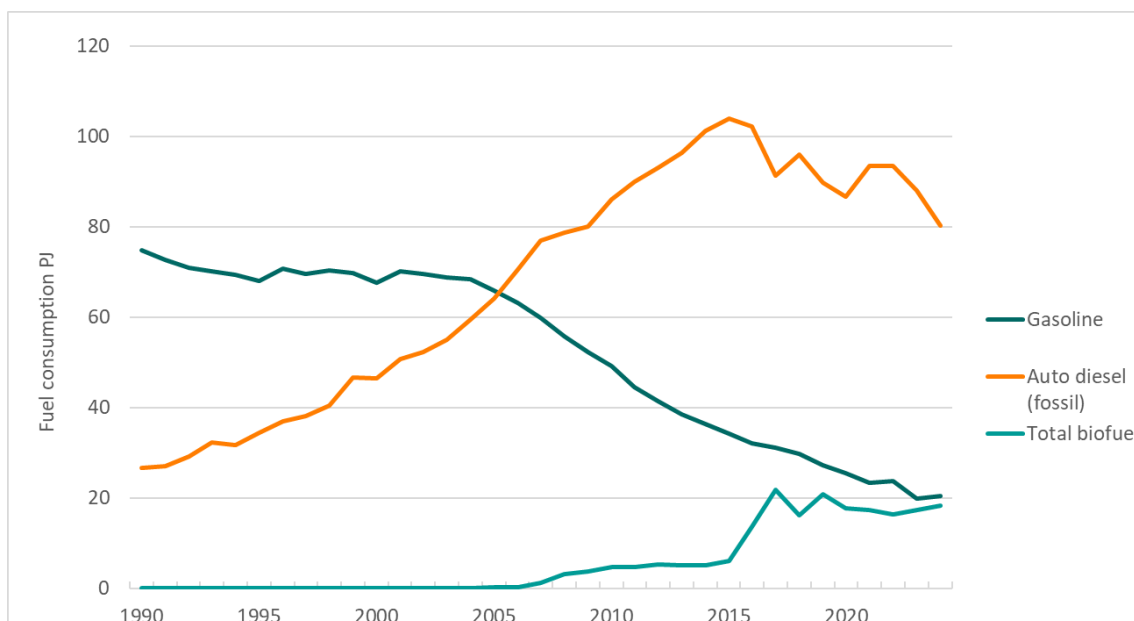


Figure 3.15: Consumption of gasoline, diesel and biofuel for road transportation. PJ. Source: Statistics Norway.

3.2.7.4 Emission factors

Emission factors (except CO₂) are from the Handbook of Emission Factors (INFRAS 2022). Factors are given as emission per vehicle kilometres for detailed combinations of subsegments and traffic situations.

Emission factors for CO₂ are given by fuel type in Table 3-4. The factor for fossil motor gasoline is 71.3 tonne CO₂ per TJ, while the factor for diesel is 73.55 tonne CO₂ per TJ. The CO₂ factor used for bio-gasoline is 71.27 tonne CO₂ per TJ and for biodiesel 77.45 tonne CO₂ per TJ.

Table 3-19, Table 3-21 and Table 3-22 show average emission factors in gram per kilometres for different vehicle categories and fossil fuels estimated in HBEFA.

Table 3-19: Average CO₂ emission factors for different vehicle categories, including cold start emissions and evaporation. The share of biofuels is not reflected in these numbers i.e., they show the emission factors of fossil fuels.

Year	Motor gasoline g/km				Diesel g/km		
	Passenger cars ¹	Light commercial vehicles	Heavy duty vehicles	Motorcycles	Passenger cars ¹	Light commercial vehicles	Heavy duty vehicles
1990	191.3	199.6	557.4	76.5	163.4	233.1	828.7
1995	189.3	202.1	557.7	86.5	163.2	234.9	815.9
2000	183.7	200.9	557.2	98.3	158.9	231.1	859.4
2005	178.4	187.1	556.4	94.9	159.1	213.6	894.6
2010	173.4	179.9	560.8	94.7	150.3	204.7	969.1
2011	171.4	179.1	560.9	94.8	147.9	203.7	975.9
2012	168.9	179.2	561.0	95.0	146.0	202.5	981.4
2013	165.5	179.7	561.0	95.4	145.1	201.6	987.3
2014	161.9	179.6	561.0	96.0	144.7	200.2	992.6
2015	158.3	179.2	557.2	96.7	144.7	198.5	985.4
2016	155.4	179.3	557.2	97.5	145.0	197.4	991.1
2017	152.1	179.3	557.2	97.9	145.4	195.5	1 002.2
2018	149.3	177.2	557.2	97.8	145.6	193.5	1 003.8
2019	147.8	175.8	557.2	97.4	146.1	191.5	1 000.8
2020	145.6	174.2	557.1	97.2	146.3	189.3	1 007.5
2021	144.2	174.6	557.0	96.9	146.4	189.0	1 003.6
2022	142.4	172.5	556.5	95.0	146.2	186.5	998.1
2023	141.2	170.4	555.7	95.0	146.2	184.8	985.8
2024	140.1	170.6	555.0	95.1	146.3	183.4	974.0

Source: Statistics Norway, HBEFA 4.2. ¹ Excluding plugin hybrid vehicles

Table 3-20: General CH₄ and N₂O emission factors from natural gas and LPG in passenger cars and heavy-duty vehicles in 2024.

Source	Fuel	CH ₄ kg/TJ	N ₂ O kg/TJ
Passenger cars	LPG	24.6	0.9
Heavy duty vehicles	Natural gas	10.3	5.3

Source: HBEFA (INFRAS 2022), COPERT 5, IPCC (2006)

Table 3-21: Average CH₄ emission factors on vehicle category, including cold start emissions and evaporation.

	Motor gasoline g/km				Diesel g/km		
	Passenger cars ¹	Other light duty vehicles	Heavy duty vehicles	Motorcycles	Passenger cars ¹	Other light duty vehicles	Heavy duty vehicles
1990	0.1193	0.1227	0.1566	0.2107	0.0069	0.0053	0.0308
1995	0.0939	0.1065	0.1566	0.1834	0.0052	0.0049	0.0268
2000	0.0592	0.0797	0.1567	0.1990	0.0039	0.0034	0.0158
2005	0.0371	0.0556	0.1568	0.3002	0.0029	0.0024	0.0113
2010	0.0271	0.0417	0.1558	0.2813	0.0025	0.0017	0.0065
2011	0.0258	0.0408	0.1558	0.2794	0.0028	0.0019	0.0055
2012	0.0243	0.0398	0.1558	0.2761	0.0030	0.0021	0.0049
2013	0.0227	0.0391	0.1558	0.2714	0.0033	0.0025	0.0044
2014	0.0211	0.0385	0.1558	0.2662	0.0035	0.0028	0.0037
2015	0.0196	0.0381	0.1563	0.2591	0.0039	0.0031	0.0032
2016	0.0183	0.0378	0.1563	0.2523	0.0046	0.0036	0.0028
2017	0.0170	0.0365	0.1563	0.2440	0.0052	0.0042	0.0024
2018	0.0158	0.0354	0.1563	0.2321	0.0056	0.0048	0.0021
2019	0.0151	0.0348	0.1563	0.2210	0.0059	0.0057	0.0018
2020	0.0143	0.0345	0.1563	0.2093	0.0061	0.0068	0.0018
2021	0.0140	0.0344	0.1563	0.1973	0.0062	0.0075	0.0016
2022	0.0135	0.0332	0.1563	0.1940	0.0063	0.0082	0.0014
2023	0.0132	0.0320	0.1563	0.1827	0.0065	0.0088	0.0014
2024	0.0130	0.0305	0.1563	0.1731	0.0066	0.0093	0.0013

Source: Statistics Norway, HBEFA 4.2. ¹ Excluding plugin hybrid vehicles

Table 3-22: Average N₂O emission factors on vehicle category, including cold start emissions and evaporation.

	Motor gasoline g/km				Diesel g/km		
	Passenger cars ¹	Other light duty vehicles	Heavy duty vehicles	Motorcycles	Passenger cars ¹	Other light duty vehicles	Heavy duty vehicles
1990	0.0072	0.0068	0.0071	0.0013	0.0000	0.0000	0.0088
1995	0.0093	0.0083	0.0071	0.0014	0.0002	0.0004	0.0087
2000	0.0098	0.0113	0.0071	0.0016	0.0026	0.0030	0.0090
2005	0.0052	0.0104	0.0071	0.0015	0.0039	0.0040	0.0077
2010	0.0042	0.0078	0.0071	0.0016	0.0046	0.0044	0.0153

	Motor gasoline g/km				Diesel g/km		
	Passenger cars ¹	Other light duty vehicles	Heavy duty vehicles	Motorcycles	Passenger cars ¹	Other light duty vehicles	Heavy duty vehicles
2011	0.0038	0.0074	0.0071	0.0016	0.0049	0.0046	0.0204
2012	0.0034	0.0069	0.0071	0.0016	0.0052	0.0048	0.0243
2013	0.0029	0.0063	0.0071	0.0016	0.0055	0.0050	0.0269
2014	0.0024	0.0058	0.0071	0.0016	0.0057	0.0052	0.0314
2015	0.0021	0.0053	0.0071	0.0016	0.0059	0.0055	0.0347
2016	0.0018	0.0048	0.0071	0.0016	0.0063	0.0059	0.0377
2017	0.0015	0.0042	0.0071	0.0016	0.0066	0.0065	0.0399
2018	0.0013	0.0037	0.0071	0.0016	0.0069	0.0071	0.0416
2019	0.0012	0.0034	0.0071	0.0016	0.0071	0.0077	0.0430
2020	0.0010	0.0030	0.0071	0.0017	0.0073	0.0083	0.0436
2021	0.0010	0.0029	0.0071	0.0017	0.0074	0.0088	0.0452
2022	0.0009	0.0027	0.0071	0.0017	0.0076	0.0092	0.0459
2023	0.0009	0.0024	0.0071	0.0017	0.0077	0.0095	0.0457
2024	0.0008	0.0021	0.0071	0.0017	0.0079	0.0098	0.0468

Source: Statistics Norway, HBEFA 4.2. ¹ Excluding plugin hybrid vehicles

The N₂O emission factor in the HBEFA is from the COPERT IV model. In addition to the "normal" reduction of the emission factor according to the Euro-classes, the N₂O emission factor is influenced by the sulphur content. Indeed, a lower sulphur content of gasoline leads to a reduced deactivation of the catalyst and reduced N₂O formation. This finding is backed up by several international peer-reviewed papers. The sulphur content in gasoline was 0.3% in 2004 and 0.05% in 2005. This sharp drop in sulphur content explains the decrease in N₂O emission factor between 2004 and 2005. Similar development in the N₂O emission factor can also be seen in countries, which also use the HBEFA model, e.g., Switzerland and Sweden.

In the inventory, the same emission factors for CH₄ and N₂O are used for biofuels as for corresponding fossil fuels. Thus, the average implied emission factor for biomass in road transport is a function of the fractions of bio-gasoline and biodiesel in the biofuel mix. Initially, the biofuel amounts were almost exclusively biodiesel, but in recent years bio-gasoline has had a growing share of the mix.

3.2.7.5 Uncertainty assessment and time series consistency

The uncertainty in the activity data and the CO₂ emissions from road transportation is found to be ±5% and ±3% of the mean, respectively. In the case of CH₄ and N₂O, the

uncertainty in the emission factors are ± 45 and ± 65 , respectively (Gustafsson 2005). A detailed description of the uncertainty analysis is given in Annex 2.

The total consumption of gasoline and diesel, and hence the CO₂ emissions from these fuels, are well known. The uncertainty of the gasoline and diesel consumption in road transport is related to the allocation to off-road use.

A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category. The data quality is generally better for the latter part of the time series.

3.2.7.6 Category-specific QA/QC and verification

The consumption of gasoline and diesel for road traffic in the energy balance is estimated as total sales minus consumption for other uses, i.e., a top-down approach. The HBEFA emission model makes bottom-up estimates of consumption. The top-down and bottom-up data on fuel consumption are compared on an annual basis. The discrepancies are further explained in section 3.2.7.3.

Annex 4 has a description of the general QA/QC procedure.

3.2.7.7 Category-specific recalculations

There are recalculations in this source category this year. See chapter 10.1.1 for details.

3.2.7.8 Category-specific planned improvements

In 2026, Norway plans to use version 5.1 of HBEFA (Handbook Emission Factors for Road Transport) with updated national data and emission factors. The planned activities will improve the data quality for the time series from 1990.

Norway is currently evaluating the validity of the CO₂ emission factors for gasoline and diesel and researching sources for other relevant factors, see chapter 10.4.

3.2.8 Transport – Railways, 1A3c

3.2.8.1 Category description

Railway traffic in Norway uses mainly electricity. Diesel is used at a small number of lines, for shunting etc. There is also a minor consumption of coal in museum railways. In the inventory this is considered to be a cultural service and is included in 1A4a_{ii}. In 2024, GHG emissions from railways accounted for 0.5% of the total emissions from transport. Emissions from this source category decreased by 51% from 1990 to 2024.

3.2.8.2 Methodological issues

The general estimation methodology for calculating combustion emissions from consumption figures and emission factors is used in this source category.

3.2.8.3 Activity data

Consumption of tax-free diesel used in rail transport is based on invoice information from the sales statistics for petroleum products. From 1990-1994 an allocation key is used to estimate diesel consumption based on total sales deducted consumption in leisure boats.

3.2.8.4 Emission factors

The emission factors used in this source category are displayed in Table 3-4 for CO₂ and Table 3-23 for CH₄ and N₂O.

Table 3-23: General CH₄ and N₂O emission factors from diesel use in railways.

Source	Fuel	CH ₄ kg/TJ	N ₂ O kg/TJ
Railway	Diesel	4.18	27.84

Source: *Winther and Nielsen (2006); IPCC (2006)*

3.2.8.5 Uncertainty assessment and time series consistency

The consumption data are considered to be of high quality. Their uncertainty is estimated to be $\pm 5\%$ of the mean. The uncertainty in the emission factors for CO₂ is $\pm 3\%$ of the mean, whereas for CH₄ and N₂O, the uncertainty is $\pm 25\%$ of the mean.

A general assessment of time series consistency has not revealed any inconsistencies in the emission estimates for this category.

3.2.8.6 Category-specific QA/QC and verification

The diesel consumption from the Energy balance is annually compared with data on consumption reported to Statistics Norway on rail transport statistics.

Annex 4 has a description of the general QA/QC procedure.

3.2.8.7 Category-specific recalculations

There are recalculations in this source category this year. See chapter 10.1.1 for details.

3.2.8.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.2.9 Transport – Navigation, 1A3d

3.2.9.1 Category description

According to UNFCCC, Norwegian national sea traffic is defined as ships moving between two Norwegian ports. In this connection, installations at the Norwegian part of the continental shelf are defined as ports. Emissions from fishing are described in section 3.2.11 and 3.2.12.

Greenhouse gas emissions from navigation constituted 6% of the national GHG total in 2024 and 24% of emissions from transport. Emissions from navigation have increased by 60% from 1990 to 2024. The increased emissions in the 90s can be largely explained by the growing activity in the oil and gas sector in general but especially by the fast-growing production of crude oil and hence the increased demand for supply and other ships serving the offshore industry. Due to the decreasing production of crude oil since 2001, the demand for transport of crude oil has been reduced. Nevertheless, this reduction has been counteracted by growth in demand in other segments of transport.

According to the approach 2 key category analysis, navigation is a key category with respect to:

- CO₂ emissions in level both in 1990 and in 2024 and in trend.
- CH₄ emissions in level in 2024 and in trend.

3.2.9.2 Methodological issues

Emissions from navigation are estimated according to the Tier 2 IPCC methodology. Emissions from moveable installations used in oil and gas exploration and extraction are split between energy industries (CRT 1A1) described in section 3.2.4 and navigation: Emissions from drilling and other activities at production and exploration fields are reported under energy industries, while emissions from transport and other activities are reported under navigation. Emissions from international marine bunkers are excluded from the national totals and are reported separately (see section 3.2.2), in accordance with the IPCC guidelines (IPCC 2006).

The allocation of emissions from navigation in domestic and international bunkers follows the delineation used in the Norwegian Energy Balance.

Annual emissions are estimated from sales of fuel to domestic shipping, using average emission factors in the calculations.

3.2.9.3 Activity data

The annual statistics on the sale of petroleum products form the basis for determining consumption of petroleum products in both the Energy Balance and the GHG Inventory. The sales statistics are based on annual reports from oil companies and on import data from the foreign trade statistics at Statistics Norway. Oil companies report on sales by the

organization number of the customers purchasing the products. These organization numbers are then used to identify the customers' industry.

Marine gas oils, heavy distillates and heavy fuel oil sold directly to end users in international navigation, whether the buyer is a foreign company or a Norwegian company engaged in international sea transport, are classified as international bunkers in the Energy Balance. Sales made directly to households or domestic industries (e.g., shipping, fishing, oil and gas extraction) are allocated according to the industry of the purchaser, based on the organization number.

Sales of petroleum products to resellers are distributed to end users using distribution keys. The distribution keys are derived from direct end-user sales. Until 2022, reseller sales of marine gas oil were allocated using monetary tax data on refunds and exemptions from the basic fee on mineral oil, adjusted for direct end-user sales and military consumption figures collected from the Norwegian Defense Research Establishment. Only industries with substantial consumption of marine gas oil are included in this distribution: fishing, extraction of crude petroleum and natural gas, domestic coastal transport, and international sea transport. It is assumed that the distribution of refunds and exemptions reflects the distribution of actual marine gas oil consumption, even though the fee applies to all mineral oils. In 2023 the basic fee on mineral oil was removed, and as a result the distribution keys from 2022 have been used since. To compensate for this loss of information the sales statistics increased the data collection, resulting in a larger share of direct end-user sales of marine gas oil from 2023. In the years prior to 2023 the reseller share of marine gas oil was somewhat higher than 50%. From 2023 the share has been reduced to close to 25 %.

The figures from monetary tax data are not consistent and do not cover all relevant industries until 2015. Thus, the figures for 2015 are used for the years 2010 to 2015. For the years 1995 to 2009, the industry distribution from 2010–2012 is used as the distribution key for all the fuels used in vessels, adjusted for the direct sales in the sales statistics. For the years 1990–1994, information on direct sales is incomplete. Instead, the industry distribution from 1995–1997 is used as the allocation key.

Fuel sales to the oil and gas extraction sector include stationary and mobile consumption at offshore facilities as well as consumption at supply ships and other supporting vessels. These sales are split between navigation and energy industries. Information on use for drilling, stationary combustion etc., is reported from the oil companies into the reporting tool Footprint. Consumption for these activities is reported under Energy industries (CRT 1A1c-ii). Only the remaining part of sales, assumed to be for drilling rigs during transit, supply ships, etc., is included with Navigation.

For marine gas oil, the amount used for navigation is equal to total sales figures except fishing, military and international bunkers, after the deduction of estimated stationary use, mainly in oil and gas extraction, but also some minor use in manufacturing industries and construction.

Consumption of natural gas in shipping is collected through an annual form-based survey submitted by natural gas dealers, who allocate consumption between international bunkers and domestic navigation.

From 2023, the Norwegian Government introduced a requirement that a certain share of liquid fuels sold to maritime transport is biofuels. The biofuel, which consists of HVO, is mainly blended into marine gas oils and is included in the marine gas oil figures reported in the sales statistics.

The blending requirement applies only to domestic use, so all blended biofuel is allocated to vessels operating within territorial waters. Statistics Norway (SSB) receives annual data from the Norwegian Environment Agency on the amount of biofuel blended into the fuel, and this information is incorporated into the energy balance and subsequently into the GHG inventory.

3.2.9.4 Emission factors

CO₂

For CO₂ the following standard emission factors based on carbon content are used:

- Marine gas oil/diesel and special distillate: 73.55 tonne per TJ
- Heavy fuel oil: 78.82 tonne per TJ
- LNG: 55.9 tonne per TJ
- Biomass (HVO): 66.13 tonne CO₂ per TJ

CH₄ and N₂O

For liquid fuels and biomass, the general/standard emission factors for CH₄ and N₂O used in the emission inventory are taken from IPCC/OECD: 0.23 kg CH₄/tonne fuel and 0.08 kg N₂O/tonne fuel.

In the case of oil drilling, the employed factors are as follows:

- CH₄: 0.8 kg/tonne marine gas oil/diesel; 1.9 kg/tonne heavy fuel oil
- N₂O: 0.02 kg/tonne marine gas oil/diesel.

For vessels using LNG as a fuel, the CH₄ emission factors in Table 3-24 are used. From the year 2000, when the first vessel that used LNG as fuel started operating, a mean factor for all ships weighted after consumption data for the different ship categories (vessels and military ships) are calculated. The mean factors are shown in Table 3-25.

The IPCC factor for N₂O from liquid fuels is also used for LNG.

Table 3-24: Methane emission factors for vessels using LNG as fuel gas.

Vessel category	Methane emission factor (kg CH ₄ /tonne LNG)	Methane emission factor (kg CH ₄ / TJ)
Ferry (Currently lean burn engines only)	44	917
Offshore supply (Currently dual fuel engines only)	80	1 668

Source: **MARINTEK (2010)**, and estimations from Statistics Norway

Table 3-25: Mean methane emission factors for vessels using LNG as fuel gas, based on the consumption data for the different ship categories of the various years.

Year	Methane emission factor (kg CH ₄ /tonne LNG)	Methane emission factor (kg CH ₄ / TJ)
1990-2002	44	917
2003	70.3	1 464
2004	74.0	1 541
2005	74.2	1 546
2006	74.0	1 543
2007	50.1	1 043
2008	52.8	1 101
2009	56.6	1 180
2010	58.1	1 211
2011	55.3	1 153
2012	49.9	1 040
2013	47.0	980
2014	44.7	931
2015 -	44.2	921

Source: **MARINTEK (2010)**, and estimations from Statistics Norway

3.2.9.5 Uncertainty assessment and time series consistency

An important source of uncertainty is that not all the sales data in the sales statistics for petroleum products is specific on whether the fuel is sold to fishing vessels, domestic navigation or international bunkers.

Fuel bunkered abroad but combusted at voyages between two Norwegian ports are not included in the sales data. There are also uncertainties in the emission factors.

The uncertainty in the activity data for navigation is assessed to be $\pm 20\%$. With regard to emission factors the uncertainty for ships and fishing vessels is $\pm 3\%$ of the mean for CO₂. For CH₄ and N₂O the corresponding uncertainties are $\pm 25\%$ of the mean (see also Annex 2).

A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

3.2.9.6 Category-specific QA/QC and verification

A comparison of inventory emission data (based on petroleum sales in Norway) against emissions calculations based on AIS data, was carried out by the Norwegian Environment Agency in 2021 (Agency 2021). AIS based methodology resulted in somewhat higher emissions (approximately 1 million tonnes pro anno). The study concluded that differences in system limits were the most likely cause of the differences in emissions: AIS based methodology will include emissions from bunkering overseas. Since then, AIS based methodology has been developed further, resulting in slightly lower difference. The difference is now between 0,5 and 0,8 million tonnes for the years 2020-2024.

Annex 4 has a description of the general QA/QC procedure.

3.2.9.7 Category-specific recalculations

There are recalculations in this source category this year. See chapter 10.1.1 for details.

3.2.9.8 Category-specific planned improvements

The Norwegian Coastal Administration has since 2011 used a model based on Automatic Identification System (AIS) data to estimate the emissions from ships to air. The Norwegian Environment Agency was co-financing the development project. In 2015, the delimitation of activities was improved to correspond better to definitions in the inventory. The Norwegian Coastal Administration has developed a new and improved model, which in 2024 replaced the previous model. In 2025, a project in collaboration with Statistics Norway and the Norwegian Coastal Administration evaluated if this model could be used to improve or verify the inventory for navigation. It was found that the AIS model needs further development and verification before it potentially can be used as a source for the inventory. The Norwegian Coastal Administration is doing refinement to the model throughout 2026, and the Norwegian Environment Agency is following this work.

3.2.10 Transport – Other transportation, 1A3e

3.2.10.1 Category description

In old submissions, this source category included emissions from motorized equipment. In later submissions, emissions have been reported under the accurate sectors according to the guidelines (IPCC 2006) i.e., CRT 1A2, 1A4 and 1A5.

Figures on natural gas used in turbines for pipeline transport are reported under 1A1 Energy Industries, see chapter 3.2.4.1.

3.2.11 Motorized equipment (incl. in 1A2, 1A4 and 1A5)

3.2.11.1 Category description

The category *motorized equipment* comprises off-road transportation and other machinery, which are all mobile combustion sources except on road, sea, air, and railway. Equipment used in agricultural and construction sectors are the most important categories. Other categories include mines and quarries, forestry, snow mobiles, leisure boats, and miscellaneous household equipment.

Emissions from motorized equipment are estimated using the common methodology but are reported under several source categories:

- Manufacturing and construction: IPCC 1A2g-vii
- Commercial and institutional: IPCC 1A4a-ii
- Households: IPCC 1A4b-ii
- Agriculture/Forestry/Fishing: IPCC 1A4c-ii
- Military: IPCC 1A5b 3.2.13

Primarily consumption of gasoline and diesel is considered, including biofuels.

3.2.11.2 Methodological issues

The general estimation methodology for calculating combustion emissions from consumption figures and emission factors is used in this source category.

3.2.11.3 Activity data

Gasoline and diesel are handled differently. They are both based on data from the energy balance. Diesel used in off-road transportation and other machinery is tax-free since 1994, and tax-free diesel in the years 1990-1993 are extrapolated based on the split between diesel with or without tax in 1995-1998.

There is also a minor consumption of coal in museum railways. In the inventory it is considered to be a cultural service and is included in 1A4a-ii. The consumption is estimated based on information from different museum railways, and the same figure is used for all years from 1990.

1A4b-ii households

The consumption of gasoline, diesel and biofuels in leisure boats is estimated based on a model using data on size of the fleet, type of fuel, 2- and 4-stroke engine, size of engine, and the expenses on fuel. The data is collected from a boating survey (Båtlivsundersøkelsen) in 2011 and 2023, and the time series are extrapolated. The consumption has been assigned to households.

The gasoline consumption in snow mobiles is based on the number of scooters, annual mileage, and consumption per kilometres on 2- and 4-stroke engines. The fleet data is obtained annually from the Norwegian Public Roads Administration. Annual mileage is assumed to be 850 km/year per scooter. The consumption (l/km) on 2- and 4-stroke engines are based on data from importers of snow mobiles. The gasoline consumption has been assigned to households.

Smaller motorized equipment on gasoline (e.g., chainsaws and lawn mower) is calculated using 2% of the gasoline consumption in households (including bioethanol) deducted consumption for leisure boats.

Off-road diesel other than in household

The figures for consumption of off-road diesel in agriculture (e.g., in tractors) come from Statistics Norway's Sample Survey of Agriculture and Forestry (LU). This is a form-based sample survey where agricultural holdings report how much diesel they have used in their business activity. Questions regarding energy are only included in LU every 3–4 years. Activity data for intervening years is calculated by using the percentage change in quantities in the aggregate accounts for diesel of the Budget Committee for Agriculture as calculated by the Budget Committee for Agriculture (Nibio).

Consumption of off-road diesel in forestry, manufacturing and construction, commercial and institutional is covered by the annual statistics on sales of petroleum products. Distributor sales are broken down by industry according to distribution formulas.

3.2.11.4 Emission factors

The emission factors used are presented in Table 3-4 for CO₂, and Table 3-21 and Table 3-26 for CH₄ and N₂O.

Emission factors for tractors have been used for tax-free diesel consumption in agriculture and forestry, while emission factors for construction machinery have been used for tax-free diesel consumption in all other industries. The emission factors are calculated from the basic factors in Winther and Nielsen (2006), weighted by the age and engine rating distribution of the tractor and construction machinery populations, as well as assumptions on motor load and operating hours and the introduction scheme for emission regulations by the EU (Stage I, II, III and IV).

Emission factors for snow mobiles are adapted from the factors for mopeds in the road traffic emission model (HBEFA).

Table 3-26: General emission factors for other mobile sources.

Source	Fuel	CH ₄ kg/TJ	N ₂ O kg/TJ
Leisure boats 2-stroke	Motor gasoline	116.17	0.46
Leisure boats 4-stroke	Motor gasoline	38.72	1.82
	Diesel	4.18	0.70
Motorized equipment 4-stroke	Motor gasoline	50.11	1.59
Motorized equipment 4-stroke	Diesel	3.94	3.1

Source: **Bang (1993); SFT (1999d); Statistics Norway (2014a)**

Snow mobiles have the same emission factors as mopeds. Bold figures have exceptions for some sectors, see Table 3-27

Table 3-27: Exceptions from the general factors for greenhouse gases and precursors for other mobile sources.

Component	Emission factor (kg/TJ)	Fuel	Source	Sectors
CH ₄	125.28	Motor gasoline	Motorized equipment 4-stroke	Private households
N ₂ O	3.05	Diesel	Motorized equipment 4-stroke	Agriculture and forestry

Source: **Bang (1993); SFT (1999d); Statistics Norway (2014a)**

3.2.11.5 Uncertainty assessment and time series consistency

The total consumption of gasoline and diesel is well known, but the estimated consumption allocated on the off-road sources are considered quite uncertain (see Annex 2).

A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category.

3.2.11.6 Category-specific QA/QC and verification

There is no category-specific QA/QC procedure for this sector. See Annex 4 for a description of the general QA/QC procedure.

3.2.11.7 Category-specific recalculations

There are recalculations in this source category this year. See chapter 10.1.1 for details.

3.2.11.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.2.12 Other Sectors, 1A4

3.2.12.1 Category description

The source category *Other Sectors* includes stationary and mobile combustion in agriculture, forestry, fishing, commercial and institutional industries, and households. Section 3.2.11 describes mobile combustion in motorized equipment (off-road vehicles and other machinery).

In 2024, the emissions from this sector amounted to about 2.9 million tonnes CO₂ equivalents, which is 6% of national total GHG. The sector emissions decreased by 34% from 1990 to 2024. Throughout the inventory period, emissions have fluctuated although with a decreasing trend. The decreasing trend is mainly due to reduced consumption of fuel oil in the commercial, institutional and households' sectors.

According to the approach 2 key category analysis for 1990 and 2024, this sector is in conjunction with stationary combustion in sectors 1A1 and 1A2, a key category with respect to:

- Emissions of CO₂ from the combustion of liquid fuels and gaseous fuels in level in 1990 and 2024, and in trend
- Emissions of CO₂ from the combustion of other fuels in level in 1990 and 2024, and in trend
- Emissions of CO₂ from the combustion of solid fuels in trend
- Emissions of CH₄ from the combustion of biomass in level in 1990 and 2024 and in trend

3.2.12.2 Activity data

Commercial and institutional sectors

Consumption of petroleum products is retrieved from the statistics on sales of petroleum products. For stationary petroleum products like light heating oil and heating kerosene, more sales are made directly to users than via distributors. The distribution of direct sales will then be used as distribution formulas, with the assumption that direct sales have the same industrial classification as the distributor sales.

From 2005 and onwards, total consumption of LPG is given by the annual sales statistics for petroleum products and distributed using the shares of direct sales in 2009-2012, the same as for agriculture. It is assumed that LPG consumption in the transport industries, as well as sale and maintenance of vehicles, support activities for transportation and rental and leasing activities is used for transport. For the years prior to 2005 the source of LPG consumption is statistics on the construction industry.

Consumption of natural gas is collected in a separate survey. When necessary, assumptions are made to break down consumption in accordance with the detailed industrial classification. Calculated emissions from combustion of biogas at a sewage treatment plant are included for all years since 1993.

Activity data for natural gas consumption from this source is published in Statistics Norway's statistics bank table 11561¹⁹ and can be found by selecting natural gas under energy product, and Other under Energy Balance Item.

Residential/Households

For the years before 2005 and for 2012, the use of wood in households is based on the annual survey on consumer expenditure which gives the amount of wood burnt. The statistics cover purchase in physical units and estimates for self-harvest of wood. The survey figures refer to quantities acquired, which do not necessarily correspond to use. The survey gathers monthly data that covers the preceding twelve months; the figure used in the emission calculations (taken from the energy balance), is the average of the survey figures from the year in question and the following year.

Use of fuelwood in households for the years from 2005 to 2011 and after 2013 is based on responses to questions relating to wood-burning in Statistics Norway's Travel and Holiday Survey. The figures in the survey refer to quantities of wood *used*. The survey quarterly gathers data that covers the preceding twelve months. For the period 2005 to 2011 the figure used in the emission calculations is the average of 5 quarterly surveys (1 survey per quarter plus a round of bonus questions in the 4th quarter). Since 2013 the figure used in the emission calculations is the average of 3 quarterly surveys (Quarters 1, 2, and 4). Household biomass combustion is minimal in the 3rd quarter and therefore has little overall effect on results. Otherwise, the surveys used in 2005-2011 and after 2013 are identical.

All surveys used to gather data on household wood combustion have used the same methodology for sampling and controlling for bias in sampling and missing responses, reducing the risk for inconsistency in the time series. Combustion takes place in small ovens in private households. The general downward trend in emissions since 2012 can be

¹⁹ <https://www.ssb.no/en/statbank/table/11561>

attributed to reduced consumption of wood due to increased electrification of household heating, milder winters, and the phasing in of more efficient wood stoves using newer technology.

Figures on use of coal and coal coke are derived from information from the main importer. Formerly, Norway's only coal producing company had figures on coal sold for residential heating in Norway. From about 2000, this sale has been replaced by imports from abroad. The volumes of imported charcoal for grocery trade, garden centres, retail sale of furniture and other shops that sell items for the home are placed under household consumption.

Consumption of light heating oil and heating kerosene in households is calculated using consumption figures collected as part of Statistics Norway's survey of consumer expenditure (FBU) (Norway 2013). This survey was conducted for the years 1993, 1994, 1995, 2001, 2004, 2006, 2009 and 2012, and households were asked to report the volumes of oil and kerosene they had procured during the past 12 months. The intervening years are calculated using changes in sales of light heating oil and heating oil from the statistics on sales of petroleum products, adjusted for consumption in manufacturing and mining (Norway 2018; Statistics Norway Annually-g). This is because consumption in manufacturing and mining is less dependent on temperatures than household consumption. Use of natural gas has been based on sales figures reported to Statistics Norway from the distributors. Statistics Norway has a separate model for calculating fuel used in leisure boats by households. Activity data is described in section 3.2.11.

Agriculture/forestry/fishing

Stationary

Consumption of heating kerosene, LPG, light heating oil and heavy fuel oil is covered by the annual statistics on sales of petroleum products. Distributor sales are broken down by industry according to distribution formulas. Figures on LPG consumption prior to 2005 are taken from agriculture statistics. From 2005 and onwards, total consumption is given by the annual sales statistics for petroleum products and distributed to agriculture industry using the share of direct sales in 2009-2012. Until further work is done, the same distribution formula is applied to all these years. The minor use of coal was previously collected annually from the only consumer. Since 2002, however, there has been no use of coal in the Norwegian agricultural activities. Use of natural gas in agriculture, which has increased considerably since it first was registered in 2003, is based on sales figures reported to Statistics Norway from the distributors. The survey was first carried out in 2004, but data on inland consumption of natural gas had been collected since 1994. Prior to 1994 the consumption was insignificant.

Fishing (mobile)

This source category includes fuel consumption used by vessels in the economic sectors agriculture, forestry, fishing and aquaculture (fish farms). Consumption of marine gas oil,

heavy distillates, heavy fuel oil and biomass (HVO) is covered by the annual statistics on sales of petroleum products through the energy balance. See 1A3d Navigation in section 3.1.9 for more details.

3.2.12.3 Emission factor

The emission factors used in this source category are presented in sections 3.2 and 3.2.11. For residential wood burning three separate categories for CH₄ and N₂O emission factors are used, corresponding to wood-burning method Wood burning stoves that use older technology (before 1998) emit 16.11 g/kg (959 kg/TJ) CH₄, and open fireplaces emit 5.3 g/kg (315 kg/TJ) CH₄, while stoves from before 1998 and open fireplaces emit 0,032 g/kg (1.9 kg/TJ) N₂O (Morten Seljeskog et al. 2017) Since 1998 Norwegian wood stoves have become increasingly more efficient and therefore have lower emissions. To account for this effect, emission factors for wood stoves produced after 1998 are implemented using a trend curve based on research by Øyvind Skreiberg (2023), where each year has a distinct emission factor. This is used to account for the phasing in of newer, less polluting wood stoves into the existing Norwegian wood stove fleet. Emission factors for new stoves range from 7.98 g/kg (474 kg/TJ) in 1998 to 3.95 g/kg (247 kg/TJ) in 2024 for CH₄, and 0.042 g/kg in (2.45 g/TJ) 1998 and 0.032 g/kg (1.9 kg/TJ) in 2024 for N₂O. The emission factors for newer stoves are used increasingly as time goes on due to older stoves being phased out in Norwegian households.

3.2.12.4 Uncertainty assessment and time-series consistency

Uncertainty in fishing is described together with navigation in section 3.2.9.

Uncertainty is reduced for sectors where use was previously given as a residual, e.g., use of heating kerosene and heavy distillates in households, and total use of fuel oil in commercial and institutional industries. Generally, the uncertainty, applies mainly to the distribution of use between industries – the total use is defined as equal to registered sales, regardless of changes in stock.

The uncertainty in the activity data for this source category is $\pm 20\%$ of the mean for solid and liquid fuels, and $\pm 30\%$ of the mean for biomass and waste (see Annex 2).

3.2.12.5 Category-specific QA/QC and verification

There is no category-specific QA/QC procedure for this sector. Annex 4 has a description of the general QA/QC procedure.

3.2.12.6 Category-specific recalculations

There are recalculations in this source category this year. See chapter 10.1.1 for details.

3.2.12.7 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.2.13 Other emissions from energy combustion, 1A5

3.2.13.1 Category description

In 2024, the emissions from this sector amounted to about 0.3 million tonnes CO₂ equivalents, which is 0.6% of national total GHG. The emissions from this sector decreased by 47% from 1990 to 2024. The trend fluctuates significantly, mainly due to annual changes in military procurement.

Military

This source includes emissions from fuel use in military stationary and mobile activities.

Emissions from non-fuel use of liquid fuels

In the energy balance, small amounts of gasoline, diesel and residual fuel oil are reported as being used for non-fuel purposes. A fraction of this consumption is estimated to result in emissions to air, while the remaining fractions remain in products or enter waste streams.

Lubricants in mobile combustion

Two-stroke gasoline engines are lubricated by adding oil to the gasoline. The oil is thus combusted and converted to CO₂. As lubricant, oil in two-stroke gasoline is not included in the Norwegian energy statistics, a separate estimation must be performed to obtain completeness.

3.2.13.2 Activity data and emission factors

Military

Fuel used in the military is annually collected from the sale statistics of petroleum products. From 2010, figures of aviation kerosene, marine gas oil and LNG are collected from the Norwegian Defense Research Establishment and are used as a supplement in 1A5b Military mobile.

Emission factors used for stationary activities are presented in section 3.2 and emission factors used for mobile activities are presented in the corresponding transport sectors (see sections 3.2.6 to 3.2.11). The stationary and mobile emissions from the Norwegian military activities are presented in CRT 1A5a and 1A5b.

Emissions from non-fuel use of liquid fuels

Activity data: Total non-fuel domestic consumption of fuel oils is obtained from the Norwegian energy balance. The quality of the data is mixed throughout the time series. Annual surveys of feedstock use were performed for 1993-2001. For 2002 a different type of survey was used.

In addition to gas/diesel oil, gasoline and residual fuel oil have been recorded earlier in the time series.

Time series for the non-fuel use of these fuels are given in section 3.6.2 on feedstocks etc.

Fraction emitted: Gas/diesel oil and gasoline: 0.5, and residual oil: 0.11.

Emission factors: General emission factors for liquid fuels were obtained from Table 3-4, Table 3-6 and Table 3-7. The selected factors are 3 kg CH₄/TJ and 0,6 kg N₂O/TJ.

Lubricants in mobile combustion

The amount of combusted lubricant oil is proportionate to the consumed two-stroke gasoline. The blend ratio is assumed to be falling linearly from 3% in 1990 to 2% in 2012, based on Internet search (retailers and discussion fora 2014, pages in Norwegian only). Parts of the two-stroke gasoline engines are blended abroad (petrol retailers pers. comm., 2014), and the estimated CO₂ emission from this lubricant oil is hence included in the emission estimates for gasoline. The share being blended abroad is not known and is assumed to be 50%.

The amount of oil giving emissions not already accounted for is estimated by multiplying the two-stroke gasoline consumption by the oil blend ratio and the share of gasoline being blended in Norway:

$$3. \quad E = A \times R \times D$$

where:

E = emission

A = consumed two-stroke petrol

R = blend ratio (oil:petrol)

D = share of two-stroke gasoline being blended domestically

The conversion from tonnes of consumed lubricant to tonnes of emitted CO₂, is performed based on IPCC default factors for energy content (NCV) and carbon content per unit of energy.

Table 3-28: Conversion factors used to estimate CO₂ emissions.

Factor	Value	Unit
Net calorific value (NCV)	0.0402	TJ/tonne
Carbon content (CC)	20	Tonne C/TJ

Source: IPCC (2006)

N₂O and CH₄ emissions have been estimated as fixed fractions of the CO₂ emission, based on IPCC default factors.

Table 3-29: Conversion factors used to estimate CH₄ and N₂O emissions.

Factor	Value	Unit
CH ₄	0.00286	Tonne CO ₂ eq/tonne CO ₂ emitted
N ₂ O	0.00254	Tonne CO ₂ eq/tonne CO ₂ emitted

Source: **IPCC (2006)**

3.2.13.3 Uncertainty assessment and time-series consistency

Military

There have been large variations in annual sales of military aviation kerosene prior to 2010 as stock changes have not been considered. The actual annual use of kerosene and hence emissions are therefore uncertain prior to 2010.

Lubricants in mobile combustion

The uncertainty in the emissions estimate from lubricant use in two-stroke petrol engines is assumed to be moderate. The total consumption of gasoline is well known, while the amount going to two-stroke gasoline engines is estimated. The uncertainty in the activity data is assumed to be 20%, based on the uncertainty in the road traffic estimation (see section 3.2.7). The uncertainty of the carbon content is an IPCC default value, and the NCV uncertainty is assumed to be equally large. Based on these uncertainties, the overall uncertainty of the emissions from lubricating oil used in two-stroke gasoline engines is estimated to be 30%.

3.2.13.4 Category-specific recalculations

There are no recalculations in this source category this year.

3.2.13.5 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.3 Fugitive emissions from solid fuels and oil and natural gas and other emissions from energy production (CRT 1.B)

3.3.1 Fugitive Emissions from Coal Mining and Handling, 1B1

3.3.1.1 *Category description*

In Norway, coal is only produced on the archipelago of Svalbard. Since 1990 coal production has occurred at seven mines. In 2024 only two mines were still active: One mine operated by a Norwegian company near Longyearbyen, and one mine operated by a Russian company in Barentsburg.

As the Norwegian GHG inventory, according to official definitions, shall include emissions from all activities at Svalbard, emissions from Russian coal production have also been estimated and included in the Norwegian greenhouse gas inventory.

Emissions of CH₄ and CO₂ from mining activities are included in the inventory. The emissions factor for CH₄ also includes potential emissions during post-mining handling of the coal. Emissions of NMVOC and particles from handling of coal are included in the inventory. Indirect emissions of CO₂ from emissions of CH₄ and NMVOC are reported separately in CRT Table 6.

In 2005 there was a fire in one of the Norwegian coal mines and consequently the production was almost halved from 2004 to 2005 as Figure 3.16 illustrates. The emissions from this fire are included in the inventory under 1B1c Mine fire. The CO₂ emissions from the fire are estimated to approximately 1.26 kilotonnes.

In 2008 a fire broke out in the Russian mine at Barentsburg. Shortly after the fire started, the mine was filled with water. Hence there were no significant emissions from the fire, and these emissions are not estimated. Russian activity data are more uncertain than the Norwegian, which causes a correspondingly higher uncertainty in the emission figures.

A smouldering fire has taken place in the mine in Pyramiden, the Russian mine that was closed in 1998. At an inspection in 2005, no emissions were registered, which indicates that the fire had burnt out. Due to lack of data, emissions for earlier years from this fire have not been estimated. However, Norwegian authorities assume that these emissions were limited.

Coal has been produced in Svalbard since the beginning of the 1900s. Emissions of methane from abandoned underground mines are also included in the inventory and make up a significant share of the total emissions from coal mining.

The total emissions from mining, including abandoned mines, is reduced by 58% from about 183 kilotonne in 1990 to 77 kilotonne CO₂ equivalents in 2024. In 2024 abandoned mines represented 66% of total emissions from source category 1.B.1. The emissions from mining, excluding from abandoned mines, were in 2024 estimated to 26 kilotonnes of CO₂ equivalents. The emissions, excluding abandoned mines, are unchanged from 2023 to 2024. Total coal production was flat.

Figure 3.16 shows that the production of coal at Svalbard has decreased by 73% from 1990 to 2024. There was a peak in the production in 2007 when the production was five times higher than in 1990.

CH₄ from coal mining is defined as key category according to Approach 2 in both level in 1990 and in trend.

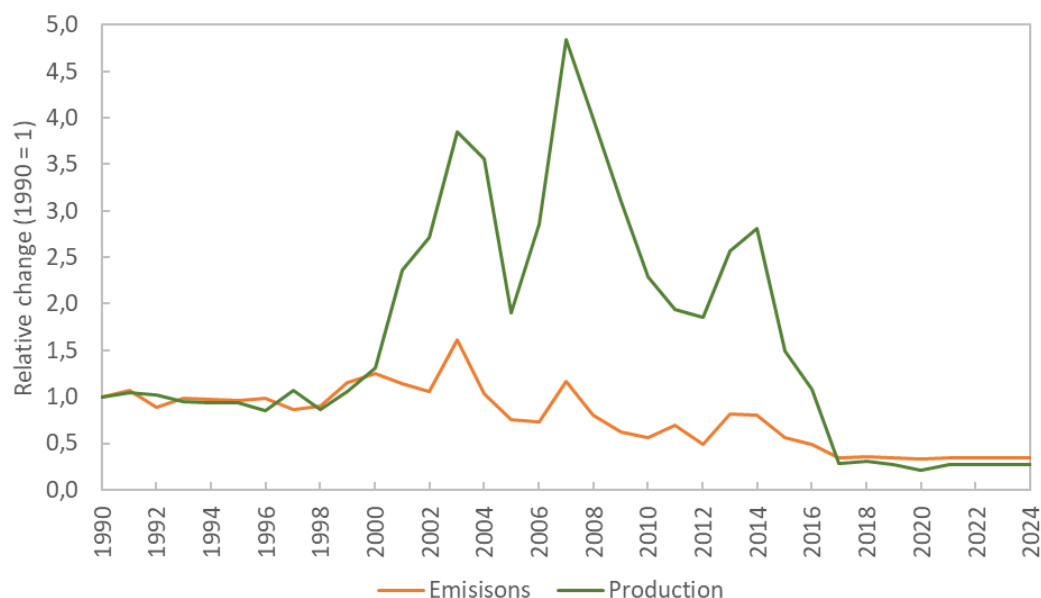


Figure 3.16: Relative change in coal production in Norway and related GHG emissions. Excluding emissions from abandoned underground mines. 1990=1.

3.3.1.2 Methodological issues

3.3.1.2.1 CO₂

Emissions of CO₂ from coal mining on Svalbard are calculated by multiplying the amount of coal extracted (raw coal production) with standard emission factors (Tier 1). The calculations are performed by Statistics Norway.

See Chapter 9 for more information about indirect CO₂.

3.3.1.2.2 CH₄

Emissions of methane from coal mining on Svalbard are calculated by multiplying the amount of coal extracted (raw coal production) with country specific emission factors (Tier 2). The calculations are performed by Statistics Norway.

3.3.1.2.3 NMVOC

NMVOC emissions from handling of coal are estimated by multiplying the amount of coal extracted (raw coal production) with Tier 2 emission factors from EMEP/EEA Guidebook (2013).

3.3.1.2.4 Abandoned underground mines

Methane emissions from abandoned underground mines have been calculated with a Tier 1 methodology with factors from 2019 Refinements, using the following formula:

$$CH_4 \text{ emissions} = \text{Number of abandoned coal mines remaining unflooded} * \\ \text{Fraction of gassy coal mines} * \text{Emission factor} * \text{Conversion factor}$$

The conversion factor is the density of CH₄ and converts volume of CH₄ to mass of CH₄. The conversion factor (density) has a value of 0.67 *10⁻⁶ Gg m⁻³.

3.3.1.3 Activity data

Figures on Norwegian production (raw coal production) is reported by the plant to Statistics Norway. Russian figures are reported to the Norwegian authorities on Svalbard; these figures are, however, regarded as highly uncertain, consisting of a mixture of figures on production and shipments.

The national Energy balance only includes Norwegian production. Thus, the activity data in 1B1a will differ from the coal production data in the Reference Approach.

Abandoned underground mines

Information on the history of mining at Svalbard was obtained from the Directorate of Mining with the Commissioner of Mines at Svalbard in 2014. The information from the directorate included assessment of degree of flooding. Where no information about flooding is available, the mines are included in the number of abandoned mines remaining unflooded, to avoid underestimation. Table 3-30 gives an overview of the number of abandoned mines remaining unflooded for different time periods of abandonment, as well as the used fractions of gassy mines for each time period.

Table 3-30: Number of mines abandoned from 1901-present.

Time of abandonment	Number of abandoned mines remaining unflooded	Fraction of gassy mines
1901-1925	6	0.5
1926-1950	3	0.33
1951-1975	7	0.43
1976-2000	6	0.33
2001-present	2	0.0

Directorate of Mining (2014)

It is assumed that all historic coal mining activities in Norway have taken place at Svalbard.

3.3.1.4 Emission factors

3.3.1.4.1 CH₄

For Norwegian coal production a country specific emission factor of CH₄ from extraction of coal was determined in 2000 in two separate studies performed by IMC (2000) and Bergfald & Co AS (2000).

The emissions of methane from coal mining were in the study measured in two steps. First, coal samples were collected and the methane content in the coal was analysed (IMC 2000). The samples had seam gas contents of 0.535-1.325 m³ methane per tonne coal, yielding an average content of 0.79 m³ per tonne. This factor includes the total possible methane emissions from coal mining, loading, and transport both on shore and on sea. The factor also includes the possible emission from handling and crushing of coal at the coal power plant.

Secondly, the methane content in ventilation air from the underground coal mines at Spitsbergen was measured (Bergfald & Co AS 2000). From the Norwegian mines the methane content in the ventilation air was measured to 0.1-0.4 m³ methane per tonne coal.

Considering the measurements, it was therefore decided to use 0.54 kg methane per tonne coal as emission factor when calculating methane emissions from coal mining in Norway.

According to IPCC's Good Practice Guidance, the Norwegian mines at Spitsbergen have characteristics that should define the mines as underground mines, whereas the emission factor we use is more characteristic for surface mines. The low content of methane is explained with the mine's location 300-400 meters *above* sea level. Furthermore, the rock at Spitsbergen is porous and therefore methane has been aired for many years.

For the Russian mine in Barentsburg, the emission factor for CH₄ has been estimated in the same manner as the Norwegian factor, based on measurements by Bergfald & Co AS (2000). This is an underground mine, which causes considerably higher emissions than from the Norwegian mines; we use the factor 7.16 kg methane per tonne coal for this mine. The mine in Pyramiden is situated more like the Norwegian mines; accordingly, we use the same emission factor for this as for the Norwegian mines.

3.3.1.4.2 CO₂

The low default emission factor of 0.05 m³ CO₂ per tonne for underground mines from the tier 1 methodology of the IPCC Guidelines (IPCC 2019) is used. Using the IPCC CO₂ density (1.84 kg/m³), this corresponds to $0.05 \times 1.84 = 0.092$ kg CO₂ per tonne.

3.3.1.4.3 NMVOC

Emission factors for NMVOC are taken from (EEA 2023). The Tier 2 factors used are 0.2 kg NMVOC per tonne coal for surface mines and 3 kg NMVOC per tonne coal for underground mines.

3.3.1.4.4 CH₄ from abandoned underground mines

The fraction of gassy mines is determined by the Norwegian Environment Agency based on information about geological characteristics of the different geographic areas of Svalbard, obtained from Bergfald & Co AS (2000) and the Directorate for Mining with the Commissioner of Mines at Svalbard.

Default emission factors from the tier 1 methodology of the IPCC Guidelines (IPCC 2019) are used (Table 3-31). The complete table may be found in table 4.1.6 in volume 2 of the guidelines.

Table 3-31: Emission factors used for calculating emissions from abandoned underground mines. Million m³ CO₂ /mine.

Inventory year	Time period of abandonment				
	1901-1925	1926-1950	1951-1975	1976-2000	2001-present
1990	0.281	0.343	0.478	1.561	NA
1995	0.272	0.327	0.439	0.921	NA
2000	0.264	0.314	0.408	0.713	NA
2005	0.256	0.301	0.382	0.601	1.265
2010	0.249	0.29	0.361	0.529	0.845
2011	0.248	0.288	0.357	0.518	0.801
2012	0.247	0.286	0.353	0.507	0.763

Inventory year	Time period of abandonment				
	1901-1925	1926-1950	1951-1975	1976-2000	2001-present
2013	0.246	0.284	0.35	0.496	0.73
2014	0.244	0.283	0.346	0.487	0.701
2015	0.243	0.281	0.343	0.478	0.675
2016	0.242	0.279	0.34	0.469	0.652
2017	0.241	0.277	0.336	0.461	0.625
2018	0.239	0.275	0.333	0.453	0.604
2019	0.238	0.273	0.33	0.446	0.586
2020	0.237	0.272	0.327	0.439	0.577
2021	0.236	0.27	0.324	0.432	0.555
2022	0.235	0.268	0.322	0.425	0.542
2023	0.234	0.267	0.319	0.419	0.529
2024	0.233	0.265	0.316	0.413	0.518

3.3.1.5 Uncertainty assessment and time-series consistency

The uncertainty in the activity data concerning Norwegian coal production is regarded as being low. The uncertainty in Russian data is regarded being considerably higher.

Today, country specific factors based on measurements are used in the calculations of CH₄ emissions from mining and post-mining activities. We assume that the uncertainty in the EF is much lower than that reported in Rypdal and Zhang (2000), when an IPCC default emission factor was used. In Rypdal and Zhang (2000) the uncertainty in the EF was estimated by expert judgments to as much as -50 to +100%.

The EF we use for the Norwegian mines is an average of the measurement of methane in coal sampled in the study (IMC 2000). This average EF is two to eight times higher than the methane content measured in ventilation air by Bergfald & Co AS (2000). This should indicate that the chosen emission factor is rather conservative.

A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category.

For abandoned underground mines the same data source is used for the entire time series, and no time series inconsistencies are identified for the calculation of CH₄ emissions from.

When mines are transferred from being active mines to being abandoned mines, emissions of CH₄ from the mine increases significantly. This is due to default EF being used for calculating emissions from abandoned mines, while country-specific EF are used for calculating emissions from the active mines, and the country-specific EFs are significantly lower than equivalent standard factors for mining activities.

3.3.1.6 Category-specific QA/QC and verification

Independent methods to estimate the EFs used in the calculations are described above in this chapter.

Statistics Norway and the Norwegian Environment Agency carry out internal checks of the emission time-series and corrections are made when errors are detected; see Section 1.5 for general QA/QC procedures.

For abandoned underground mines no category-specific QA/QC routines are in place for the emission estimates.

3.3.1.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

3.3.1.8 Category-specific planned improvements

Norway has started work to establish a country specific emission factor for CH₄ from coal mining and handling, see chapter 10.4.

3.3.2 Fugitive Emissions from Oil and Natural Gas – 1B2

3.3.2.1 Overview

The total production of oil, gas and NGL and condensate increased to peak production of 264 mill. Sm³ o.e. in 2004 and has since varied between 215 and 258 mill. Sm³ o.e. (Figure 3.17). The increase in production from 1990 to 2004 was 111%. In 2024, the total production was 94% higher than in 1990, and 3% higher than the previous year. Between 2023 and 2024, oil production decreased by 1% while gas production increased by 8%.

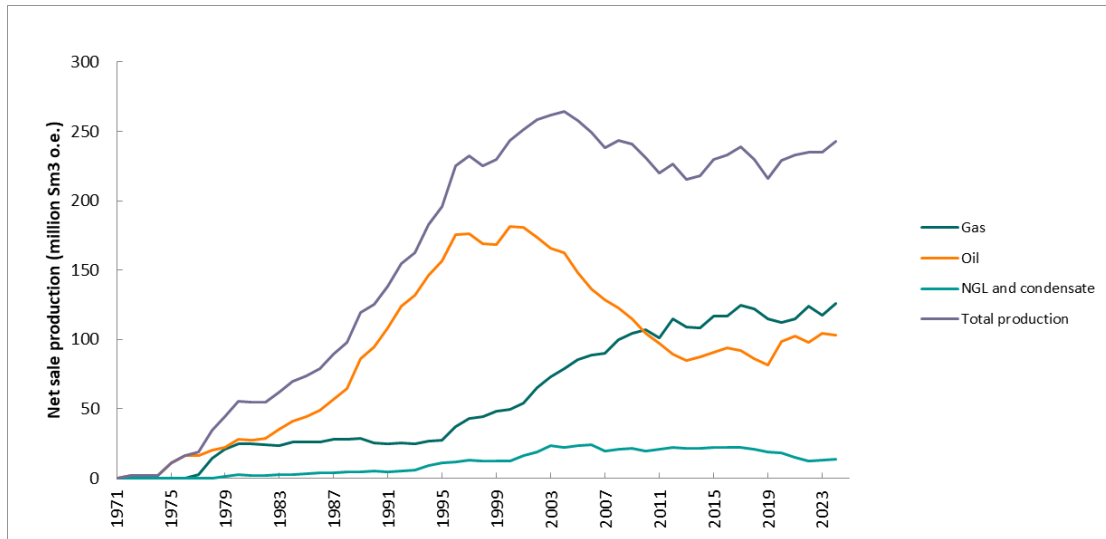


Figure 3.17: Net sale production of oil, gas and NGL and condensate. Million Sm³ oil equivalents.
Source: Norwegian Offshore Directorate.

Figure 3.18 shows the number of exploration wellbores on the Norwegian continental shelf in the period 1990-2024. The timeseries for all exploration wellbores is reported in under 1B2a1 Exploration (oil) and therefore IE is reported in 1B2b1 Exploration (gas).

The total numbers of development wellbores are shown in Figure 3.19.

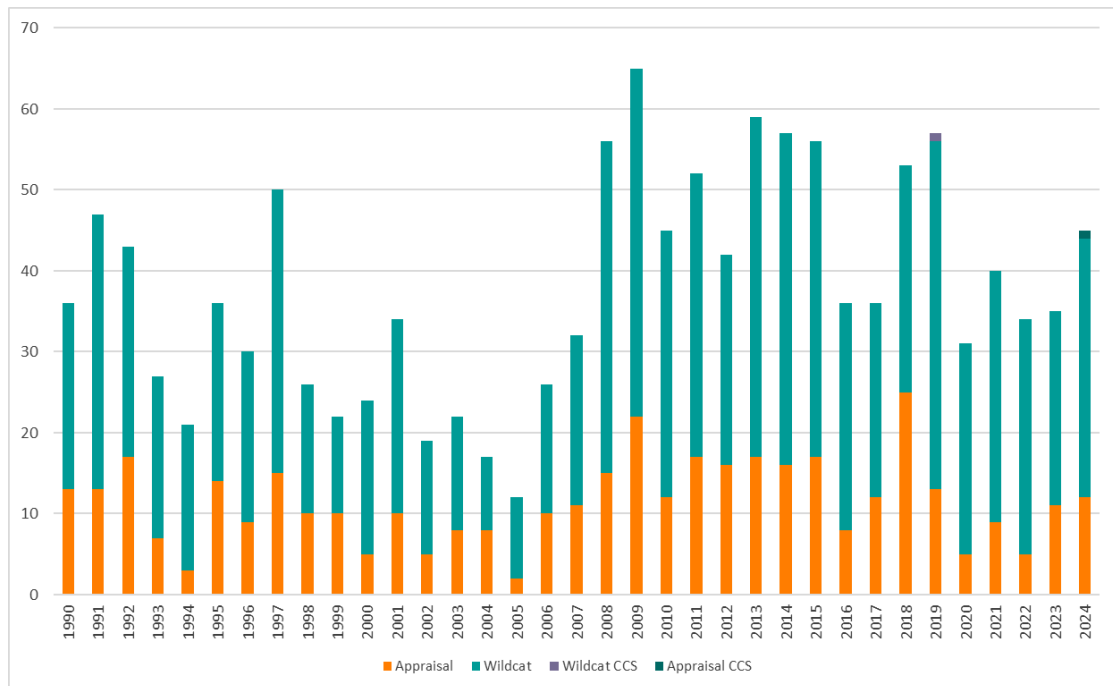


Figure 3.18: Exploration wellbores by year entered/spudded. Number of wildcats, appraisal wells, wildcats for CCS and CCS appraisal wells. Source: Norwegian Offshore Directorate.

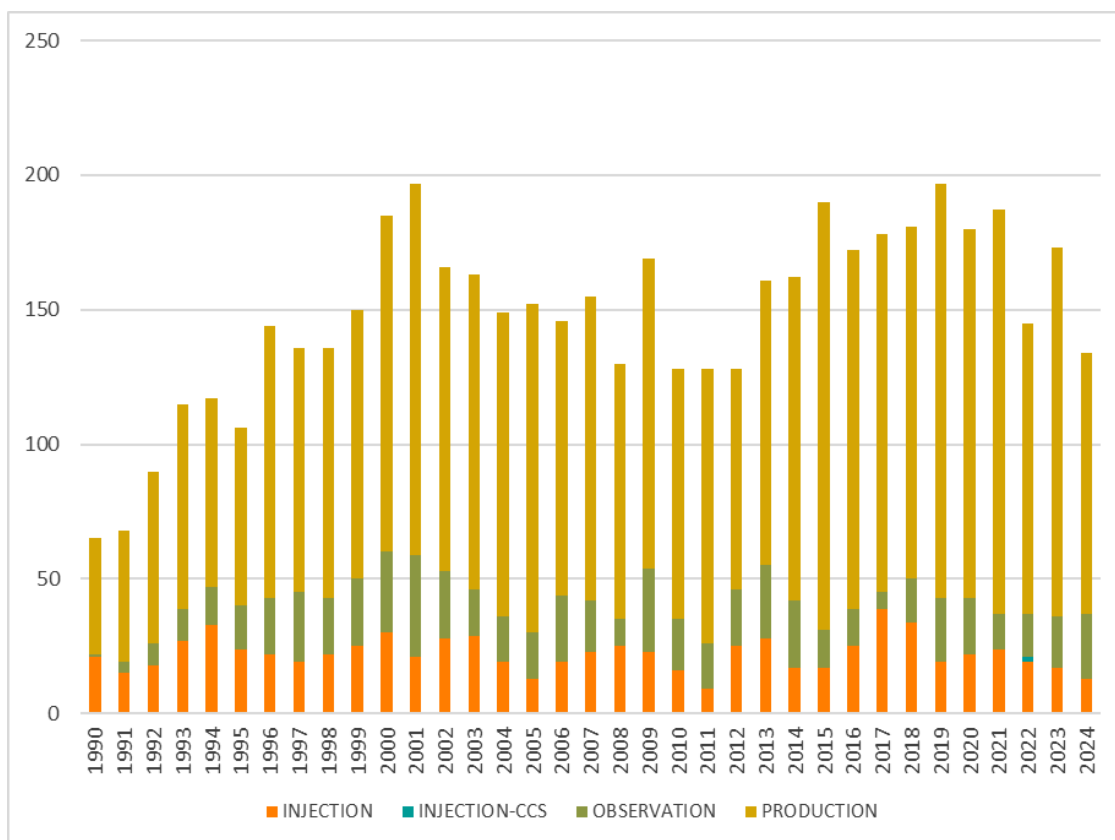


Figure 3.19: Development wellbores by year entered/spudded. Number of production, observation, and injection wells, as well as injection wells for CCS. Source: Norwegian petroleum directorate.

The sector Fugitive Emissions from Oil and Natural Gas (1B2) includes fugitive emissions mainly connected to oil and gas exploration and production, gas terminals and refineries. Emissions from combustion for energy purposes in the source categories mentioned above are reported in source category 1A1c. These are emissions from combustion of natural gas and diesel in turbines, motors, and boilers. Venting and other emissions connected to CCS are reported in 1C, see Section 3.4.

Fugitive emissions from oil, natural gas and venting and flaring, accounted for 4% of the total GHG emissions in Norway in 2024, and 6% of the total GHG emissions in the energy sector.

Figure 3.20 shows the trend in fugitive emissions from oil and gas production, venting and flaring, and Figure 3.21 shows the relative change in emissions from the same sources. The total sector emissions decreased by 38% from 1990 to 2024 and by 7% between 2023 and 2024.

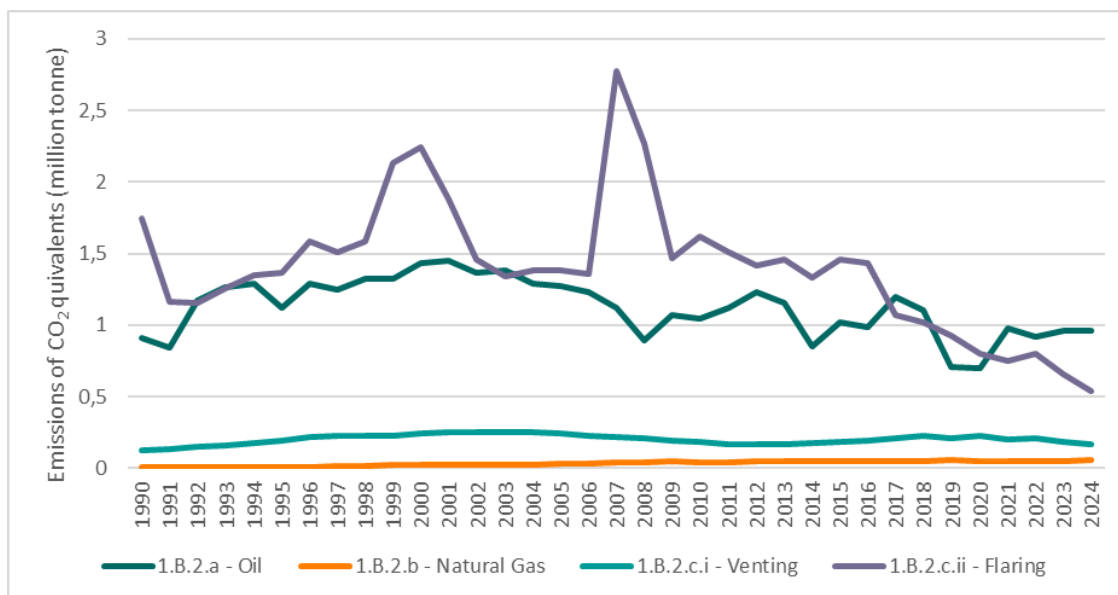


Figure 3.20: 1.B.2 Fugitive emissions from oil and gas related activities. Million tonne CO₂ equivalents. Source: Statistics Norway/Norwegian Environment Agency.

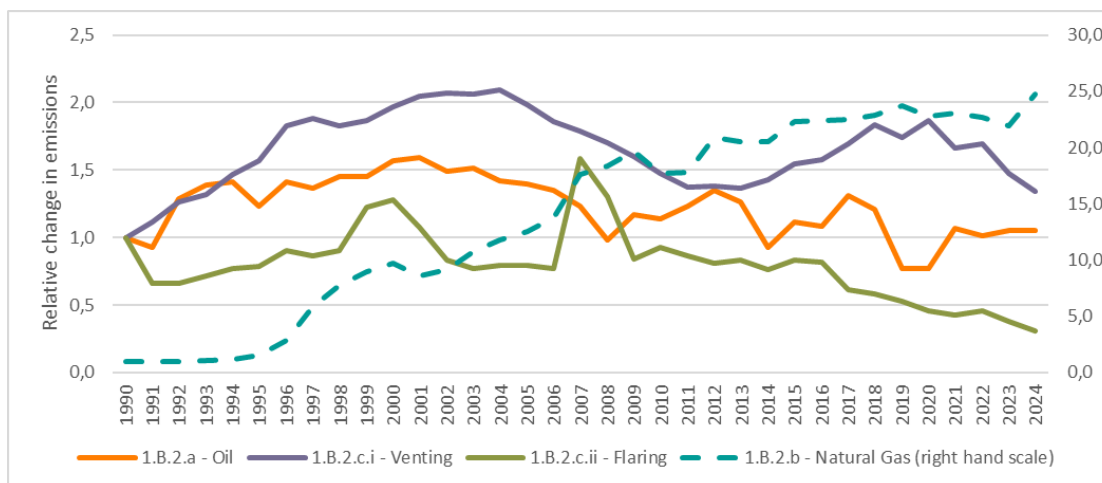


Figure 3.21: Relative change in 1.B.2 Fugitive emissions in CO₂ equivalents from oil and gas related activities. 1990=1. Source: Statistics Norway/Norwegian Environment Agency.

The fugitive emissions from oil and gas activities, excluding 1.B.2.a.4 (see description of this source below), decreased by 59% between 1990 and 2024, while the total production of oil, gas and NGL and condensate increased by 94%.

The different development in emissions and production is mainly explained by measures taken to reduce NMVOC emissions from storage and loading of crude oil offshore and onshore, measures to reduce venting of CH₄ offshore and that flaring of gas for most years is lower than in 1990. It is prohibited to flare at oil and gas fields offshore other than for security reasons. The peak emissions from flaring in 2007-2008 (*Figure 3.20*) were due to start-up problems at an LNG plant. More information about flaring offshore is given in chapter 3.3.6.

Emissions from 1.B.2.a.3 transport, which are mainly indirect CO₂ emissions of NMVOC and CH₄ from storage and loading of crude oil offshore and onshore, are reduced substantially due to implemented measures. The reduction has been counteracted by increased emissions from catalytic cracking in 1.B.2.a.4.

Catalyst regeneration (coke burn-off) in a catalytic cracker unit at one refinery constitutes close to all emissions reported in CRT category 1.B.2.a.4 and normally about 30-50% of the total emissions reported in 1B2. The low emissions in 1B2a in 2019 and 2020 are mainly caused by lower activity as the catalytic cracker was replaced.

Emissions from natural gas distribution increased by orders of magnitude between 1990 and 2009 due to increased domestic gas distribution but has since levelled off. In 2024 the emissions were about 20 kilotonnes CO₂ equivalents.

3.3.2.1.1 Overall description of methodology for fugitive emissions from fuels

Table 3-33 gives an overview over methodology (tier), EF and AD for each source category within the sector used in the calculations of the fugitive emissions of CO₂, CH₄, N₂O and NMVOC. The table shows if the EF and/or AD used in the calculations are CS or PS. The notation R/E in the table indicates that emission estimates is based on reporting from the entities (R) or calculated (E) by Statistics Norway; see e.g., 3.3.6 Section about flaring. Generally, emission estimates up until year 2002 are carried out by Statistics Norway, whereas emissions since year 2003 are reported by the operators.

Table 3-32 shows the shares of total CO₂, CH₄ and N₂O emissions in the sector that is based on reported emissions and estimates by the Statistics Norway in 2024. Most of the CH₄ and CO₂ emissions in the sector, included coal mining, are based on reports from the plants (mainly offshore oil and gas production facilities). N₂O is based on estimates performed by Statistics Norway.

Table 3-32: Shares of total CO₂, CH₄ and N₂O emissions based on reported emissions and estimates.

	CO ₂		CH ₄		N ₂ O	
	Estimated	Reported	Estimated	Reported	Estimated	Reported
1B Fugitive emissions from fuels	7%	93%	25%	75%	100%	0%
1.B.1.a Coal Mining	100%	0%	100%	0%		0%
1.B.2.a Oil	6%	94%	0%	100%		0%
1.B.2.b Natural gas	99%	1%	93%	7%		0%
1.B.2.c Venting and flaring	5%	95%	0%	100%	100%	0%

Source: Statistics Norway/Norwegian Environment Agency

Sector 1.B.2.a Oil:

- The emissions are from a catalytic cracker at one oil refinery and venting and leakages from oil production. Indirect CO₂ emissions, mainly from loading and storage of crude oil are not included as reported emissions, although they are estimated based on reported emissions of NMVOC and CH₄.

1.B.2.b Natural gas:

- 99% is *estimated* and is indirect CO₂ based on mostly reported CH₄ emissions from gas terminals.

Table 3-33: Fugitive emissions from oil and natural gas. Emission sources, compounds, methods, emission factors and activity data included in the Norwegian GHG Inventory.

Fugitive emissions from fuels	CO ₂	CH ₄	N ₂ O	NMVO C	Method	Emission factor	Activity data
1.B.2.a Oil							
i. Exploration	NE	R	NO	R	Tier II	CS	PS
ii. Production	E	R	NA	R	Tier II	CS	PS
iii. Transport	IE	R/E	NA	R/E	Tier II	CS	PS
iv. Refining/Storage	R/E	R	NA	R	Tier II	CS	PS
v. Distribution of oil products	NA	NA	NA	R/E	Tier II	C/CS	CS/PS
vi. Other	NO	NO	NO	NO			
1.B.2.b Natural gas							
i. Exploration	IE	IE	NA	IE	Tier II	CS	PS

Fugitive emissions from fuels	CO ₂	CH ₄	N ₂ O	NMVO C	Method	Emission factor	Activity data
ii. Production	R/E	R	NA	R	Tier II	CS	PS
iii. Processing	IE	IE	NA	IE	Tier II	CS	PS
iv. Transmission and storage	IE	IE	NA	IE	Tier II	CS	PS
v. Distribution	NO/IE	NO/E	NA	IE	Tier II	OTH	CS/PS
vi. Other	E	R	NA	R	Tier II	CS	PS
1.B.2.c							
Venting							
i. Oil	R/E	R	NA	R	Tier II	CS/PS	PS
ii. Gas	NE	R	NA	R	Tier II	CS/PS	PS
iii. Combined	NO	NO	NA	R/E	Tier II	CS/PS	PS
Flaring							
i. Oil (well testing)	R/E	E	E	R/E	Tier II	CS	PS
ii. Gas							
- Gas and oil fields	R/E	R/E	E	R/E	Tier II	CS	PS
- Gas terminals	R	R	E	R/E	Tier I	CS	CS
- Refineries	R	R	R/E	E	Tier I	CS	CS
iii. Combined	IE	IE	IE	IE	Tier I	CS	CS

Directorate of Mining (2014)

R = emission figures in the national emission inventory are based on figures reported by the plants. E = emission figures are estimated by Statistics Norway (Activity data * emission factor). IE = Included elsewhere, NO = Not occurring, CS = Country specific, PS = Plant specific, Tier = the qualitative level of the methodology used, C=Corinair, OTH=Other.

Venting and leakages of CO₂ are estimated using IPCC standard emission factors. Notably, these factors result in relatively high CO₂ emissions compared to CH₄ emissions from the same sources. This could suggest that the IPCC standard factors are too high for Norwegian country specific conditions. However, no data are currently available to establish country-specific emission factors for Norway.

Indirect emissions of CO₂ from emissions of CH₄ and NMVOC are reported separately in CRT Table 6.

3.3.2.1.2 QA/QC

The specific QA/QC carried out for offshore oil and gas extraction is described in Annex 4. Emissions covered by the EU ETS are verified annually. In addition, the emissions are checked both by the case handler and by the Norwegian Environment Agency's inventory team.

3.3.2.2 *Diffuse emissions and venting from oil and gas exploration and production*

This section describes fugitive emissions of CH₄ and NMVOC reported from upstream oil and gas activities, and how these emissions are allocated to one of the four source categories 1B2aii (Oil production diffuse emissions), 1B2bii (Natural gas production diffuse emissions), 1B2c(Venting)i (Oil) and 1B2c(Venting)ii (Gas). No venting emissions take place from exploration activities.

The methane and NMVOC emissions from the upstream oil and gas activity is either caused by dedicated natural gas vents, by fugitive (diffuse) emissions leaking out from valves, fittings and instruments in the hydrocarbon containing process systems, or from accidental leakages. The major source is cold venting. Venting occurs at oil fields, gas fields and combined oil/gas fields and depends on planned system design and measures implemented.

To improve the understanding of fugitive emissions of methane and NMVOC from the upstream oil and gas facilities on the Norwegian continental shelf, the Norwegian Environment Agency conducted a study in October 2014 to March 2016 (Add Novatech AS 2016a; Add Novatech AS 2016b; Add Novatech AS 2016c; Husdal et al. 2016). The production facilities on the Norwegian continental shelf were assessed individually to identify and map their respective sources of methane and NMVOC emissions.

The study provided emission estimation methods for the identified emission sources (Add Novatech AS 2016b). For 9 minor sources, emissions are estimated as a general addition to the emissions from an installation, as recommended by (Husdal et al. 2016).

Many emissions from the predominant emission sources can theoretically be recycled. Recovery of such waste gases is a well-proven technique. Recovery is the chosen disposal solution for many of these emission sources on some installations. Technical or cost-related restrictions on the facilities without recovery may have made such action unfavorable.

Individual permits pursuant to the Pollution Control Act regulate all offshore oil and gas fields. Installations built after 2005 have specific methane emission limit values (ELV) in their permits. NEA has started a process aiming to set methane ELVs in permits for installations built before 2005, since sufficiently good emission data now are available based on a new reporting regime implemented in 2017, ref. section 3.3.2.1.

The source specific quantification and reporting of emissions provides a firm basis for assessment of measures for emission reductions.

3.3.2.2.1 Methodological issues

Emissions of CH₄ and NMVOC from cold venting and diffuse emissions for each oil and gas production field are reported annually to the Norwegian Environment Agency from the field operators.

A new method for calculation and reporting of venting and diffuse emissions from offshore oil and gas production fields is used in the field operators' annual reports from 2017 onwards. For the years 1990-2016 emission estimates are reported. The time series is assumed to be consistent throughout the reporting period.

Methodology 2017-present

For some vents, the emissions are measured using flow meters. Emissions that cannot be measured are determined using emission factors, by process simulation, using tailor-made software or by other adequate methods. All quantification methods used to establish vented methane emission inventories are subject to uncertainties, ranging from a few percent to several tens of percent for single sources. The largest percentages of uncertainty are those for emission sources with small emissions.

Diffuse emissions (leaks of natural gas directly into the atmosphere) are quantified according to the "OGI leak / no leak" method, where high-sensitivity IR cameras are used to detect small gas leaks (Offshore Norge 2023). All the facilities on the NCS are scanned with such cameras on an annual or semi-annual basis. This is also the case with the onshore oil and gas facilities (refineries and gas terminals).

Dedicated activity data are used by operators to estimate and report venting and diffuse emissions from various emission sources. E.g., for the produced water degassing tank, AD is the accumulated quantity of produced water through the degassing point during the reporting period. For common vents, the volume of natural gas and waste gas from source quantified by source may be used. For drilling, the number of wellbores serves as AD. See guidelines in (Offshore Norge 2023) and further elaboration in Husdal et al. (2016). Only emissions are reported by the operators.

Dedicated emissions factors are used for estimating and reporting venting and diffuse emissions from individual sources, e.g. small gas leaks, drilling and produced water (grams methane and grams NMVOC per m³ produced water through the degassing point and per bar pressure drop from nearest upstream degassing point), see guidelines in Offshore Norge (2023) and further elaboration in Husdal et al. (2016)

Table 3-34 and Table 3-35 illustrate the details in the annual reported emissions from the operators. Small discrepancies between CRT data and these tables are due to difference in updating status, etc.

Table 3-34: Venting emissions from offshore oil and gas production in 2024.

Source ID	Main source	Sub source	CH ₄ emissions (tonnes)	NMVOC emissions (tonnes)	Emissions of CO ₂ equivalents (tonnes) ²⁰
1.1	Measured emissions	Measured common vent	1 253	1 425	37 912
10.1	Triethyleneglycol (TEG) regeneration	TEG degassing tank	0	0	0
10.2	Triethyleneglycol (TEG) regeneration	TEG regenerator	31	385	1 707
10.3	Triethyleneglycol (TEG) regeneration	Stripping gas	265	565	8 608
20.1	Monoethyleneglycol (MEG) regeneration	MEG degassing tank	0	18	43
20.2	Monoethyleneglycol (MEG) regeneration	MEG regenerator	2	12	91
20.3	Monoethyleneglycol (MEG) regeneration	Stripping gas	0	0	0
30.1	Amine regeneration	Amine degassing tank	0	0	0
30.2	Amine regeneration	Amine regenerator	0	0	0
40.1	Produced water handling	Produced water degassing tank	220	59	6 224
40.2	Produced water handling	Flotation tank / CFU	250	139	7 246
40.3	Produced water handling	Flotation gas	0	0	0
40.4	Produced water handling	Discharge caisson	1 166	294	32 991
50.1	Centrifugal compressor sealant oil	Degassing pots	0	0	0
50.2	Centrifugal compressor sealant oil	Sealing oil retention tank	2	0	44
50.3	Centrifugal compressor sealant oil	Sealing oil storage tank	1	1	28
60.1	Pistonne compressor	Separator chamber	17	7	479
60.2	Pistonne compressor	Crank shaft housing	0	0	0

²⁰ Emissions of CO₂ equivalents include indirect CO₂ emissions from CH₄ and NMVOC, using conversion factors of 2,75 t CO₂/t CH₄ and 2,2 t CO₂/t NMVOC. The NMVOC conversion factor is a generic factor for indirect CO₂ calculations.

Source ID	Main source	Sub source	CH ₄ emissions (tonnes)	NMVOC emissions (tonnes)	Emissions of CO ₂ equivalents (tonnes) ²⁰
70.1	Dry compressor seals	Primary seal gas	776	432	22 474
70.2	Dry compressor seals	Secondary seal gas	41	14	1 156
70.3	Dry compressor seals	Leakage of primary seal gas to secondary vent	73	48	2 142
80.1	Flare gas that does not burn	Extinguished flare and ignition of flare	740	757	22 206
80.2	Flare gas that does not burn	Non-flammable flare gas	21	14	620
80.3	Flare gas that does not burn	Inert gas flushed open flare	224	108	6 451
100.1	Purge and blanket gas	Purge and blanket gas	132	90	3 856
110.1	Gas analysers and test stations	Gas analysers and test stations	56	20	1 602
130.1	Storage tanks for crude oil at FPSOs	Gas freeing in connection with tank inspection	87	228	2 906
130.2	Storage tanks for crude oil at FPSOs	Abnormal operating situation	41	529	2 305
140.1	Gas freeing of process systems	Gas freeing of process systems	11	10	339
160.1	Cold venting from turbines	Cold venting from turbines	5	1	141
Totals			5 414	5 157	161 573

Table 3-35: Diffuse emissions from offshore oil and gas production in 2024.

Source ID	Main source	Sub source	CH ₂ emissions (tonnes)	NMVOC emissions (tonnes)	Emissions of CO ₂ equivalents (tonnes)
90.1	Leaks in the process	Larger gas leaks	60	101	1 898
90.2	Leaks in the process	Small gas leaks	557	419	16 391
120.1	Drilling	Drilling	37	37	1 116
900.1	General addition	FPSO	17	27	534

Source ID	Main source	Sub source	CH ₂ emissions (tonnes)	NMVOC emissions (tonnes)	Emissions of CO ₂ equivalents (tonnes)
910.1	General addition	Fixed facilities	1 409	1 298	41 957
Totals			2 081	1 882	61 895

The allocation of reported emissions into the source categories for diffuse emissions and venting relevant for upstream oil and gas activities is described below.

Emissions from sources listed in Table 3-34 are categorised as "Venting emissions" and allocated to CRT 1B2c(Venting)i (Oil) or 1B2c(Venting)ii (Gas), depending on whether the installation from which they occur is classified as an "oil" or "gas" installation. (See below).

Similarly, emissions from sources listed in Table 3-35 are categorised as "Diffuse emissions" and allocated to CRT 1B2b2 or 1B2a2, depending on the classification of the installation. Additionally, the emissions may be allocated to 1B2a1 if the reported activity from which the emissions occur is "Exploration". All exploration activities are categorised as "Oil Exploration" (1B2a1).

Emissions are reported on facility level. Facilities are categorized as follows:

1. Facilities with any reported production of oil in a given year, are categorised as "Oil" for that year. (Regardless of whether the facility also produces gas or condensate.) Facilities with any reported production of gas or condensate, but no production of oil, are categorised as "Gas".
2. Some facilities have no reported production in any year. If such a facility is associated with a field with any reported production of oil, it is categorized as "oil". If the associated field has no reported production of oil, but does report production of gas or condensate, the facility is categorized as "Gas".
3. The very few facilities remaining are categorized as "Oil".

Diffuse emissions from "Oil" installations are allocated to source category 1B2a2, and venting emissions to source category 1B2c(Venting)i. Diffuse emissions from "Gas" installation are allocated to source category 1B2b2, while venting emissions are allocated to 1B2c(Venting)ii.

Table 3-36: Allocation of reported emissions.

Activity	Type of installation	Type of emission	Source category
Exploration	Oil	Diffuse emissions	1B2a1
Exploration	Oil	Venting	1B2c(Venting)i*
Production	Oil	Diffuse emissions	1B2a2
Exploration	Oil	Diffuse emissions	1B2a1
Production	Gas	Diffuse emissions	1B2b2
Production	Gas	Venting	1B2c(Venting)ii
Production	Oil	Venting	1B2c(Venting)i

1990-2016 time series

Emissions are calculated by multiplying relevant EFs by activity data. EFs for all source categories are based on IEF for the years 2017-2021.

1B2a1 (Diffuse emissions from oil exploration):

$$EF_{1B2a1} = \text{Sum of emissions in 1B2a1 2017-2021} / \text{Sum of number of exploration wellbores 2017-2021}$$

1B2b2 (Diffuse emissions from gas production on gas installations):

$$EF_{1B2b2} = \text{Sum of emissions in 1B2b2 in 2017-2021} / \text{Sum of gas production on gas facilities (in Sm}^3\text{) 2017-2021}$$

1B2c(Venting)ii (Venting emissions from gas production on gas installations):

$$EF_{1B2c(Venting)ii} = \text{Sum of emissions in 1B2c(Venting)ii in 2017-2021} / \text{Sum of gas production on gas facilities (in Sm}^3\text{) 2017-2021}$$

The method for allocating emissions between oil or gas production relies on categorising facilities as either oil or gas installations (see above). This entails that emissions from gas production on oil installations are included in "Oil emissions" (In source categories 1B2a2 or 1B2c(Venting)i). We assume that implied emission factors for gas production on gas facilities are also applicable as emission factors for gas production on oil facilities.

1B2a2 (Diffuse emissions from gas production on oil installations):

$$EF_{1B2a2(gas\ production)} = EF_{1B2b2} = \text{Sum of emissions in 1B2b2 in 2017-2021} / \text{Sum of gas production on gas facilities (in Sm}^3\text{) 2017-2021}$$

1B2c(Venting)i (Venting emissions from gas production on oil installations):

$$EF_{1B2c(Venting)i(gas\ production)} = EF_{1B2c(Venting)ii} = \text{Sum of emissions in 1B2c(Venting)ii in 2017-2021} / \text{Sum of gas production on gas facilities (in Sm}^3\text{) 2017-2021}$$

Additionally, EFs for oil production on oil facilities need to be derived. This is done by calculating the emissions from gas production on an oil facility using the EFs for gas and then subtracting these emissions from the total emissions from the facility. EF for oil production on the facility is then derived as remaining emissions divided by oil production on the facility, as described in the two equations below.

1B2a2 (Diffuse emissions from oil production on oil facilities):

$$EF_{1B2a2(oil\ production)} = (Sum\ of\ emissions\ in\ 1B2a2\ 2017-2021 - EF_{1B2b2} * sum\ of\ gas\ production\ on\ oil\ facilities) / Sum\ of\ oil\ production\ on\ oil\ facilities\ (in\ Sm^3)\ 2017-2021$$

1B2c(Venting)i (Venting emissions from oil production on oil facilities):

$$EF_{1B2c(Venting)i(oil\ production)} = (Sum\ of\ emissions\ in\ 1B2c(Venting)i\ 2017-2021 - EF_{1B2c(Venting)ii} * sum\ of\ gas\ production\ on\ oil\ facilities) / Sum\ of\ oil\ production\ on\ oil\ facilities\ (in\ Sm^3)\ 2017-2021$$

The necessary activity data for production on facility level are available only for the period 2000-2021. These AD are expressed in terms of gross production Sm^3 . For period 1990-1999 only the yearly net production data (for the Norwegian continental shelf) are available. We have therefore decided to derive the yearly gross production for 1990-1999 from the yearly net production for 1990-1999, based on their relationship in the period 2000-2021 during which we have data on both.

Yearly gross oil production:

A strong linear relation has been found to exist between the yearly gross production and net production of oil between 2000 and 2021. A simple linear regression is therefore deployed:

$$\text{Yearly gross oil production} = a * \text{yearly net oil production} + b$$

Yearly gross gas production:

Linear regression yields gross gas productions which are relatively invariable and independent of net productions for period 1990-1999. This seems unlikely since the total net production of oil and gas has risen significantly in this period. Given the substantial production increase and rapidly changing circumstances, we have chosen to derive gross gas productions as a fraction of net oil + gas productions for period 1990-1999 and selected 2000 as the base year for calculation. So, for 1990-1999, we have:

$$\text{Yearly gross gas production} = \left(\frac{\text{gross gas production}}{\text{net oil} + \text{gas production}} \right)_{\text{year 2000}} * \text{yearly net (oil + gas) production}$$

Yearly gross gas production on gas facilities:

The yearly gross gas productions need to be split between productions on oil facilities and gas facilities. This is achieved by a simple linear regression since the ratio between gross

gas production on gas facilities and total gross gas production remains relatively stable in period 2000-2021. For 1990-1999 we therefore have:

Yearly gross gas production on gas facilities = c * yearly gross gas production + d

The method now used to extrapolate emissions from 2016 back to 1990 does not consider improvements in technology during the period. We have assumed same emissions per unit produced oil equivalent for the whole time series. Technological improvements will have led to reduced emissions and thus there is a risk that the emissions early in the time series are underestimated. Due to lack of data, we have not been able to adjust the emissions in the first years of the inventory.

Verification

Implied emission factors from the reported data have been compared to the Tier 1 emission factors given in IPCC (2006), as well as with factors given in IPCC (2019), where possible (Table 3-37). Compared to IPCC 2006, the Norwegian emission factors are lower for the source category 1B2a2 (diffuse emissions from oil production), but higher for 1B2b2 (Diffuse emissions from gas production) and 1B2c(Venting)i (Venting emissions from gas production). Compared to IPCC 2019 refinement, all Norwegian emission factors are lower.

Table 3-37: Comparison of emission factors.

Source category	IEF Norway 2017-2021	EF Tier 1 IPCC 2006	EF Tier 1 IPCC 2019	IEF Norway 2017-2021	EF Tier 1 IPCC 2006	EF Tier 1 IPCC 2019	Units
	CH ₄			NMVOC			
1B2a1	0.0307	-	-	0.0307	-	-	Tonnes per well
1B2b1	-	-	-	-	-	-	
1B2b2	0.00128	0.38	0.676	0.00137	0.091	0.161	Tonnes per mill Sm ³ gas produced on gas installations
1B2a2	0.00346	0.00059	0.492	0.00328	0.00074	0.212	Tonnes per thousand Sm ³ oil produced
1B2c(Venting)i	0.0372	0.72	1.96	0.0413	0.43	0.848	Tonnes per thousand Sm ³ oil produced
1B2c(Venting)ii	0.0242	-	2.26	0.0302	-	0.539	Tonnes per mill Sm ³ gas produced on gas installations

Comparisons of reported and estimated CH₄ and NMVOC venting/diffuse emissions to estimates using IPCC 2006 default factors are shown in Figure 3.22 and Figure 3.23. Emissions from exploration have not been compared, as default EFs either do not exist, or are not given at the relevant source level (IPCC 2006 gives EFs for venting and flaring combined). Also, we have not been able to compare emissions from venting in oil production with default EFs from IPCC 2006. This is because even though IPCC 2006 provides EFs for venting from oil production, it does not provide such for gas production. This leaves us unable to estimate emissions from gas production on the combined oil and gas production fields under 1B2c(Venting)i using default factors.

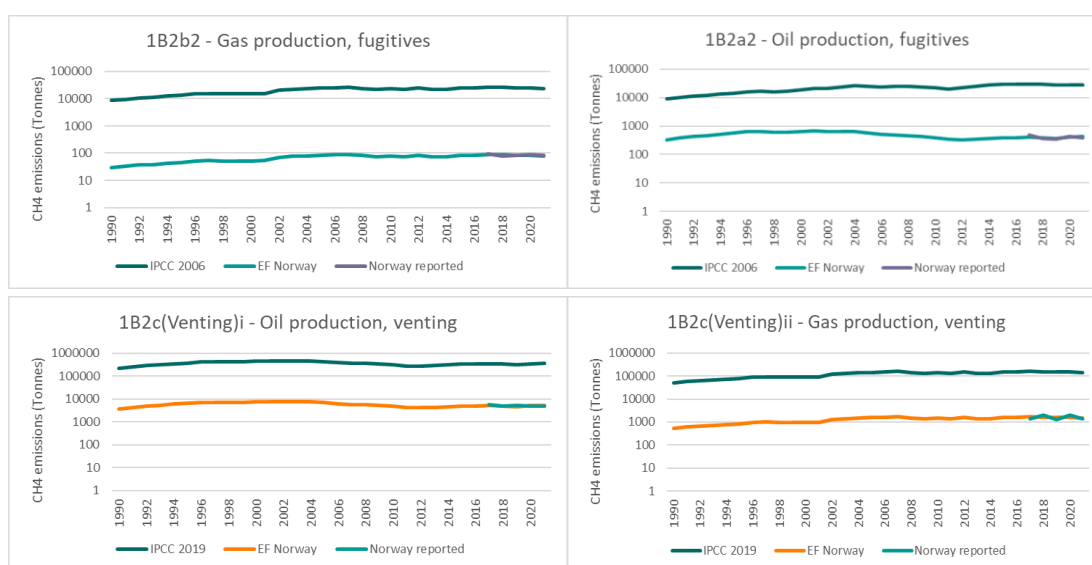
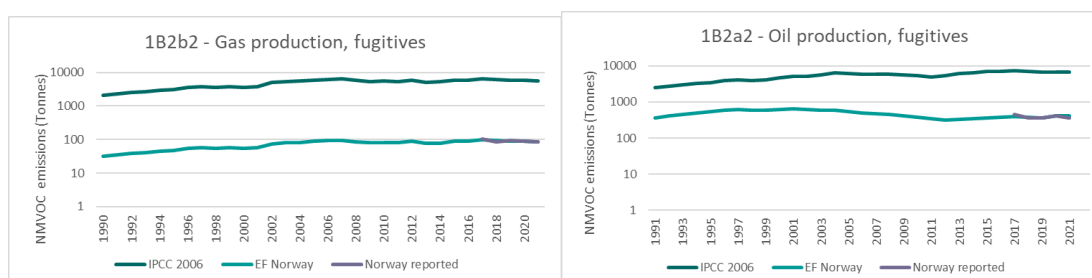


Figure 3.22: CH₄ emissions IPCC default factors and country specific emission factors, respectively.



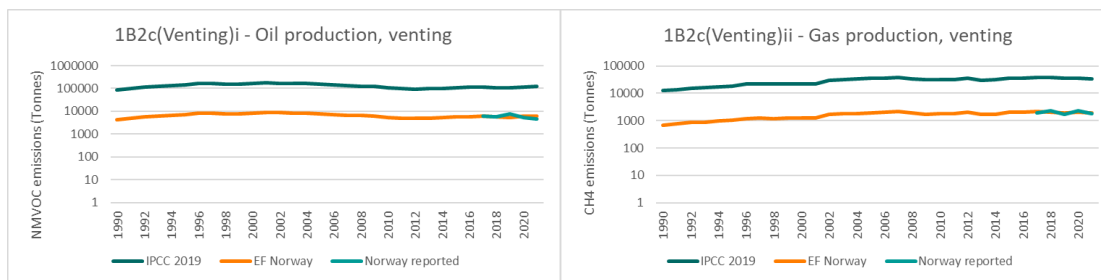


Figure 3.23: NMVOC emissions using IPCC default factors and country specific emission factors, respectively.

The comparison shows that emissions are low relative to the estimates using IPCC default factors. The CH₄ reported emissions are 0.3-3.9% of emission values using IPCC default factors. For NMVOC reported emissions are 1.5-15.4% of values found using IPCC default factors.

The venting rate is low due to strict security regulations. To minimize emissions from venting, several technical measures have been implemented on the offshore production facilities.

Measures implemented include operational optimization, recovery of waste gases by returning it back to the process or to flare. These measures are further described in Add Novatech AS (2016a) and Geir Husdal et al. (2016). Recovery of waste gases is BAT for new field development projects and is re-evaluated when modifications on existing field. The BAT regulation in Norway also includes requirements on implementing leak detection and repair (LDAR) programs to reduce fugitive emissions.

3.3.3 Fugitive Emissions from Oil, 1.B.2.a

3.3.3.1 Description

This section describes emissions from transport (loading and storage of crude oil), refining of oil and distribution of gasoline. For emissions from exploration (1B2a1) and production (1B2a2), see section 3.3.2.2.

Transport of crude oil – 1B2a3

Emissions from loading and storage of crude oil produced on the Norwegian continental shelf (NCS) are included in the Norwegian inventory. This includes oil loaded from oil fields that span both the Norwegian and United Kingdom's continental shelf when loading takes place on the Norwegian part of the shelf.

Loading and storage of crude oil on the oil fields offshore and at oil terminals onshore causes direct emissions of CH₄ and indirect emissions of CO₂ from oxidized NMVOC and CH₄. Especially during loading, volatile organic compounds (VOCs) are released from the ship's cargo tanks to the atmosphere.

When shuttle tankers are loaded with oil from offshore installations, the atmosphere originally present in the empty cargo tanks will be evacuated as the oil is filled. The evacuated gas contains VOC-gas originally in the tanks prior to filling and VOC-gas that is evaporated from the loaded oil. A considerable effort has been made in reducing the amounts of such evacuated VOC gas to be emitted to atmosphere. This has resulted in several technologies implemented for VOC treatments on the ships. About 20 ships are used for in the Norwegian sector. Each ship is equipped with a VOC treatment system. The selected system varies from ship to ship.

Refining/storage – 1B2a4

Non-combustion emissions from Norway's oil refineries include CO₂, CH₄ and NMVOC. It is important to have in mind that the source category 1.B.2.a.iv also includes CO₂ emissions from catalyst regeneration (coke burn off) at the catalytic cracker at one refinery, see section 3.3.3.4.

Distribution – 1B2a5

Gasoline distribution causes emissions of NMVOC, which lead to indirect CO₂ emissions. These emissions are reported in table 6. Activity data are reported under 1B2a5.

Fugitive emissions from oil (1B2a) is a key category for CO₂ both level in 1990 and 2002 and trend, following approach 2. It is a key category for CH₄ for level in 1990 and trend.

3.3.3.2 Methodological issues

Transport – 1B2a3

The general method for calculating emissions of CH₄ and NMVOC from offshore loading and storage of crude oil is:

field specific amount of crude oil loaded and stored multiplied with field specific emission factors.

For the years 1990-2002 the emissions of CH₄ and NMVOC are calculated by Statistics Norway. The calculation is based on the field-specific amounts of crude oil loaded and stored, multiplied with field specific emission factors. Field specific activity data and emission factors used in the calculation were reported annually by the field operators. In addition, emission figures were reported annually to the Norwegian Environment Agency and used in the QC of the emission figures calculated by Statistics Norway.

Since 2003, emissions of CH₄ and NMVOC from loading and storage of crude oil on shuttle tankers included in the GHG Inventory are based on reported emission figures from the oil companies. Emissions, activity, and emissions factors are reported from each field operator. Although the method of obtaining data changed in 2002, the figures will be comparable with the corresponding ones for 1990-2002.

Norway considers the method for calculating the CH₄ and NMVOC emissions from loading and storage of crude oil offshore is consistent over the time series.

For the two Norwegian oil terminals onshore, the emissions from loading of crude oil are reported annually from the terminals to the Norwegian Environment Agency. At one of the terminals, a VRU for recovering NMVOC was installed in 1996, and at the other, a VRU was installed in 2008. The efficiencies of the VRU's are about 80% and 90%, respectively. The calculation of the emissions of CH₄ and NMVOC at both terminals is based upon the amount of crude oil loaded and oil specific emission factor dependent of the origin of the crude oil loaded.

The reported indirect CO₂ emissions from the oxidation of CH₄ and NMVOC in the atmosphere for this source category is calculated by Statistics Norway, see Chapter 9.

Refining/Storage – 1B2a4

The direct emissions of CO₂, CH₄ and NMVOC included in the inventory are reported by the refineries to the Norwegian Environment Agency. The direct CO₂ emissions reported in this sector originate from catalyst regeneration (coke burn-off) in the catalytic cracking unit and the coke calcining kilns at one refinery, as well as fugitive emissions from the gas stream. The emissions from the catalytic cracker are included in the Norwegian ETS and the emissions reported in source category 1.B.2.a.iv are therefore regarded being of high quality.

Statistics Norway calculates the indirect CO₂ from oxidized CH₄ and NMVOC.

Distribution – 1B2a5

NMVOC emissions from gasoline distribution are calculated from the amount of gasoline sold and emission factors for loading of tankers at gasoline depot, loading of tanks at gasoline stations and loading of cars.

3.3.3.3 Activity data

Transport – 1B2a3

The amount of oil buoy loaded and stored on vessels offshore is reported by the field operators to the Norwegian Environment Agency (NEA). From 2003 and onwards, the inventory is based on data reported to the NEA.

Before 2003, Statistics Norway gathered data on amounts of crude oil loaded at shuttle tankers and stored on storage vessels from the Norwegian Offshore Directorate. The data from each field are reported monthly by the field operators to the Norwegian Offshore Directorate.

The amount of oil loaded at onshore oil terminals is also reported annually to the Norwegian Environment Agency.

The amount of crude oil buoy loaded and stored on vessels offshore and crude oil loaded and unloaded at onshore oil terminals is reported for all years in source category 1B2a3, as recommended by ERT in previous review reports.

Refining – 1B2a4

The amount of crude oil refined included in the CRT equals the amount of crude oil converted in refineries from the Energy balance.

Distribution – 1B2a5

Gasoline sold is annually collected in Statistics Norway's sale statistics for petroleum products.

3.3.3.4 Emission factors

Transport – 1B2a3

From 1990 to 2002 emission factors used in the calculation of CH₄ and NMVOC emissions from loading and storage of crude oil offshore and onshore were field/plant specific and were reported to the Norwegian Environment Agency. The Norwegian Environment Agency forwarded the emission factors to Statistics Norway that calculated the emissions.

From 2003, the inventory is based on reported emissions from the operators using field-specific factors. The emission factors used by the field operators in their calculations is reported to the Norwegian Environment Agency.

The evaporation rate varies from field to field and over time, and the emission factors are dependent on the composition of the crude oil as indicated by density and Reid vapour pressure (RVP). For most fields, the VOC evaporation emission factors are obtained from measurements, which include emissions from loading and washing of shuttle tankers. The CH₄ content of the VOC evaporated is also measured so that total emissions of VOC are split between CH₄ and NMVOC.

Loading onshore: Norway's two oil terminals have both installed VRUs, which reduce NMVOC emissions from loading of ships at the terminals by about 80–90%. However, the VRU technology is not designed to reduce methane and ethane emissions.

Refining/Storage – 1B2a5

The CO₂ emissions from the catalytic cracker during catalyst regeneration are calculated as described above under Methodological issues. The CO₂ IEF in CRT is calculated from the emissions from catalytic cracking at one refinery and the amount of crude oil refined at all refineries.

The emission factor used in the calculation of methane emissions from the largest refinery is based upon measurements using DIAL (Differential absorption LIDAR) and FLIR.

Distribution – 1B2a5

Emission factor for NMVOC from filling gasoline into cars used in the calculations are from EEA (2001) and is 1.48 kg NMVOC/tonne gasoline.

3.3.3.5 Uncertainty assessment and time-series consistency

The uncertainty in the emission factors of methane from *oil loading* (Rypdal & Zhang 2000) and NMVOC (Rypdal & Zhang 2001) is estimated to be $\pm 40\%$ and in the activity data $\pm 3\%$.

A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category.

3.3.3.6 Source-specific QA/QC and verification

See annex 4 on QA/QC of point sources.

Statistics Norway's calculated emissions for 1990-2002 are compared with the emission data that the field operators report to the Norwegian Environment Agency. No discrepancy of significance between the two emission calculations was found.

Since 2003 the Norwegian Environment Agency has annually compared data reported by the oil field operators with the annual report from the VOC Industry Cooperation. If discrepancies are found between the two datasets, they are investigated, and corrections are made if appropriate. If errors are found, the Norwegian Environment Agency contacts the plant to discuss the reported data, and changes are made if necessary.

3.3.3.7 Category-specific recalculations

Revised data on CO₂, CH₄, and NMVOC emissions have been incorporated for the years 1990-2023. This update results from small adjustments in reported emission figures for later years, and consequentially small adjustments in the emission factors for earlier years.

3.3.3.8 Category-specific planned improvements

Norway has started work to establish a time series for CO₂ emissions from exploration, see chapter 10.4.

3.3.4 Fugitive Emissions from Natural Gas, 1.B.2.b

3.3.4.1 Description

This chapter describes fugitive emissions from the gas terminals and emissions from distribution of natural gas. For 1.B.2.b.i Exploration and ii Production see section 3.3.2.2.

The Norwegian gas system has two main parts: The extraction and export sector, including processing terminals and transmission pipelines handling large gas volumes, and a much smaller domestic network. Emissions from both transmission, processing, distribution and storage within the main extraction/export system are reported in 1B2b6 Other. All emissions from the domestic system are reported in 1B2b5 Distribution.

The rationale for this allocation is that emissions from transmission and storage in the extraction and export sector cannot be split from emissions from extraction and processing emissions at integrated facilities. The emissions from the domestic system might be split. However, the data in 1B2b4 *Transmission and storage* would then be misleading, as it would cover only a small fraction of Norwegian emissions for this activity. Thus, emissions from 1B2b4 are reported as "included elsewhere".

3.3.4.2 Methodological issues

Other (Gas terminals) – 1B2b6

Fugitive emissions of CH₄ and NMVOC from gas terminals are reported annually to the Norwegian Environment Agency.

The methane and NMVOC emissions are either caused by point sources (e.g., dedicated natural gas vents, wastewater treatment plants, storage tanks and loading of hydrocarbon products on vessels), by diffuse emission from valves, fittings and instruments in the hydrocarbon containing process systems, or from accidental leakages.

The emissions are calculated based on monitoring and/or calculation. Diffuse emissions from equipment units are recorded in the leak detection and maintenance program. The number of sealed and leaky equipment units is collected two times a year and the average number of the counting is used in the calculation. It is assumed in the calculation figures that a leakage has lasted the whole year if not the opposite is documented.

Venting and diffuse emissions of CO₂ are estimated using IPCC default emission factors.

Gas distribution – 1B2b5

Norway has chosen to calculate data for gas distribution based on the default emission factor from the IPCC 2006 Guidelines. This was decided as conclusion to the discussion with the expert review team during the review of NIR 2016.

Only emissions of CH₄ are reported in 1B2b5. CO₂ emissions are reported as "included elsewhere". According to the energy statistics, the total consumption data refers to amounts fed into the domestic transmission and distribution systems. The same activity data are used for calculating emissions from combustion of the natural gas. Any carbon leakage before combustion would thus be included as CO₂ in the combustion emissions in 1A. This applies to both direct emissions of CO₂ and indirect CO₂ emissions from CH₄ leakage. Direct emissions of CO₂ are likely to be very small: Using the default values from IPCC (2006) they would be 25 tonnes or less throughout the time series. There was no activity in this sector until 1994.

3.3.4.3 Activity data

Other (Gas terminals) – 1B2b6

Activity data are reported yearly from the gas terminals to the Norwegian Environment Agency, pursuant to the Pollution Control Act.

Gas distribution – 1B2b5

Data on the use of natural gas from the energy statistics are used. From the total domestic consumption including energy sectors the following consumption is excluded:

- Consumption in the gas extraction and processing industry, offshore and onshore, whose emissions from transport is included in 1.B.2.b.vi *Other*
- Consumption for methanol production, whose emissions from transport are included in 2.B.8.a *Methanol*. The plant has its own gas pipeline from an offshore gas field, and emissions from transmission are included with other process emissions at the plant.

The remaining consumption of natural gas is distributed to final consumption by pipeline or LNG systems. An increasing fraction of the consumption is LNG.

The same activity data are used for transmission and distribution. The factors from IPCC (2006) shown below refer to amount of *marketable gas* (transmission/storage) and *utility sales* (distribution).

3.3.4.4 Emission factors

Other (Gas terminals) – 1B2b6

Reported emissions of CH₄ and NMVOC are used. Venting and diffuse emissions of CO₂ are estimated using IPCC standard emission factors.

Gas distribution – 1B2b5

Emission factors from IPCC (2006) are used for the emission estimates, as shown in Table 3-38. The factors refer to pipeline distribution. As no tier 1 methodology was available for LNG distribution, and data for a tier 2 or 3 approach could not be obtained, the factors are used for all Norwegian activity as defined above.

Table 3-38: Emission factors for gas distribution.

Category	Subcategory	Emission source	Value	Selected value	Unit	Uncertainty
Gas Transmission and Storage	Transmission	Fugitives	6.6 E-05 – 4.8 E-04	2.73 E-04	Gg per 10 ⁶ m ³ of marketable gas	±100%
		Venting	4.4 E-05 – 3.2 E-04	1.82 E-04	Gg per 10 ⁶ m ³ of marketable gas	±75%
	Storage	All	2.5 E-05	2.5 E-05	Gg per 10 ⁶ m ³ of marketable gas	-20 - 500%
Gas Distribution	All	All	1.1 E-03	1.1 E-03	Gg per 10 ⁶ m ³ of utility sales	-20 - 500%

Source: IPCC (2006), vol 2 Energy, table 4.2.4

3.3.4.5 Uncertainty assessment and time-series consistency

The uncertainty in the emission factors for fugitive methane from natural gas is estimated to be -50/+100%. The uncertainty in the activity data $\pm 3\%$.

A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category.

3.3.4.6 Source-specific QA/QC and verification

See annex 4 on QA/QC of point sources.

3.3.4.7 Category-specific recalculations

Revised data on CO₂, CH₄, and NMVOC emissions have been incorporated for the years 1990-2023. This update results from small adjustments in reported emission figures for later years, and consequentially small adjustments in the emission factors for earlier years.

3.3.4.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.3.5 Fugitive Emissions from Venting, 1.B.2.c Venting

3.3.5.1 Description

This chapter contains some information on venting from upstream oil and gas activities, however, most information is to be found in chapter 0.

CO₂ from venting and flaring is according to approach 2 a key category with respect to level in 1990 and 2024 and trend. CH₄ from venting and flaring is a key category with respect to level in 1990 and 2024.

3.3.5.2 Methodological issues

See chapter 3.3.2

3.3.5.3 Activity data

See chapter 3.3.2

3.3.5.4 Emission factors

See chapter 3.3.2

3.3.5.5 Uncertainty assessment and time-series consistency

The uncertainty in CH₄ and NMVOC emissions from venting and diffuse emissions and, hence, in the indirect emissions of CO₂, is much higher than for flaring.

All uncertainty estimates for this source are given in Annex 2.

3.3.5.6 Source-specific QA/QC and verification

See annex 4 on QA/QC of point sources.

Statistics Norway and the Norwegian Environment Agency perform internal checks of the reported data for venting from the field operators. Some errors in the time-series are usually found and the field operators are contacted, and changes are made.

3.3.5.7 Category-specific recalculations

There are recalculations in this source category this year. See chapter 10.1.1 for details.

3.3.5.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.3.6 Fugitive Emissions from Flaring, 1.B.2.c Flaring**3.3.6.1 Description**

The sector 1.B.2.c Flaring includes emissions from flaring of gas offshore during extraction and production, at gas terminals and at refineries.

Most of the emissions in sector 1.B.2.c Flaring come from flaring of natural gas offshore (during well testing, extraction, production, and pipeline transport), at gas terminals, and flaring of refinery gas at the refineries. There is some flaring of oil in connection with well testing – amounts flared and emissions are reported to the Norwegian Environment Agency.

The Petroleum Act states that flaring is prohibited unless for safety reasons. Permits are granted on a case-by-case basis on technical and safety grounds. This is a main reason why the flare gas volumes emitted from upstream oil and gas installations in Norway are small compared to many other countries.

The CO₂ Tax Act introduced in 1991 is a tax on the burning of oil and gas in the offshore petroleum industry, giving rise to further reductions of flaring and cold venting. Another instrument is the *Greenhouse Gas Emission Trading Act*.

In 2024, CO₂ equivalents emissions from flaring offshore contributed with 1% of the total GHG emissions in Norway. The emissions were 69% lower in 2024 than in 1990, whereas the oil and gas production was 94% higher (Figure 3.24). The reduction in emissions from flaring is partly explained by the introduction of tax on gas flared offshore and by the prohibition of flaring offshore for other than safety reasons. The amount of gas flared may fluctuate from year to year due to variation of start-ups, maintenance, and interruption in operation. To minimize emissions from flaring technical measures have been implemented. The leap in emissions from offshore flaring in 1999-2001 occurred because several oil/gas fields came into production in that period.

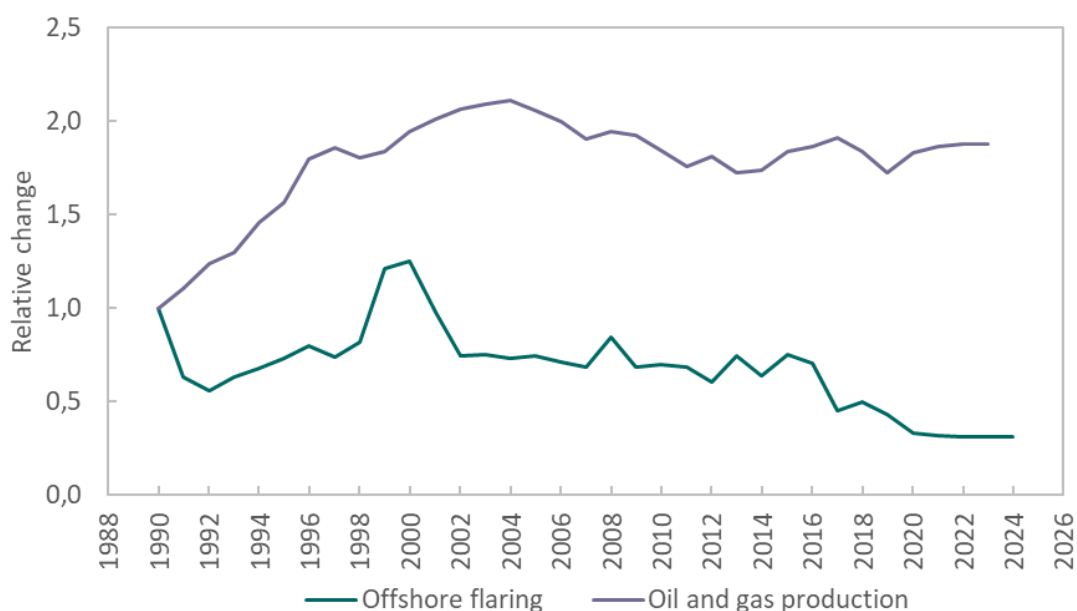


Figure 3.24: Relative change in CO₂ emissions from flaring offshore and total production of oil and gas (including NGL and condensate). 1990=1. Source: Statistics Norway/Norwegian Environment Agency.

Venting and flaring is according to Approach 2 a key category with respect to CO₂ for both level in 1990 and 2024 and trend, and for CH₄ with respect to level in 1990 and 2024.

3.3.6.2 *Methodological issues*

Flaring of gas offshore - CO₂

The general method for calculating CO₂ emissions from flaring offshore is the amount of gas flared at each field multiplied by field specific emission factors.

Gas specific data about the gas flared is not available for all flares and years, leading to variation in the calculation method over the years.

The EU ETS data are reported annually to the Norwegian Environment Agency. From 2008, emissions of CO₂ from flaring used in the inventory is estimated as follows:

- Reported EU ETS emissions from flares based on CMR data are used unchanged
- Fields where some flares are with, and some are without CMR data: An average EF for the field based on the CMR data for 2014 is calculated and used for the flares using default EF. For the first years with EU ETS this method is often used for the fields as a whole and thereafter up to 2014 to a lesser degree
- Gas fields with flaring but without any CMR data in 2014: The average emissions factor for 2014 of 2.694 CO₂ per Sm³ based on all CMR data is used.

For the years after 2014, the same procedure is used for each new year, but the time series is not recalculated annually.

For the period 1990-2007 the emissions are estimated from the amount of gas flared per field and emission factor based on EU ETS data for 2013. See section 3.3.6.4 for information about the emission factors that are used.

We consider that the method is consistent for all years.

Flaring of gas offshore - CH₄ and N₂O

Estimated emissions of CH₄ from flaring of gas offshore is calculated by Statistics Norway for 1990-2002 and is thereafter based on reported emission data from the field operators to the Norwegian Environment Agency. N₂O emissions from flaring is estimated by Statistics Norway for all years.

Well testing

Emissions of CH₄ and N₂O from flaring of oil in well testing is estimated for all years by Statistics Norway based on the amounts tested reported annually by the field operators to the Norwegian Environment Agency. The same emission factors are used for the whole period. CO₂ emissions from well testing is based on the plants annual report.

Gas terminals

Emissions of CO₂ from flaring are reported from the gas terminals.

Oil refineries

The refineries report annually CO₂ emissions from flaring to the Norwegian Environment Agency. The emissions are calculated by multiplying the amount of gas flared with plant specific emission factors. See additional information section 3.2.4.2 .

3.3.6.3 Activity data

Amounts of gas flared at offshore oil and gas installations are reported monthly by the operators to the Norwegian Offshore Directorate.

Amounts of gas flared at the gas terminals are reported to the Norwegian Environment Agency.

Amounts of refinery gas flared are determined by distributing the total amounts of refinery gas between different combustion technologies using an old distribution key, based on data collected from the refineries in the early 1990s. This distribution was confirmed in 2003.

AD for well testing is based on data from the well operators to the Norwegian Environment Agency as part of the required annual reporting. The extent of well testing has varied between 0 and 19 wells per year throughout the timeseries, with 0 wells tested in 2023. Well testing is the only source of oil flaring in Norway.

3.3.6.4 Emission factors

Flaring offshore – CO₂

It is mandatory for oil and gas field operators included in the EU ETS to use field or flare specific emissions factor in the calculation of CO₂. If no flare specific factor is used, the default emissions factor is 3.73 kg CO₂ per Sm³. The default emission factor is usually considerable higher than measured emission factors. Since 2013, flare specific factors have been developed for most of the flares.

The field specific factors are estimated in a model developed by the Christian Michelsen Research (CMR) institute. The estimations are based on measurements with ultrasound of mass and volume on each flare.

There are several flares on a field, but flare specific emission factors are not estimated for all flares. For each field a field specific emission factor is estimated based on the flares with measured data. For 2013, an average emissions factor of 2.637 kg CO₂ per Sm³ was calculated for all flares at all fields with measurements data.

For the years 1990-2007, an annual emission factor is estimated from the field specific CMR measurements from 2013 weighted with the amount of flared gas for each field.

For the years after 2007 the EU ETS contains information about each single flare. At most fields there are a mixture of flares with CMR emission factors and default factors.

The emission factors used for calculation of emissions after 2007 is explained in section 3.3.6.2.

Table 3-39 presents the average EF for flaring offshore for the period 1990-2024.

3.3.6.4.1 Gas terminals

In Table 3-39, the CO₂ emission factors for flaring at one gas terminal are shown.

Table 3-39: Emission factors for flaring of natural gas at offshore oil and gas facilities and one gas terminal onshore.

	Average emission factor for flaring at one gas terminal	Average emission factor for flaring offshore
	tonne CO ₂ /tonne natural gas	kg CO ₂ /Sm ³ natural gas
1990	2.7	2.70
1991	2.7	2.66
1992	2.7	2.73
1993	2.7	2.80
1994	2.7	2.79
1995	2.7	2.69
1996	2.7	2.66
1997	2.7	2.34
1998	2.7	2.34
1999	2.7	2.46
2000	2.7	2.48
2001	2.7	2.37
2002	2.7	2.47
2003	2.7	2.41
2004	2.7	2.45
2005	2.7	2.44
2006	2.69	2.43
2007	2.67	2.43
2008	2.67	3.67
2009	2.67	3.35
2010	2.65	3.18
2011	2.76	3.09
2012	2.75	2.89

	Average emission factor for flaring at one gas terminal	Average emission factor for flaring offshore
	tonne CO ₂ /tonne natural gas	kg CO ₂ /Sm ³ natural gas
2013	2.62	3.17
2014	2.59	2.98
2015	2.53	3.16
2016	2.59	3.01
2017	2.54	3.02
2018	2.65	2.91
2019	2.65	3.02
2020	2.63	2.96
2021	2.72	2.96
2022	2.67	3.03
2023	2.10	2.97
2024	2.72	2.89

Source: Norwegian Environment Agency/Norwegian Offshore Directorate/Statistics Norway

3.3.6.4.2 Well testing

Emission factors used in the calculations for well testing are shown in Table 3-40.

Table 3-40: Emission factors for flaring in connection with well testing.

Compounds (unit)	Unit/tonne flared oil	unit/kSm ³ flared natural gas
CO ₂ (tonnes)	3.17	2.72
CH ₄ (tonnes)	Field specific	0.00024
N ₂ O (tonnes)	Field specific	0.00002
NM VOC (tonnes)	0.0033	0.00006
CO (tonnes)	0.018	0.0015

Source: *Offshore Norge (2023)*

3.3.6.5 Uncertainty assessment and time-series consistency

The uncertainty in the amount of gas flared is regarded as being low, $\pm 1.4\%$, based on data reported in the emission trading scheme (Norwegian Climate and Pollution Agency 2011) and assumptions in Rypdal and Zhang (2000). The uncertainty in the CO₂ emission factor for flaring is ± 4.5 (Norwegian Climate and Pollution Agency 2011) and Rypdal and Zhang (2000). All uncertainty estimates for this source are given in Annex 2.

3.3.6.6 Source-specific QA/QC and verification

Statistics Norway and the Norwegian Environment Agency perform internal checks of the reported data for the amount of gas reported as flared from the field operators. Some errors in the time-series may be found, and if so, the field operators are contacted and changes are made. The quality of the activity data is considered to be high due to a tax on gas flared offshore. The Norwegian Offshore Directorate has a thorough control of the amount of gas reported as flared. The oil and gas sector is included in the EU ETS from 2008.

See annex 4 for QA/QC of point sources.

3.3.6.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

3.3.6.8 Category-specific planned improvements

No planned activities this year that will improve the data quality or the documentation for this source category.

3.4 CO₂ capture and storage at oil and gas production fields, 1C

3.4.1 Category description

This chapter describes emissions related to the capture, transport, and storage of CO₂ from natural gas produced at the gas-condensate field Sleipner Vest (including the Gudrun field and the Utgard field) and the gas field Snøhvit (including Albatross and Askeladd). It also describes emissions related to transport and storage of CO₂ that has been captured at a cement factory and transported by ship to a commercial CO₂ geological storage outside the coast of Norway.

Emissions occur primarily from venting of captured CO₂ when the injection facilities are not operating. Smaller emissions occur from several minor sources such as leakage from compressors. No emissions are reported from pipeline transport or from the CO₂ reservoirs.

The emissions are reported under 1C CO₂ Transport and storage. The reporting in CRT table 1C also includes cumulative data on total CO₂ injected and stored. Emissions occurring from drilling of CO₂ injection wells have been included in 1C2c.

3.4.2 CO₂ capture and storage at the gas-condensate field Sleipner Vest

3.4.2.1 Description

The natural gas in the Sleipner Vest offshore gas-condensate field in the North Sea contains about 9% CO₂. The CO₂ content must be reduced to about 2.5% to meet sales gas specifications. The amount of CO₂ removed has decreased sharply over the last years due to depletion of the reservoirs and reduced natural gas production. The field and the CO₂ injection program have been in operation since 1996.

Reservoir

When development of the Sleipner Vest field was planned around 1990, it was assumed that a national tax on CO₂ emissions would be introduced quite soon. It was therefore decided that the removed CO₂ should be injected for permanent storage into a geological reservoir. Such a tax was introduced in 1991 and extended in 1996.

Selecting an appropriate reservoir is essential for the success of geological storage of CO₂. In the search for a suitable reservoir the operators were looking for a large saline aquifer with reasonably high porosity and a solid cap rock above to prevent upward migration and minimize risk of leakage. Furthermore, the CO₂ should be stored under high pressure. Under these conditions CO₂ is liquefied and less likely to move upwards than CO₂ in gaseous form.

The Utsira Formation aquifer, which is located above the producing reservoirs at a depth of 800 – 1000 meters below sea level, was chosen for CO₂ storage because of, among other things, its large extension (which guarantees sufficient volume), and its excellent porosity and permeability, ensuring good injectivity). The formation is overlain by a thick, widespread sequence of Hordaland Group shales, which act as an effective barrier to vertical CO₂ migration, see Figure 3.25.

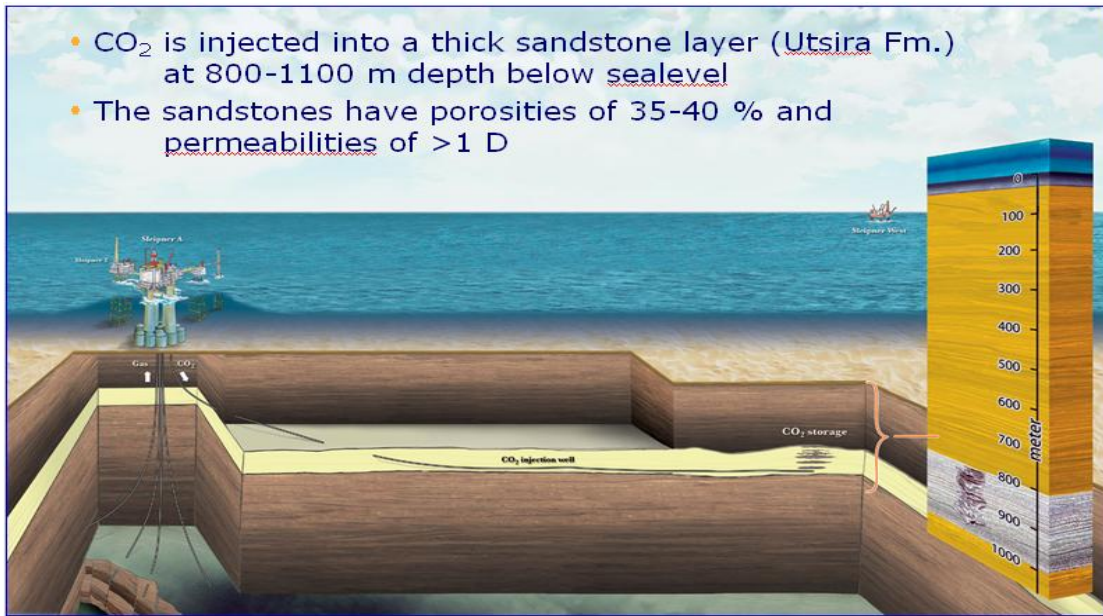


Figure 3.25: CO₂ capture from Sleipner Vest well stream and storage at Sleipner. Source: Equinor.

Injection well

When considering the location of the injection point, it was crucial to minimize the risk of CO₂ migration back to the gas- and condensate producing wells. An injection point 2.5 km east of the Sleipner A platform was chosen. From this point, the injected CO₂ migrates vertically up towards the sealing shales and horizontally along the saddle point of this structure away from the producing wells drilled from the Sleipner A platform.

From the Sleipner platform, the compressed CO₂ is transported by a 350 m long pipeline to the injection well.

Monitoring

The monitoring in the injection phase includes the following:

- 4D seismic studies to monitor migration and extension of the CO₂ plume in the reservoir. The latest 4D seismic surveys were conducted in 2020 and 2023.
- Continuous monitoring of CO₂ pressure and temperature at the injection wellhead
- Monitoring of the CO₂ volume flow
- Fall off test and stage rate tests for verification of infrastructure integrity and injectivity

A brief summary of the results from the latest seismic survey, which was carried out in 2023, is given here.

There are no signs of leakage of CO₂ out of the storage formation. The elongated shape of the CO₂ plume confirms that no pressure build-up occurs in the Utsira formation. In June 2023, the CO₂ plume covered an area of 5.7 km². CO₂ was detected up to 3200 m away from the injection point, and the plume measured 5500 m from end to end. The distance from the CO₂ front to the nearest well, which is a plugged and abandoned exploration well, was 305 m. The front of the plume has migrated westwards since 2010 in line with what is predicted based on reservoir simulations. However, there are small movements from one year to the next, and decreasing speed due to reduced injection rates in recent years.

CO₂ pressure and temperature at the wellhead of the CO₂ injection well are continuously monitored. There is no downhole pressure gauge or temperature sensor installed. Historically, the injection pressure has been stable at around 65 bar. An alarm will be triggered at a wellhead pressure of 70 bar, and a shutdown function (trip) will be triggered at 75 bar.

A differential pressure-based flow meter is used for continuous measurement of the volume of CO₂ that is reinjected or vented to the atmosphere.

Amounts of CO₂

Figure 3.26 shows the amounts of CO₂ that have been injected and stored since start-up of production in 1996.

When CO₂ injection is stopped due to maintenance or for any unplanned reason, the captured CO₂ is vented to the atmosphere. The amount of CO₂ vented to the atmosphere is included in the greenhouse gas inventory reported under 1C1a. The emissions from venting are presented in figure 1.2

By 31.12.2024, 19.18 million tonnes CO₂ have been injected and stored in the Utsira Formation and 0.33 million tonnes CO₂ have been vented.

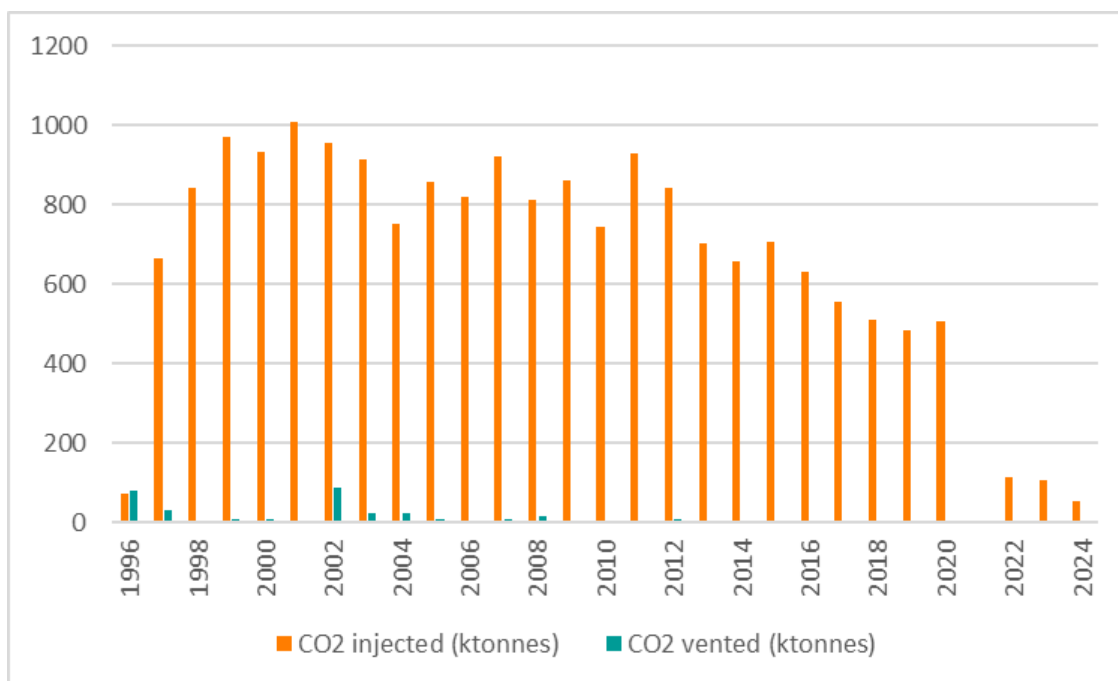


Figure 3.26: Injected and vented CO₂ at Sleipner Vest. Source: Norwegian Environment Agency.

Diffuse emissions from the CO₂ capture plant (amine absorber) and the CO₂ compressor are estimated to about 1,0 kt CO₂/year and these figures are included in CRT table 1.C.

3.4.2.2 Methodological issues

The operator reports the amount of CO₂ injected and emitted to the Norwegian Environment Agency annually. Injected volumes of CO₂ are not reported as emissions in the emission inventory, since they are permanently stored in the sub seabed geological structures. No leakages, or enhanced risk of leakages from the reservoir, have been detected since injection was launched in 1996.

The reported data cover emissions to the atmosphere when the injection system is out of operation. These emissions are determined by continuous metering of the gas stream by a VCONE-meter.

The reported amounts of CO₂ injected in the Utsira formation are based on continuous metering of the gas stream by an orifice meter. The composition of the CO₂ stream is stable. About 98% is CO₂ and the remaining 2% are mainly methane and heavier hydrocarbons.

3.4.2.3 The diffuse emissions are estimated based on equipment specific leakage factors. Uncertainty assessment and time-series consistency

The reported data covers emissions to the atmosphere when the injection system is out of operation. The accuracy in these measurements made by VCONE-meter is +/- 5%.

The orifice meter used to meter the amount of CO₂ injected in the Utsira formation have +/- 3% accuracy.

3.4.2.4 Category-specific QA/QC and verification

Storage of CO₂ is regulated by the Pollution Control Act and the specific regulations of geological storage of CO₂. Pursuant to the Pollution Control Act and the specific regulations, the operator shall hold a permit, in which site-specific requirements for injection and storage at the Sleipner field are laid down. Among other things, this permit specifies how the mass flow of CO₂ into the reservoir shall be measured, how the composition of the CO₂ stream shall be analyzed and how migration and extension of the CO₂ plume in the reservoir shall be monitored and documented. The Norwegian Environment Agency conducts audits and controls on a yearly basis to verify that these requirements are met.

Since 2013 direct CO₂ emissions from the injection facilities are included in the EU-ETS. In the national emissions inventory, the amount of CO₂ vented is reported under 1C2a - Injection.

3.4.2.5 Category-specific recalculations

There have been no recalculations performed for this source category this year.

3.4.2.6 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

3.4.3 CO₂ capture and storage at Hammerfest LNG/Snøhvit

3.4.3.1 Description

Hammerfest LNG was in 2004 granted a permit pursuant to the Pollution Control Act to produce Liquefied Natural Gas (LNG), Liquefied Petroleum Gas (LPG) and condensate from the well stream extracted from reservoirs at the Snøhvit field in the Barents Sea. The permit also allowed for injection of 730 000 tonnes of CO₂ per year for permanent storage in offshore sub seabed geological formations at the Snøhvit field. The production at Hammerfest LNG started in 2007, and the CO₂ injection started in 2008.

The permit was updated in 2016 to ensure compliance with requirements in Directive 2009/31/EC of the European Parliament and of the Council on the geological storage of

carbon dioxide (the CCS-directive), and also the new Norwegian CO₂ storage regulations adopted in 2016 to incorporate the Directive into Norwegian law. In 2018, the allowed amount of CO₂ injected and stored was increased to 830 000 tonnes of CO₂ per year.

The natural gas in the Snøhvit reservoirs contains about 5-7.5% CO₂. Prior to the LNG production, CO₂ must be removed to avoid formation of dry ice in the downstream liquefaction process and to meet sales gas specifications.

The facilities for separation and injection of CO₂ are placed onshore at Hammerfest LNG. An amine absorption unit performs the separation. The recovered CO₂ is condensed and recompressed before being transported by a 152 km long subsea pipeline and re-injected into the sub seabed formations. A schematic of the CO₂ re-injection system is shown in Figure 3.27.

During the expected lifetime of the Snøhvit field, it is anticipated that about 23 million tonnes of CO₂ will be separated from the natural gas and re-injected for permanent sub seabed storage.

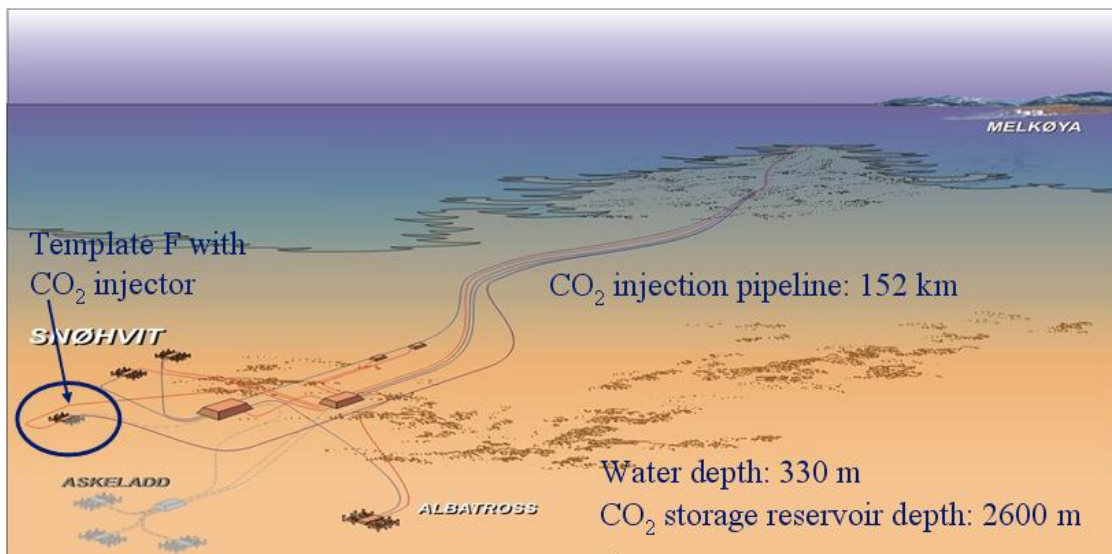


Figure 3.27: Snøhvit Field overview. Source: Equinor.

Reservoir

Several geological structures in the Snøhvit area were evaluated for disposal of CO₂. Among four structures identified as possible candidates for CO₂ storage, a saline aquifer called Tubåen at the Snøhvit field was chosen as the primary storage location.

In March 2011, the injection point was moved from Tubåen to the Stø formation at a depth of 2450 meters below sea level, due to lower injectivity in Tubåen than expected.

CO₂ injection wells

Two wells called G-4 H and F-2 H are available for CO₂ injection at Snøhvit, see figure 4.1. G-4 H is the primary injector, while F-2 H is a contingency well to be used if injection in G-4 H for some reason is not possible, for instance during maintenance and testing operations.

CO₂ injected and vented

By 31.12.2023, 8 766 ktonnes have been injected and stored at the Snøhvit field, and 525 ktonnes CO₂ have been vented at Hammerfest LNG.

CO₂ venting occurs when the CO₂ reinjection system must shut down. The maximum vent rate is almost equal to the CO₂ removal flow rate. A separate vent stack for the CO₂ is installed at the plant.

Figure 3.27 shows the yearly injected volumes in the Tubåen/Stø formation at the Snøhvit field and vented volumes for at Hammerfest LNG. These figures are reported to the Norwegian Environment Agency on a yearly basis.

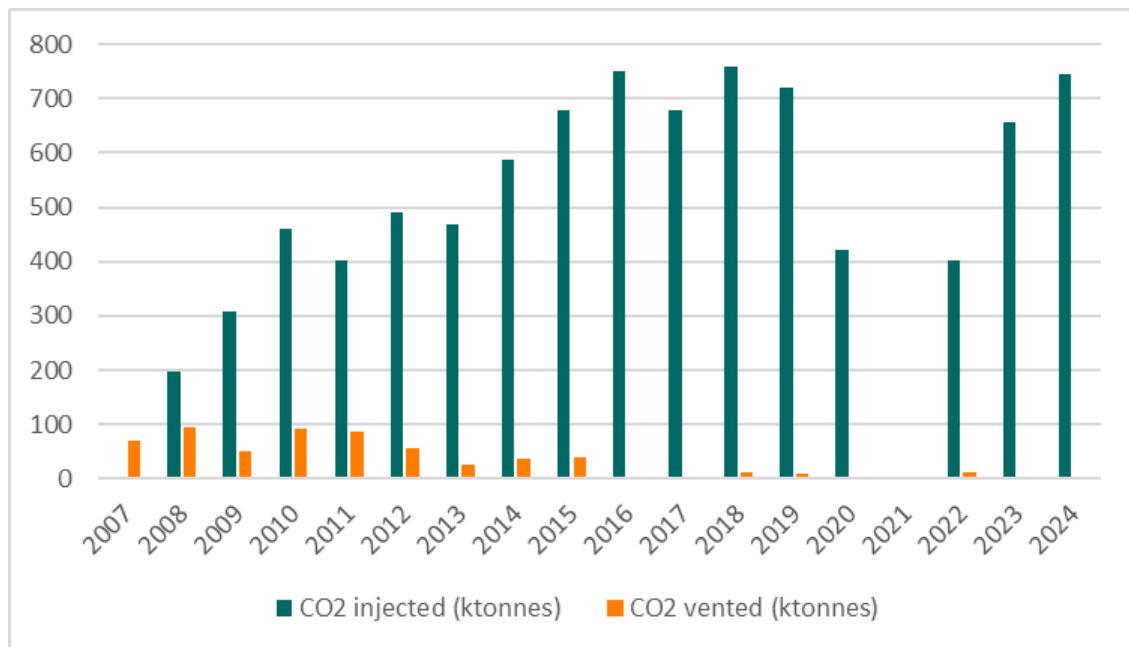


Figure 3.28: Injected and vented CO₂ at the Snøhvit field and Hammerfest LNG. Source: Equinor.

In September 2020 a fire at Hammerfest LNG caused severe damage to one of the five gas turbines installed at Hammerfest LNG. The production was shut down for repair until May 2022. Thus, no CO₂ was injected during this period.

Monitoring

Hammerfest LNG uses a differential pressure-based flow meter to measure the amount of gas being reinjected. The meter is located downstream of CO₂ recompression.

Pressure and temperature are monitored regularly as part of the daily operation of the seabed installations, providing important information about injectivity and CO₂ migration in the reservoir. Fall-off tests are carried out regularly to verify that no leaks occur in the pipeline system, and stage rate tests are used for monitoring CO₂ injectivity.

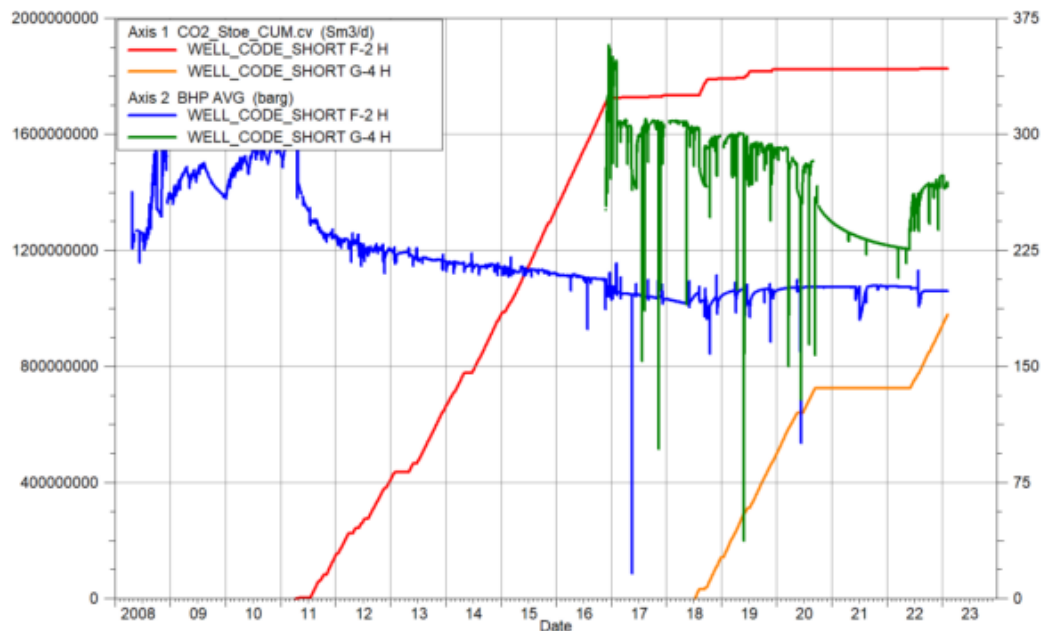


Figure 3.29: Bottom hole pressure and CO₂ volume injected into the Stø formation in F-2 H and in G-4 H.

Collection of 4D seismic data has been carried out in 2011, 2012, 2014 and 2019 and 2022. A baseline 4D survey was conducted in 2009. The next 4D seismic survey is planned to be carried out in 2025. So far, no irregularities in the CO₂ distribution and no CO₂ leakage out of the reservoir have been observed.

4D seismic has been used with good results to monitor the F-2 H and G-4 H CO₂ plume. *Figure 3.29* shows the development of the CO₂ plume in F-2 H from 2011 to 2019.

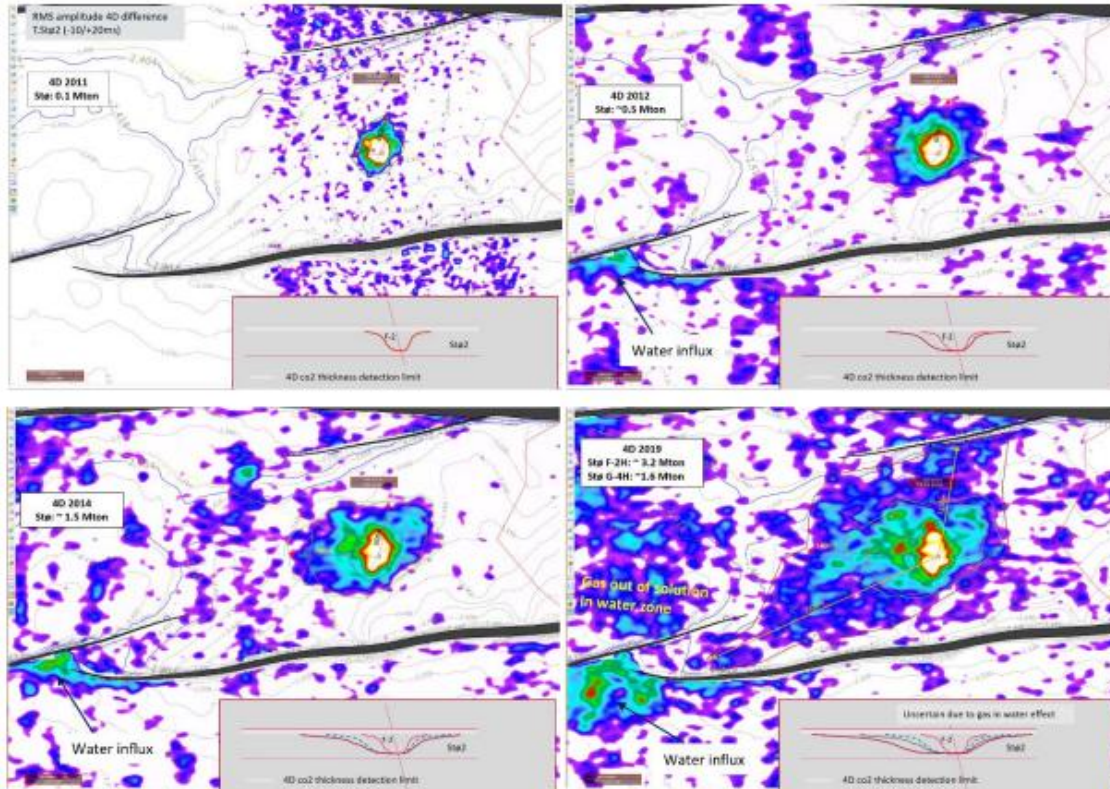


Figure 3.30: 4D RMS amplitude at Stø2 level. The approximate distribution of CO₂ is indicated in the figure. Sketch shows probable thicknesses of CO₂ in Stø 2, and that under approx. 7-9m thickness it is not possible to monitor the plume.

It is expected that when the CO₂ plume hits the oil and gas zone, the acoustic contrast between CO₂ and hydrocarbons becomes weaker, and one will most likely not be able to see the plume on 4D seismic. In 2019 and 2022, the 4D seismic showed no 4D effect as CO₂ most likely reached the gas zone in the F segment.

Figure 3.31 and *Figure 3.32* show 4D effects for 2019-2012 and 2022-2012 in the upper parts of Stø2 formation. In the G-4 H area, we still clearly see how CO₂ migrates westwards towards a shallower structure and lower pressure. Free gas in the water zone does not seem to be a problem here yet. Further west in the G-segment we see 4D softening effect which is most likely related to the occurrence of CO₂ in gaseous phase (gas out of solution) in the water zone. With more time for pressure drop, one can expect that this gas out of

solution 4D effect also spreads towards the G-4 H area. This will make it more difficult to monitor CO₂ distribution in the future as we have seen in the F-2 H area.

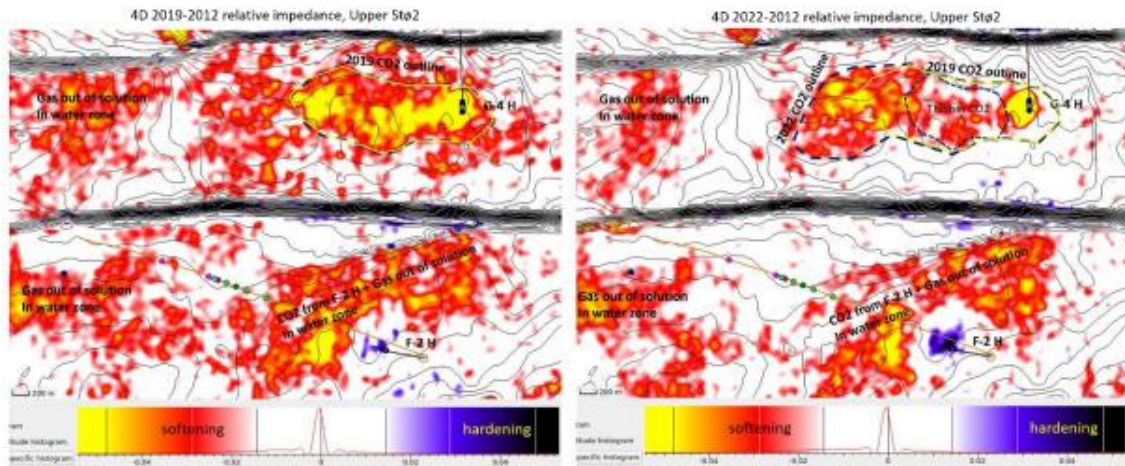


Figure 3.31: 4D relative acoustic impedance from 4D seismic inversion for 2019-2012 and 2022-2012 for upper parts of Stø2 Fm.

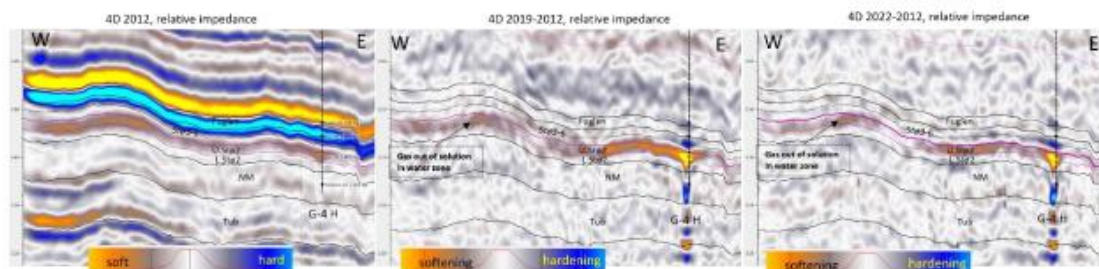


Figure 3.32: 4D relative impedance section from west to G-4 H in east for 2012, 4D difference 2019-2012 and 2022-2012. It is the upper parts of Stø2 Fm that take most of the injected CO₂ volumes in G-4 H.

Even if there are problems following the CO₂ distribution in the reservoir due to gas out of solution, no CO₂ leakage out of the Stø Formation on the Snøhvit structure can be observed, which would most likely have been visible if that was the case.

An adapted reservoir simulation model is used to forecast pressure development and CO₂ migration. It focuses on both injectors and the CO₂ migration area to the west. Figure 3.33

shows where the injector G-4, and the backup injector F-2 are located, and how the model predicts that injected CO₂ will move towards shallower areas and zones that have been pressure depleted due to natural gas production. This is compared with interpretations of the CO₂ plume from 4D seismic.

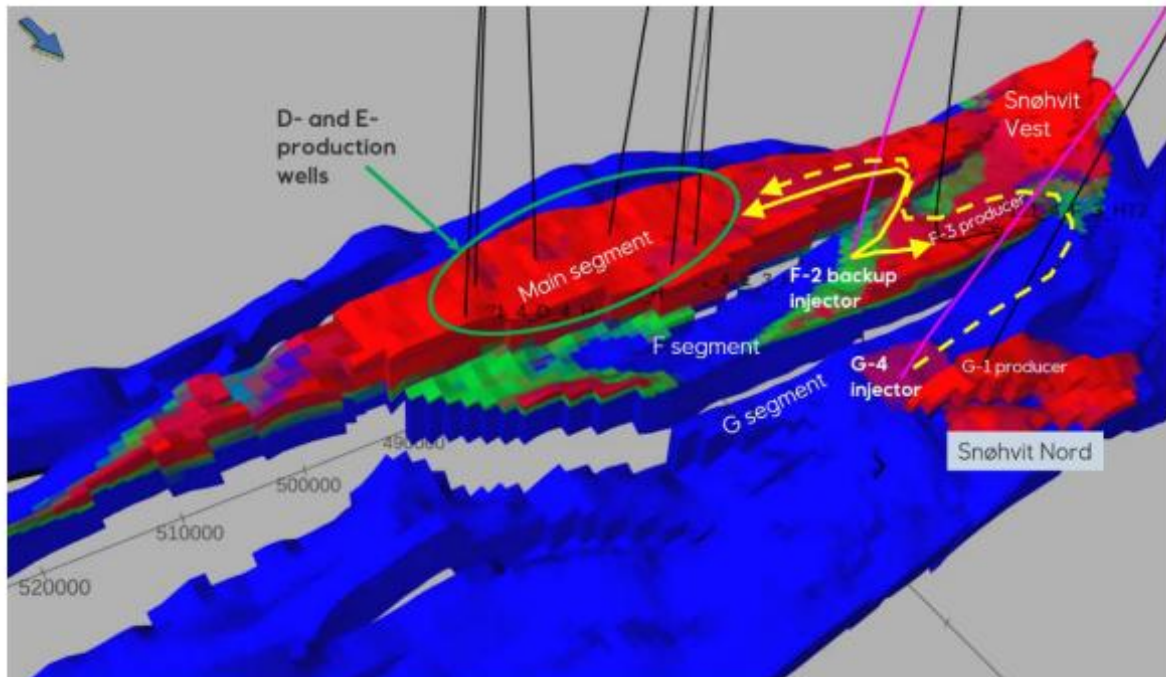


Figure 3.33: The reservoir simulation model shows how injected CO₂ is expected to move (indicated by yellow arrows) towards shallower areas and zones where the reservoir pressure has been reduced due to production of natural gas.

An inspection of the pipeline transporting CO₂ from Hammerfest to the Snøhvit field in 2022 showed that the pipeline had been pulled out of position, most likely due to trawling, but no leakage was observed.

3.4.3.2 Methodological issues

CO₂ injected

The amount of CO₂ being injected is measured continuously by an orifice meter.

CO₂ venting to atmosphere

The reported data cover CO₂ emissions to the atmosphere when the injection system is out of operation. These emissions are measured by a venturi flow meter.

Gas composition of injected or vented gas is analyzed regularly. This is primarily done to verify performance of the CO₂ separation. Analyses have shown that the composition is 98,5 - 99,5% CO₂, 0,007% H₂S, 0,3% CH₄ and 0,09% NMVOC (by weight). It has been agreed

that in the reports to the environmental authorities, ventilated gas shall be reported as 100% CO₂.

Diffuse sources and pipeline transport

Diffuse emissions from the CO₂ capture plant are estimated to be about 1.0 kt CO₂/year and these figures are included in CRT table 1.C.

For pipeline transport of CO₂, emissions are reported as Not Estimated. The IPCC tier 1 method gives a medium emission factor of 0.0014 Gg per year and per km of transmission pipeline (IPCC (2006), vol 2, table 5.2). The pipeline is 152 km long, corresponding to an emission estimate of 0.2 kt CO₂. However, based on our best knowledge we anticipate that this would overestimate emissions from the pipeline. Firstly, the main sources of emissions are likely to be equipment at the ends of the pipeline and not the pipeline itself. Emissions from equipment at the onshore input end are included in the reported emissions from the Hammerfest plant. Secondly, no indication of leakages has so far been found by continuous monitoring of injection pressure and periodic fall off tests. The pipeline and injection wells are also subject to acoustic deep-water survey and visual inspection by Remotely Operated Vehicle to detect any sign of corrosion or irregularities which may cause leakages.

3.4.3.3 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any inconsistencies in the emission estimates for this category.

An uncertainty assessment of the differential pressure-based flow meter measurements at Snøhvit has been performed. The resulting uncertainty was found to be 5.89% (95% KI).

3.4.3.4 Category-specific QA/QC and verification

Operators of CO₂ storage projects must apply for a permit pursuant to the Pollution Control Act. In accordance with the permit provisions, Equinor has implemented systems for monitoring the storage site. So far, no signs of leakage from the reservoir to the water column or the atmosphere have been observed. Hence, no CO₂ emissions from the reservoir have been included in the emission inventory.

Since 01.01.2013, emissions from CCS facilities and activities have also been regulated under the emission trade scheme (EU-ETS). The emissions of CO₂ and the amounts of CO₂ injected are reported to the Norwegian Environment Authority on an annual basis. In the emissions inventory, the amount of CO₂ vented at Hammerfest LNG (Snøhvit CO₂ storage project) – is reported under 1C2a - Injection.

3.4.3.5 Category-specific recalculations

There have been no recalculations performed for this source category this year.

3.4.3.6 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4. Industrial processes and product use (CRT sector 2)

4.1 Overview of the sector

The Industrial processes and other product use (IPPU) sector contributed to 18.7% of the total national emissions of greenhouse gases (including indirect CO₂, without LULUCF) in 2024. For most categories in the IPPU sector, plant-level process emissions are aggregated to estimate national-level emissions. A large share of the GHG emissions from industrial processes included in the Norwegian GHG inventory are therefore from annual reports sent by each plant to the Norwegian Environment Agency. For delimitation toward the energy sector, see information in chapter 3.2.

The rest of the emissions included in the inventory are calculated by Statistics Norway. The calculations are based on emission factors and activity data. The emission factors are collected from different sources, while the activity data used in calculations carried out by Statistics Norway is from official statistics normally collected by Statistics Norway.

The general QA/QC methodology and the specific QA/QC carried out for Industrial processes is described in Annex 4.

Norway reports indirect emissions of CO₂ from oxidized CH₄ and NMVOC in CTF tables 2, 6 and 10. Chapter 9 gives an overview of the source categories from which indirect CO₂ emissions are reported. The indirect emissions of CO₂ are calculated by Statistics Norway and are based on the emissions of CH₄ and NMVOC.

Table 4-1 gives an overview of the IPPU sector in Norway's GHG inventory. The GHG emissions from IPPU in 2024 were 8.3 million tonnes CO₂ equivalents and the emissions in 1990 were 14.7 million tonnes CO₂ equivalents. The emissions from this source category decreased by 43.3% from 1990 to 2024 and decreased by 1.4% from 2023 to 2024. The decrease from 1990 to 2024 is mainly due to reduced PFC emissions from production of aluminum and SF₆ from production of magnesium. The reduction in the SF₆ emissions is due to the closing down of production of cast magnesium in 2002, improvements in the gas insulated switchgear (GIS) sector and an almost end in the use of SF₆ as tracer gas. In June 2006, the magnesium recycling foundry also closed. In addition, N₂O emissions from nitric acid production have decreased substantially since 1990.

Metal industry (2C) is the largest category within IPPU, and the emissions are mainly from production of ferroalloys and aluminium. The other main contributing sectors are Chemical Industry (2B), Mineral Industry (2A) and Product uses as substitutes for ODS (2F). Table 4-2 shows the source categories in IPPU according to the key category analysis.

Table 4-1: Emission trends for IPPU categories (ktonnes CO₂ equivalents).

Category	1990	1990, % of IPPU	2023	2024	2024, % of IPPU	Trend 1990-2024 (%)	Trend 2023-2024 (%)
2A	730.8	5.0 %	822.7	816.4	9.8 %	11.7 %	-0.8 %
2B	3 898.5	26.5 %	1 821.4	1 768.8	21.2 %	-54.6 %	-2.9 %
2C	9 781.3	66.5 %	4 743.7	4 714.5	56.6 %	-51.8 %	-0.6 %
2D	173.3	1.2 %	96.6	97.6	1.2 %	-43.7 %	1.1 %
2E							
2F	0.0	0.0 %	767.7	725.1	8.7 %	1 459 459.1 %	-5.5 %
2G	85.4	0.6 %	91.3	98.0	1.2 %	14.8 %	7.4 %
2H	31.3	0.2 %	107.3	109.6	1.3 %	250.6 %	2.2 %
Total	14 700.7	100.0 %	8 450.6	8 330.0	100.0 %	-43.3 %	-1.4 %

Source: Statistics Norway and the Norwegian Environment Agency

Table 4-2: Key categories in the sector Industrial processes and product use.

CRT code	Source category	Gas	Identification criteria *
2A1	Cement production	CO ₂	L1
2A2	Lime production	CO ₂	L1 T1
2B1	Ammonia production	CO ₂	L1 T1 L2
2B2	Nitric Acid Production	N ₂ O	L1 T1 L2 T2
2B5	Carbide production	CO ₂	L1 T1 T2
2B6	Titanium dioxide production	CO ₂	L1
2B8	Petrochemical and carbon black production	CO ₂	L1 T1 L2
2B10	Other	N ₂ O	L1 T1
2C2	Ferroalloys production	CO ₂	L1 L2
2C3	Aluminium production	CO ₂	L1 T1 L2 T2
2C3	Aluminium production	PFC	L1 T1 L2 T2
2C4	Magnesium production	SF ₆	L1
2D1	Lubricant use	CO ₂	T1
2F	Product uses as substitutes for ODS	HFC	L1 T1 L2 T2
2H2	Food and beverages industry	CO ₂	T1

*"L" refers to level and "T" to trend analyses. Numbers refer to approaches.

4.2 Mineral industry – 2A

The sector category Mineral industry includes CO₂ emissions in the source categories cement production, lime production, glass production, ceramics, other uses of soda ash, non-metallurgical magnesia production and other process use of carbonates (see Table 4-3).

Table 4-3: Mineral industry. Component included in the inventory, tier of method and key category.

Source category	CO ₂	Tier	Key category
2A1. Cement production	R	Tier 3	Yes
2A2. Lime production	R	Tier 3	Yes
2A3. Glass production	R	Tier 3	No
2A4a. Ceramics	R	Tier 3	No
2A4b. Other uses of soda ash	E	Tier 1	No
2A4c. Non metallurgical magnesium production	R	Tier 3	No
2A4d. Other process use of carbonates	R	Tier 2	No

R = emission figures in the national emission inventory are based on figures reported by the plants. E = emission figures are estimated. NA = Not Applicable. NO = Not Occuring. IE = Included Elsewhere.

Table 4-4: Emission trends for 2A Mineral industry (ktonnes CO₂ equivalents).

Source category	1990	1990, % of IPPU	2023	2024	2024, % of IPPU	Trend 1990-2024 (%)	Trend 2023-2024 (%)
2A1. Cement production	634.3	4.3 %	594.2	560.7	6.7 %	-11.6 %	-5.6 %
2A2. Lime production	49.8	0.3 %	204.5	235.4	2.8 %	372.2 %	15.1 %
2A3. Glass production	5.6	0.0 %	8.3	6.2	0.1 %	11.0 %	-25.3 %
2A4a. Ceramics	3.7	0.0 %	NO	NO	NA	NA	NA
2A4b. Other uses of soda ash	9.0	0.1 %	4.0	3.8	0.0 %	-58.1 %	-5.6 %
2A4c. Non metallurgical magnesium production	NO	NA	NO	NO	NA	NA	NA
2A4d. Other process use of carbonates	28.4	0.2 %	11.8	10.3	0.1 %	-63.8 %	-12.7 %
Total 2A.	730.8	5.0 %	822.7	816.4	9.8 %	11.7 %	-0.8 %

Source: Statistics Norway and the Norwegian Environment Agency

Table 4-4 shows that the CO₂ emissions from this sector category were about 0.8 million tonnes in 2024, this accounts for 9.8% of the total emission from the IPPU sector. The emissions from

this sector have increased by 11.7% from 1990 to 2024, mainly due to increased production of clinker and lime in more recent years. The emissions from this sector category decreased by 0.8% from 2023 to 2024. Table 4-5 and

Table 4-6 show that most of the limestone and dolomite uses within the IPPU sector are within 2A. In addition to uses in the IPPU sector, there are reported emissions in 3G from the use of limestone and dolomite.

Table 4-5: Balance in ktonnes in recent years for the use of limestone in IPPU.

Limestone use	2020	2021	2022	2023	2024
2A1 - Cement production	1 647	1 588	1 614	1 350	1 274
2A2 - Lime production	436	478	562	451	523
2A3 - Glass production	0	0	0	0	0
2A4a - Ceramics	NA	NA	NA	NA	NA
2A4c - Non-metallurgical magnesium production	0	0	0	0	0
2A4d - Other process uses of carbonates	0	0	0	0	0
2C2 - Production of ferroalloys	38	30	32	20	25
2H1 - Pulp and paper	20	21	20	19	18
Total limestone	2 141	2 116	2 228	1 841	1 840

Source: Norwegian Environment Agency

Table 4-6: Balance in ktonnes in recent years for the use of dolomite in IPPU.

Dolomite use	2020	2021	2022	2023	2024
2A2 - Lime production	16	10	32	30	27
2A4c - Non-metallurgical magnesium production	50	7	0	0	0
2A4d - Other process uses of carbonates	13	18	16	7	11
2A3 - Glass production	12	14	13	14	10
2C2 - Production of ferroalloys	2	4	8	4	5
Total dolomite	93	53	69	55	53

Source: Norwegian Environment Agency

There is no information that indicates that there are other emissive uses of limestone and dolomite that are not reported. The uses with no emissions are according to the Geological Survey of Norway slurry and crushed rock for filling. A potential use of limestone is in flue gas

desulphurization (FGD), but this is not used in Norway. The industry primarily uses sea water scrubbing technology.

4.2.1 Cement Production, 2A1

4.2.1.1 Category description

Two plants in Norway produce cement and they are covered by the EU ETS. The process emissions originate from the raw material calcium carbonate (CaCO_3). The resulting calcium oxide is heated to form clinker and then crushed to form cement.

4.2.1.2 Methodological issues

The emissions of CO_2 from clinker production included in the GHG inventory are reported by the two producers in their annual report under their regular permit and under the EU ETS to the Norwegian Environment Agency. Before entering the EU ETS, the plants used a tier 2 methodology while they now use a tier 3 methodology. The plants report data on the types and quantities of carbonates consumed to produce clinker, as well as their emission factors and oxidation factors. The reported emissions include Cement Kiln Dust (CKD).

4.2.1.3 Activity data

The amount of clinker, CKD and other carbonates that the plants use in their calculation are reported by the plants to the Norwegian Environment Agency. The annual total clinker production is reported in the CRT Table 2(I).A-Hs1 and Table 4-7 shows the clinker production for some selected years in the time series. The 16% decrease in emissions from 2022 to 2023 is a result of a 15% decrease in production.

Table 4-7: Norwegian clinker production (ktonnes).

Year	Total production
1990	1 244.1
1995	1 682.9
2000	1 649.6
2005	1 454.3
2010	1 433.8
2015	1 284.1
2016	1 306.3
2017	1 461.5
2018	1 429.4
2019	1 406.9
2020	1 407.1
2021	1 360.8
2022	1 390.7

Year	Total production
2023	1 181.0
2024	1 121.9

Source: Statistics Norway and the Norwegian Environment Agency

4.2.1.4 Emission factors

CO₂

The emission factors used are plant specific. The factors are dependent on the chemical composition of the clinker i.e., the content of Ca and Mg. The fraction of CaO from non-carbonate sources like ashes is subtracted. The emission factors are calculated particularly for the two Norwegian plants. Prior to entering the EU ETS, the emission factors did not vary much and tended to be around 0.530 tonne CO₂ per tonne clinker for one plant (Tokheim 2006) and 0.541 tonne CO₂ per tonne clinker as recommended by SINTEF (1998c) for the other plant. After entering the EU ETS, the plants face stricter requirements concerning how their EF are determined and the reported EFs fluctuate close to the IPCC default emission factor of 0.52 tonne CO₂/tonne clinker. The same emission factors are used for CKD as for clinker production. Until 2009, both plants have used a conversion factor of 1. This means that all Ca and Mg have been assumed to be carbonates. From 2010, the largest plant has reported conversion factors that are less than 1 while the smaller plant continued to use a conversion factor of 1 until 2015.

4.2.1.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. The two plants have reported their emissions to the Norwegian Environment Agency for many years. Cement production was included in the EU ETS in 2005. After entering the EU ETS, the plants faced stricter requirements concerning how AD and EF are determined and the EFs vary more from one year to another. The reduction in IEF from 2009 to 2010 is a consequence of lower EFs in 2010 for both plants. The EF for the plant producing about 70% of the total production decreased the most, pushing the IEF for total production down. This explains the inter-annual variations in the IEF in the end of the time series.

4.2.1.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The emissions are covered by the EU ETS, and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the Norwegian Environment Agency's inventory team.

Statistics Norway occasionally calculates alternative emission figures for CO₂ and compares them with the emission figures reported by the plants to the Norwegian Environment Agency to check if they are reasonable. The calculations are based on the clinker production (reported annually from the plants to the Statistic Norway). The calculated emission figures have agreed quite well with emissions figures reported by the plants.

4.2.1.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.2.1.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.2.2 Lime Production, 2A2

4.2.2.1 Category description

Three plants that produce lime in Norway reported CO₂ emissions from processes to the Norwegian Environment Agency and all three plants are covered by the EU ETS. The large increase in CO₂ emissions from lime production from 1990 is due to increased production at existing plants and the establishment of a new plant in 2007 with large production.

4.2.2.2 Methodological issues

All three plants calculate the emissions of CO₂ based on the input of limestone and dolomite and plant specific emission factors for CO₂ from limestone and dolomite respectively. The emissions are reported to the Norwegian Environment Agency in accordance with the reporting requirements of the EU ETS²¹ and is in line with the tier 3 method of the IPCC 2006 GL. The activity data is corrected for lime kiln dust (LKD).

4.2.2.3 Activity data

The activity data used for the reported emissions is the input of limestone and dolomite and this is reported annually to the Norwegian Environment Agency. Nearly all production in Norway consists of quicklime, but there is also some dolomitic lime. Table 4-8 shows the lime production and consumption in 2A for some of the years in the time series. The high emissions in 2022 compared to 2021 and 2023 are explained by a high production level in 2022.

Table 4-8: Input of limestone and dolomite and limestone production (ktonnes) in 2A2.

Year	Total limestone and dolomite consumption	Total limestone production
1990	116.3	62.0
1995	162.7	86.8
2000	158.9	84.6
2005	197.6	102.6
2010	576.5	315.2
2015	524.8	286.1
2016	519.1	293.4
2017	510.8	282.1

²¹ <https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:02012R0601-20190101&from=EN>

Year	Total limestone and dolomite consumption	Total limestone production
2018	489.3	269.2
2019	475.5	265.4
2020	453.4	251.7
2021	488.8	272.5
2022	595.8	332.3
2023	483.1	269.3
2024	552.3	310.4

Source: Norwegian Environment Agency

Even though the emissions are calculated based on limestone and dolomite consumption, Norway reports final lime production values as AD in CRT Table 2(I).A-Hs1 in order to facilitate comparability across Parties.

4.2.2.4 Emission factors

The plants use an emission factor of 0.474 tonnes CO₂ per tonne dolomite used. The emission factors for limestone are plant specific and are in the range of 0.43-0.44 (reported with more decimals). One plant used a conversion factor of 1 until 2007 and the two others until 2008. This means that all Ca and Mg have been assumed to be carbonates. Since then, the plants have reported conversion factors that are less than 1.

4.2.2.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. Figure 4.1 shows the IEFs for lime production for both consumption and production as AD. Using final lime production values as AD results in IEFs closer to the default IPCC EF, but also to less stable IEFs as it varies more than if consumption is used as AD.

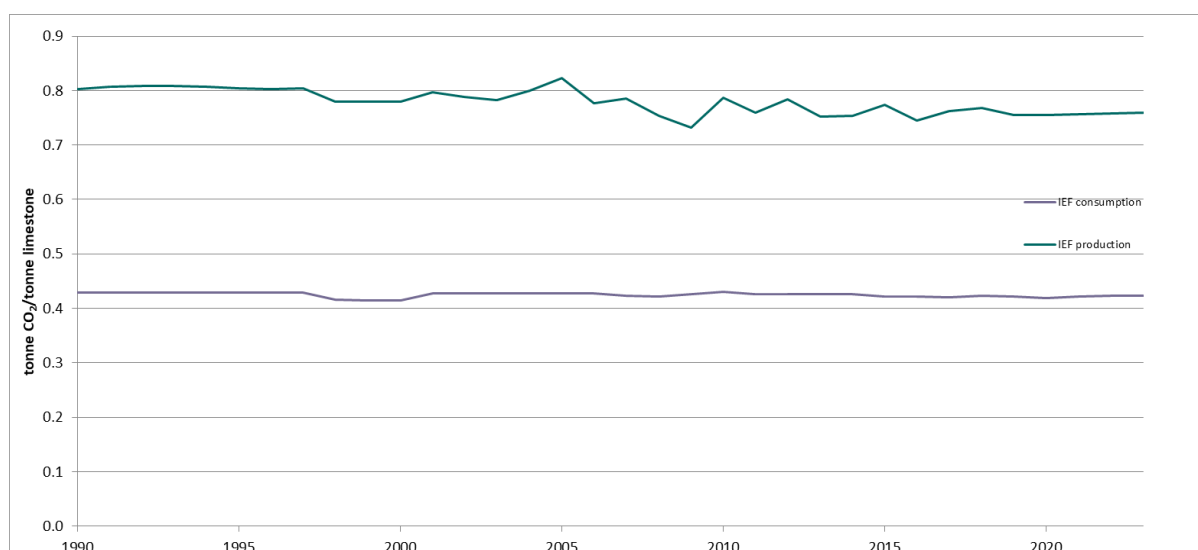


Figure 4.1: IEF (tonne CO₂ per tonne limestone) with consumption or production as AD. Source: Norwegian Environment Agency.

4.2.2.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The emissions are covered by the EU ETS, and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by Norwegian Environment Agency's inventory team.

4.2.2.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.2.2.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.2.3 Glass production, 2A3

4.2.3.1 Category description

Three plants producing glass or glass fibre are included in the emission inventory, based on emission reports to the Norwegian Environment Agency. All three plants are covered by the EU ETS.

4.2.3.2 Methodological issues

Two plants producing glass wool and one plant producing glass fibre report emission figures on CO₂ to the Norwegian Environment Agency. The two glass wool producing plants report emissions from the use of soda ash, limestone and dolomite, while the glass fibre producer reports emissions from the use of limestone and dolomite.

4.2.3.3 Activity data

The aggregated use of soda ash, limestone and dolomite is reported as activity data in CRT Table 2(I).A-Hs while details for the use of soda ash and dolomite are shown in Table 4-9 and

Table 4-6.

4.2.3.4 Emission factors

The emission factors used are 0.41492 tonnes CO₂/tonne soda ash (IPCC 2006), 0.481 tonnes CO₂/tonne dolomite (EU ETS) and 0.44 tonnes CO₂/tonne limestone (EU ETS).

4.2.3.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category.

4.2.3.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The emissions are covered by the EU ETS, and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the Norwegian Environment Agency's inventory team.

4.2.3.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.2.3.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.2.4 Ceramics, 2A4a

4.2.4.1 Category description

One plant that produced bricks until 2014 is included in the emission inventory, based on emission reported to the Norwegian Environment Agency. The plant was covered by the EU ETS.

4.2.4.2 Methodological issues

The plant reported emission figures of CO₂ to the Norwegian Environment Agency. The emissions are calculated by multiplying the amount of limestone and clay used in its production with emission factors.

4.2.4.3 Activity data

The amount of limestone and clay used in the production of bricks was reported each year from the plant to the Norwegian Environment Agency. The amounts of limestone used are reported in CRT Table 2(I).A-Hs1.

4.2.4.4 Emission factors

The EF of 0.44 tonnes CO₂ per tonne limestone used by the brick producing plant is the standard EF used in the EU ETS for limestone. The plant used an emission factor of 0.088 tonnes CO₂ per tonne clay used.

4.2.4.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. The emissions reported under 2A4a include emissions from the use of clay, but the AD in the CRT is limestone only. The use of clay decreased after 1996, and this explains the overall decrease in IEF for 2A4a. Calculations show that the IEF for CO₂ from limestone and dolomite use only is more stable than when the emissions from the use of clay also are included.

4.2.4.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The emissions were covered by the EU ETS, and their emissions were verified annually. In addition, the emissions were checked both by the case handler and by the Norwegian Environment Agency's inventory team.

4.2.4.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.2.4.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.2.5 Other uses of soda ash, 2A4b

4.2.5.1 Category description

There is no production of soda ash in Norway, so all soda ash is imported. Soda ash is used and reported in 2A3 (glassworks), 2C3 (aluminium production) and 2C7aii (nickel production). The import of soda ash is higher than the sum of the amounts consumed in these industries. This difference is assumed to be emissive, and the corresponding CO₂ emissions are estimated and reported here under 2A4b.

4.2.5.2 Methodological issues

The emission figures for CO₂ are estimated by multiplying the amount of soda ash assumed to be emissive with an emission factor.

4.2.5.3 Activity data

The activity data is total import of soda ash minus consumption in glass wool, nickel and aluminium production. The amounts of soda ash are reported in CRT Table 2(I).A-Hs1 and are shown in Table 4-9.

Table 4-9: Balance for soda ash use for Norway (ktonnes).

Year	Import	2A4b (Other uses of soda ash)	2A3 (Glassworks)	2C3 (Aluminium production)	2C7ii (Nickel production)
1990	45.1	21.7	4.2	0.9	18.3
1995	55.0	24.5	4.2	0.9	25.3
2000	49.1	17.0	5.3	0.9	25.8
2005	63.8	21.3	5.4	0.9	36.1
2010	38.1	NO	3.5	0.9	33.6
2015	44.0	2.6	4.0	1.2	36.2
2016	47.7	7.2	3.7	0.9	36.0
2017	47.5	8.1	3.7	0.7	34.9
2018	47.2	4.0	3.7	0.9	38.6
2019	54.5	12.9	3.6	0.9	37.1
2020	43.8	4.7	3.8	0.8	34.5
2021	52.6	10.7	3.2	1.1	37.6
2022	45.8	10.2	3.4	0.9	31.3

Year	Import	2A4b (Other uses of soda ash)	2A3 (Glassworks)	2C3 (Aluminium production)	2C7ii (Nickel production)
2023	48.0	9.6	3.5	0.6	34.2
2024	47.7	9.1	3.3	0.9	34.5

Source: Norwegian Environment Agency and Statistics Norway

4.2.5.4 Emission factors

The emission factor for soda ash use is 0.41492 tonnes CO₂/tonne soda ash from the IPCC 2006 Guidelines (IPCC 2006).

4.2.5.5 Uncertainty assessment and time-series consistency

The estimated and reported emissions under 2A4b are determined by deducting known use in 2A3, 2C3 and 2C7ii from the import of soda ash. As we do not have sufficient information to determine where the rest of the imported soda ash has been consumed, there is some uncertainty as to whether all soda ash consumption in fact is emissive. There is also some uncertainty associated with the foreign trade statistics, and in the assumption that CO₂ emissions occur the same year as the soda ash is imported. According to the IPCC 2006 Guidelines, there is negligible uncertainty associated with the emission factor, given that the correct emission factor is applied (IPCC 2006).

A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.2.5.6 Category-specific QA/QC and verification

There is no source specific QA/QC procedure for this sector. However, when the calculation first was included in the inventory, a comparison was made between figures on net import of soda ash in foreign trade statistics and in the Norwegian Product Register. Import figures from the Product Register for the period 2000-2011 never constituted more than 41% of the amounts imported according to foreign trade statistics. Thus, it was assumed that the net import in the foreign trade statistics is a good proxy for the total quantity of soda ash used in Norway.

4.2.5.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.2.5.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category. In the future, we might examine what these other uses of soda ash are to confirm whether they are emissive or not.

4.2.6 Non-metallurgical magnesium production, 2A4c

4.2.6.1 Category description

One plant whose main activity is producing magnesium oxide from limestone and dolomite is included in the emission inventory. The plant was established in 2005 and was closed during 2021. The plant was covered by the EU ETS.

4.2.6.2 Methodological issues

The plant reported emission figures of CO₂ to the Norwegian Environment Agency. The emissions are calculated by multiplying the amount of limestone and dolomite used in its production with emission factors.

4.2.6.3 Activity data

The amount of limestone and dolomite used in the production was reported each year from the plant to the Norwegian Environment Agency. The aggregate amounts of limestone and dolomite used are reported in CRT Table 2(l).A-Hs1 and Table 4-10 shows the usage for some selected years in the time series.

Table 4-10: Usage (kt) of limestone and dolomite in the non-metallurgical magnesium production.

Year	Limestone use	Dolomite use
2005	0.0	1.4
2010	1.4	0.0
2015	0.0	147.3
2016	0.0	90.2
2017	0.0	32.5
2018	0.0	66.6
2019	0.0	109.1
2020	0.0	50.2
2021	0.00	6.6

Source: Norwegian Environment Agency

4.2.6.4 Emission factors

The plant used the emission factor (EF) equal to the standard EF used in the EU ETS for limestone before it entered the EU ETS and used plant specific EFs after it entered the EU ETS. The plant did not use limestone every year, and the EFs for 2006, 2008, 2009 and 2010 are in the range of 0.41-0.4504. The EF for the dolomite used is equal to the standard EF used in the EU ETS (0.45) for 2005, 2006 and 2007 before it entered the EU ETS. From 2008 the plant used plant specific EFs in the range of 0.40940014-0.495096639.

Apart from 2012 and 2015-2018, the plant used a conversion factor of 1. This means that for most years, all Ca and Mg have been assumed to be carbonates.

4.2.6.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.2.6.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The emissions were covered by the EU ETS, and their emissions were verified annually. In addition, the emissions are checked both by the case handler and by the Norwegian Environment Agency's inventory team.

4.2.6.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.2.6.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.2.7 Other process use of carbonates, 2A4d

4.2.7.1 Category description

The emissions from five plants are reported under 2A4d. The CO₂ emissions from two plants producing leca are included in the emission inventory, based on emission reports to the Norwegian Environment Agency. Production at one of the plants ended in 2004 and the existing plant is covered by the EU ETS. The third plant has neutralized sulphuric acid waste primarily with limestone and fly ash but now uses only fly ash. The use of fly ash reduces CO₂ emissions compared with when limestone is used. Finally, the category includes CO₂ emissions from two plants producing rock wool, based on emission reports to the Norwegian Environment Agency.

4.2.7.2 Methodological issues

The two plants producing leca report their use of dolomite and the corresponding CO₂ emissions to the Norwegian Environment Agency. The leca producer that still is in operation also reports some process emissions that are not from the use of dolomite. This includes the use of clay, waste oil mixed into the clay as an additive and scraps of glass wool. For the plant neutralizing sulphuric acid waste, the emissions are calculated by multiplying the amounts of limestone and fly ash used to neutralize sulphuric acid waste with emission factors. Data for the amounts of fly ash are only reported for 1997-2016. In addition, the plant has reported emissions from the use of fly ash only for 2010 and later years. For 1997-2009, CO₂ emissions from fly ash use have therefore been estimated and for 2017 and later years the amounts of fly ash have been estimated. The two plants producing rock wool report their use of dolomite and limestone and the corresponding CO₂ emissions to the Norwegian Environment Agency.

4.2.7.3 Activity data

The activity data are primarily the use of dolomite and limestone, but there is also some use of clay, waste oil, scraps of glass wool and fly ash. The aggregate amounts of limestone and dolomite used by the plants included in 2A4d are reported in the CRT Table 2(I).A-Hs1. Table 4-11 shows some of the activity data for some selected years in the time series.

Table 4-11: Use of limestone, dolomite, clay and fly ash in 2A4d (other process use of carbonates), all in kt.

Year	Limestone	Dolomite	Clay	Fly ash	Scraps of glass wool
2010	0.0	8.7	174.0	118.3	0.0
2015	0.0	15.3	99.5	132.6	0.0
2016	0.0	11.5	133.2	145.2	0.0
2017	0.0	15.6	147.9	152.5	0.0
2018	0.0	17.4	154.2	127.6	0.0
2019	0.0	10.1	154.7	98.3	0.0
2020	0.0	12.6	112.0	112.9	0.4
2021	0.0	18.3	145.3	51.3	14.2
2022	0.2	16.4	140.0	48.4	21.3
2023	3.8	10.7	91.9	23.1	16.8
2024	1.3	10.5	56.0	49.4	6.0

Source: Norwegian Environment Agency

4.2.7.4 Emission factors

An emission factor (EF) of 0.48 t CO₂/t dolomite was used by the leca producer that closed in 2004. At that time, there was no standard EF for dolomite. We assume that the EF of 0.48 is derived from the standard factors for CaCO₃ and MgCO₃ and an assumption of the ratio of these in the dolomite. For the leca producer that still is in production, the EF (for dolomite) for 1990-2011 is 0.477 and has since then used standard EF from the EU ETS and plant specific EFs in the range of 0.466-0.48. The EFs for the use of clay from 2013 and onwards range between 0.01596492-0.01974294. The EF for the waste oil mixed into clay is 3.2 t CO₂/t waste oil and the EF for scraps of glass wool is in the range of 0.318 to 0.338 t CO₂/t scrap of glass wool. The plant that neutralizes sulphuric acid waste uses an emission factor of 0.44 t CO₂/t limestone. For fly ash, IEFs for the years 2010-2016 have been calculated by the Norwegian Environment Agency to be in the range of 40 to 140.2 kg CO₂/t fly ash and with an average of 72.7 based on activity data and emissions. The IEF of 68.5 kg CO₂/t fly ash for 2010 (closest year with reported data) has been used for the years 1997-2009 and the IEF of 68.2 kg CO₂/t fly ash for 2016 (closest year with

reported data) has been used for the years after 2016. The two plants producing rock wool use emission factors of 0.44 t CO₂/t limestone and 0.481 t CO₂/t dolomite.

4.2.7.5 *Uncertainty assessment and time-series consistency*

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category. The IEF is relatively stable 1990-2008, variations may be due to emissions from the use of clay and ash that are not included as AD in the CRT. The IEF since 2008 varies more and this is primarily due to a shift from using limestone to ash at the plant that neutralizes sulphuric acid waste.

4.2.7.6 *Category-specific QA/QC and verification*

The specific QA/QC carried out for Industrial processes is described in Annex 4. The existing plant producing leca is covered by the EU ETS and the emissions are verified annually. The emissions are checked both by the case handler and by the Norwegian Environment Agency's inventory team. The reported emissions from the plant that neutralizes sulphuric acid waste occur under its regular permit and are checked both by the case handler and by the agency's inventory team.

4.2.7.7 *Category-specific recalculations*

There have been no recalculations performed for this source category this year.

4.2.7.8 *Category-specific planned improvements*

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.3 Chemical industry – 2B

Several activities are included under Chemical Industry. Nearly all emissions figures from this industry included in the inventory are reported figures from the plants to the Norwegian Environment Agency. Table 4-12 shows the GHGs that are emitted from each source category, tier of methodology and if the source category is key category or not.

Table 4-12: Chemical industry. Components included in the inventory, tier of method and key category.

Source category	CO ₂	CH ₄	N ₂ O	NM VOC	Tier	Key category
2B1. Ammonia production	R	NA	NA	NA	Tier 2	Yes
2B2. Nitric acid production	NA	NA	R	NA	Tier 3	Yes
2B5a. Silicon carbide production	R+E	R/E	NA	NA	Tier 2	Yes
2B5b. Calcium carbide production	R	NA	NA	R	Tier 1	No*
2B6. Titanium dioxide production	R	NA	NA	NA	Tier 2	Yes

Source category	CO ₂	CH ₄	N ₂ O	NMVOC	Tier	Key category
2B8a. Methanol production **	R	R+E	R	R+E	Tier 2	Yes***
2B8b. Ethylene production **	R+E	R	R	R	Tier 2	Yes***
2B8g. Other	R+E	R	NA	R	Tier 2	Yes***
2B10. Other	NA	NA	R	NA	Tier 3	Yes

R = emission figures in the national emission inventory are based on figures reported by the plants. E = emission figures are estimated. NA = Not Applicable. NO = Not Occuring. IE = Included Elsewhere.

** In the key category analysis, 2B5a and 2B5b have been aggregated to 2B5.*

***Minor N₂O emissions from 2B8a and 2B8b are reported under 2B10 Petrochemical N₂O in the CRT*

**** In the key category analysis, 2B8a, 2B8b and 2B8g have been aggregated to 2B8*

Table 4-13 shows the trends for 2B as a whole and for the various source categories. The GHG emissions from this sector category were about 1.8 million tonnes in 2024, this is 21.2% of the total emission from the IPPU sector. The emissions from this sector decreased by 54.6% from 1990, mainly due to lower emissions from the production of nitric acid, ammonia and carbide. The emissions decreased by 2.9% from 2023 to 2024.

Table 4-13: Emission trends for 2B Chemical industry (kt CO₂ equivalents).

Source category	1990	1990, % of IPPU	2023	2024	2024, % of IPPU	Trend 1990-202 (%)	Trend 2023-2024 (%)
2B1. Ammonia production	795.2	5.4 %	727.4	658.8	7.9 %	-17.2 %	-9.4 %
2B2. Nitric acid production	1 772.6	12.1 %	54.5	66.3	0.8 %	-96.3 %	21.6 %
2B5a. Silicon carbide production	245.6	1.7 %	0.4	0.1	0.0 %	-99.9 %	-64.2 %
2B5b. Calcium carbide production	178.1	1.2 %	NO	NO	NA	NA	NA
2B6. Titanium dioxide production	200.5	1.4 %	177.2	249.8	3.0 %	24.6 %	41.0 %
2B8a. Methanol production	NO	NA	220.7	86.9	1.0 %	NA	-60.6 %
2B8b. Ethylene production	606.9	4.1 %	488.7	469.5	5.6 %	-22.6 %	-3.9 %
2B8g. Other	47.8	0.3 %	17.6	18.3	0.2 %	-61.8 %	3.9 %
2B10. Petrochemical N₂O	0.2	0.0 %	0.3	0.2	0.0 %	56.6 %	-20.8 %
2B10. Other (production of fertilizers)	51.5	0.4 %	134.5	218.9	2.6 %	324.7 %	62.7 %

Source category	1990	1990, % of IPPU	2023	2024	2024, % of IPPU	Trend 1990-202 (%)	Trend 2023- 2024 (%)
2B. Total	3 898.5	26.5 %	1 821.4	1768.8	21.2 %	-54.6 %	-2.9 %

Source: Statistics Norway and the Norwegian Environment Agency

There is some minor production of hydrogen in Norway, but the production methods do not generate direct GHG emissions. According to the 2019 Refinement to the 2006 IPCC Guidelines, hydrogen production methods that generate no direct GHG emissions should not be considered in the IPPU sector. There is therefore no further description of hydrogen production in this NID and the source category has not been specified in the CRT tables.

4.3.1 Ammonia Production, 2B1

4.3.1.1 Category description

In Norway ammonia is produced by catalytic steam reforming of wet fuel gas (containing ethane, propane, and some butane). This is one of the steps in the production of fertilizers. Hydrogen is needed to produce ammonia, and wet fuel gas is the basis to produce hydrogen. The emissions reported in this category include all emissions from fuel combustion, including emissions from heavy heating oil used in boilers and from ethane used for direct heating. A substantial amount of CO₂ is recovered from the production process.

Figure 4.2 shows the time series for the gross CO₂ emissions, amount of recovered CO₂ and the net CO₂ emissions reported in 2B1. The variations from 1998 to 1999 and 1999 to 2000 are likely to be a result of the plant upgrading production capacity and energy efficiency in 1999-2000. The increase in emissions from 2014 to 2015 is due to an expansion in production capacity in which imported ammonia is replaced with domestic ammonia production. The emissions decreased, however, in 2016 and 2017 since domestic ammonia production decreased. In 2018, emissions increased as domestic ammonia production increased. The 13% decrease in emissions in 2021 is explained by a similar decrease in the production level and the 29% increase in emissions in 2022 is explained by an increase in production of 34%.

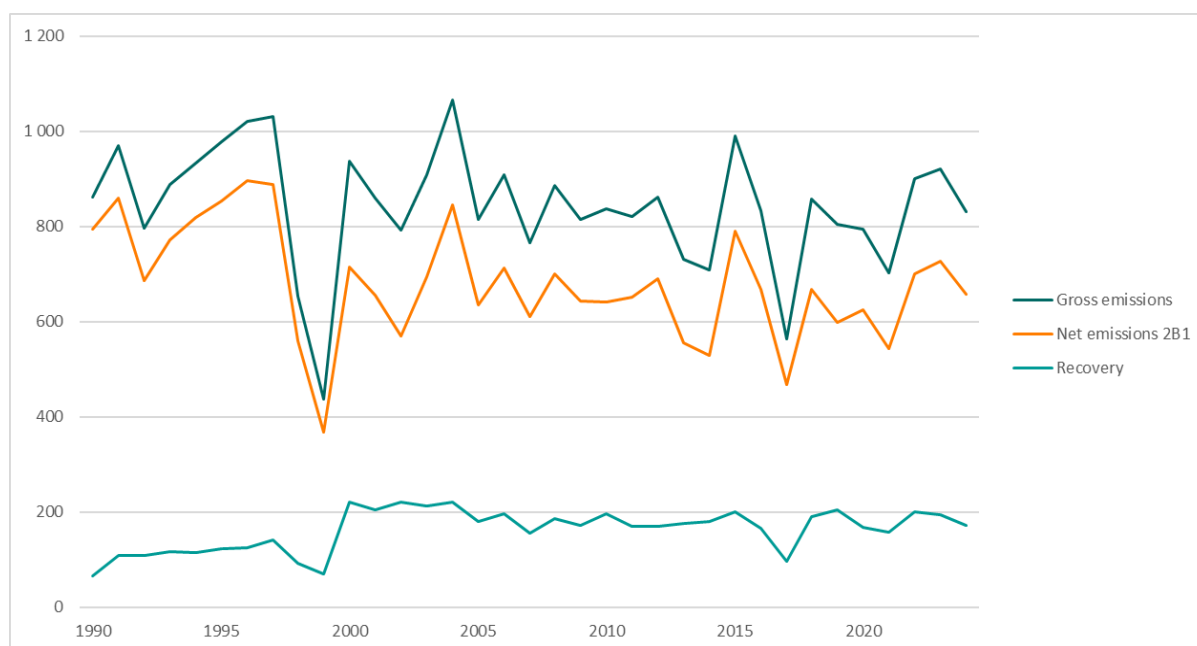


Figure 4.2: CO₂ emissions from production of ammonia. Source: Norwegian Environment Agency.

4.3.1.2 Methodological issues

The CO₂ emission figures in the Norwegian emission inventory are based on annual reports from the plant that is included in the EU ETS. The plant has reported consistent figures back to 1990 and calculates the emissions by multiplying the amount used of each fossil fuel with emission factors. Statistics Norway allocates these emissions to IPPU and ensures that emissions from this fuel use are not also reported under Energy.

The gross emissions include captured CO₂. A part of the CO₂, which is generated during the production process, is captured, and sold to other objectives et cetera soft drinks, and therefore deducted from the emission figures for this source. The amount of CO₂ recovered by the plant is determined by using the amount of CO₂ from the compressor unit minus the amount of CO₂ emitted. In both cases, these are measured by orifice plate with a dp-cell. This then goes to tank and then transported by trucks or boats. In accordance with footnote 5 in CRT table 2(I)A-H, the amount of CO₂ reported as recovered that is not exported is included in 2H2 Food and Drink.

Subtracting the captured CO₂ results in the net emissions reported in 2B1. Table 4-14 below presents the various activity data, emission factors, emissions, and the balance between gross, captured CO₂ and reported emissions in 2B1 for the latest reported year.

Table 4-14: Activity data, emission factors and balance for 2B1 in 2024.

	Ktonnes	Emission factor (tonne CO ₂ /tonne)	ktonnes CO ₂
Heating oil	0.6	3.17	1.9
Liquefied petroleum gas	0.1	3.00	0.4
CO-rich gas	9.8	3.000133	29.3
Ethane	73.4532	1.295377	95.1496
Gross emissions			830.6
Captured CO ₂			171.8
Net emissions in 2B1			658.8

Source: Norwegian Environment Agency

4.3.1.3 Activity data

The total amount of fossil fuels used are reported annually by the plant to the Norwegian Environment Agency and the use varies from one year to another. The various fuels used in the latest reported year are shown in Table 4-14. As a part of the official Industrial statistics, gas consumed is also reported to Statistics Norway that uses these figures for the QA/QC calculations by an alternative method. The ammonia production is reported in CRT Table2(I).A-Hs1.

4.3.1.4 Emission factors

The emission factors used are estimated based on the composition of the gases consumed. The plant states that the composition is based on daily analysis and that the composition of each gas (their emission factor) is stable. The reported emission factors for the latest reported year are shown in Table 4-14.

4.3.1.5 Uncertainty assessment and time-series consistency

The amount of gas is measured by using turbine meters and the meters are controlled by the Norwegian Metrology Service. The uncertainty in the measurement of propane and butanes is calculated to ± 0.2 and ethane $\pm 0.13\%$. The mix of propane/butanes is as average 60% propane and 40% butanes.

Figure 4.3 shows that there are some inter-annual variations in the IEF. The variations from 1998 to 1999 and 1999 to 2000 are likely to be a result of the plant upgrading production capacity and energy efficiency in 1999-2000. Figure 4.2 shows that there was a large drop in emissions and recovery in 1999. It is challenging to investigate this further as more data is not available and since the data quality at that time is poorer than now. Since the plant has reported under the voluntary agreement for 2008-2012 and under the EU ETS from 2013, the data quality has improved and the IEF is relatively stable in the end of the time series.

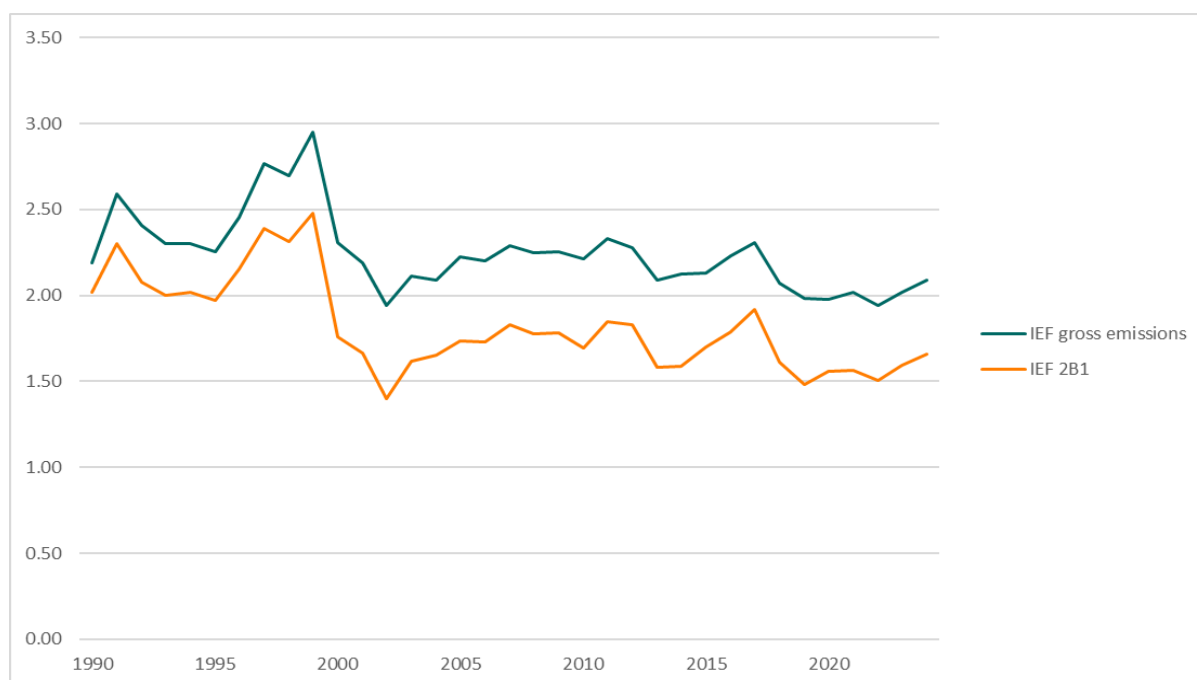


Figure 4.3: IEF for process emissions of CO₂ from ammonia production (tonne CO₂/tonne ammonia).

Source: Norwegian Environment Agency.

4.3.1.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plant has been reported under the voluntary agreement and the emissions are now covered by the EU ETS and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

The figures reported from the plant are occasionally compared to calculations done by Statistics Norway based on total amount of gas consumed and an emission factor of 3 tonne CO₂/tonne LPG. The calculated emissions figures have agreed quite well with emissions figures reported by the enterprise.

4.3.1.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.3.1.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.3.2 Production of Nitric Acid, 2B2

4.3.2.1 Category description

There are two plants in Norway producing nitric acid and these plants are covered by the EU ETS. Nitric acid is used as a raw material in the manufacture of nitrogenous-based fertilizer. The production of nitric acid (HNO_3) generates nitrous oxide (N_2O) and NO_x as by-products of high temperature catalytic oxidation of ammonia (NH_3).

The two plants have together six production lines. One production line was rebuilt in 1991 and in 2006 two lines were equipped with the technology – N_2O decomposition by extension of the reactor chamber. Since then, all production lines have to a certain extent been equipped with this technology. The newest production line was established in 2018.

Figure 4.4 shows that the production specific N_2O emissions were reduced substantially in the early 1990s and again from 2006. The reduced emissions in the early 1990s were due to rebuilding of one production line in 1991 and that a larger part of the production came from that line. The reduced emissions from 2006 are due to the installation of the earlier mentioned technology. There was a large increase in production of about 43% from 2009 to 2010 that came after a decrease in production of about 26% from 2008 to 2009. The low production level in 2009 reflects the lower economic activity due to the economic recession.

4.3.2.2 Methodological issues

N_2O

The two plants report the emissions of N_2O to the agency. N_2O emissions have been continuously measured since 1991 at one production line and from 2000 at another. The emissions at the three other production lines were based on monthly and weekly measurements but are from 2008 based on continuous measurements.²²

4.3.2.3 Activity data

The plants report the amounts of N_2O in the gas, based on continuous measurements. The plants also report the production of HNO_3 to the agency. Production and emission levels are shown for some years in Table 4-15.

Table 4-15: Production (ktonnes HNO_3) and N_2O emissions (ktonnes).

Year	Total production	Total emissions
2015	1 729.7	0.844
2016	1 669.2	0.810

²² See point 16 in Annex IV of <https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:02012R0601-20190101&from=EN> for the requirements for continuous measurements under the EU ETS.

Year	Total production	Total emissions
2017	1 733.7	0.706
2018	1 980.6	0.669
2019	1 916.5	0.618
2020	1 951.3	0.333
2021	2 022.1	0.185
2022	2 029.1	0.196
2023	1 870.1	0.206
2024	1 984.0	0.250

Source: Statistics Norway and Norwegian Environment Agency

4.3.2.4 Emission factors

Not relevant.

4.3.2.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. The uncertainty in the measurements was in 2000 estimated by the plant to $\pm 7\%$. However, in the 2006 report to the Norwegian Environment Agency one plant reports that the uncertainty in measurement of N_2O is calculated to $\pm 1-3\%$.

The inter-annual changes of IEFs are likely to be explained by variations in the level of production between the lines with different IEFs. Figure 4.4 shows that the IEF for nitric acid production has substantially decreased from 1990. The low production level in 2009 reflects the lower economic activity due to the economic recession.

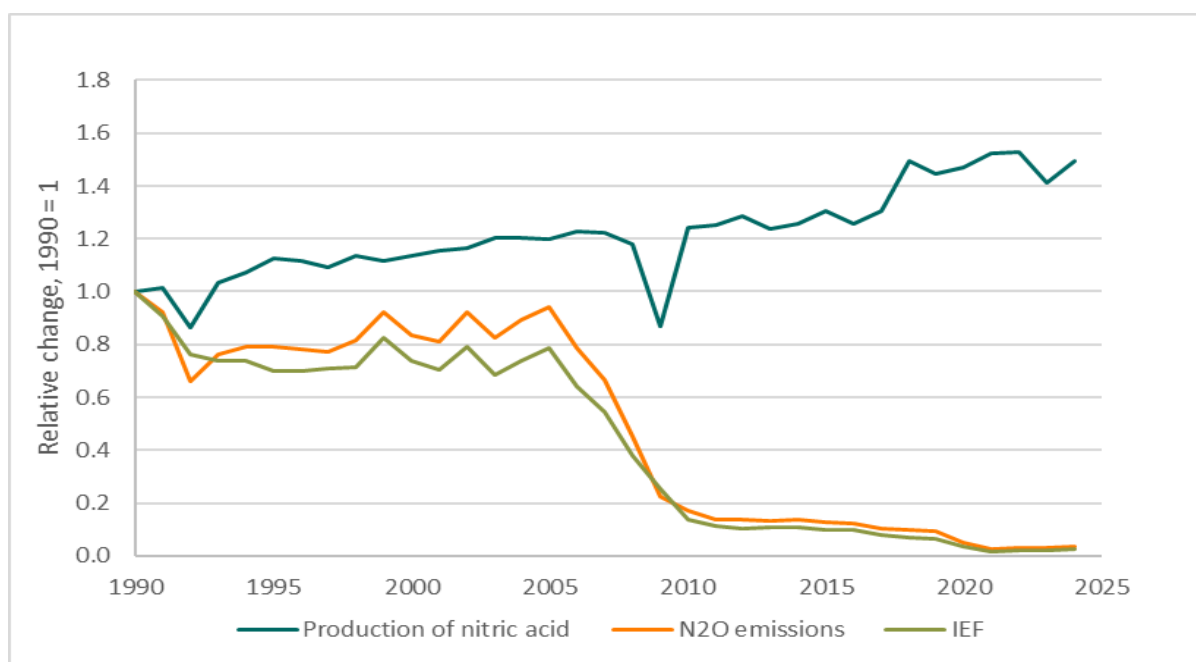


Figure 4.4: Relative change in total emissions, total production and IEF for nitric acid production. 1990=1. Source: Norwegian Environment Agency.

4.3.2.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The emissions are covered by the EU ETS, and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

4.3.2.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.3.2.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.3.3 Silicon carbide, 2B5a

4.3.3.1 Category description

Silicon carbide (SiC) has been produced at three plants until 2006 when one plant was closed. The plants were included into the EU ETS from 2013. SiC is produced by reduction of quartz (SiO_2) with petrol coke as a reducing agent. In the production of silicon carbide, CO_2 and CO are released as by-products from the reaction between quartz and carbon. Methane (CH_4) may be emitted from petrol coke during parts of the process and sulphur origin from the petrol coke.

The large decrease in emissions since 1990 is due to reduced production and that one plant was closed in 2006. The fluctuation in emissions over the years is due to variation in production of crude silicon carbide. There was a large production decrease from 2002 to 2003 and an increase from 2009 to 2010 and this is due to a low production level in 2009. The production level in 2009 is also lower than that of 2008 and reflects the lower economic activity due to the economic recession. The production levels and therefore the resulting emissions were very low in 2023 and 2024.

4.3.3.2 Methodological issues

The emissions of CO₂, CH₄ and NMVOC are calculated based on crude silicon carbide production as activity data and emission factors. This is regarded as being a Tier 2 method in IPCC (2006). Indirect emissions of CO₂ are reported in CRT table 6 and are calculated by Statistics Norway based on the emission of CH₄ and NMVOC.

4.3.3.3 Activity data

The activity data used by the plants for the calculation of CO₂, CH₄ and NMVOC are the produced amount of crude silicon carbide. The production is shown in Table 4-16 for some years.

Table 4-16: Norwegian crude silicon carbide production (ktonnes).

Year	Production
1990	83.4
1995	83.6
2000	66.7
2005	35.0
2010	27.2
2015	17.6
2016	18.7
2017	21.2
2018	21.7
2019	18.5
2020	16.5
2021	16.4
2022	14.2
2023	0.4
2024	0.3

Source: Statistics Norway and Norwegian Environment Agency

4.3.3.4 Emission factors

The plants use the country-specific emission factor that is the basis for the IPCC (2006) default factor of 2.62 tonne CO₂/tonne crude silicon carbides, see

Table 4-17. However, the smallest existing producer has recently shifted from producing silicon carbide to special production which is not included as activity data in the CRT. The IEF in the CRT Table2(I).A-Hs1 in 2022 is therefore slightly lower than 2.62. All plants use the default emission factor of 11.6 kg CH₄ /tonnes crude SiC from the IPCC 2006, see Table 4-17. The two plants did not operate under normal circumstances in 2023 and 2024 and the implied emission factors for both CO₂ and CH₄ for these two years are lower than normal.

Table 4-17: Emission factor for CO₂ and CH₄ used for silicon carbide production.

Component	Emission factor	Source
CO ₂	2.62 tonnes CO ₂ /tonnes crude SiC	IPCC 2006
CH ₄	11.6 kg CH ₄ /tonnes crude SiC	IPCC 2006

For NMVOC, an emission factor of 10.8 t NMVOC/kt SiC is used for the whole time series. This is based on measurements by the plants.

4.3.3.5 Uncertainty assessment and time-series consistency

The three productions sites use the amount of crude silicon carbide produced as activity data. The uncertainty of the activity data is related to the uncertainty of the weighing equipment and is calculated to be $\pm 3\%$. The uncertainty in the emission factors for CO₂ and CH₄ are $\pm 10\%$. This is the default value in the IPCC 2006 Guidelines. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.3.3.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plants have been reported under the voluntary agreement and the emissions are now covered by the EU ETS and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

4.3.3.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.3.3.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.3.4 Calcium carbide, 2B5b

4.3.4.1 Category description

One plant in Norway was producing calcium carbide until 2003 and the emissions from this source were about 178 000 tonnes CO₂ in 1990. The production of calcium carbide generates CO₂ emissions when limestone is heated and when petrol coke is used as a reducing agent.

4.3.4.2 Methodological issues

The CO₂ figures in the inventory are based on emission figures reported from the plant to the agency. The emission estimates are based on the amount of calcium carbide produced each year and an emission factor estimated by SINTEF (1998b). Some of the carbon from petrol coke will be sequestered in the product, but not permanently. Thus, this carbon is included in the emission estimate.

4.3.4.3 Activity data

The amount of calcium carbide produced is reported by the plant to the agency.

4.3.4.4 Emission factors

The emission factor used by the plants in the calculation of CO₂ has been estimated to be 1.69 tonne/tonne CaC₂ by SINTEF (1998b). An additional 0.02 t CO₂ /t CaC₂ from fuel is reported in the Energy chapter.

4.3.4.5 Uncertainty assessment and time-series consistency

For uncertainty, see description for 2B5a. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.3.4.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4.

4.3.4.7 Category specific recalculations

There have been no recalculations performed for this source category this year.

4.3.4.8 Category-specific planned improvements

Since the plant is closed there is no further planned activity to review historical data.

4.3.5 Titanium dioxide production, 2B6

4.3.5.1 Category description

One plant producing titanium dioxide slag is included in the Norwegian inventory and it was included in the EU ETS in 2013. The plant also produced pig iron as a by-product. The titanium dioxide slag and pig iron are produced from the mineral ilmenite and coal is used as a reducing agent. Various components including CO₂ are emitted during the production process.

4.3.5.2 Methodological issues

The method that is used for all years can be defined as a calculation based on carbon balance. This method accounts for all the carbon in the materials entering the process and subtracts the CO₂ captured in the products.

4.3.5.3 Activity data

The carbon inputs are dominated by coal, but there are also some pet coke, electrodes, carbides, and some masses. Table 4-18 shows the most important carbon inputs.

Table 4-18: Carbon inputs (ktonnes) for titanium dioxide production in 2024.

Activity data	Amount (ktonnes)
Coal	66.9
Coke	25.5
Pet coke	3.1
Electrode mass (tonne dry weight)	1.5

Source: Norwegian Environment Agency

4.3.5.4 Emission factors

The mass balance for each year requires emission factors. The emission factors for the most important carbon inputs are shown in Table 4-19.

Table 4-19: Emission factors for some of the carbon inputs in 2024.

Activity data	EF (tonne CO ₂ /tonne)
Coal	2.568628
Coke	2.896619
Pet coke	3.569736
Electrode mass (dry weight)	3.298578

Source: Norwegian Environment Agency

4.3.5.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.3.5.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plant has been reported under the voluntary agreement, and the emissions are now covered by the EU ETS, and the emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

4.3.5.7 Category-specific recalculations

There have been recalculations performed for this source category this year, see chapter 10 for details.

4.3.5.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.3.6 Methanol, 2B8a

4.3.6.1 Category description

One plant established in 1997 produces methanol and it is covered by the EU ETS. Natural gas and oxygen are used in the production of methanol. The conversion from the raw materials to methanol is done in various steps and on different locations at the plant. CH₄, N₂O and NMVOC are emitted during the production process. The emissions reported in this category include all emissions from flaring and combustion of fuels derived from the natural gas feedstock.

Minor CO₂ emissions from other energy combustion (diesel and propane) are included under 1A2c. Indirect emissions of CO₂ are reported in CRT table 6 and are calculated by Statistics Norway based on the emission of CH₄ and NMVOC, see chapter 9 for details about EFs. Minor N₂O emissions are reported under 2B10 Petrochemical N₂O in the CRT.

4.3.6.2 Methodological issues

The plant reports emission figures of CO₂, CH₄, N₂O and NMVOC to the Norwegian Environment Agency. The reported CO₂ emissions from flaring and combustion of derived fuels are based on the amounts of gas multiplied by emission factors and these are all reported under the EU ETS. Statistics Norway allocates these emissions to IPPU and ensures that emissions from this fuel use are not also reported under Energy.

Most of the CH₄ emissions reported by the plant are from a washing tower. The CH₄ emissions from this source were first estimated by the plant for the year 2022 and were estimated based on measurements of the composition of gases and the number of operating hours in a monthly basis. The emissions from this source for the years 1997-2021 were estimated by the plant by using the IEF for 2022 (t CH₄ emissions per tonne methanol produced) multiplied by the annual methanol production.

The plant reports diffuse CH₄ and NMVOC emissions based on the use of infrared cameras twice during a year to estimate an emission factor per operating hour. The emissions reported by the

plant for 2021 and 2022 have been used by the Norwegian Environment Agency to calculate an average IEF for 2021 and 2022 (t CH₄ and NMVOC emissions per tonne methanol produced) and this is multiplied with the annual methanol production to estimate emissions for the years 1997-2020. Similarly, the CH₄ and NMVOC emissions from flaring and combustion are from 2021 as reported by the plant. For the years prior to 2021, the Norwegian Environment Agency have calculated an average IEF for 2021 and 2022 and multiplied this with the annual methanol production.

4.3.6.3 Activity data

The annual emissions from flaring and combustion of fuels are based on the reported combusted amounts. The total fuels used for some years are shown in Table 4-20. The majority of this is natural gas, but there is also some syngas, flaring gas and liquid off-spec methanol (LOFS). The production volume of methanol in 2024 was about 217 ktonnes and the time series for the production is reported in CRT table2(I).A-Hs1. The fuel use and production level in 2024 was low compared to earlier years due to a maintenance turnaround.

Table 4-20: Sum of fuels (kt) used in methanol production.

2019	2020	2021	2022	2023	2024
128	122	101	100	112	39

Source: Norwegian Environment Agency

The activity data used to calculate the indirect CO₂ emissions are the diffuse emissions of CH₄ and NMVOC.

4.3.6.4 Emission factors

CO₂

The plant reports its emission factors to the Norwegian Environment Agency. The EF for natural gas is stable at around 2.70 tonnes CO₂ per tonne natural gas. The EF for the flaring gas varies. The EF for syngas is at around 1.2-1.3 tonnes CO₂ per tonne syngas and the EF for LOFS is around 0.3 tonne CO₂ per tonne LOFS.

4.3.6.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. There are variations in the implied emission factor. This is primarily due to the variations in the level of flaring. The IEF peaks occur in years when the level of flaring is high.

4.3.6.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plants emissions are verified annually under the EU ETS. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

4.3.6.7 Category-specific recalculations

There have been recalculations performed for this source category this year, see chapter 10 for details.

4.3.6.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.3.7 Ethylene, 2B8b

4.3.7.1 Category description

From 1990 until 2000, the emissions reported under this category were from one single plant that produced primarily ethylene, but also vinyl chloride and propylene. In 2001, the part of the plant producing vinyl chloride was separated into a different plant. So, from 2001, the emissions are reported by two plants, and they are now both covered by the EU ETS.

Most of the emissions reported under this category are CO₂ emissions from the production of ethylene, but there are also CO₂ emissions from the production of vinyl chloride and propylene. The emissions in this category include all emissions from the plants, apart from minor emissions from the combustion of diesel and propane that are reported under 1A2C. Emissions of CH₄ and NMVOC emissions from leakages in the process are also included. Indirect emissions of CO₂ from CH₄ and NMVOC are reported in CRT table 6. Minor N₂O emissions are reported under 2B10 Petrochemical N₂O in the CRT. Further emissions of N₂O from combustion are reported in 1A2c.

4.3.7.2 Methodological issues

CO₂, CH₄ and NMVOC

The plants report emission figures of CO₂, CH₄, N₂O and NMVOC to the Norwegian Environment Agency. For the plant that primarily produces ethylene, the reported emissions from flaring and combustion of fuels are based on the amounts of gas multiplied by emission factors. For the plant producing vinyl chloride, the reported CO₂ emissions stem from recycling hazardous waste to hydrochloric acid.

Statistics Norway allocates these emissions in IPPU and ensures that emissions from this fuel use are not also reported under Energy. The CH₄ and NMVOC emissions are based on measurements and are reported to the Norwegian Environment Agency.

Indirect emissions of CO₂ calculated by Statistics Norway are based on the emission of CH₄ and NMVOC.

4.3.7.3 Activity data

The annual emissions from flaring and combustion of fuels are based on the reported combusted amounts. The total fuel used for some years is shown in Table 4-21. The majority of this is natural gas, but there are also some flaring gas, oxy exhaust gas and hazardous waste. The production volumes of ethylene, VCM, propylene and vinyl chloride are aggregated and reported in CRT table2(l).A-Hs1. The production volumes of ethylene and VCM in 2023 were about 657 ktonnes and 432 ktonnes respectively. The production of ethylene fell from about 617 kt in 2021 to 422 kt in 2022 and then increased to about 657 kt in 2023. There is also a corresponding decrease and then increase in the associated fuel use from this plant. The production level and sum of fuels used in 2024 are similar to those for 2023.

Table 4-21: Sum of fuels (kt) used in 2B8b.

2019	2020	2021	2022	2023	2024
529	570	573	419	519	503

Source: Norwegian Environment Agency

The CH₄ and NMVOC emissions are reported annually to the Norwegian Environment Agency. The activity data used to calculate the indirect CO₂ emissions are the diffuse emissions of CH₄ and NMVOC.

4.3.7.4 Emission factors

CO₂

The plants report the emission factors used as part of their reporting under the EU ETS.

CH₄

For the plant producing vinyl chloride, the reported diffuse emissions of CH₄ are based on a measurement derived emission factor of 5 kg CH₄ per operating hour. See chapter 9 for details concerning the EFs used for indirect CO₂ emissions from CH₄ and NMVOC.

4.3.7.5 Uncertainty assessment and time-series consistency

Uncertainty estimates are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category.

The various products that are aggregated into the reported AD in the CRT tables have their own implied emission factors (IEFs). The aggregation of various production volumes with different IEFs results in variations in the aggregate IEF. For instance, in the period 2021-2023, plant 1 produced ethylene and accounted for about 81-83% of the reported emissions in 2B8b, 53-60% of the aggregate AD in 2B8b and the IEF was 0.72, 0.80 and 0.61 respectively in 2021, 2022 and 2023. Plant 2 produced VCM in 2021-2023 and accounted for about 19-17% of the reported emissions in 2B8b, 47-40% of the aggregate AD in 2B8b and the IEF was 0.19, 0.22 and 0.20 respectively in

2021, 2022 and 2023. An alternative IEF based on the sum of fuels as reported in table 4-21 gives a more stable IEF as the change in IEF from 2021-2022 is 5% and from 2022 to 2023 it is -5%.

4.3.7.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plants are covered by the EU ETS, and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

4.3.7.7 Category-specific recalculations

There have been recalculations performed for this source category this year, see chapter 10 for details.

4.3.7.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.3.8 Other, plastic, 2B8g

4.3.8.1 Category description

The emissions included in this category are from a plant that now produces polyethylene and a plant that produces formalin and binders. They are both part of the EU ETS. The emissions reported in this category include all emissions from the plant producing polyethylene and the process emissions from the plant producing formalin and binders, except for minor emissions from the combustion of diesel and heating oil. These are reported under 1A2C.

4.3.8.2 Methodological issues

CO₂, CH₄ and NMVOC

The plant producing polyethylene reports emission figures of CO₂, CH₄ and NMVOC to the Norwegian Environment Agency. The reported emissions from flaring and combustion of fuels are based on the amounts of fuels multiplied by emission factors. Statistics Norway allocates these emissions in IPPU and ensures that emissions from this fuel use are not also reported under Energy. CH₄ and NMVOC emissions reported are based on measurements. Indirect emissions of CO₂ calculated by Statistics Norway are based on the emissions of CH₄ and NMVOC.

The plant that produces formalin and binders reports CO₂ emissions to the Norwegian Environment Agency. The process emissions reported under IPPU has since 2013 been based on a mass balance considering the produced amounts of formalin and the amounts of methanol used in the process. The IEFs for the process emissions calculated as tonnes CO₂ per tonne formalin produced are in the range of 0.15-0.18 for the years 2013-2019. The average of 0.168 has been used together with the production levels of formalin to estimate the process emissions for the years 1990-2012.

4.3.8.3 Activity data

The annual emissions from the plant producing polyethylene are from flaring and combustion of fuels and are based on the reported combusted amounts. The majority of this is natural gas, but there are also some flaring gas and hazardous waste.

Table 4-22: Sum of fuels (kt) used in production of polyethylene.

2019	2020	2021	2022	2023	2024
5	5	8	3	8	8

Source: Norwegian Environment Agency

The production volumes of polyethylene and polypropylene are aggregated and reported in CRT table2(I).A-Hs1. The production volume of polyethylene in 2024 was about 118 ktonnes and the production of formalin (100%) in 2024 was about 32 ktonnes.

4.3.8.4 Emission factors

CO₂

The plants report the emission factors used as part of their reporting under the EU ETS.

4.3.8.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.3.8.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plant is covered by the EU ETS, and the emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

4.3.8.7 Category-specific recalculations

There have been recalculations performed for this source category this year, see chapter 10 for details.

4.3.8.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.3.9 Other, production of fertilizers, 2B10


4.3.9.1 Category description

A plant producing fertilizers has reported N₂O emissions from its production since 2011 to the agency. Urea nitrate is added to the process to reduce the formation of NO_x emissions and this process forms N₂O emissions.

4.3.9.2 Methodological issues

According to the plant, the formation of NO_x is reduced using urea nitrate and cyanic acid. The process forms N₂O, see formulas below.

Reduction of NO_x through Urea nitrate and cyanic acid:

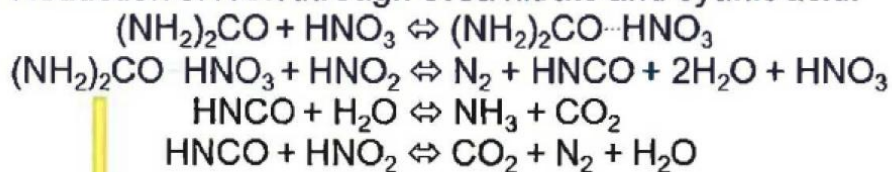

N₂O formation:



The emissions of N₂O are based on measurements of gas volumes and samples are taken for analysis by gas chromatograph. The plant has reported N₂O emissions since 2011 and the Norwegian Environment Agency has estimated the emissions for the years 1990-2010 based on production levels and assumptions about the IEF. There are many factors that influence the emissions, and these have varied over time. Such factors are production levels, composition of phosphates, use of urea etc. The plant's reporting of emissions for the years 2011-2013 results in an average IEF of 0.27 kg N₂O per tonne produced fertilizer.

This IEF was used to estimate the emissions for the years 2007-2010 as the factors influencing the emissions were similar to 2011-2013. In the years 2002-2006, the plant used more of one type of phosphate than in the period 2007-2013 and the IEF is therefore assumed to be 25% lower. The use of the phosphate type was even larger in the years 1990-2001 and the IEF is therefore assumed to be 50% lower than for the years 2007-2013.

The increase in emissions in 2024 is due to a combination of factors in the process. This led to an increased use of urea to avoid increased emissions of nitrogen dioxide, but this increased the N₂O emissions.

4.3.9.3 Activity data

See description in chapter 4.3.9.2. Although there are several factors that influence the emissions, the production of fertilizers is included as activity data in CTF table 2(I).A-Hs1.

4.3.9.4 Emission factors

See description in chapter 4.3.9.2.

4.3.9.5 Uncertainty assessment and time-series consistency

The estimates for the years 1990-2010 are uncertain since there are many factors that could influence the emissions. Chapter 4.3.9.2 describes how the emissions for 1990-2010 were estimated and explains the differences in IEF over time. Uncertainty estimates for greenhouse gases are given in Annex 2.

4.3.9.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The emissions in this category are not covered by the EU ETS, but the emissions have been reported since 2011 and are considered and tracked by the agency's inventory team.

4.3.9.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.3.9.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.4 Metal industry – 2C

The Metal industry in Norway includes plants producing iron and steel, ferroalloys, aluminium, magnesium, zinc, anodes and nickel, see Table 4-23. Nearly all emissions figures from the production of metals included in the inventory are figures reported annually from the plants to the agency.

Table 4-23: Metal industry. Components included in the inventory, tier of method and key category.

Source category	CO ₂	CH ₄	PFCs	SF ₆	Tier	Key category
2C1a. Iron and steel production	R	NA	NA	NA	Tier 3	No
2C2. Ferroalloys production *	R	R	NA	NA	Tier 2/3	Yes
2C3. Aluminium production	R	NA	R	R	Tier 2/3	Yes
2C4. Magnesium production	E	NA	NA	R	Tier 2	Yes
2C6. Zinc production	R + E	NA	NA	NA	Tier 2	No
2C7. Anode production	R	NA	NA	NA	Tier 2	No
2C7. Nickel production	R	NA	NA	NA	Tier 2	No

R = emission figures in the national emission inventory are based on figures reported by the plants. E = emission figures are estimated. NA = Not Applicable. NO = Not Occurring. IE = Included Elsewhere.

* Small N₂O emissions from 2C2 are reported under 2C7 Ferroalloys N₂O in the CRT

Table 4-24 shows the trends for the sector Metal Production (2C) as a whole and for the various source categories. The GHG emissions from this sector category were about 4.7 million tonnes in 2024, this is 56.6% of the total emission from the IPPU-sector. The largest contributors to the GHG emissions from Metal industry in 2024 are Ferroalloy production and Aluminium production. The emissions from Metal Production have decreased by 51.8% from 1990. The reduction since 1990 is due to decreased PFC and SF₆ emissions that again were due to improvement in technology in aluminium production, the close of a magnesium plant in 2006 and generally lower production volumes. The emissions decreased by 0.6% from 2023 to 2024. There was a large increase in emissions from 2009 to 2010, this is mainly due to a low production level for ferroalloys in 2009. The production level in 2009 is also lower than that of 2008 and reflects the lower economic activity due to the economic recession.

Table 4-24: Emission trends for 2C Metal industry (kt CO₂ equivalents).

Source category	1990	1990, % of IPPU	2023	2024	2024, % of IPPU	Trend 1990-2024 (%)	Trend 2023-2024 (%)
2C1a. Iron and steel production	12.4	0.1 %	34.1	30.4	0.4 %	146.1 %	-10.8 %
2C2. Ferroalloys production	2 555.0	17.4 %	2 550.7	2 490.3	29.9 %	-2.5 %	-2.4 %
2C3. Aluminium production	4 919.5	33.5 %	2 065.9	2 101.3	25.2 %	-57.3 %	1.7 %
2C4. Magnesium production	2 235.6	15.2 %	NO	NO	NA	NA	NA
2C6. Zink production	3.0	0.0 %	3.8	2.7	0.0 %	-7.3 %	-27.8 %
2C7 Ferroalloys N₂O	4.5	0.0 %	3.8	3.5	0.0 %	-22.3 %	-9.8 %
2C7 Anode production	43.8	0.3 %	71.2	72.0	0.9 %	64.4 %	1.2 %
2C7 Nickel production	7.6	0.1 %	14.2	14.3	0.2 %	88.2 %	0.6 %
2C. Total	9 781.3	66.5 %	4 743.7	4 714.5	56.6 %	-51.8 %	-0.6 %

Source: Statistics Norway and the Norwegian Environment Agency

4.4.1 Steel, 2C1a

4.4.1.1 Category description

Norway includes one plant producing steel that is covered by the EU ETS and the activity data in the CRT is steel produced.

4.4.1.2 Methodological issues

Emission figures of CO₂ annually reported to the Norwegian Environment Agency are used in the Norwegian GHG Inventory. This reporting includes both the reporting under the EU ETS and

reporting as required under its regular emission permit. The emission figures are based on mass balance calculations.

4.4.1.3 Activity data

The CO₂ emissions stem from an Electric Arc Furnace (EAF) where scrap iron is melted with other carbon materials. The emissions from the scrap iron are calculated based on the use of each type of scrap iron and the appurtenant content of carbon in each type of scrap iron. The types of scrap iron are according to the UK steel protocol and the carbon content in the types of scrap used varies from 0.15% up to 4%. The other input materials to the EAF are coal, lime and the metals ferromanganese, ferrosilicon and silicomanganese and electrodes. The outputs are steel, dust and slag. Net emissions from the mass balance are the process emissions.

4.4.1.4 Emission factors

Since a mass balance is used, it is the carbon contents of the carbon materials that go into the mass balance that are used. For the scrap iron, all ten types of scrap iron have their own carbon content.

4.4.1.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category. The process emissions prior to 2005 have mostly been estimated based on the process emissions per tonne steel produced in 1998 and 2005, this explains the increasing variation in the CO₂ IEF for steel after 2005 since the emissions from 2005 and onwards are based on annual reported data from the EU ETS.

4.4.1.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plant is covered by the EU ETS, and the emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

4.4.1.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.4.1.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.4.2 Production of Ferroalloys, 2C2

4.4.2.1 Category description

There are 12 plants producing ferroalloys in Norway and the plants were included in the EU ETS in 2013. One plant closed in 2001, two plants were closed during 2003 and two in 2006. The plant that was out of production in 2006 started up again in 2007. Ferrosilicon, silicon metal, ferromanganese and silicon manganese are now produced in Norway. Ferrochromium was produced until the summer of 2001. Ferro silicon with 65 to 96% Si and silicon metal with 98-99% Si is produced. The raw material for silicon is quartz (SiO₂). SiO₂ is reduced to Si and CO using

reducing agents like coal, coke, and charcoal. The waste gas CO and some SiO burns to form CO₂ and SiO₂ (silica dust).

In ferroalloy production, raw ore, carbon materials and slag forming materials are mixed and heated to high temperatures for reduction and smelting. The carbon materials used are coal, coke, and some bio carbon (charcoal and wood). Electric submerged arc furnaces with graphite electrodes or consumable Soederberg electrodes are used. The heat is produced by the electric arcs and by the resistance in the charge materials. The furnaces used in Norway are open, semi-covered or covered.

The CO is a result of the production process. In open or semi- closed furnaces, the CO reacts with air and forms CO₂ before it is emitted. This is due to high temperature and access to air in the process. In a closed furnace the CO does not convert to CO₂ as there is no access to air (oxygen) in the process. The waste gas is then led from furnace and used as an energy source or flared and is reported under the relevant Energy sectors. The technical specification of the furnaces is irrelevant since emissions are calculated using a mass balance or calculated by multiplying the amount of reducing agents in dry weight with country specific EFs.

Several components are emitted from production of ferroalloys. Emission of CO₂ is a result of the oxidation of the reducing agent used in the production of ferroalloys. In the production of FeSi and silicon metal NMVOC and CH₄ emissions originate from the use of coal and coke in the production processes. From the production of ferro manganes (FeMn), silicon manganes (SiMn) and ferrochromium (FeCr) there are only CO₂ emissions.

Measurements performed at Norwegian plants producing ferroalloys indicate that in addition to emissions of CO₂ and CH₄ also N₂O is emitted. Due to the CRT, the N₂O emissions are reported in 2C7i (ferroalloys N₂O).

The large increase in emissions from 2009 to 2010 is due to a low production level for ferroalloys in 2009. The production level in 2009 is also lower than that of 2008 and reflects the lower economic activity due to the economic recession.

4.4.2.2 Methodological issues

CO₂

The methods used in the calculation of CO₂ emissions from production of ferroalloy is in accordance with the method recommended by the IPCC (2006). Emissions are reported by each plant in an annual report to the agency.

The plants have used one of the two methods below for calculating CO₂ emissions:

1. Mass balance: the emission of CO₂ is calculated by adding the total input of C in raw materials before subtracting the total amount of C in products, wastes and sold gases (Tier 3).

2. Calculate emission by multiplying the amount of reducing agents in dry weight with country specific emission factors for coal, coke, petrol coke, electrodes, anthracite, limestone, and dolomite (Tier 2).

To ensure consistency, each plant has used one method for the entire time series.

Indirect emissions of CO₂ are calculated based on the emission of CH₄ and are reported in CRT table 6.

CH₄ and N₂O

The emissions of CH₄ and N₂O are calculated by multiplying the amount of ferroalloy produced with an emission factor. Emissions are reported by each plant in an annual report to the agency.

Plants producing ferro manganese, silicon manganese and ferrochromium do not emit emissions of CH₄ and N₂O.

NMVOC

The emissions are estimated by Statistics Norway from the consumption of reducing agents and an emission factor.

4.4.2.3 Activity data

CO₂

Calculation of emissions is based on the consumption of gross reducing agents and raw materials (carbonate ore, limestone, and dolomite). Note that the use of limestone and dolomite and the corresponding emissions are included here under 2C2.

Table 4-25 shows the amount of reducing agents used as activity data in the CRT for some selected years. The reducing agents include the use of bio carbon and the use increased from about 2001.

Table 4-25: Ktonnes of reducing agents in the ferroalloys production for some selected years.

Activity data	1990	2000	2010	2022	2023	2024
Coal (dry weight)	395.3	544.9	360.3	595.9	553.4	498.5
Coke (dry weight)	379.0	450.1	328.0	356.7	335.9	372.3
Electrodes	34.7	48.1	48.8	47.5	43.4	39.9
Petrol coke	8.4	12.9	7.8	2.7	6.8	8.2
Pulverised coke	0.0	0.0	9.7	8.6	9.6	5.7
Bio carbon	16.6	17.5	104.0	194.6	194.4	165.8

Activity data	1990	2000	2010	2022	2023	2024
Total	834.0	1 073.6	858.6	1 206.0	1 143.5	1 090.4
Bio as % of total	2 %	2 %	12 %	16 %	17 %	15 %

Source: Norwegian Environment Agency

CH₄ and N₂O

The gross production of different ferroalloys is used in the calculation.

NMVOC

The gross amount of reducing agents that are used for the calculation of NMVOC emissions are annually reported to Statistics Norway from each plant.

4.4.2.4 Emission factors

CO₂

The carbon content of each raw material used in the Tier 3 calculation is from carbon certificates from the suppliers. The carbon in each product, CO gas sold et cetera, is calculated from the mass of product and carbon content. In the Tier 2 calculation the emission factors are listed in Table 4-26.

Table 4-26: Emission factors from production of ferroalloys. Tonnes CO₂/tonne reducing agent or electrode.

	Coal	Coke	Electrodes	Petrol coke	Carbonate ore	Dolomite Limestone
Ferro silicon	3.08	3.36	3.36	--	--	--
Silicon metal	3.12	3.36	3.54	--	--	--
Ferro chromium	--	3.22	3.51	--	--	--
Silicon manganese	--	3.24	3.51	3.59	0.16- 0.35	0.43-0.47
Ferro manganese	--	3.24	3.51	3.59	0.16- 0.35	0.43-0.47

Source: SINTEF (1998a); SINTEF (1998b); SINTEF (1998c)

CH₄ and N₂O

Measurements performed at Norwegian plants producing ferro alloys indicate emissions of N₂O in addition to CH₄. The emissions of CH₄ and N₂O are influenced by the following parameters:

- The silicon level of the alloy (65, 75, 90 or 98% Si) and the silicon yield
- The method used for charging the furnace (batch or continuously)
- The amount of air used to burn the gases at the top controlling the temperature in off gases.

Measurement campaigns at silicon alloy furnaces have been performed since 1995, and these measurements are the base for the values in the BREF document for silicon alloys. The results of the measurements, that the emissions factors in the Norwegian CH₄ and N₂O are based upon, are presented in SINTEF (2004). A summary of the report is given in the publication "Reduction of emissions from ferroalloy furnaces" (Grådahl et al. 2007). The focus for the studies has been NO_x emissions. However, the emissions of CH₄ and N₂O have also been measured.

Full scale measurements have been performed at different industrial FeSi/Si furnaces. The average CH₄ and N₂O concentrations in the ferroalloy process are with some exceptions a few ppm. For N₂O and CH₄ the exception is during spontaneous avalanches in the charge (i.e. collapse of large quantities of colder materials falling into the crater or create cavities) occur from time to time, see figure 7 in Grådahl et al. (2007). In the avalanches the N₂O emissions go from around zero to more than 35 ppm. The avalanches are always short in duration. There are also increased N₂O emissions during blowing phenomenon.

The EF used in the inventory represents the longer-term average N₂O and CH₄ concentration measurements outside the peaks in concentrations. The peaks in concentration occur due to avalanches (sudden fall of large amount of colder charge into the furnace) that occur from time to time is not fully reflected in the EFs. The EFs used are considered conservative, particular for the early 1990s when avalanches occurred more frequently than in later years.

All companies apply sector specific emission factors in the emission calculation, see Table 4-27. The factors are developed by the Norwegian Ferroalloy Producers Research Organisation (FFF) and standardized in meeting with The Federation of Norwegian Process Industries (PIL) (today named Federation of Norwegian Industries) in February 2007.

NMVOC

Statistics Norway uses an emission factor of 1.7 kg NMVOC/tonne coal or coke in the calculations (Limberakis et al. 1987).

Table 4-27: Emission factors for CH₄ and N₂O from production of ferroalloys.

	Si-met			FeSi-75%			FeSi-65%		
Alloy, charging routines and temperature	Batch-charging	Sprinkle - charging ¹	Sprinkle - charging and >750°C ²	Batch-charging	Sprinkle - charging ¹	Sprinkle - charging and >750°C ²	Batch-charging	Sprinkle - charging ¹	Sprinkle - charging and >750°C ²
kg CH ₄ per tonne metal	0.1187 (M)	0.0881 (M)	0.1000 (E)	0.0890 (E)	0.0661 (E)	0.0750 (E)	0.0772 (E)	0.0573 (E)	0.0650 (E)

kg N₂O per tonne metal	0.0433 (E)	0.0214 (E)	0.0252 (E)	0.0297 (E)	0.0136 (E)	0.0161 (E)	0.0117 (E)	0.0078 (E)	0.0097 (E)
--	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------	---------------

¹Sprinkle-charging is charging intermittently every minute.

² Temperature in off-gas channel measured where the thermocouple cannot 'see' the combustion in the furnace hood.

M=measurements and E= estimates based on measurements

4.4.2.5 Uncertainty assessment and time-series consistency

The uncertainty in activity data and emission factors have been calculated to $\pm 5\%$ and $\pm 7\%$ respectively, see Annex 2. The IEF (tonne CO₂/tonne reducing agent) for the ferroalloys production has a downward trend from around the year 2001. This is due to the increased use of bio carbons. Fluctuations in the IEF can also be due to variations in use of the various reducing agents, amounts of sold CO and production of ferro alloy products.

4.4.2.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plants have been reported under the voluntary agreement and the emissions are now covered by the EU ETS, and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

Statistics Norway makes in addition occasional quality controls (QC) of the emission data based on the consumption of reducing agents they collect in an annual survey and average emission factors.

4.4.2.7 Category-specific recalculations

There have been recalculations performed for this source category this year, see chapter 10 for details.

4.4.2.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.4.3 Aluminium production, 2C3

4.4.3.1 Category description

The emissions from this category are primarily CO₂ and PFC from primary aluminium production. There are also some minor emissions of SF₆ in the period 1992-2000 from an open mill that handled secondary aluminium production until it was closed in 2001. The category also includes minor emissions of CO₂ from a plant producing secondary aluminium.

There are seven plants in Norway producing primary aluminium and they were included into the EU ETS in 2013. Both prebaked anode and the Soederberg production methods are used. In the Soederberg technology, the anodes are baked in the electrolysis oven, while in the prebaked

technology the anodes are baked in a separate plant. In general, the emissions are larger from Soederberg technology than from prebaked technology.

Production of primary aluminium leads to emission of CO₂ and perfluorocarbons (PFCs). The emission of CO₂ is due to the electrolysis process during the production of aluminium.

There has been a substantial reduction in the total PFC emissions from the seven Norwegian primary aluminium plants since 1990. This is a result of the sustained work and the strong focus on reduction of the anode effect frequency in all these pot lines and that there has been a shift from Soederberg to prebaked technology. The focus on reducing anode effect frequency started to produce results from 1992 for both technologies. For prebaked technology the PFC emissions in kg CO₂ equivalents per tonne aluminium were reduced from 2.69 in 1990 to 2.07 in 1991 and 1.01 in 1992 and respective values for Soederberg were 5.79, 5.47 and 5.20. In 2024 the specific PFC emissions for prebaked and Soederberg were 0.06 and 0.09 kg CO₂ equivalent, see Figure 4.5 and Table 4-28.

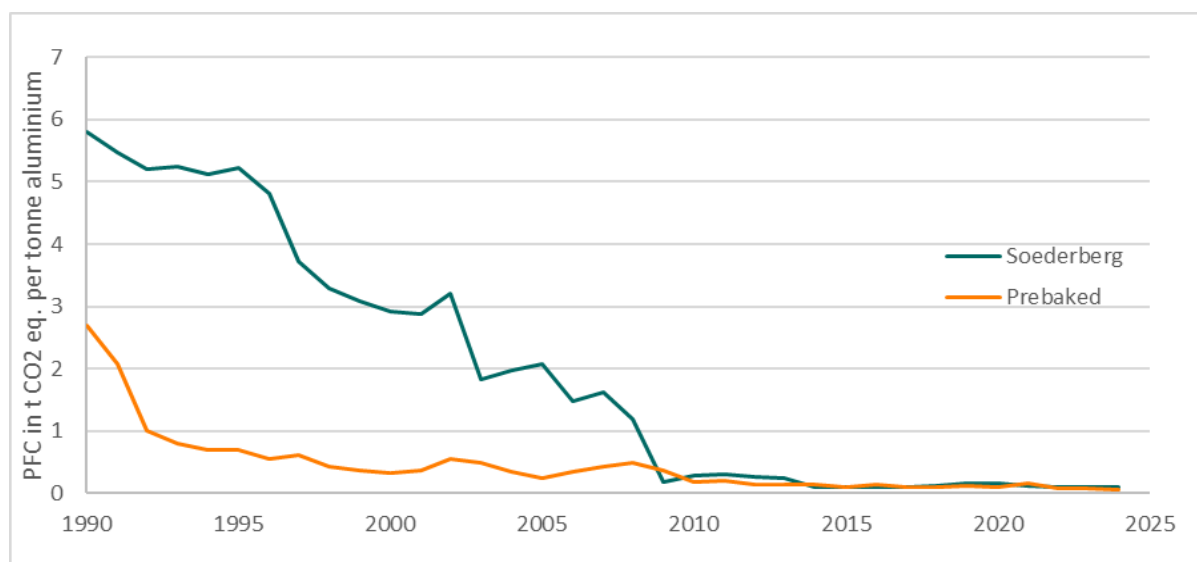


Figure 4.5: PFC in tonne CO₂ equivalent per tonne primary aluminium. Source: Norwegian Environment Agency.

Table 4-28: Shares of the technologies used in aluminium production and the PFC IEFs. PFC in kg CO₂ equivalents per tonne primary aluminium.

Year	Share of production from Soederberg technology	Share of production from pre-baked technology	PFC IEF Soderberg	PFC IEF pre-baked
1990	43 %	57 %	5.79	2.69
1995	39 %	61 %	5.22	0.70
2000	39 %	61 %	2.92	0.32
2005	20 %	80 %	2.08	0.25
2010	8 %	92 %	0.28	0.19
2015	8 %	92 %	0.11	0.11
2016	8 %	92 %	0.10	0.14
2017	7 %	93 %	0.10	0.09
2018	7 %	93 %	0.13	0.10
2019	7 %	93 %	0.17	0.12
2020	7 %	93 %	0.16	0.11
2021	7 %	93 %	0.12	0.16
2022	6 %	94 %	0.09	0.09
2023	5 %	95 %	0.10	0.07
2024	5 %	95 %	0.09	0.06

Source: Norwegian Environment Agency

In 1990, 57% of the primary aluminium production in Norway was produced with prebaked technology and the share of aluminium production from prebaked was increased to 95% in 2024. Two new plants with prebaked technology were established in 2002 and plants using Soederberg technology were closed down in the period 2002-2009. The shares of the two technologies and their PCF IEFs are shown in Table 4-28. The PFC emissions from production of aluminium have decreased by 97.7 % from 1990 to 2024 and decreased by 13.5% between 2023 and 2024. The large decrease in PFC emissions between 2021 and 2022 is because there was an increase between 2020 and 2021, primarily due to increased production at one of the plants that increased its production capacity. The production from this plant increased from about 94 kt aluminium in 2020 to about 169 kt aluminium in 2021.

The PFC emissions per tonne primary aluminium produced in Norway was 4.02 kg CO₂ equivalents in 1990 and 0.06 kg CO₂ equivalents in 2024. This has been a reduction of 98.5% since 1990. An increase in production capacity is also included in the modernisation, leading to higher total emissions of CO₂. PFCs and CO₂ emissions from aluminium production are both identified as key categories.

4.4.3.2 *Methodological issues*

CO₂

The inventory uses the emission figures reported to the Norwegian Environment Agency calculated by each plant.

A plant producing secondary aluminium has reported process emissions of CO₂ under the EU ETS since 2020. The emissions are from the use of scrap aluminium and use of CO₂ for fire extinguishing. The reported process emissions have been used in combination with the amounts of aluminium produced to calculate implied emission factors (IEF). The average IEF for the period 2020-2023 has then been used together with production levels to estimate the time series 1990-2019.

For the years including 2012, the primary aluminium industry calculated the CO₂ emissions separate for each technology based on consumption of reducing agents. This includes carbon electrodes, electrode mass and petroleum coke. The emissions factors are primarily calculated from the carbon content of the reducing agents.

From 2013 and onwards, the CO₂ emissions from Soederberg cells and from Prebake cells are calculated using the mass balance methodology that considers all carbon inputs, stocks, products and other exports from the mixing, forming, baking and recycling of electrodes as well as from electrode consumption in electrolysis. We have no indications that this has resulted in an inconsistent time series.

PFCs

Perfluorinated hydrocarbons (PFCs), e.g., tetrafluoromethane (CF₄) and hexafluoroethane (C₂F₆), are produced during anode effects (AE) in the Prebake and Soederberg cells, when the voltage of the cells increases from the normal 4-5V to 25-40V. During normal operating conditions, PFCs are not produced. The fluorine in the PFCs produced during anode effects originates from cryolite. Molten cryolite is necessary as a solvent for alumina in the production process.

Emissions of PFCs from a pot line (or from smelters) are dependent on the number of anode effects and their intensity and duration. Anode effect characteristics vary between plants and depend on the technology used (Prebake or Soederberg).

The national data are based on calculated plant specific figures from each of the Norwegian plants. A Tier 2 method is used, which is based on a technology specific relationship between anode effect performance and PFCs emissions. The PFCs emissions are then calculated by the so-called slope method, where a constant slope coefficient (see Table 4-29), is multiplied by the product of anode effect frequency and anode effect duration (in other words, by the number of anode effect minutes per cell day), and this product is finally multiplied by the annual aluminium production figure (tonnes of Al/year).

Table 4-29: Technology specific slope coefficients and weight fractions for the calculation of PFCs emissions from primary aluminium production.

Technology ^a	"Slope coefficient" ^{b, c} (kg PFC/t _{Al})/ (anode effect/cell/day)		Weight fraction C ₂ F ₆ /CF ₄	
	S _{CF₄}	Uncertainty (±%)	F _{C₂F₆/CF₄}	Uncertainty (±%)
CWPB	0.143	6	0.121	11
SWPB	0.272	15	0.252	23
VSS	0.092	17	0.053	15
HSS	0.099	44	0.085	48

a. Centre Worked Prebake (CWPB), Side Worked Prebake (SWPB), Vertical Stud Søderberg (VSS), Horizontal Stud Søderberg (HSS).

b. Source: Measurements reported to IAI, US EPA sponsored measurements and multiple site measurements.

c. Embedded in each slope coefficient is an assumed emission collection efficiency as follows: CWPB 98%, SWPB 90%, VSS 85%, HSS 90%. These collection efficiencies have been assumed based on measured PFC collection fractions, measured fluoride collection efficiencies and expert opinion.

"Slope coefficient": The connection between the anode parameters and emissions of PFC.

Measurements of PFCs at several aluminium plants have established a connection between anode parameters and emissions of CF₄ and C₂F₆. The mechanisms for producing emissions of PFC are the same as for producing CF₄ and C₂F₆. The two PFC gases are therefore considered together when PFC emissions are calculated. The C₂F₆ emissions are calculated as a fraction of the CF₄ emissions.

The Tier 2 coefficients for Centre Worked Prebaked cells (CWPB) are average values from about 70 international measurement campaigns made during the last decade, while there are fewer data (less than 20) for Vertical Stud Soederberg cells (VSS). The main reason for the choice of the Tier 2 method is that the uncertainties in the facility specific slope coefficients is lower than the facility specific based slope coefficients in Tier 3. This means that there is nothing to gain in accuracy of the data by doing measurements with higher uncertainties.

"Slope coefficient" is the number of kg CF₄ per tonne aluminium produced divided by the number of anode effects per cell day. The parameter cell day is the average number of cells producing on a yearly basis multiplied with the number of days in a year that the cells have been producing.

From 2022 and onwards, two of the plants have used plant specific slope coefficients for CF₄ and a third plant started to use plant specific slope coefficients for CF₄ in 2024. These plants have therefore also used plant specific weight fractions for C₂F₆.

Sulphur hexafluoride (SF₆)

SF₆ used as cover gas in the aluminium industry is assumed to be inert, and SF₆ emissions are therefore assumed to be equal to consumption. At one plant SF₆ was used as cover gas in the production of a specific quality of aluminium from 1992 to 1996. The aluminium plant no longer produces this quality, which means that SF₆ emissions have stopped.

4.4.3.3 Activity data

The consumption of reducing agents and electrodes and the production of primary aluminium is reported annually to the agency and the latter is reported as activity data in the CRT tables. The mass balance summarising the consumption of reducing agents in 2024 is shown in Table 4-30.

Table 4-30: Mass balance for primary aluminium production in 2024.

Reducing agent	Amount (kt)	CO ₂ emissions (kt)
Petroleum coke	237.4	838.2
Prebaked anodes	638.7	1 067.1
Pitch	59.6	202.2
Coke	23.3	83.0
Soda	0.9	0.4
Anode remnant	137.2	-167.5
Waste	1.8	-2.0
Tar	0.1	-0.3
Green anodes	0.0	0.0
Filter dust	1.0	-2.0
Graphite	0.0	0.1
Total	1 100.0	2 019.2

Source: Norwegian Environment Agency

PFCs

The basis for the calculations of PFCs is the amount of primary aluminium produced in the pot lines and sent to the cast house. Thus, any remelted metal is not included here.

4.4.3.4 Emission factors

There are many factors for the carbon contents of the reducing agent that are used for the mass balances reported by the plants. The contents in tonne CO₂/tonne reducing agent for the most important reducing agents in 2024 are (rounded to two decimals) 3.52-3.61 for petroleum coke, 3.51-3.58 for prebaked anodes and 3.39-3.41 for pitch.

The PFC emissions are calculated using the Tier 2 recommended values by IAI (2005) for CF₄ (the slope coefficients of 0.143 kg CF₄/tonne Al/anode effect minutes per cell day for CWPB and 0.092 for VSS). The amount of C₂F₆ is calculated from the Tier 2 values for CF₄, where the weight fraction of C₂F₆ to CF₄ is set equal to 0.121 for CWPB and 0.053 for VSS. This is consistent with the 2006 IPCC GL. All values are technology specific data, recommended by IAI. Our facility specific

measured data that we have used until today are all in agreement with these data, within the uncertainty range of the measurement method employed.

4.4.3.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2.

PFCs

The uncertainties in the so-called Tier 2 slope coefficients from IAI is lower (6% and 17% for CWPB and VSS cells, respectively), compared to the measured facility specific based slope coefficients, where the uncertainties are around 20%, even when the most modern measuring equipment is used (the continuous extractive-type Fourier Transform Infrared (FTIR) spectroscopic system). Control measurements in two Hydro Aluminium plants (Karmøy and Sunndal) done by Jerry Marks in November 2004, showed that the measured values for CWPB and VSS cells were well within the uncertainty range of the Tier 2 slope coefficients.

Chapter 4.4.3.1 explains the downward trend of the IEF for PCF emissions, but there are also some inter-annual changes that can be explained. The reduced IEF for Soederberg from 2002 to 2003 is because one plant using this technology closed and had no production in 2003. This plant produced 18% of the aluminium produced with this technology in 2002 and had an IEF in 2002 that was the highest among all the plants producing with Soederberg technology in that year. The reduced IEF for Soederberg from 2008 to 2009 is because another plant using this technology closed in 2009. This plant produced 56% of the aluminium produced with this technology in 2008 and the production in 2009 was minor. The plant's IEF in 2008 was the highest among all the plants producing with Soederberg technology in that year. The variations in the IEF for prebaked between 2014 and 2018 are due variations in the anode effect frequency for one plant.

CO₂

The implied emission factor for CO₂ is relatively stable over the time series. The largest inter-annual changes in the IEF are from 2009 to 2010 and from 2010 to 2011 and can be explained by production problems at one plant in 2010. The concerned plant produced about 18% of the total aluminium in 2010 and uses prebaked technology. Its CO₂ IEF in 2010 was unusually high since the consumption of anodes per tonne aluminium produced were 22% higher in 2010 than in comparable years.

With the inclusion of the aluminium and anode production in the EU ETS system from 2013, a new methodology was introduced for the calculation of CO₂ emissions from anode production in integrated aluminium and anode plants. For one plant, it was no longer possible to split CO₂ process emission between aluminium and anode production and all the emissions from this plant are reported in 2C3.

4.4.3.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plants have been reported under the voluntary agreement and the emissions are now covered by the EU ETS and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

As a quality control, it is checked that the reports are complete. Each figure is compared with similar reports from previous years and analysed taking technical changes and utilisation of production capacity during the year into account. If errors are found the Norwegian Environment Agency contacts the plant to discuss the reported data and changes are made if necessary.

The Norwegian Environment Agency has annual meetings with the aluminium industry where all plants are represented. This forum is used for discussion of uncertainties and improvement possibilities. The agency's auditing department regularly audit the aluminium plants. As part of the audits, their system for monitoring, calculation and reporting of emissions are controlled.

The emission figures reported by the plants are also occasionally controlled by Statistics Norway. Statistics Norway makes their own estimates based on the consumption of reducing agents and production data collected in an annual survey and average emission factors.

4.4.3.7 Category-specific recalculations

There have been recalculations performed for this source category this year, see chapter 10 for details.

4.4.3.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.4.4 Magnesium production, 2C4

4.4.4.1 Category description

There was previously one plant in Norway producing magnesium. The plant closed the production of primary magnesium in 2002, and the production of cast magnesium was closed in 2006. From the mid-1970s, both the magnesium chloride brine process and the chlorination process were used for magnesium production. Since 1991, only the chlorination process was in use.

Production of magnesium leads to process related emissions of CO₂ and CO. During the calcinations of Dolomite (MgCa(CO₃)₂) to magnesium oxide, CO₂ is emitted. During the next step, magnesium oxide is chlorinated to magnesium chloride and coke is added to bind the oxygen as CO and CO₂. SO₂ is emitted due to the sulphur in the reducing agent used.

In the foundry, producing cast magnesium, SF₆ is used as a cover gas to prevent oxidation of magnesium. The Norwegian producers of cast magnesium have assessed whether SF₆ used a

cover gas reacts with other components in the furnace. The results indicate that it is relatively inert, and it is therefore assumed that all SF₆ used as cover gas is emitted to the air.

The emissions decreased due to improvements in technology and in process management. Primary magnesium production stopped in 2002, and only secondary production is retained, and this production has no CO₂ emissions from processes. During 2006 also the production of remelting Mg stopped and since then there were no emissions from this source.

4.4.4.2 Methodological issues

CO₂

The Norwegian emission inventory uses production data as activity data. The CO₂ emissions are therefore calculated by using annual production volume and the emission factor recommended by SINTEF (SINTEF 1998c). This is considered to be in line with the tier 2 method in the IPCC 2006 Guidelines (IPCC 2006).

SF₆

The consumption of the cover gas SF₆ is used as the emission estimates in accordance with the tier 2 method in the IPCC 2006 Guidelines (IPCC 2006). The plant reported the emissions each year to the agency.

4.4.4.3 Activity data

In the GHG emission inventory we have used production volumes as activity data in the calculation of CO₂. The plant reported the consumption of SF₆ to the agency.

4.4.4.4 Emission factor

An emission factor of 4.07 tonnes CO₂/tonnes produced magnesium is used to calculate the annual emissions of CO₂ (SINTEF 1998c).

4.4.4.5 Uncertainty assessment and time-series consistency

The uncertainty estimates are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.4.4.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4.

4.4.4.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.4.4.8 Category-specific planned improvements

Since the plant is closed there is no further planned activity to review historical data.

4.4.5 Zinc production, 2C6

4.4.5.1 Category description

One plant in Norway produces zinc and the plant's main products are zinc, zinc-alloys and aluminium fluoride. The plant has reported process emission of CO₂ from the use of ore materials for the year 2012 and onwards.

4.4.5.2 Methodological issues

CO₂

The tier 1 method and a default EF from the 2006 IPCC GL is not applicable since the plant uses an electrolytic process and the 2006 IPCC GL states that this does not result in non-energy CO₂ emissions. However, the plant reports some process emissions of CO₂ from the use of ore materials using a mass balance approach for both roasting and sintering. This tier 2 method is more accurate than the tier 1 method because it considers the materials and the variety of furnace types used rather than assuming industry-wide practices.

Emission figures have been reported by the plant to the Norwegian Environment Agency for the year 2012 and onwards and the agency has estimated the emissions for the years 1990-2011 by correlating the annual production levels of zinc with the ratio between process and combustion emissions in 2012. For the years 1990-1993, with no production data available, the emissions have been set equal to the emissions in 1994.

4.4.5.3 Activity data

The plant has reported the amounts of ore materials used for the year 2012 and onwards and it ranges from about 144 000 to 349 000 tonnes. The production of zinc is reported as the AD in CTF table2(I).A-Hs2.

4.4.5.4 Emission factors

The plant has reported emission factors for the ore materials used for the year 2012 and onwards. The emission factors (t C/t ore material) are in the range of 0.01-0.003.

4.4.5.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.4.5.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plant reports annually through its permit and the agency's inventory team tracks emissions and AD for the plant.

4.4.5.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.4.5.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.4.6 Anode production, 2C7i

4.4.6.1 Category description

Four plants in Norway produce anodes and they were included into the EU ETS in 2013. Three plants produce prebaked anodes, and one plant produces coal electrodes. These are alternatives to the use of coal and coke as reducing agents in the production process for aluminium and ferroalloys. The anodes and coal electrodes are produced from coal and coke. The production of anodes and coal electrodes leads to emissions of CO₂.

4.4.6.2 Methodological issues

The emissions of CO₂ from the production of anodes are calculated by each plant and the method is based on the Aluminium Sector Greenhouse Gas Protocol by the International Aluminium Institute (IAI 2005).

The emissions are calculated from the consumption of anthracite and petrol coke. In addition, pitch is included in production. The calculations of CO₂ from processes are uptime in hours multiplied with an emission factor for each feedstock. When calcinations of anthracite the EF is 167 kg CO₂ per uptime hour and for petrol coke the EF is 238 kg CO₂. In addition, there are emissions from energy use that are reported in the Energy sector.

From 2012, there was a methodological challenge for integrated anode and aluminium production plants since reported EU ETS data do not provide information to split emissions on the two processes. Equation 4.21 from the 2006 IPCC Guidelines is not used for calculating these emissions in the EU ETS system, where emissions are calculated based on a carbon mass balance approach without information on ash and sulphur content. Therefore, emissions from two integrated plants that previously were reported under 2C7ai were included under 2C3.

4.4.6.3 Activity data

See methodological issues.

4.4.6.4 Emission factors

See methodological issues.

4.4.6.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.4.6.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plants have been reported under the voluntary agreement and the emissions are now covered by the EU ETS

and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

4.4.6.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.4.6.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.4.7 Nickel production, 2C7ii

4.4.7.1 Category description

One plant in Norway produces nickel. During the production of nickel, CO₂ is emitted from the use of soda ash.

4.4.7.2 Methodological issues

CO₂ emission figures are annually reported from the plant to the agency.

4.4.7.3 Activity data

The activity data is the annual amounts of soda ash used in the production process, see Table 4-9.

4.4.7.4 Emission factors

An emission factor of 0.41492 tonnes CO₂/tonne soda ash is used for the calculations.

4.4.7.5 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.4.7.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plant reports as required by its regular permit and has also reported under the voluntary agreement. The agency's inventory team tracks emissions and AD for the plant.

4.4.7.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.4.7.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.5 Non-energy products from fuels and solvent use – 2D

Norway reports emissions from the source categories lubricants use, paraffin wax, solvent use, road paving with asphalt and use of urea, see Table 4-31.

Table 4-31: Non-energy products from fuels and solvent use. Components included in the inventory, tier of method and key category.

Source category	CO ₂	Tier	Key category
2D1. Lubricants use	E	Tier 2	Yes
2D2. Paraffin wax use	E	Tier 1	No
2D3a. Solvent use	E	Tier 2	No
2D3b. Road paving with asphalt	E	Tier 1	
2D3d. Other (use of urea)	E	Tier 1	

R = emission figures in the national emission inventory are based on figures reported by the plants. E = emission figures are estimated. NA = Not Applicable. NO = Not Occuring. IE = Included Elsewhere.

Table 4-32 shows the emission trends for 2D as a whole and for the various source categories. The GHG emissions from this sector category were about 0.1 million tonnes CO₂ equivalents in 2024, this is 1.2% of the total emission from the IPPU-sector. The emissions from the 2D sector decreased by 43.7% from 1990 and the emissions increased by 1.2% from 2023 to 2024.

Table 4-32: Emission trends for 2D Non-energy products from fuels and solvent use (kt CO₂ equivalents).

Source category	1990	1990, % of IPPU	2023	2024	2024, % of IPPU	Trend 1990-2024 (%)	Trend 2023-2024 (%)
2D1. Lubricants use	167.1	1.1 %	41.4	45.1	0.5 %	-73.0 %	8.9 %
2D2. Paraffin wax use	6.2	0.0 %	26.8	26.1	0.3 %	318.6 %	-2.7 %
2D3a. Solvent use	IE*	NA	IE	IE	NA	NA	NA
2D3b. Road paving with asphalt	IE*	NA	IE	IE	NA	NA	NA
2D3d. Other (use of urea)	NO	NA	28.4	26.5	0.3 %	NA	-6.7 %
2D. Total	173.3	1.2 %	96.6	97.6	1.2 %	-43.7 %	1.1 %

Source: Statistics Norway and the Norwegian Environment Agency

*Included in the indirect CO₂ emissions

4.5.1 Lubricant use, 2D1

4.5.1.1 Category description

Lubricants are mostly used in transportation and industrial applications and are partly consumed during their use. It is difficult to determine which fraction of the consumed lubricant is actually combusted, and which fraction is firstly resulting in NMVOC and CO emissions and then oxidised to CO₂. Hence, the total amount of lubricants lost during their use is assumed to be fully oxidized and these emissions are directly reported as CO₂ emissions.

Emissions from waste oil handling are reported in the Energy Sector (energy recovery) and in the Waste sector (incineration).

4.5.1.2 Methodological issues

The CO₂ emissions from lubricant use are estimated by multiplying sold amounts of lubricants (m³) by density, country specific oxidation factors, default NCV value (TJ/tonne), default C content (tonne/TJ) and the mass ratio of CO₂/C:

$$(4.11) E_p = A_p * d * NCV * ODU_p * CC * 44/12$$

where:

E_p = CO₂ emission from product group p

A_p = Sold amount of lubricant from product group p (activity data)

d = Density

NCV = Net calorific value for lubricants

ODU_p = Fraction being oxidized during use from product group p

CC = Carbon content

The method is applied to subgroups of lubricants, as does the tier 2 method in the 2006 guidelines. However, even though the lubricant product groups in the Norwegian inventory are more detailed than in the tier 2 method, no distinction is made between lubricant oil and lubricant wax in the activity data. Thus, tier 1 factors are applied for NCV and CC .

It is assumed that all lubricant consumption and oxidation occurs within the sales year.

4.5.1.3 Activity data

The sold amount of lubricant by product group is given in Statistics Norway's statistics on sales of petroleum products, see Table 4-34. This statistic is based on reporting from the oil companies and divides the lubricant into five product groups (numbered 204 – 208, see Table 4-33 and Table 4-34).

Table 4-33: Sold amounts of lubricants, except to foreign navigation (1.000 m³), 1990 – 2024.

Year	201	202	203	204	205	206	207	208
1990	99 637	0	0	0	0	0	0	0
1995	40 583	0	0	23 270	0	22 726	0	0
2000	0	29 369	12 734	9 160	13 724	18 594	0	0
2005	0	0	0	13 215	10 751	5 919	33 671	4 233
2010	0	0	0	10 412	12 189	4 147	35 434	5 514
2015	0	0	0	4 419	11 612	2 317	25 416	5 188
2016	0	0	0	5 230	13 352	3 300	29 586	5 922
2017	0	0	0	5 254	12 640	3 251	28 937	5 961
2018	0	0	0	5 518	12 898	5 291	29 802	6 210
2019	0	0	0	5 548	13 320	3 563	29 249	5 728
2020	0	0	0	5 772	12 989	4 448	29 041	5 191
2021	0	0	0	5 461	12 818	3 175	27 654	5 660
2022	0	0	0	5 368	12 596	3 065	33 109	6 099
2023	0	0	0	4 050	11 731	3 216	32 989	5 698
2024	0	0	0	4 123	12 130	3 596	37 008	5 862

Source: Statistics Norway

Historically, all lubricants were allocated to product group 201. From 1995 product group 204 and 206 were separated out, and from 1998 the remainder of 201 was split into the product groups 202, 203 and 295. Product groups 207 and 208, which were established in 2003, are reallocations of group 202 and 203.

Table 4-34: Lubricant product groups in the sales of petroleum statistics.

Product group	Product group (text)
201	Lubricants
202	Auto motor and gear oil
203	Navigation and aviation motor and gear oil
204	Industrial lubricants
205	Hydraulic oils
206	Process and transformer oil
207	Motor oil
208	Gear oil

Source: Statistics Norway

The sales statistics does not distinguish between lubricant wax and lubricant oil, and hence the default average (tier 1) carbon content (CC) factor was used.

4.5.1.4 Emission factors

ODU factors

The factors for oxidation during use (ODU) for all product groups 204 to 208 are shown in Table 4-35.

The factors were found by contacting a broad selection of users and purchasers of lubricant oils, as well as branch organisations and interest groups. We have here assumed that loss during use corresponds to oxidation during use, as described above. As the former product groups 201 – 203 are not covered in the report (Weholt et al. 2010), ODUs for these product groups were estimated. The ODU for product group 202 and 203 is simply the average of the ODUs for product number 207 and 208. For product group 201 the ODU in 1990 to 1994 was estimated as the weighted average of ODU for product group 202 to 206, based on sold amounts in 1998. In 1995 to 1997 it was estimated from product group 202, 203 and 205 in 1998.

Table 4-35: Oxidation during use (ODU) factors.

Product group	ODU factor	Source
(L = literature, E = estimated)		
201 (1990 to 1994)	0.67	E
201 (1995 to 1997)	0.17	E
202	0.175	E
203	0.175	E
204	0.75	L
205	0.15	L
206	0.90	L
207	0.25	L
208	0.10	L

Source: **Weholt et al. (2010)**

The statistics on sold lubricant include oil combusted in two-stroke petrol engines, and hence considerations must be made to avoid double counting. However, the report (Weholt et al. 2010), which is quite detailed when describing the elaboration of ODU factors, does not mention

consumption in two-stroke petrol engines. We therefore assume that consumption in two-stroke petrol engines is omitted in the ODU factors, and thus no correction for double counting is necessary.

Other factors

The figures on sold lubricants are given in m³ and must be converted to tonnes. The density varies between different lubricant types, and based on sources available on the Internet it is estimated to 0.85 m³/tonne as an average for all lubricant types, see Exxonmobile (2009) and Neste_Oil (2014). The conversion from tonnes of consumed lubricant to tonnes of emitted CO₂ is performed based on IPCC default factors for energy content (NCV) and carbon content per unit of energy see Table 4-36. This conversion method implicitly adjusts for the content of non-hydrocarbons. The amount of sold lubricants in ktonne is given in Table 4-37.

Table 4-36: Other factors.

Factor	Value	Unit	Source
Density (d)	0.85	m ³ /tonne	Producers
Net calorific value (NCV)	0.0402	TJ/tonne	IPCC 2006 GL
Carbon content (CC)	20	Tonne C/TJ	IPCC 2006 GL

Table 4-37: Sold amounts of lubricants, ktonnes.

Year	Sold amount lubricant
1990	84.7
1995	73.6
2000	71.0
2005	57.6
2010	57.5
2015	41.6
2016	48.8
2017	47.6
2018	50.8
2019	48.8
2020	48.8
2021	46.6
2022	51.2
2023	49.0

Year	Sold amount lubricant
2024	53.3

Source: Statistics Norway

4.5.1.5 Uncertainty assessment and time-series consistency

The uncertainty in the estimated emissions from lubricant use (except in two-stroke petrol engines) is assumed to be rather low. The uncertainty in the activity data is assumed to be 5%, see Table 4-38, in line with the IPCC guidelines for countries with well-developed energy statistics. Also, the uncertainty of the carbon content is an IPCC default value, and the NCV uncertainty is assumed to be equally large. The uncertainty estimate for the density is based on an expert judgement of the available data on the Internet.

The uncertainty of the country specific ODU estimate is set much lower than for the IPCC default value. This is partly due to the thorough evaluation in the report (Weholt et al. 2010), and partly due to estimations based on the ODUs from this report combined with sales and waste collection statistics, which states that 85 to 90% of all waste lubricant oil is collected by Statistics Norway (Statistics Norway & SOE Norway 2014). This rather high collection percentage seems reasonable, due to a refund scheme for waste oil combined with strict control of the collected amounts. Higher ODUs would increase this percentage, and vice versa.

Table 4-38: Uncertainty estimates (%).

Parameter	Uncertainty
Activity data (A)	5
Oxidation during use (ODU)	5
Density (d)	3
Net calorific value (NCV)	3
Carbon content (CC)	3

Based on these uncertainties, the overall uncertainty of the emissions from lubricating oil (except from use in two-stroke petrol engines) is estimated at 20%. The split of lubricants between different product groups in the activity data have varied throughout the time series, and the level of detail is lower at the beginning of the time series. This might potentially introduce some time series inconsistencies. However, this variation is taken into account for the used ODU factors, and no significant time series inconsistencies are thus expected.

4.5.1.6 Category-specific QA/QC and verification

Emissions from lubricant use are calculated in Excel sheets before being included in the main model. Activity data for the calculations of emissions from lubricants are subject to checks for

consistency compared to previous years. Major discrepancies are examined. Periodically, sales statistics are compared to waste statistics as a quality control of level. In addition, the emission estimates are subject to the general QA/QC procedures when included in the main model.

4.5.1.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.5.1.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.5.2 Paraffin wax use, 2D2

4.5.2.1 Category description

Paraffin waxes are produced from crude oil and used in a number of different applications, including candles, tapers and the like. Combustion of such products results in emissions of fossil CO₂. Emissions from the incineration of products containing paraffin wax, such as wax coated boxes, are covered by emissions estimates from waste incineration.

4.5.2.2 Methodological issues

Emissions of CO₂ from the burning of candles, tapers and the like are calculated using a modified version of equation 5.4 for Waxes – Tier 1 Method of the 2006 IPCC Guidelines:

$$(4.12) \text{ Emissions} = PC * PF * CC_{Wax} * 44/12$$

Where:

- Emissions = CO₂ emissions from waxes, tonne CO₂
- PC = total candle consumption, TJ
- PF = fraction of candles made of paraffin waxes
- CC_{Wax} = carbon content of paraffin wax (default), tonne C/TJ (Lower Heating Value basis)
- 44/12 = mass ratio of CO₂/C

Consumption figures on paraffin waxes are multiplied by the default net calorific values (NCV). Net consumption in calorific value is then converted to carbon amount, using the value for carbon content (Lower Heating Value basis) and finally to CO₂ emissions, using the mass ratio of CO₂/C.

4.5.2.3 Activity data

Statistics Norway collects data on import, export and sold produce of “Candles, tapers and the like (including night lights fitted with a float)”. Using these data, net consumption of paraffin waxes and other candle waxes (including stearin) can be calculated.

4.5.2.4 Emission factors

Parameter values used in the emissions calculations are given in Table 4-39.

Table 4-39: Parameters employed when calculating emissions.

Parameters	Factor	Unit	References
Net calorific value (NCV)	40.20	TJ/Gg	2006 IPCC
Carbon content (CCWax, Lower Heating Value basis)	20.00	tonnes C/TJ = kg C/GJ	2006 IPCC
Mass ratio of CO ₂ /C	3.67	-	
Fraction of paraffin wax (PF)	0.66	-	

The assumption of 0.66 as the fraction of all candles being made of paraffin waxes is based on estimates obtained from one major candle and wax importer (estimating ca. 0.5) and one Norwegian candle manufacturer (estimating ca 0.8). The importer estimated the fraction to be ca. 5% higher in 1990. However, since this possible change is considerably smaller than the difference between the two fraction estimates, we have chosen to set this factor constant for the whole time series. The fraction of paraffin waxes has probably varied during this period, as it, according to the importer, strongly depends on the price relation between paraffin wax and other, non-fossil waxes. However, at present we do not have any basis for incorporating such factor changes.

Furthermore, we assume that practically all of the candle wax is burned during use, so that emissions due to incineration of candle waste are negligible.

4.5.2.5 Uncertainty assessment and time-series consistency

According to the 2006 IPCC Guidelines, the default emission factors are highly uncertain. However, the default factor with the highest uncertainty is made redundant in our calculations, due to the level of detail of our activity data. A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category.

4.5.2.6 Category-specific QA/QC and verification

There is no specific QA/QC procedure for this sector. See Annex 4 for the description of the general QA/QC procedure.

4.5.2.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.5.2.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.5.3 Solvent use, 2D3a

4.5.3.1 Category description

The use of solvents leads to emissions of non-methane volatile organic compounds (NMVOC) which is regarded as an indirect greenhouse gas. The NMVOC emissions will over a period of time in the atmosphere oxidize to CO₂, which is reported in CTF tables 2, 6 and 10.

The calculated emissions from solvent use are sensitive to inter-annual changes in the activity data. Sudden changes in activity data will lead to peaks or reduction in the emissions. A further explanation is given in section 4.5.3.2. An illustration of inter annual changes is given in Figure 4.6.

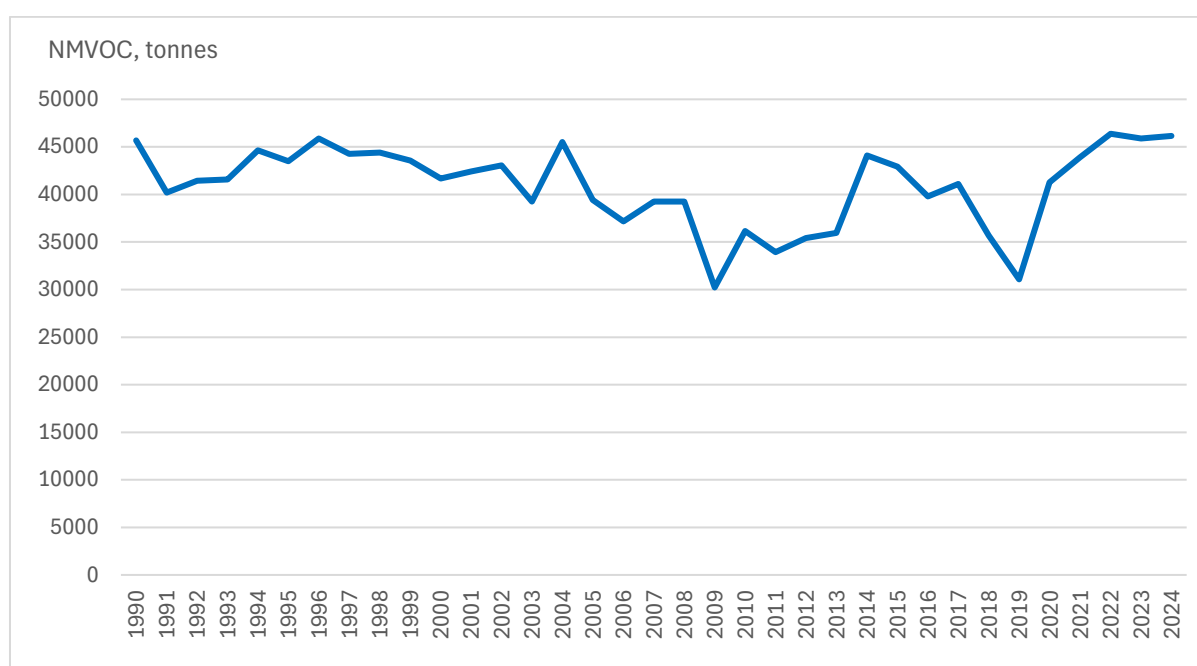


Figure 4.6: Emissions from solvent use illustrating inter-annual changes, emissions in tonnes NMVOC.

Source: Statistics Norway.

4.5.3.2 Methodological issues

The general model used is a simplified version of the detailed methodology described in chapter 6 of the EMEP/CORINAIR Guidebook 2007 (EEA 2007). It represents a mass balance *per substance*, where emissions are calculated by multiplying relevant activity data with an emission factor. For better coverage, point sources reported from industries to the Norwegian Environment Agency and calculated emissions from a side model for cosmetics are added to the estimates. A detailed description of method and activity data is available in Holmengen and Kittilsen (2009).

It is assumed that all products are used the same year as they are registered, and substances are not assumed to accumulate in long-lived products. In other words, it is assumed that all emissions generated by the use of a given product during its lifetime take place in the same year as the product is declared to our data source, the Norwegian Product Register. In sum, this leads to emission estimates that do not fully reflect the actual emissions taking place in a given year and may lead to significant interannual changes in NMVOC emissions and hence indirect CO₂. Emissions that in real life are spread out over several years will for that reason all appear in the emission estimate for the year of registration. However, this systematic overestimation for a given year probably more or less compensates for emissions due to previously accumulated amounts not being included in the estimate figures.

No official definition of solvents exists, and a list of substances to be included in the inventory on NMVOC emissions was thus created. The substance list used in the Swedish NMVOC inventory (Skårman et al. 2006) was used as a basis. This substance list is based on the definition stated in the UNECE Guidelines²³. The list is supplemented by NMVOC reported in the UK's National Atmospheric Emissions Inventory (AEA 2007). The resulting list was comprised by 678 substances. Of these, 355 were found in the Norwegian Product Register for one or more years in the period 2005-2007.

Cosmetics

Cosmetics are not subject to the duty of declaration. The side model is based on a study in 2004, when the Climate and Pollution Agency (now called Norwegian Environment Agency) calculated the consumption of pharmaceuticals and cosmetics (SFT 2005a). The consumption was calculated for product groups such as shaving products, hair dye, body lotions and antiperspirants. The consumption in tonnes each year is calculated by using the relationship between consumption in Norwegian kroner and in tonnes in 2004. Figures on VOC content and emission factors for each product group were taken for the most part from a study in the Netherlands (IVAM 2005), with some supplements from the previous Norwegian solvent balance (the previous NMVOC emission model).

4.5.3.3 Activity data

The main data source is the Norwegian Product Register. Data are usually received annually, but they can occasionally be available to late for the latest submission. This will, as well as updated information on specific chemicals, lead to recalculations.

Any person placing dangerous chemicals on the Norwegian market for professional or private use has a duty of declaration to the Product Register, and import, export and manufacturing is reported annually. The only exception is when the amount of a given product placed on the market by a given importer/producer is less than 100 kg per year.

²³ "Volatile compound (VOC) shall mean any organic compound having at 293.15 degrees K a vapor pressure of 0.01 kPa or more, or having a corresponding volatility under the particular conditions of use."

The information pertained in the data from the Product Register makes it possible to analyse the activity data on a substance level, distributed over product types (given in UCN codes; (Norwegian Product Register 2007), industrial sectors (following standard industrial classification (NACE; Statistics Norway (2014b)), including private households (no NACE), or a combination of both. As a consequence, the identification of specific substances, products or industrial sectors that have a major influence on the emissions, is greatly facilitated.

Cosmetics

The side model for cosmetics is updated each year with data on from the Norwegian Association of Cosmetics, Toiletries and Fragrance Suppliers (KLF). The data are usually received in time for the annual calculations.

Point sources

Data from nine point sources provided by the Norwegian Environment Agency is added annually to the emissions estimates. The point sources are reported from the industrial sector "Manufacture of chemicals and chemical products" (NACE 24). To avoid double counting, NMVOC used as raw materials in this sector are excluded from the emission estimates from the Product Register data.

4.5.3.4 Emission factors

Emission factors are specific for combinations of product type and industrial sector. Emission factors are gathered from the Swedish model for estimating NMVOC emissions from solvent and other product use (Skårman et al. 2006; Skårman et al. 2016). The emission factors take into account different application techniques, abating measures and alternative pathways of release (e.g., waste or water). These country-specific emission factors apply to 12 different industries or activities that correspond to sub-divisions of the four major emission source categories for solvents used in international reporting of air pollution (EEA 2007).

It is assumed that the factors developed for Sweden are representative for Norwegian conditions, as we at present have no reasons to believe that product types, patterns of use or abatement measures differ significantly between the two countries. Some adjustments in the Swedish emission factors were made when the model was first developed by Holmengen and Kittilsen (2009) and several improvements of single emissions factors have been made in the following years. The emission factors have been reviewed in 2025 to establish if they were representative to the present solvent use in all industries. The review showed an overestimation of NMVOC emissions, due to emission factors that no longer were representative. By implementing updated emission factors from the Swedish model, the overall NMVOC emissions were reduced through the time series.

In accordance with the Swedish model, emission factors were set to zero for a few products that are assumed to be completely converted through combustion processes, such as EP-additives soldering agents and welding auxiliaries. Quantities that have not been registered to industrial sector or product type are given an emission factor 0.95 kg/tonne. The general factor

for products that are diluted in water is 0.275 kg/tonne. In industries with abatement measures, the emission factor is lower.

Emission factors may change over time, and such changes are included in this model. If new information is available, the emission factors can be updated, both with fixed factors and a variation over time.

4.5.3.5 *Uncertainty assessment and time-series consistency*

Uncertainty in emission factors

The emission factors in the present model are detailed, as this model can take into account that emissions are different in different sectors and products, even when the substance is the same. However, for this to be correct, a thorough evaluation of each area of use is desirable, but not possible within a limited time frame. Thus, the emission factor is set with general evaluations, which leads to uncertainty.

The emission factors are gathered from several different sources, with different levels of accuracy. The uncertainties in emission factors depend on how detailed assessment was undertaken when the emission factor was established. Some emission factors are assumed to be unbiased, while others are set close to the expected maximum of the range of probable emission factors. This, together with the fact that the parameter range is limited, gives us a non-symmetrical confidence interval around some of the emission factors. For each emission factor we thus have two uncertainties: one negative (n) and one positive (p). These are aggregated separately, and the aggregated uncertainty is thus not necessarily symmetrical.

Uncertainty in activity data

For the activity data, the simplified declarations and the negative figures due to exports lead to known overestimations, for which the uncertainty to a large extent is known. A more elaborate problem in calculations of uncertainty is estimating the level of omissions in declaration for products where the duty of declaration does apply. In addition, while declarations with large, incorrect consumption figures are routinely identified during the QA/QC procedure, faulty declarations with small consumption figures will only occasionally be discovered. There is however no reason to believe that the Product Register data are more uncertain than the data source used in the previous model (statistics on production and external trade), as similar QA/QC routines are used for these statistics.

The errors in activity data are not directly quantifiable. Any under-coverage in the Product Register is not taken into account. The activity data from the Swedish Product register has an uncertainty of about 15% (Skårman et al. 2006). The Norwegian Product Register is assumed to be comparable to the Swedish, and thus the uncertainty in the activity data is assumed to be 15%. For some products, simplified declarations give an indication of maximum and minimum possible amounts. In these cases, the maximum amount is used, and the positive uncertainty is

set to 15% as for other activity data, while the negative uncertainty is assumed to be the interval between maximum and minimum amount. All activity data are set to zero if negative.

A detailed description of the uncertainty analysis is available in Holmengen and Kittilsen (2009). The variance of total emission was estimated from the variance estimates obtained for emission factors and activity data, using standard formulas for the variance of a sum and the variance of a product of independent random variables. The aggregated uncertainties in level and trend are given in Table 4-40 and Table 4-41.

Table 4-40: Uncertainty estimates for level in NMVOC emissions, 2005-2007. Tonnes and%.

Uncertainty in level	Negative (n)	Negative (n) (% of total emissions)	Positive (p)	Positive (p) (% of total emissions)
2005	2 288	4.58	1 437	2.88
2006	1 651	3.70	1 103	2.47
2007	1 299	2.79	1 168	2.51

Table 4-41: Uncertainty estimates for trend in NMVOC emissions, 2005-2007. Tonnes.

Uncertainty in trend	Negative (n)	Positive (p)	95% confidence interval for change
2005-2006	2 135	1 067	(-7 366, -4 164)
2006-2007	1 420	947	(407, 2 774)
2005-2007	1 882	1 076	(-5 286, -2 328)

Time series consistency

The activity data from the Norwegian Product Register is only available from 2005 onwards. For the years from 1990 to 2000, data from the previous solvent balance has been used. The two time series have been spliced by interpolation. This introduces a degree of time series inconsistency. However, the results from the previous solvent balance were evaluated and updated with new knowledge from the current model in Holmengen and Kittilsen (2009). Thus, overall time series consistency is deemed to be satisfactory.

4.5.3.6 Category-specific QA/QC and verification

The general QA/QC methodology is given in Annex 4. Large between-year discrepancies in the time series of substance quantities are routinely identified and investigated, to correct errors in consumption figures. Large within-year discrepancies between minimum and maximum

quantities in simplified declarations are routinely identified and investigated, to prevent overestimation for substances where consumption figures are given in intervals. Large within-year discrepancies between totals for industrial sectors (NACE) and totals for products (UCN) are routinely identified and investigated, to detect erroneous or incomplete industrial sectoral and product type distribution.

A project was carried out in 2025 to make sure that emission factors were representative throughout the time series. The factors were investigated with regard to type of chemical, area of use and industry. As the emission factors are gathered with different levels of accuracy and details available it is assumed that the uncertainty in emission factors remains unchanged, however with an overall higher quality.

4.5.3.7 Category-specific recalculations

There have been recalculations performed for this source category this year, see chapter 10 for details.

4.5.3.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.5.4 Road paving with asphalt, 2D3b

4.5.4.1 Category description

The emissions of NMVOC will over a period of time in the atmosphere oxidise to CO₂. These indirect CO₂ emissions are reported in CTF tables 2, 6 and 10.

4.5.4.2 Methodological issues

The emissions from road paving are calculated in accordance with a Tier 1 approach (EEA 2013).

$$E_{\text{pollutant}} = AR_{\text{production}} * EF_{\text{pollutant}}$$

where

E pollutant = the emission of the specified pollutant

AR production = the activity rate for the road paving with asphalt

EF pollutant = the emission factor for this pollutant

4.5.4.3 Activity data

The activity data used is the annual weight of asphalt used for road paving in Norway, collected by the Contractors Association - Building and Construction annually (EBA 2014).

4.5.4.4 Emission factors

The share of bitumen in the asphalt is set to be 0.05 for all years, based on information from a road technology Institute, a centre for research and development, quality control and documentation of asphalt (<http://www.asfaltteknisk.no/>). The emissions of NMVOC are calculated using an emission factor of 16 g NMVOC / tonne asphalt (EEA 2023).

4.5.4.5 *Uncertainty assessment and time series consistency*

The activity data and CO₂ emission factor used are uncertain. The annual emissions are, however, low. Activity data on asphalt used is available from 1995 onwards. For the years 1990-1994, the emission figure for 1995 is used. This introduces some degree of time series inconsistency in methodology. The annual variability in emissions throughout the entire time series is, however, insignificant, and this inconsistency is thus deemed acceptable.

4.5.4.6 *Category-specific QA/QC and verification*

There is no source specific QA/QC procedure for this sector. See Annex 4 for the description of the general QA/QC procedure.

4.5.4.7 *Category-specific recalculations*

There have been recalculations performed for this source category this year, see chapter 10 for details.


4.5.4.8 *Category-specific planned improvements*

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.5.5 *Other, 2D3d (use of urea as a reductant)*

4.5.5.1 *Category description*

Urea is used in selective catalytic reduction (SCR) to reduce NO_x emissions, in Norway primarily from road transport and shipping. When urea is injected upstream of a hydrolysis catalyst in the exhaust line, the following reaction takes place:



The ammonia formed by this reaction is the primary agent that reacts with nitrogen oxides to reduce them to nitrogen.

There were no emissions from the use of urea in SCR in 1990, and the use of urea and thus emissions have increased significantly in the last few years.

4.5.5.2 *Methodological issues*

Emissions are calculated based on equation 3.2.2 of Volume 2 of the 2006 IPCC Guidelines:

$$\text{Emissions} = \text{Activity} * 12/60 * \text{Purity} * 44/12$$

where

Emissions = CO₂ emissions from urea-based additive in catalytic converters (Gg CO₂)

Activity = amount of urea-based additive consumed for use in catalytic converters

Purity = the mass fraction (= fraction of urea in the urea-based additive)

The fraction 12/60 converts the emission figure from urea (CO(NH₂)₂) to carbon (C), while 44/12 converts C to CO₂.

Emissions are calculated as the sum of emissions from each purity.

4.5.5.3 Activity data

No official statistics cover sale, production, or use of urea in SCR in Norway. There is no national production of urea used in SCR, as the urea produced in Norway is used for fertilizers only. There are many importers of urea used in SCR, and the urea is often imported in smaller containers, and not in bulk. Information from the largest importer of urea shows that urea is imported to Norway in at least three different purities: 32.5% for use in road transport, 40% for use in shipping, and 100% for dilution before use. The statistics on external trade do not have a clear split on urea used for fertilizers and urea used in SCR, nor does it split on different purities.

Based on these considerations, import data from the largest producer together with estimates of marked shares have been used to calculate the total consumption of urea used in SCR each year. The first year of activity set at 2008, as very few vehicles had the technology prior to this year.

4.5.5.4 Emission factors

No emission factors are used for this calculation. All carbon in the urea used is converted to CO₂.

4.5.5.5 Uncertainty assessment and time series consistency

There are no emission factors in these calculations, and the purity of the different solutions are deemed to be reliable. However, the calculations are based on activity data where expert judgement is an important parameter, and there is a certain degree of uncertainty.

The same source of activity data and the same parameters have been used for all years, and the time series consistency is thus deemed to be satisfactory.

4.5.5.6 Category-specific QA/QC and verification

In the development of the emission estimates, activity data used (import data from the largest importer) were compared with import data from the statistics on external trade.

4.5.5.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.5.5.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.6 Electronics industry – 2E

Norway reports the emissions from the source category integrated circuit or semiconductor under the category 2G1, see Table 4-42.

Table 4-42: Electronics industry. Components included in the inventory, tier of method and key category.

Source category	SF ₆	HFCs	PFCs	NF ₃	Tier	Key category
2E1. Integrated circuit or semiconductor	IE*	NO	NO	NO	1	No

R = emission figures in the national emission inventory are based on figures reported by the plants. E = emission figures are estimated. NA = Not Applicable. NO = Not Occuring. IE = Included Elsewhere.

** Included in 2G1*

4.6.1 Integrated circuit or semiconductor, 2E1

4.6.1.1 Category description

There are SF₆ emissions from the use in the manufacturing of semiconductors, these are due to confidentiality reported in 2G1. There is no information available on emissions of PFC and these are therefore reported as not occurring. If PFCs are used in this process, they are likely to be included in 2F as PFCs are registered when they are imported.

4.6.1.2 Methodological issues

There have been emissions of SF₆ from this source since 1995. According to a report from SFT (1999c), data on sales to semiconductor manufacturers were collected for 1998 and amounted to 90 kg. The sales for 1998 have been used for the years 1995-1998. The report projected sales to increase to 100 kg and has been assumed for the years 1999-2002. For the years 2018-2022, the two producers have provided information on the annual amounts of SF₆ purchased. For the period 2003-2017, the amounts of SF₆ used have been interpolated linearly from 2002-2018.

4.6.1.3 Activity data

The report from 1999 assumed that 50% of the gas reacts in the etching process and the remaining 50% are emitted. Hence, 45 kg are reported as emissions from 1995 to 1998 and 50 kg from 1999 to 2002. From 2018 and onwards, we continue to assume that 50% of the gas reacts in the etching process. One producer has not installed a scrubber, and the remaining 50% is considered as emitted. Another producer has installed a scrubber that removes 96% of the SF₆ that is not assumed to react in the etching process. To be conservative, we calculate that 10% of the SF₆ that is not assumed to react in the etching process is emitted. For the period 2003-2017, the amounts of SF₆ emitted have been interpolated linearly from 2002-2018.

4.6.1.4 Emission factors

See chapter 4.2.1.3.

4.6.1.5 Uncertainty assessment and time series consistency

An uncertainty estimate is given in Annex 2. A general assessment of the time series consistency has not revealed any time series inconsistencies in the emission estimates for this source category.

4.6.1.6 Category-specific QA/QC and verification

The general QA/QC methodology is given in Annex 4. There is no specific QA/QC procedure for this source category.

4.6.1.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.6.1.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.7 Product uses as substitutes for ODS – 2F

Norway reports the source category HFCs and PFCs from refrigeration and air conditioning and other applications under the category 2F. See Table 4-43 and Table 4-44 for details.

Table 4-43: Product uses as substitutes for ODS. Components included in the inventory, tier of method and key category.

Source category	HFCs	PFCs	SF ₆	NF ₃	Tier	Key category
2F1-2F6. Refrigeration and air conditioning, foam blowing agents, fire protection, aerosols, solvents, other applications.	E	E	NO	NO	*	Yes**

*Mainly estimated using Tier 2a (emissions calculated at a disaggregated level, emission factor approach). Exceptions are mobile air conditioning that is estimated using Tier 2b (b=mass balance approach) and fire protection, aerosols and solvents that are estimated using Tier 1a (emissions calculated at an aggregated level, emission factor approach).

**In the key category analysis, 2F1 and 2F6 have been aggregated.

R = emission figures in the national emission inventory are based on figures reported by the plants. E = emission figures are estimated. NA = Not Applicable. NO = Not Occurring. IE = Included Elsewhere.

Table 4-44: Emission trends for 2F Product uses as substitutes for ODS (kt CO₂ equivalents).

Source category	1990	1990, % of IPPU	2023	2024	2024, % of IPPU	Trend 1990-2024 (%)	Trend 2023-2024 (%)
2F1. Refrigeration and air conditioning	0.0	0.0 %	739.1	699.3	8.4 %	1 407 507.0 %	-5.4 %
2F2-2F6. Foam blowing agents, fire protection, aerosols, solvents, other applications.	NO	NA	28.6	25.8	0.3 %	NA	-9.8 %
2F. Total	0.0	0.0 %	767.7	725.1	8.7 %	1 459 459.1 %	-5.5 %

Source: Statistics Norway and Norwegian Environment Agency

Table 4-44 shows the emission trends for 2F. The GHG emissions from this sector category were about 0.7 million tonnes in 2024, this is 8.7% of the total emission from the IPPU-sector. The emissions in 1990 were insignificant (50 tonnes CO₂ equivalents) but have increased substantially over the years. However, due to restrictions from the EU F-gas regulation (implemented in Norway) in combination with equipment that has reached its end of life the emissions of HFC's have declined since 2014. The emissions decreased by 5.5% from 2023 to 2024. The majority of the emissions are reported in 2F1 and these include minor emissions of PFC-218 in the years 2010-2014.

HFCs and PFCs are mainly used as substitutes for ozone depleting substances (CFCs and HCFCs) that are being phased out according to the Montreal Protocol. They are used in varied applications, including refrigeration and air conditioning equipment, as well as in foam blowing, fire extinguishers, aerosol propellants and analysing purposes. There is no production of HFCs and PFCs in Norway. However, PFCs are emitted as a by-product during the production of aluminium. Due to, high taxation, the use of PFCs in product-applications has been very low. PFC-218 has been used as a commercial cooling agent.

The amounts of imported and exported gases are found in registers from the Norwegian Directorate of Customs and Excise. All import of HFC and PFC -gases are covered in these registers, as Norway lays a tax on the import of HFC and PFC-gases. In January 2003 a tax on import and production of HFC and PFC was introduced at NOK 180 per tonne CO₂ equivalents. In July 2004 this tax was supplemented with a refund for the destruction of used gas. The tax has increased over the years and stands in 2024 at NOK 1 176 (approximately EUR 102) per tonne CO₂ equivalents of gas imported. In May 2010, EU regulation (EC) No 842/2006 on certain fluorinated greenhouse gases was implemented in Norwegian legislation, and the revised EU regulation (EU) No 517/2014 with some adjustments was implemented in December 2018. At the same time, a licensing system for import and export, including a phase down scheme for HFC in bulk, according to the requirements in the Kigali Amendment to the Montreal Protocol, were implemented in the national legislation.

In addition, practically all export of F-gases is covered, as commodities with F-gases have their own commodity code (HS-code). The registered export of F-gases from Norway is very low, and any underestimation of the export of F-gases would thus be very slight and eventually lead to over-estimation (and not under-estimation) of the emissions.

The imported and exported gases are allocated to sectors based on commodity codes and information identifying each company. In some cases (sector 2F1) the type of gas is used as additional information. Uncertainties in the distribution by sector do not affect the total amount of F-gases to be emitted over time, as the emissions over time are determined by the total amount of F-gases to be distributed. Thus, underestimation in one sector would eventually lead to an equivalent over-estimation in another sector at some point of time.

4.7.1 Refrigeration and air conditioning, 2F1

4.7.1.1 Category description

HFCs and PFCs are mainly used as substitutes for ozone depleting substances (CFCs and HCFCs) that are being phased out according to the Montreal Protocol. Emissions from refrigeration and air conditioning equipment are reported under this source category.

The calculated emissions in 2F1 are sensitive to inter-annual changes in the activity data. Sudden changes due to, for example, new legislation will lead to peaks or reduction in the emissions. An illustration of this is given in Figure 4.7.

As seen in the figure there is a reduction in emissions in 2F1a in the years around 2003-2005. In the same period, the emissions from 2F1d and 2F1c are stabilized. This development is a result of the tax on F-gas implemented in 2003, leading to reduced bulk imports in the following years. In 2F1d transport refrigeration the emissions are stable up until 2010. At this stage the emissions are falling due to reduced imports in early 2000's and that the equipment reaches end of life around 2010. The same effect can be seen in 2F1a commercial refrigeration between 2013 and 2015. The reduced imports in 2003 results in an abrupt decrease in emissions when the equipment reaches end of life. The emissions increase again in 2016-2018 as imports were normalized again for a period from 2005.

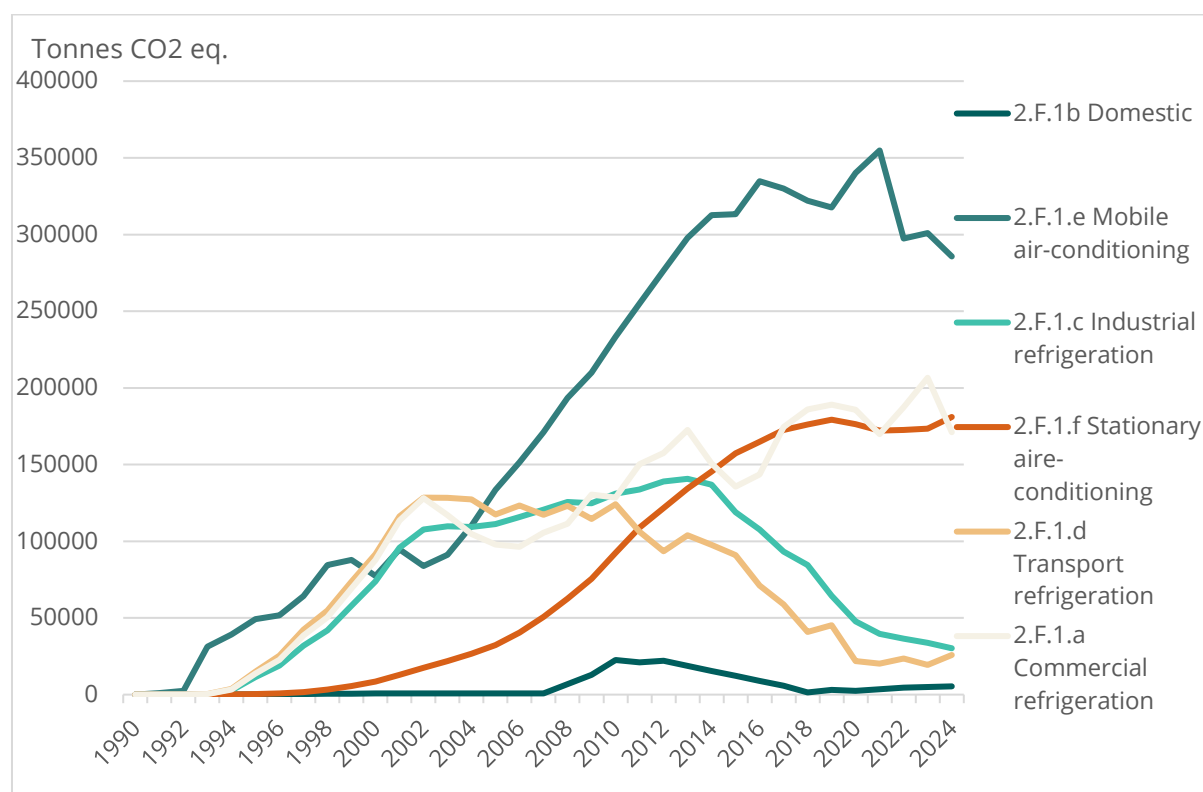


Figure 4.7: Emissions in the 2F1 sectors illustrating inter-annual changes, emissions in tonnes CO₂ equivalents. Source: Statistics Norway.

A decreasing trend in emissions in 2F1e Mobile Air-Conditioning is observed after 2016. A peak can be seen in 2021, and this is a result of a large amount of HFC-134a that was used for refilling. The decrease after 2016 is due to the EU MAC-directive and the following restriction stating that from January 1st 2017, registration, sales and use of new vehicles with air-conditioning equipment constructed for fluor containing cooling agents with a GWP value of 150 or higher, are prohibited.

The emissions in 2F1c, Industrial refrigeration reached a peak in emissions in 2014 and have had a steady reduction since.

The decline of emissions in 2F from 2019-2020 can also be seen in connection with the implementation of the restrictions from the EU F-gas regulation (implemented in 2018) which includes restrictions on refrigeration equipment that contains HFCs with GWP of 2500 and restricts the use of HFC refrigerants with GWP of 2500 or more for servicing and maintenance of refrigeration equipment.

4.7.1.2 Methodological issues

There is a good access to information regarding the use of HFCs and PFCs in Norway due to strict regulation and legislation. This provides a solid base of activity data from import and recovery (further described in 4.7.1.3). Actual emissions of HFCs and PFCs are hence calculated using the Tier 2 methodology as the input data and emission factors are country specific. This methodology takes into account the time lag in emissions from long lived sources, such as refrigerators and air-conditioning equipment. The chemicals slowly leak out from seams and ruptures during the lifetime of the equipment. The emissions are hence calculated for three different phases: when the equipment is being produced (filled for the first time), when the product is in regular use and when the product reaches its end-of-life cycle. The leakage rate, or emission factor, varies considerably depending on type of equipment and its maintenance. Figure 4.8 illustrates the life cycle of a product containing fluorinated substances and the flow of chemicals between the three phases.

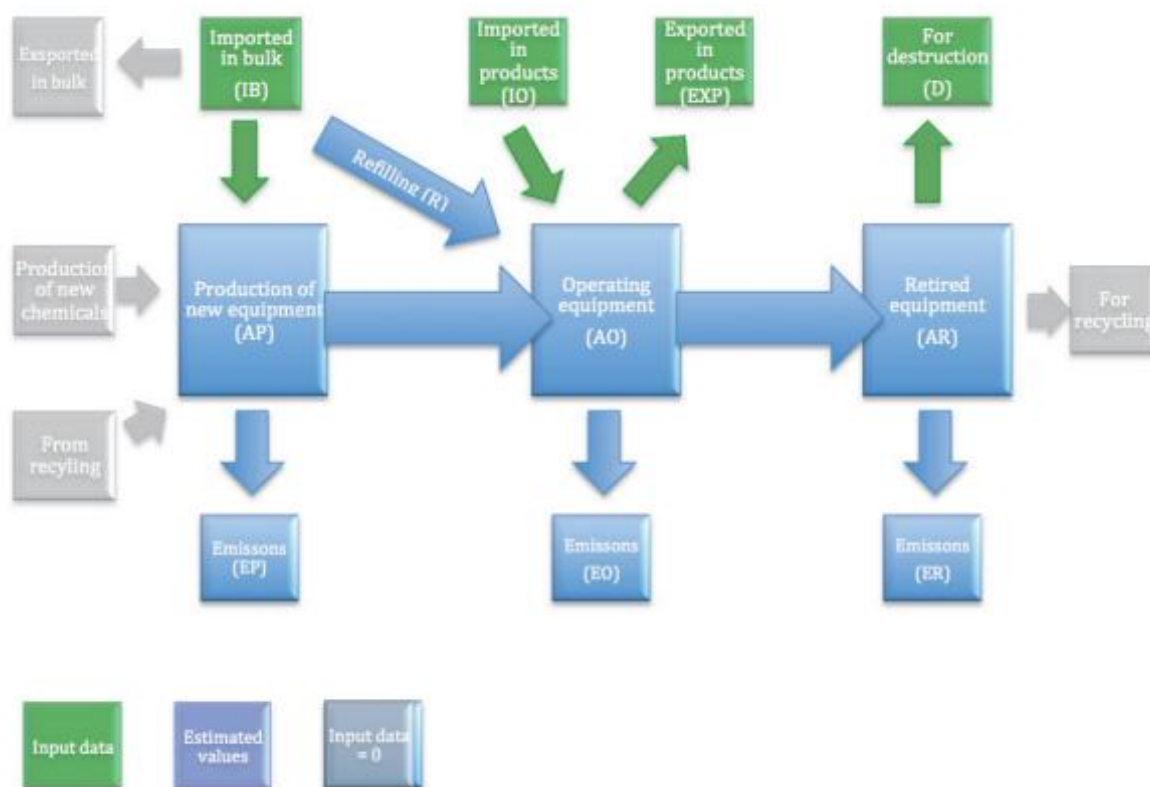


Figure 4.8: The three phases in a product's life cycle and the flow of chemicals in and out of the phases.

The total emission for each year (y), application category (a) and type of chemical (c) is calculated as follows:

$$E_{y,a,c} = EP_{y,a,c} + EO_{y,a,c} + ER_{y,a,c}$$

EP = Emissions from production of new equipment

EO = Emissions from operating equipment (equipment in use)

ER = Emissions from retired equipment

y = year

a = application

The calculation of emissions differs somewhat between the different source categories. Table 4-45 gives an overview of the source categories and the different assumptions that are used for each subcategory considering production of new equipment and refilling of equipment in use.

Table 4-45: Overview of source categories, HFC's and assumptions on production and refilling.*

Source category	Production of new equipment in Norway	Refilling of equipment in use	Application category	HFC
2F1a. Commercial Refrigeration			Stand-alone Commercial Applications	23, 32, 125, 134a and 143a
	X	X	Medium and Large Commercial Refrigeration	23, 32, 125, 134a, 143a, 152a and 218
2F1b Domestic Refrigeration				32, 125, 134a and 143a
2F1c Industrial Refrigeration	X	X		125, 134a and 143a
2F1d Transport Refrigeration	X	X		23, 125, 134a, 143a and 227ea
2F1e Mobile Air-Conditioning		X		125, 134a and 143a
2F1f Stationary Air-Conditioning	X	X		23, 32, 125, 134a and 143a
2F6 Other	X	X	Fire extinguishers	125, 134a and 227ea
	X		Foam	23, 134a and 152a
			Aerosols: inhalators	134a
			Aerosols: other	134a and 152a
			Solvents	134a and 152a

* Applications in all product groups may be imported

Emissions from almost all categories are calculated by using an emission factor approach. One exception is mobile air conditioning. For mobile air conditioning a hybrid of mass-balance and emission factor approach is used. There is no production of new cars in Norway; hence it is assumed that HFCs imported in bulk for use in mobile air conditioning is used to refill the systems after leakage. This is the mass-balance approach, and it leads to very high product life factors (up to 100%) in the beginning of the time series because no bank of chemicals was yet accumulated. A restriction is however set in the model: where the imported bulk is lower than 10% of the bank, the emission factor approach is applied. This model assumption means that the product life factor will never be lower than 10 (using an emission factor of 10%).

Emissions from production of new equipment in Norway

When HFCs and PFCs are imported as chemicals in bulk to Norway, they can either be used for production of new equipment, or they can be used for refilling of equipment already in use.

Medium and large refrigeration equipment for supermarkets is, for instance, typically built and filled up on site. Foam blowing, where HFCs are used in the process of making construction materials, is another example of production of new “equipment” taking place in Norway.

The emissions for all production activities are calculated by applying emission factors to the amount of chemicals used for new production that year, see Table 4-46. The emission factors are within the range of factors recommended by the IPCC 2006 Guidelines.

$$EP_{y,a,c} = AP_{y,a,c} * EFP_a$$

EP = Emissions from production of new equipment

AP = Amount of chemical f or production of new equipment

EFP = Emission Factor (leakage rate) f for production of new equipment

y = year

a = application

c = chemical

Emissions from equipment in use

When products containing HFCs and PFCs are in use, the chemicals will gradually leak out through seams and holes in the equipment. Some products are sealed units with typically low leakage rates, and they are not refilled with new chemicals throughout their lifetime.

Refrigerators and freezers used in households are examples of such equipment. As the chemicals leak out the equipment will gradually lose efficiency and eventually be decommissioned and replaced by new equipment. Larger equipment, for instance air conditioning equipment in office buildings or refrigeration systems in supermarkets, is refilled to keep up the efficiency throughout its operating lifetime. In all cases, as the chemicals are only gradually released, there will be a build-up of “bank”, i.e. the chemicals imported will accumulate in operating products and be emitted gradually depending on the leakage rate of the equipment.

These differences between the types of products lead to three different calculations of emission from equipment in use:

Application categories without refilling:	$EO_{y,a,c} = EO_{y-1,a,c} + AON_{y,a,c} \cdot EFO_a - AON_{y-lt,a,c} \cdot EFO_a$
Mobile air conditioning (with refilling):	$EO_{y,a,c} = \text{MAX} (IB_{y,a,c}; AO_{y(31.12),a,c} \cdot EFO_a)$
Other application categories with refilling:	$EO_{y,a,c} = AO_{y(31.12),a,c} \cdot EFO_a$
$AON_{y,a,c} = (IB_{y,a,c} - EP_{y,a,c} + IO_{y,a,c} + EXO_{y,a,c})$	
EP = Emissions from production of new equipment	
EO = Emissions from operation equipment (equipment in use)	
EFO = Emission Factor (leakage rate) for operating equipment	
AO = Amount of chemical in operating equipment	
AON = Amount of chemicals in operation equipment which is new of the year	
IB = Amount of chemicals imported in bulk	
IO = Amount of chemicals imported in products	
EXO = Amount of chemicals exported in products	
lt = lifetime (years)	
y = year	

The reported stock emissions for perfluoropropane (C₃F₈) consumed in commercial refrigeration in CRT table 2(II).B-H have a declining trend. The use of PFCs is being phased out and replaced by other gases and only small amounts of PFCs have been imported in bulk in the last few years. About the same amount of PFCs that are reported as imported are reported as collected for destruction, so there has not been a build-up of stock that would generate emissions (i.e., the entire amount of gas remained in stock from the previous year is assumed to be collected for destruction). Since 2014, the AD for annual average stock and stock emissions for C₃F₈ are therefore reported as "NO".

A more thorough description of the methodology is available in Bjønnes (2013).

Emissions from retired equipment

As a response to a recommendation from the technical expert review team (TERT), Norway has improved the methodology regarding emissions from retired equipment. When the equipment reaches its end-of-life it is emptied for the remaining F-gas. In this process there will be some emissions. The collected gas can be sent for destruction or recycled and reused. Norway has detailed figures for the amounts of F-gas being destroyed. But as this amount is relatively low, a project to identify reuse and recycling has been completed and implemented from the 2024 submission.

Application categories with refilling:	$ER_{y,a,c} = AR_{y,a,c} * EF_{eol}$
	$AR_{y,a,c} * EF_{eol} = AR_{y,a,c} - D - RE$
Application categories without refilling:	$ER_{y,a,c} = AR_{y,a,c} - D$

$ER_{y,a,c}$ = Emissions from retired equipment
 $AR_{y,a,c}$ = Amount of chemical in retired product
 EF_{eol} = Emission factor for retired equipment
 D = Amount of chemical collected for destruction
 RE = Amount of chemical recycled
 y = year
 a = application

In the sectors with recovery of F-gas from retired equipment it can be assumed that the calculated amount of F-gas that is recovered equals the destroyed and reused amount. The recycled amount is calculated as total recovery subtracted by the destroyed amount.

The amount of gas collected for recycling is used as refill and/or in new equipment. In the calculation the amount recycled gas (RE in the equation above) is added to the stock the same year as it is recycled. By adding this assumption into the calculation, it is assured that the total amount of gas remains in the systems and that the amount reused does not disappear from the equation.

4.7.1.3 Activity data

There is no production of HFC or PFC in Norway. Hence all emissions of these chemicals originate from chemicals imported in bulk or in products. The methodology requires that annual imported amounts of each chemical are obtained by source category. Various data sources are used: Amounts of chemicals imported in bulk were up to 2009 obtained from the Norwegian Climate and Pollution Agency (now Norwegian Environment Agency). After 2009, bulk data are collected from the Norwegian Directorate of Customs and Excise. Time series for imported and exported amounts of chemicals in products are based on collected data for some years and data prior to and between these years are estimated. For the years 1995-1997 data were collected through a survey performed in 1999 (SFT 1999b). Data on imports were collected from customs statistics for the years 2005-2006 and 2010-2012.

After 2011 the import data has been collected annually from The Norwegian Directorate of Customs and Excise (TAD) through two declaration systems named "TVINN" and "AFS". The information from the two data bases is combined in order to get figures on total imported amounts of chemicals. In brief, the TVINN register provides information about type of chemical and whether it is imported in bulk or in a product. When imported as bulk, the amount is allocated to an application category based on the name of the importer and type of chemical or

blend of chemicals. When imported in a product, the amount is allocated to an application category based on its classification according to the Harmonised System (HS8). This is an international system for classification of goods developed by the World Customs Organization.

The AFS register does not contain information about the classification of imported products, hence the amount of chemical is allocated to an application category based on the name of the importer and type of chemical or blend of chemicals. Information from TVINN is used by Statistics Norway in producing foreign trade statistics and is therefore readily accessible for use in the emission estimates. The following information is drawn from the data base once a year (for the year n-1):

- Year of import
- Tax rate
- Tax amount
- Product type (according to the international system for classification of goods "HS")
- Importer (name and business register number) (Bjønnes (2013))

Information from AFS is sent to Statistics Norway once a year (for the year n-1), specifically for the emission calculations:

- Year of import
- Tax rate group
- Tax amount
- Importer (name and business register number)

Statistics Norway receives information on amounts of fluorinated gas destructed each year from the company in charge of the collection. Before destruction, the gas is analyzed to ensure accuracy of amounts and components in the gas. This detailed information is available because Norway has a refund for the tax for F-gas delivered to destruction. It is assumed that all gas that is delivered to destruction in Norway is delivered through this scheme as it is a large financial benefit. The gas destructed contains F-gas removed from refrigeration systems at end-of-life. In some sectors the industry has started phasing out equipment earlier than expected for the sector. This can result in that the amount of destructed gas being larger than the calculated amount remaining in products at decommissioning. In such cases, the extra amount of destructed F-gas will reduce the corresponding stock accordingly.

The information on the gas destructed is received as amounts of each gas in total. Hence, no detailed information about the application categories from which the chemicals are collected is available. Since the origin of the chemicals is not tracked, the amounts destructed are allocated to application categories based on the calculated amounts of F-gas remaining in products at decommissioning in each of the sectors. Amounts of destroyed F-gas in the sectors commercial refrigeration, industrial refrigeration, transport refrigeration, mobile AC, and stationary refrigeration are received from Stiftelsen Returgass. F-gas collected from standalone commercial and domestic refrigeration for destruction are received separately from the Norwegian Environment Agency.

A more thorough description of the activity data is available in Bjønnes (2013).

4.7.1.4 Emission factors

The emission factors used in the calculations are shown in Table 4-46.

Table 4-46: Emission factors* for HFCs and PFCs from 2F1 Refrigeration and Air conditioning.

Source category	Lifetime (years)	Initial emission (%)	Operating emission (%)	Recovery Efficiency**	Initial charge remaining (%)
2F1a. Commercial Refrigeration					
2F1a. Stand-alone Commercial Applications	10	NO	3.5	0 (1990-2016) no fixed EF (2017-)	65
Medium/Large Commercial Refrigeration	12	2 (1990-2003) 0.5 (2004-)	10 (1990-2002) 4 (2008-)	70	80
2F1b Domestic Refrigeration	15	NO	0.5	0 (1990-2016) no fixed EF (2017-)	92.5
2F1c Industrial Refrigeration	17	2	10	90	80
2F1d Transport Refrigeration	9	1	20	70	100
2F1e Mobile AC	12	NO	10	50	60
2F1f Stationary AC	18	1 (1990-1999) 0.2 (2000-)	4	80	80

*IPCC (2006)

**In sources where Norway only use reported figures of destructed F-gas, recovery efficiency varies through the time series.

Table 4-47: Recovery Efficiency for Stand-alone Commercial Applications and Domestic refrigeration, 2020-2024, %.

	2F1a. Stand-alone Commercial Applications					2F1b Domestic Refrigeration			
	HFC-23**	HFC-32*	HFC-125	HFC-134-a*	HFC-143a**	HFC-32**	HFC-125**	HFC-134a*	HFC-143a
2020	0	325	24	116	0	0	0	116	2
2021	0	NA	32	54	0	0	10	54	2
2022	0	NA	36	17	0	0	20	17	2
2023	0	456	16	25	2	0	29	25	1

	2F1a. Stand-alone Commercial Applications					2F1b Domestic Refrigeration			
2024	0	NA	50	12	5	0	31	12	3

**If recovery efficiency is above 100% or NA more gas than what is expected is destroyed. In these cases are the destroyed amount removed from the stock.*

*** If recovery efficiency is 0 it means that no gas has been recovered, and it is assumed that 100% is emitted.*

2F1a Commercial refrigeration

It is important to note that sub-application 2F1a, Commercial refrigeration, is calculated at a more detailed level. Two groups of equipment that differs substantially in their life cycle and emission patterns, and hence emission factors, are taken into account:

- Stand-alone commercial applications include equipment like vending machines and moveable refrigerators and freezers typically used for keeping beverages and ice cream cold in supermarkets, office buildings, schools etc. There is currently no production of this kind of equipment in Norway. All emissions take place during the operating phase (emissions from stocks/lifetime emissions) or at decommissioning. The IPCC 2006 Guidelines recommends an operation emission factor between 1 and 15% for this application category, and between 0.1 and 0.5% for domestic refrigeration. Because the units imported to Norway are small, sealed units and thus similar to the refrigerators and freezers for domestic use, an emission factor in the lower end of IPCCs recommendation is believed to best reflect the actual emissions. The recovery efficiency is 0 in the period 1990-2016. From 2017 and beyond the EF varies depending on the amounts removed for destruction and reported to the Norwegian Environment Agency combined with the amount calculated to be remaining in products at decommissioning.
- Medium and large commercial refrigeration equipment are normally built and filled with fluorinated substances on site. They will thus have emissions both in the production phase and from operation/use the subsequent years. The IPCC 2006 Guidelines recommends an operation emission factor between 10 and 35% for this application category. In the 2021-submission it has been found grounds to differentiate this factor through the time series. The lower emission factor is used in the period of 1990-2002. The reasoning behind this is that the tax on imports of fluorinated substances is assumed to result in a high level of maintenance of the equipment and low leakage rates. Information from the industry has revealed that an emission factor of 10% is too high and that it is reasonable to say that the Norwegian users have an emission factor of 4% emission from 2008. There has been a linear interpolation of the emission factor between 2002 and 2008. In the 2021-submission it was also found reason to differ the emission factor for initial emissions. According to the industry the emissions connected to new installations fell to 0.5% in connection to the implementation of tax on F-gas.

2F1b Domestic Refrigeration

- Emission factors used in the calculations for domestic refrigeration are found within the ranges defined by the IPCC guidelines. There is currently no production of this kind of equipment in Norway. All emissions take place during the operating phase (emissions

from stocks/lifetime emissions) or at decommissioning. The emission factor for leakage is chosen in the lower end of IPCCs recommendation is believed to best reflect the actual emissions. The recovery efficiency is 0 in the period 1990-2016. From 2017 and beyond the EF varies depending on the amounts removed for destruction and reported to the Norwegian Environment Agency combined with the amount calculated to be remaining in products at decommissioning.

2F1c Industrial Refrigeration

In the industrial refrigeration sector, there is relatively good knowledge of the various emission factors. The factors for lifetime, initial emission, operational emission, and initial charge remaining are chosen after input from the industry. For information on the calculation of recovery, see description in section 4.7.1.2 and 4.7.1.3.

2F1d Transport

The emission factors for lifetime and initial emission are chosen in the higher end of the recommended range. It is assumed that the equipment has a long lifetime, and that during its lifetime has an annual leakage around 20%. The initial charge remaining is chosen from knowledge on filling intervals for optimized cooling. For information on the calculation of recovery, see description in section 4.7.1.2 and 4.7.1.3.

2F1e Mobile AC

There is currently no production of cars in Norway and hence is there not calculated any emissions from initial emissions. The average lifetime on private cars and vans in Norway is approximately 18 and 15 years respectively. It is assumed that the average lifetime for all mobile air condition is lower than this. An annual leakage of minimum 10% is chosen from the lower end of recommended range in IPCC 2006 guidelines and is also supported by the industry. The leakage rate can be higher in years where bulk imports and reuse are higher than the calculated 10% leak. An initial charge remaining of 60% is chosen from information regarding expected service interval on private cars and buses. Information from the car industry indicates a recovery rate in the higher end of the recommended range in the guidelines. According to the industry, scrapped vehicles are emptied for refrigerant gas as a part of the scrapping process. Some of the gas is delivered for destruction and some gas is cleaned and reused (see description in section 4.7.1.2 and 4.7.1.3).

2F1f Stationary AC

Equipment in stationary AC is either built and filled with fluorinated substances on site or installed as prefabricated and imported heat pumps. They will thus have emissions both in the production phase and from operation/use in the subsequent years. The IPCC 2006 Guidelines recommends an initial emission factor between 0.2 and 1% for this application category. In the 2021-submission it has been found grounds to differ this factor through the time series. It is expected higher initial emissions in the 90's and that these emissions are reduced from 1% to 0.2% from 2000 and onwards due to new improved installation techniques. The operational emission of 4% is within the IPCC range. For information on the calculation of recovery, see description in section 4.7.1.2 and 4.7.1.3.

4.7.1.5 *Uncertainty assessment and time series consistency*

The uncertainties of the different components of the national greenhouse gas inventory have been evaluated in detail in 2006 by Statistics Norway (See annex 2) and reviewed in 2022. The leakage rate and lifetime are considered quite uncertain and are estimated to be +50% for both HFC and PFC. The quality of activity data is considered quite good and are estimated to be 10% for both HFC and PFC. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.7.1.6 *Category-specific QA/QC and verification*

In addition to the general QA/QC procedures described in Annex 4, the activity data, emissions figures, and the model used to estimate emissions are checked by several manual and automatic controls performed during and after the production of the figures.

Firstly, the activity data on imports and exports of chemicals undergo automatic checks before they are used as input for the emission calculations. Double counting and missing values are flagged and checked at a detailed level, i.e., for each observation of amount of chemical by importer/exporter and goods.

Aggregated figures for amount of chemical imported/exported for each year are then checked manually as they are entered into excel sheets containing time series for each CRT equipment/emission source. Potential errors like missing values or major differences in figures between years are checked and corrected if necessary. Aggregated figures on imports per gas are also compared with tables from the Norwegian Directorate of Customs and Excise, to check that our computerized coding has not altered the total amounts of import per gas. These controls would probably benefit from being automatic in the future.

Both activity data and emissions per chemical and type of equipment/emission source undergo controls in the excel sheets where the emissions calculations take place: Potential emissions are compared with actual emissions and IEFs are calculated and checked. Currently, these controls are only applied to the most important emission sources. The controls would probably also benefit from being automatic in the future.

The estimated emissions are finally subjected to several controls to identify errors in activity data and/or the calculation model. This includes the flagging of:

- Emissions from combinations of industrial sector and type of chemical that have not occurred previous years
- Emissions from combinations of industrial sector and type of chemical that occurred the previous year, are not occurring this year
- Large or small emissions compared with the previous years:
 - By type of chemical and sector
 - By type of chemical and CRT/NFR emission source
 - Recalculations

4.7.1.7 *Category-specific recalculations*

There have been no recalculations performed for this source category this year.

4.7.1.8 *Category-specific planned improvements*

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.7.2 Other applications, 2F6

4.7.2.1 *Category description*

Due to confidentiality restrictions, Norwegian emissions from categories 2F2 (foam blowing), 2F3 (fire extinguishers), 2F4 (aerosols/metered dose inhalers (MDI)) and 2F5 (solvents) are reported in the CRT tables using the notation key "IE" and aggregated under 2F6 (Other applications using ODS substitutes) and not disaggregated by substance. Note however, that the calculations are made for each subsector.

An analysis of the category shows that more than 95% of the Norwegian emissions reported in 2F6 since 1995, in terms of CO₂ equivalents²⁴, are from Foam blowing agents, aerosols and fire extinguishers. For the other categories included in the aggregated 2F6 amount, the emitted amounts were zero or close to zero. It has been a shift between the subsectors in the last years, and emissions from metered dose inhalers (included in 2F4) has become larger.

Foam blowing agents (2F2), i.e., emissions of HFC-134a and HFC-152a from the use of hard foam/closed cells-products. For HFC-134a the per capita emissions were in the range of 0 - 1.6 kg CO₂ equivalents before 1998, 2.3 - 4.4 kg CO₂ equivalents in the period 1998 to 2012 and 1.3 - 4.4 kg CO₂ equivalents in the period 2013 - 2021. Per capita emissions in comparable countries were in the range of 0 - 11.71 kg CO₂ equivalents in 2012. For HFC-152a the per capita emissions were in the range of 0 - 0.8 kg CO₂ equivalents in the period 1990 - 2012 and approximately 0.8 kg from 2012 - 2021. Per capita emissions in comparable countries were in the range of 0 - 1.74 kg CO₂ equivalents in 2012.

Aerosol (2F4), i.e., emissions from the use of HFC-134a in metered dose inhalers (2F4a). The per capita emissions have grown from 0 - 3.0 kg CO₂ equivalents per capita before 2000, to 3.5 - 4.4 kg CO₂ equivalents per capita in the period 2001 - 2017. The amounts are decreasing and rapidly reduced after 2018. Per capita emissions in comparable countries were in the range of 0.24 - 12.91 kg CO₂ equivalents in 2012.

Fire extinguishers (2F3), both in use and in the waste phase, of the gases HFC-125, HFC-134a and HFC-227ea). The emissions have increased from 0 - 0.3 kg CO₂ equivalents per capita before 2011, to a stable level in the range 2.1 - 3.0 kg CO₂ equivalents per capita in the period 2011 - 2021. Comparable countries had emissions in the range of 0.59 - 6.78 kg CO₂ equivalents per capita in 2012.

²⁴ Note that the reported emissions in sector 2F6 are given in CO₂ eq.

The Norwegian per capita emission for each of these three sectors in 2012 was well within the range of the selected comparable countries. Table 4-48 below shows the per capita reported emissions in 2020 for 2F2-2F6 for the same countries as in the 2012 analysis. Norway is within the range of these countries.

Table 4-48: Per capita emissions for 2F2-2F6, 2020.

Country	Per capita emissions (tonnes CO ₂ eq) for 2F2-2F6
United States of America	0.115
United Kingdom of Great Britain and Northern Ireland	0.029
Ireland	0.024
Norway	0.008
Austria	0.073
Sweden	0.004
Finland	0.004
Denmark	0.002

Source: UNFCCC, Norwegian Environment Agency

4.7.2.2 Methodological issues

See description for source category 2F1.

4.7.2.3 Activity data

See description for source category 2F1.

4.7.2.4 Emission factors

Leakage rates and product lifetimes used in the calculations are shown in Table 4-49.

Table 4-49: Emission factors* for HFCs from products and lifetime of products.

Source category	Lifetime (years)	Production/initial emission (% of initial charge)	Lifetime emission (% of initial charge/year)
2F2 Foam			
2F2a Closed cells	20	5	4.5
2F2b Open cells	NO	NO	NO

Source category	Lifetime (years)	Production/initial emission (% of initial charge)	Lifetime emission (% of initial charge/year)
2F3 Fire protection	30	2	2
2F4 Aerosols			
2F4a Metered Dose Inhalers	2	NO	50
2F4b Other aerosols	2	NO	50
2F5 Solvents	2	NO	50

Source: *IPCC (2006)*

4.7.2.5 Uncertainty assessment and time series consistency

See description for source category 2F1.

4.7.2.6 Category-specific QA/QC and verification

See description for source category 2F1.

4.7.2.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.7.2.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.8 Other product manufacture and use – 2G

Norway reports the source categories electric equipment, SF₆ and PFCs from other product use, medical applications, propellant for pressure and aerosol cans and other use of N₂O under the category 2G, see Table 4-50.

Table 4-50: Other product manufacture and use. Components included in the inventory, tier of method and key category.

Source category	HFCs	PFCs	SF ₆	NF3	N ₂ O	Tier	Key category
2G1. Electric equipment	NO	NO	E*	NO	NA	Tier 2	No
2G2. SF ₆ and PFCs from other product use	NA	NO	E	NO	NA	Tier 1	No
2G3a. Use of N ₂ O in anaesthesia	NA	NA	NA	NA	E	Tier 1	No

Source category	HFCs	PFCs	SF ₆	NF ₃	N ₂ O	Tier	Key category
2G3b.1. Propellant for pressure and aerosol cans	NA	NA	NA	NA	E	Tier 1	No
2G3b.2. Other use of N₂O	NA	NA	NA	NA	E	Tier 1	No

R = emission figures in the national emission inventory are based on figures reported by the plants. E = emission figures are estimated. NA = Not Applicable. NO = Not Occurring. IE = Included Elsewhere

** Includes SF₆ from the use in the manufacturing of semiconductors previously reported in 2E1*

Table 4-51 shows the emission trends for 2G as a whole and for the various sub-categories. The GHG emissions from this sector category were about 0.1 million tonnes CO₂ equivalents in 2024, this is 1.2% of the total emission from the IPPU-sector. The emissions from this sector have increased by 14.8% since 1990 and increased by 7.4% from 2023 to 2024.

Table 4-51: Emission trends for 2G Other product manufacture and use (kt CO₂ equivalents).

Source category	1990	1990, % of IPPU	2023	2024	2023, % of IPPU	Trend 1990-2024 (%)	Trend 2023-2024 (%)
2G1.Electric equipment	52.7	0.4 %	24.8	31.4	0.4 %	-40.5 %	26.4 %
2G2. SF₆ and PFCs from other product use	2.3	0.0 %	26.8	30.4	0.4 %	1 219.4 %	13.2 %
2G3a. Use of N₂O in anaesthesia	30.4	0.2 %	11.0	12.5	0.2 %	-58.8 %	13.6 %
2G3b1. Propellant for pressure and aerosol products	NO	NA	28.2	23.4	0.3 %	NA	-17.2 %
2G3b2. Other use of N₂O	NO	NA	0.4	0.4	0.0 %	NA	0.0 %
2G. Total	85.4	0.6 %	91.3	98.0	1.2 %	14.8 %	7.4 %

Source: Statistics Norway and Norwegian Environment Agency

As part of the transformation to new reporting guidelines, Norway has examined whether there are activities that would result in emissions of trinitrogenfluoride (NF₃). Our assessment is that here are no emissions of NF₃ in Norway.

4.8.1 Electric equipment, 2G1

4.8.1.1 Category description

SF₆ is used as an insulation medium in high tension electrical equipment including gas insulated switchgear (GIS) and circuit breakers. There is no production of SF₆ in Norway. In March 2002 a voluntary agreement was signed between the Ministry of Environment and the most important

users and producers of GIS. According to this agreement emissions from this sector should be reduced by 13% in 2005 and 30% in 2010 with 2000 as base year. For the following up of this agreement, the users (electricity plants and –distributors) and producer (one factory) report annually to the government. This voluntary agreement terminated successfully in 2010, but a continuation is being discussed. Although the voluntary agreement has terminated, the users still report annually to the Norwegian Environmental Agency. Emissions of SF₆ from the use in the manufacturing of semiconductors previously reported in 2E1 are due to confidentiality now reported in 2G1.

4.8.1.2 Methodological issues

The general methodology for estimating SF₆ emissions was revised in a SFT report (SFT 1999c), while the sector specific methodology for GIS, AIS and medium voltage switchgear were revised in the 2022 reporting based on new information from the Norwegian users.

Emissions from production of GIS (one factory) were included for the first time in 2003. The company has, as part of the voluntary agreement with the Ministry of the Environment, made detailed emission estimates back to 1985. These emissions constitute a significant part of national emissions of SF₆. In recent years emissions rates have been considerably reduced due to new investments and better routines. The company now performs detailed emission calculations based on accounting of the SF₆ use throughout the whole production chain. Due to confidentiality, emissions from production are reported under emissions from stock.

In the period of 1990-2002 the estimates of emissions of SF₆ have been made upon the information in SFT report (SFT 1999c). The emissions are calculated with emission factors from Table 4-52. From 2003 and onwards the reporting group of users of SF₆ in electrical equipment have reported detailed figures on the amounts in stock, reuse, destroyed, refilling and new equipment. The group of users covers a high share of the total users. An evaluation of the shares in 2020 led to a share as given in Table 4-52.

Table 4-52: Share of users of SF₆ reporting annually to the Norwegian Environmental Agency.

	Share of users reporting
GIS ≥ 60kV	95%
AIS ≥ 60kV	80%
medium voltage switchgear < 60kV	60%

An important assumption in the calculations is that the reported figures reflect the activity in the rest of the population. This information makes a solid basis for calculation of annual country specific emission factors. The calculation follows the tier 2 method as given in the IPCC (2006).

4.8.1.3 Activity data

Data is collected from companies that use SF₆ in various equipment and processes. The calculations take into account imports, exports, recycling, accumulation in bank, technical lifetimes of products, and different rates of leakage from processes, products and production processes. From 2003 and onwards emission estimates reported directly from users and producers, according to the voluntary agreement, are important input.

4.8.1.4 Emission factors

The product lifetime is assumed to be 50 years in the whole period for all emission sources. Leakage rates used in the calculations are shown in Table 4-53.

Table 4-53: Leakage rates from products containing SF₆, %.

Product emission source	Sealed medium voltage switchgear	GIS/AIS
1990-2000	0.2	1.0
2005	0.2	0.44
2010	0.27	0.4
2015	0.31	0.3
2016	0.31	0.24
2017	0.31	0.2
2018	0.31	0.22
2019	0.31	0.22
2020	0.35	0.3
2021	0.35	0.2
2022	0.35	0.18
2023	0.35	0.15
2024	0.35	0.21

Source: **SFT (1999c)**, Statistics Norway

4.8.1.5 Uncertainty assessment and time series consistency

An uncertainty estimate is given in Annex 2. The uncertainty has been revised in the 2022 report. The uncertainty of 10% for the activity data and 60% for the emission factors is an updated expert judgement (Rypdal & Zhang 2000). A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.8.1.6 Category-specific QA/QC and verification

The current methodology was first established in the SFT report (SFT 1999c), with emissions from GIS calculated from stock data estimates and leakage factors. It was revised in 2004 when data from the voluntary agreement on GIS became available, with emissions estimated from reported

data on refilling (Hansen 2007). The methodology was revised again in the 2022 reporting and confirmed the assumptions in previous reviews in early time series.

4.8.1.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.8.1.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.8.2 SF₆ and PFC from other product use, 2G2

4.8.2.1 Category description

This source category includes SF₆ emissions from other product use.

4.8.2.2 Methodological issues

The method for other sources is described in a SFT report (SFT 1999c). For tracer gas, medical use, and other minor uses, the activity data are annual consumption as estimated in the SFT report. However, for tracer gas some major research projects expired in 2001 and 2006, respectively, and the consumption has been reduced. For sound-insulating windows and footwear, the emissions are calculated from estimated stock of SF₆ in the products, and from production of windows. Footwear with SF₆ was imported, and the use ended in 2001. There was no production of sound-insulating windows from 2008.

These sound-insulating windows were used from 1985 and have a lifetime of 30 years. The increase in emissions from 2014 to 2015 is due to the phasing out of the first windows and the remaining SF₆ in those windows is reported as emitted.

4.8.2.3 Activity data

Data is collected from direct consultations with importers and exporters of bulk chemicals and products containing SF₆. The activity data are annual additions of SF₆ to the product stock, as estimated by SFT (1999c). The calculations take into account imports, exports, recycling, accumulation in bank, technical lifetimes of products, and different rates of leakage from processes, products and production processes.

In addition to the activity data described above, the calculations include emissions from uncontrolled accidents. There was one incident in 2017 leading to an unusual peak in emissions from stocks in 2G2e, about 1.3 times as large as the surrounding years.

4.8.2.4 Emission factors

Leakage rates and product lifetimes used in the calculations are shown in Table 4-54 and Table 4-55.

Table 4-54: Yearly rate of leakage of SF₆ from different processes.

Emission source	Leakage rate (% of input of SF ₆)
Secondary magnesium foundries	100
Tracer gas in the offshore sector	0
Tracer gas in scientific experiments	100
Medical use (retinal surgery)	100
Production of sound-insulating windows	2
Other minor sources	100

Source: *SFT (1999c)*Table 4-55: Product lifetimes and leakage rates from products containing SF₆.

Product emission source	Yearly rate of leakage	Product lifetime (years)
Sound-insulating windows	1	30
Footwear (trainers)	25	9
Other minor sources	100	1

Source: *SFT (1999c)*

4.8.2.5 Uncertainty assessment and time series consistency

An uncertainty estimate is given in Annex 2. The uncertainty of 60% is an expert judgement (Rypdal & Zhang 2000).

A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category.

4.8.2.6 Category-specific QA/QC and verification

The current methodology was established in a SFT report (SFT 1999c), with emissions from GIS calculated from stock data estimates and leakage factors. It was revised in 2004 when data from the voluntary agreement on GIS became available, with emissions estimated from reported data on refilling (Hansen 2007).

4.8.2.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.8.2.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.8.3 Use of N₂O in anaesthesia, 2G3a

4.8.3.1 Category description

N₂O is used in anaesthesia procedures in hospitals, by dentists and by veterinarians.

4.8.3.2 Methodological issues

N₂O is used in anaesthesia procedures and will lead to emissions of N₂O. For the year 1998 and annually from 2000, the emissions are given by data on sales of N₂O for medical uses from the three major producers and importers in Norway. The data include N₂O used as anaesthesia in hospitals, by dentist and by veterinarians. For the year 1999, sales figures have been interpolated between 1990 and 2000. For the years prior to 1998, annual consumption is estimated on basis of sales figures for 1998 and the number of births and number of bed nights in hospitals for each year to estimate consumption. For the years 1990-1998, no N₂O is assumed used by dentists and veterinarians as the amounts they used in 2000 were very small.

4.8.3.3 Activity data

For this source actual sale of N₂O is used for the year 1998, and annually from 2000. For the calculations of use prior to 1998, annual number of births and bed nights in hospitals are taken from the Statistical yearbook of Norway.

4.8.3.4 Emission factors

The figures are based on sales of N₂O.

4.8.3.5 Uncertainty assessment and time-series consistency

The figures are uncertain. There may be small importers not included in Statistics Norway's telephone survey with 2000 and the investigation done by the Norwegian Environment Agency in 2014, but the emissions are small, so it is believed that the uncertainty is at an acceptable level. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.8.3.6 Category-specific QA/QC and verification

There is no source specific QA/QC procedure for this sector.

4.8.3.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.8.3.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.8.4 Propellant for pressure and aerosol products, 2G3b.1.

4.8.4.1 Category description

N₂O is used as a propellant in spray cans and this use will lead to emissions of N₂O. It is also used in research work, for instance in the food industry and at universities. There is no production of N₂O for these purposes in Norway.

4.8.4.2 Methodological issues

Information on sale volumes has been reported by the plants to Statistics Norway for the years 1994 and 2003. From 2018, foreign trade statistics show increased amount of spray cans. It is assumed that all propellant is released to air.

4.8.4.3 Activity data

Information has been gathered from the plants indicating that there is no production or sale of N₂O for use as a propellant in Norway. N₂O is already in the aerosol cans when imported. There was no import of these cans prior to 1993. For the years 1994-2002 the number of cans imported in 1994 has been used as activity data, while the number of cans imported in 2003 has been used as activity data from 2003-2017. From the year 2018 import data of cans containing N₂O is collected from the foreign trade statistics at Statistics Norway.

4.8.4.4 Emission factors

Not relevant.

4.8.4.5 Uncertainty assessment and time-series consistency

The figures for 1994 and 2003 are used for many years. It is believed that all figures from all major importers are included in the inventory. From the year 2018 the activity data is updated annually from the foreign trade statistics at Statistics Norway. The import data showed that figures from the years 2018 and 2019 were at the same level as the activity data used between 2003 and 2017. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.8.4.6 Category-specific QA/QC and verification

There is no source specific QA/QC procedure for this sector.

4.8.4.7 Category-specific recalculations

There have been recalculations performed for this source category this year, see chapter 10 for details.

4.8.4.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.8.5 Other use of N₂O, 2G3b.2

4.8.5.1 Category description

Small amounts of N₂O are used for research work and for drag-racing.

There were no emissions of N₂O from use in research and for drag racing in 1990. The use has been estimated to 407 tonnes CO₂ equivalents from the year 1993 and onwards.

4.8.5.2 Methodological issues

Data on imported amounts in 2002 has been used for all years and it is assumed that all propellant is released to air.

4.8.5.3 Activity data

Data on imported amounts in 2002 have been used for all years.

4.8.5.4 Emission factors

Not relevant.

4.8.5.5 Uncertainty assessment and time-series consistency

The figures for one year are used for all years. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.8.5.6 Category-specific QA/QC and verification

There is no source specific QA/QC procedure for this sector.

4.8.5.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.8.5.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.9 Other – 2H

Under Other production, Norway reports the two source categories pulp and paper and food and beverages industry, see Table 4-56.

Table 4-56: Other production. Components included in the inventory, tier of method and key category.

Source category	CO ₂	NM VOC	Tier	Key category
2H1. Pulp and paper	R	NA	Tier 2	No
2H2. Food and beverages industry	R	E	Tier 2	Yes

R = emission figures in the national emission inventory are based on figures reported by the plants. E = emission figures are estimated. NA = Not Applicable. NO = Not Occuring. IE = Included Elsewhere.

Table 4-57 shows the emission trends for 2H as a whole and for the various sub-categories. The GHG emissions from this sector category were 0.1 million tonnes CO₂ equivalents in 2024, this is 1.3% of the total emission from the IPPU-sector. The emissions from this sector increased by 250.6% from 1990 and the emissions increased by 2.2% from 2023 to 2024.

Table 4-57: Emission trends for 2H Other (kt CO₂ equivalents).

Source category	1990	1990, % of IPPU	2023	2024	2024, % of IPPU	Trend 1990-2024 (%)	Trend 2023-2024 (%)
2H1. Pulp and paper	10.5	0.1 %	8.4	8.4	0.1 %	-20.0 %	0.0 %
2H2. Food and beverages industry	20.8	0.1 %	98.9	101.3	1.2 %	387.1 %	2.4 %
2H. Total	31.3	0.2 %	107.3	109.6	1.3 %	250.6 %	2.2 %

Source: Statistics Norway and Norwegian Environment Agency

4.9.1 Pulp and paper, 2H1

4.9.1.1 Category description

There are CO₂ emissions from non-combustion from two plants in this sector and they are covered by the EU ETS. The emissions originate from the use of limestone. Emissions from combustion are included in Chapter 3.

4.9.1.2 Methodological issues

The CO₂ emissions are calculated by multiplying the amount of limestone by an emission factor.

4.9.1.3 Activity data

Activity data is reported by the plants to the agency. The amount of limestone is calculated from purchased amount, adjusted for limestone in storage in the beginning and end of the year. The aggregate amounts of limestone used by the plants included in 2H1 are reported in the CRT Table 2(I). A-Hs2.

4.9.1.4 Emission factors

The emission factor used in the calculation is 0.44 tonne CO₂ per tonne limestone.

4.9.1.5 Uncertainty assessment and time-series consistency

Uncertainty estimates are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.9.1.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4. The plants are covered by the EU ETS, and their emissions are verified annually. In addition, the emissions are checked both by the case handler and by the agency's inventory team.

4.9.1.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.9.1.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

4.9.2 Food and beverages industry, 2H2

4.9.2.1 Category description

This source category includes CO₂ from carbonic acid mainly used in breweries, domestic use of captured CO₂, imported CO₂ and CO₂ from production of bio protein.

Some CO₂ emissions from the production of ammonia (2B1) is captured and (mainly) used as carbonic acid in carbonated beverages in Norway. The emissions reported here in 2H2 include CO₂ bound in products and imported CO₂. The emissions are reported in this source category, although the largest part of the emissions take place after the bottles are opened and not in the breweries. Exported CO₂ from this source is not included in the Norwegian emission inventory.

One plant produced bio protein in the years 2001-2005. Natural gas was used to feed the bacteria cultures that produced the bio protein, and this was used as animal fodder.

4.9.2.2 Methodological issues

For carbonic acid, the CO₂ figures are based on the sales and export statistics from the ammonia producing plant and import statistics from Statistics Norway's External trade in goods statistics. The plant producing bio protein, reported emissions of about 2 000 – 11 000 tonnes CO₂ and these are included in the national inventory.

4.9.2.3 Activity data

For carbonic acid, the CO₂ figures are based on the sales and export statistics from the ammonia producing plant and import statistics from Statistics Norway's External trade in goods statistics, see Table 4-58.

Table 4-58: Sold CO₂ (minus exports), imported CO₂ and domestic use (ktonnes).

Year	Sold CO ₂ (minus exports)	Imported CO ₂	Domestic use of CO ₂ (2H2)
1990	20.0	0.8	20.8
1995	34.0	2.4	36.4
2000	50.0	2.6	52.6
2005	53.0	18.4	71.4
2010	76.0	8.7	84.7
2015	88.6	11.1	99.8
2016	80.4	24.9	105.4
2017	45.8	59.8	105.6

Year	Sold CO ₂ (minus exports)	Imported CO ₂	Domestic use of CO ₂ (2H2)
2018	91.3	21.6	112.9
2019	83.5	21.8	105.4
2020	79.7	30.6	110.3
2021	71.3	32.2	103.5
2022	75.9	21.2	97.1
2023	80.9	18.0	98.9
2024	70.3	30.9	101.3

Sources: Statistics Norway and the Norwegian Environment Agency

Activity data for bio protein production is the amount of natural gas used in the process.

4.9.2.4 Emission factors

The activity data for carbonic acid is CO₂, so emission factors are not relevant.

4.9.2.5 Uncertainty assessment and time-series consistency

See the uncertainty in the activity data for the ammonia plant (2B1) in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

4.9.2.6 Category-specific QA/QC and verification

The specific QA/QC carried out for Industrial processes is described in Annex 4.

4.9.2.7 Category-specific recalculations

There have been no recalculations performed for this source category this year.

4.9.2.8 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

5. Agriculture (CRT sector 3)

5.1 Overview of sector

About 9.9% of the total Norwegian emissions of greenhouse gases (GHG) originated from agriculture in 2024. This corresponds to 4.42 million tonnes CO₂ eq. Emissions from agriculture were in 2024 about 10% lower than in 1990, and about 0.3% higher than in 2023.

The sector's largest sources of GHG's were enteric fermentation (CH₄) from domestic animals contributing with 51% of the sector's emissions, and N₂O from agricultural soils contributing with 33%. Manure management contributed about 12%. CO₂ emissions in the agriculture sector, mainly from liming and a minor part from urea application, contributed with 3%. Minor emissions of the greenhouse gases N₂O and CH₄ arising from the burning of crop residues on fields also occurred.

Table 5-1: Emissions from Agriculture categories in 1990, 2023 and 2024 (ktonnes CO₂ equivalents).

Category	1990	1990, % of Agriculture	2023	2024	2024, % of Agriculture	Trend 1990-2024 (%)	Trend 2023-2024 (%)
3A Enteric fermentation	2 494	51%	2 294	2 270	51%	-9%	-1%
3B Manure management	541	11%	557	552	12%	2%	-1%
3D Agricultural soils	1 623	33%	1 419	1 461	33%	-10%	3%
3F Field burning of agricultural residues	38	1%	3	4	0%	-90%	50%
3G Liming	231	5%	133	133	3%	-43%	0%
3H Urea application	1	0%	0.3	0.2	0%	-56%	-13%
Total	4 928	100%	4 405	4 419	100%	-10%	0%

Source: Statistics Norway and the Norwegian Environment Agency

Agriculture contributes particularly to CH₄, N₂O and NH₃ emissions. Domestic animals are the major source of CH₄ emissions from agriculture. Both enteric fermentation and manure management contribute to emissions of CH₄. Manure management also generates emissions of N₂O.

Microbiological processes in the soil lead to emissions of N₂O. Both direct and indirect N₂O from soil processes are described in the IPCC methodology and are included in the Norwegian inventory. Direct N₂O emissions arising from the use of fertilizer (manure, synthetic fertilizer, sewage sludge and other organic fertilizers applied to soils), emissions from pastures, crop residues and cultivation of organic soils are included. Indirect N₂O emissions from atmospheric deposition and nitrogen leaching and run-off from both the manure management systems and from agricultural soils are also included.

Manure storage and the use of fertilizer (manure, synthetic fertilizer, sewage sludge and other organic fertilizers applied to soils) also generate emissions of ammonia (NH₃) and NO_x that gives indirect N₂O from atmospheric deposition. NH₃ volatilized from grazing animals are also included in the estimations of indirect N₂O.

As indicated in chapter 1.4, the Approach 2 key category analysis performed in 2026 for the years 1990 and 2024 has revealed key categories in terms of total level and/or trend uncertainty in the agriculture sector as shown in Table 5-2. The key categories according to Approach 1 key category analysis are also provided in Table 5-2.

Table 5-2: Key categories in the sector Agriculture.

IPCC	Source category	Gas	Identification criteria	Method
3A1	Enteric fermentation – Cattle	CH ₄	L1, T1, L2, T2	Tier 2
3A2	Enteric fermentation – Sheep	CH ₄	L1 L2	Tier 2
3A4	Enteric fermentation – Other	CH ₄	L2	Tier 1
3B1	Manure management – Cattle	CH ₄	L1, L2	Tier 2
3B	Manure management	N ₂ O	L1, L2	Tier 2
3D1a	Direct emissions from managed soils – Inorganic N fertilizers	N ₂ O	L1, T1, L2, T2	Tier 1
3D1b	Direct emissions from managed soils – Organic N fertilizers	N ₂ O	L2	Tier 1
3D1d	Direct emissions from managed soils – Crop residues	N ₂ O	L2, T2	Tier 1
3D1f	Direct emissions from managed soils – Cultivation of organic soils	N ₂ O	L1, L2	Tier 1
3D2b	Indirect emissions from managed soils – Nitrogen leaching and run-off	N ₂ O	L1, L2, T2	Tier 1
3G	Liming	CO ₂	L1, T1	Tier 1

5.1.1 Livestock population characterisation

5.1.1.1 Data sources

The animal population data used in the estimations on a disaggregated level are provided in Annex 5, table A5-1 and A5-2. The same data for number of animals of the various animal groups is used in all the different calculations of emissions.

The main sources of the livestock statistics are the register of production subsidies (sheep for breeding, goats, poultry for egg production and beef cows), statistics of approved carcasses (animals for slaughter and pig categories) and the Cow Recording System at TINE BA²⁵ (TINE BA Annually) (heifers for breeding and dairy cows). These sources cover 85-100% of the animal populations. The estimated shortage of coverage is compensated in the total number of animals used in the emission estimates. The coverage in the data sources is shown in Table 5-3.

Table 5-3: Estimated coverage (%) of animal populations in the data sources used.

	Statistics Norway, production subsidies	Statistics Norway, statistics of approved carcasses ⁴	TINE	Other
Dairy cows		100 ²	97.7 ¹	
Replacement heifers			97.4 ¹	
Young cattle for slaughter		100	100 ³	
Beef cows	99.8	100 ²		
Sheep	99.8	100		
Goats	100			
Laying hens	100			
Chicks for breeding	100			
Chicken for slaughter		100		
Other poultry for breeding	96.5			
Other poultry for slaughter		100		
Sows		100		
Young pigs for breeding		100		
Pigs for slaughter		100		
Horses	Unknown ⁵			Unkown ⁵
Fur-bearing animals	100			

²⁵ TINE BA is the sales and marketing organisation for Norway's dairy cooperative and covers most of the milk production and the meat production induced by milk production.

	Statistics Norway, production subsidies	Statistics Norway, statistics of approved carcasses ⁴	TINE	Other
Deer	100			
Reindeer				100 ⁶

Source: Estimations by Statistics Norway and the Cow Recording System (dairy cows and heifers).

¹ Share of livestock herds.

² Data source only for slaughter weight

³ Data source only for slaughter age

⁴ Figure refers to share of slaughtered animals, excluding home slaughter. Animals dead from other causes also excluded

⁵ Total number of horses used in the inventory is based on data from productions subsidies (54% of total number) and an additional estimation of number of horses outside agriculture by NIBIO and Nasjonalt hesteregister.

⁶ Norwegian Agriculture Agency

The statistics of approved carcasses covers close to 100% of all slaughtered animals. Home slaughter is not included, but the extent of home slaughter is very low due to legal restrictions. Even animals consumed by producers are in most cases registered at the slaughterhouses. The basis for calculating the number of pigs (animal years) is the number of slaughtered pigs per year and the other pig-categories; sows, young pigs for breeding (gilts) and weaners (piglets) are derived from that number based on how long an animal lives in the different phases. This methodology is a result of a project from NIBIO and the swine production corporation Norsvin SA²⁶ (Bonesmo & Gjerlaug-Enger 2022). Activity data is provided by Norsvin SA.

The whole series was revised and led to 24% lower animal number per year compared to former estimation.

The number of dairy cows and heifers for breeding derive from the Cow Recording Systems (TINE BA Annually). Between 96 and 99% of all dairy cows are registered here, and in addition, the number used in the inventory is adjusted for this missing part. The adjustment is based on the percentage of herds controlled by the cow recording system.

The registers are updated annually. In addition to the animals included in these registers, an estimate of the number of other horses is obtained from the Norwegian Institute of Bioeconomy Research (NIBIO). The number of reindeer is obtained from the Norwegian Reindeer Husbandry Administration.

For the categories of animals living shorter than a full year or two, generally animals for slaughter, lifetime is taken into account to get a yearly average for the number of animals.

²⁶ Norsvin SA is the research and sales organization of swine genetics in Norway.

5.1.1.2 Method for estimating number of cattle

For dairy cows, additional information from the Cow Recording System concerning daily milk production and amount of concentrate in the diet is used (TINE BA Annually). The Cow Recording System also supplies annual information about slaughter age for heifers and bulls and data for estimating live weight of dairy cows and heifers for breeding, and also the age of young cows at their first calving. (Moen, *pers. Comm.*²⁷).

For heifers and bulls for slaughter, animal numbers are based on data from statistics of approved carcasses which provide data on numbers slaughtered and slaughter weights. Combined with slaughter age from the Cow Recording System (TINE BA Annually), this gives a precise estimation of animal life time for each animal slaughtered. There are several reasons for this way of counting the animals:

1. The coefficients for N and VS excretion (3B) and formation of methane (3A) are based on the development of the animals through their lifetime (weight gain, age, feed consumption). The information on these parameters is most precise when they are connected to the animals in this way.
2. When using the number of animals slaughtered, there is an almost perfect coherence between the definition of the categories counted and the representation of the coefficients.
3. Counting the number of animals slaughtered gives a very precise value of the number of animals.
4. Counting the number of animals as number of live animals at specific dates (which is the only other alternative) takes away the possibility to group the animals in the five categories of young cattle that is being used in the definitions now because this statistic only gives the number of young cattle as a total.

One principal draw-back of this method for estimating animal population is that emissions in all stages of these animals' lives will be accounted for in the year of slaughter, even though the emissions in the early stages of the lives of these animals to a large extent took place in the previous year. In a stable population of animals, this error is automatically adjusted for. Since animal populations are relatively stable, this error is considered much smaller compared to errors related to estimating animal year based on animal populations in the register of production subsidies which was previously used. The data sources used also ensure a better coherence between animal numbers, lifetime and weight. Estimated animal years for cattle are provided in Table 5-4.

The number of milk cows calving for the first time (=heifers for replacement) and their average age at time of calving is reported by the Cow Recording System (TINE BA Annually) on request from Statistics Norway. These data date back to 2004. For the years 1990-2003, average fraction (number of heifers)/ (number of milk cows) for the years 2004-2011 is

²⁷ Moen, O. (*annually*): Personal information, email from Oddvar Moen, Tine Rådgivning annually.

used to estimate number of heifers based on number of milk cows. Number of heifers for replacement in beef production is collected from annual reports from Animalia (Norwegian Meat and Poultry Research Centre (www.animalia.no)). Figures exist from 2007. For previous years, the number is estimated with the same method as for heifers for milk production.

Table 5-4: Estimated animal years for cattle.

	Heifer for replacement	Heifers for slaughter	Bulls for slaughter	Beef cows ¹	Dairy cows
1990	311 279	47 020	289 945	8 193	325 896
1995	299 284	47 103	284 237	20 334	310 346
2000	280 121	63 512	285 349	42 324	284 880
2005	255 862	57 619	263 170	54 841	255 663
2010	239 839	53 410	230 872	67 110	232 294
2015	240 419	64 814	206 328	77 408	222 553
2016	243 942	64 361	217 885	84 372	220 461
2017	247 715	43 501	250 630	88 332	215 849
2018	245 636	52 356	260 129	92 304	211 730
2019	240 049	47 230	238 845	94 001	199 417
2020	245 069	52 767	229 068	99 748	195 076
2021	247 748	56 773	229 199	106 082	196 934
2022	230 862	44 258	245 335	109 517	189 099
2023	225 246	66 507	239 498	108 693	183 022
2024	224 597	63 770	230 564	105 447	181 639

Source: Cow Recording System (TINE BA Annually)(dairy cows), slaughter statistics and estimations by Statistics Norway

5.1.1.3 Method for estimating number of sheep

In the estimations of emissions from manure management, the sheep population is divided between sheep > one year, and sheep < one year. Data from both the register of production subsidies and slaughter statistics is used in estimating the number of animals. In 2017 two changes appeared in the register data: The counting date changed from 1st of January to 1st of March, and the two categories' sheep > one year and sheep < one year were merged into one category for adult sheep. To solve this, figures are split into the two categories sheep > and < one year based on data from the Norwegian Meat and Poultry Center, Animalia. Sheep more than one year old is estimated as the number of sheep registered 1. of March deducted for the number of sheep slaughtered before May the same year. The sheep slaughtered later in the year are counted as living the whole year.

Sheep less than one year old are estimated as number of sheep under one year registered 1st of March + number of lambs slaughtered June-December $\times 143/365$. Lambs slaughtered before June are assumed to be registered as sheep under one year 1st of March. Practically all lambs slaughtered after June are born in the spring. An expert judgment suggests an average lifetime of 143 days for slaughtered lambs born in the spring (UMB, *pers. comm*²⁸).

In the estimations of enteric methane, sheep is split in four categories: sheep > 1 year, sheep < 1 year for breeding, lambs slaughtered June-Dec. and lambs slaughtered Jan.-May. Sheep over one year are estimated as explained above. Sheep under one year for breeding are estimated as the number of sheep under one year registered 1st of March deducted for the number of lambs slaughtered March-May. For the numbers of slaughtered lambs, slaughter statistics are used. The numbers of slaughtered lambs were previously estimated. A more detailed description of the method can be found in NIR 2020, Annex IX, section 1.2.

5.1.1.4 Deviations from FAO statistics

There are some differences between the number of animals used in these calculations and the FAO statistics. The general reason that animal statistics used in the emission inventory differ from the statistics delivered to FAO is that the statistics are used for different purposes. Animal statistics used in the inventory must be categorized so that the categories fit the recommended methodology and the various emission factors used in the emission estimations. The figures reported to the FAO are provided by the Norwegian Institute of Bioeconomy Research (NIBIO)²⁹. NIBIO makes an overall estimation for the agricultural sector, which is the basis for the annual negotiations for the economic support to the sector. This estimate includes a grouping of all agricultural activities, comprising area, number of animals and production data. Differences include:

- Different emphasis on the dates for counting.
- NIBIO does not register pigs under 8 weeks, whilst Statistics Norway does. For the number of animals for slaughter, Statistics Norway uses the statistics of approved carcasses, which together with data on slaughter age gives a far better figure on estimated animal years (average population through the year) compared to figures for registered animals at specific dates which is used in the FAO statistics.
- For the number of dairy cows and heifers for replacement, Statistics Norway uses statistics from the Cow Recording System (TINE BA Annually), which is presumed to give a more accurate figure on number of animal years of dairy cows than the figures from Statistics Norway.

²⁸ UMB (2001): Expert judgement by Department of Animal Science, Ås: Norwegian University of Life Sciences.

²⁹ Former named the Agricultural Economics Research Institute (NILF).

Emissions from other animal groups than included in the estimations (ostrich, donkey, lama and alpaca) are expected to be very small and decreasing. Emissions from ostrich have earlier been included in the estimations, but the number of ostriches has had a decreasing trend and are now very limited (39 in 2013). At the most the number of ostriches was 2113 in 1999. The total emissions from ostrich were less than 500 tonnes of CO₂ equivalents when the animal population was at its highest.

5.1.2 Nitrogen in animal manure as basis for emission estimates

Access to nitrogen is vital for all plant growth; hence nitrogen is added to the soil from i.e., animal manure. This causes emissions to air at various points of compounds containing nitrogen. Of the nitrogen compounds emitted to air from animal manure, N₂O, NO_x and NH₃ are estimated.

According to the IPCC and LRTAP guidelines, process emissions of nitrogen compounds from use of animal manure are calculated from the following sources:

1. Manure management systems (N₂O, NH₃ and NO_x)
2. Application of manure on soil (N₂O, NH₃ and NO_x)
3. Droppings from animals on pastures (N₂O, NH₃ and NO_x)
4. Leakage of nitrogen through manure management systems and soils (N₂O)
5. Deposition of nitrogen from emissions of NH₃ and NO_x (N₂O)

Though the nitrogen flow depends continuously on its surroundings (soil characteristics, temperature, moisture etc.) and the preceding supplies and losses of N, the emission estimates of each of the sources above are generally done independently of emissions from the other sources mentioned. Figure 5.1 gives an overview of the manure nitrogen flows in the Norwegian greenhouse gas inventory.


The Norwegian model for calculating agricultural manure nitrogen emissions to atmosphere is described in Carbon Limits (2020a).

The following decides the amounts of N that are used as the basis for the respective emission calculations:

- The amount of N in manure systems is calculated as total N in manure adjusted for the N that is dropped on pastures. In addition, the nitrogen added in bedding (applicable only to solid manure) is taken into account, and the consequent immobilization of TAN in that bedding, in line with EEA (2023). The volumes of different bedding types used are based on Luostarinen et al. (2017). These volumes are converted into weights and thence tot-N added due to bedding as quoted in Grönroos et al. (2017).
- N₂O emitted during spreading is calculated from the amounts of N in manure spread to land. This means that N lost through leaching in manure storage and as

N_2O , NH_3 and NO_x in manure housing and storage is deducted. However, N lost as N_2O , NH_3 and NO_x during spreading, as well as indirect emissions of N_2O due to atmospheric deposition, are not deducted.

- NH_3 emitted during and after spreading of manure is based on the amounts of TAN in manure spread to land minus N lost through leaching in manure storage and as N_2O , NH_3 and NO_x in manure housing and storage. NO_x emitted during and after spreading of manure also has the same basis. For NH_3 emissions, N lost as N_2O and NO_x during spreading, as well as indirect emissions of N_2O due to atmospheric deposition is not deducted. Similarly, for NO_x emissions, N lost as N_2O and NH_3 during spreading, as well as indirect emissions of N_2O due to atmospheric deposition is not deducted.
- Emissions of N_2O , NH_3 and NO_x from pasture are calculated independently of each other and are based on the amounts of N (or TAN for NH_3 emissions) estimated in manure dropped during grazing.
- N_2O lost through leaching due to spreading is based on total N in manure spread to land minus N lost through leaching in manure storage and as N_2O , NH_3 and NO_x in manure housing and storage. N_2O lost through leaching due to grazing is based on total N excreted on pastures. N_2O lost through leaching during storage of manure is based on the amounts of N estimated for the particular management systems that are susceptible to leaching. N lost through emissions of NH_3 from housing is not deducted.
- The nitrogen in NH_3 and NO_x volatilized during housing, storage, pasture and spreading of manure is the basis for the calculation of N_2O emissions from atmospheric deposition. How the amounts of N are estimated in the various emission estimates, is described in more details in the respective chapters below.

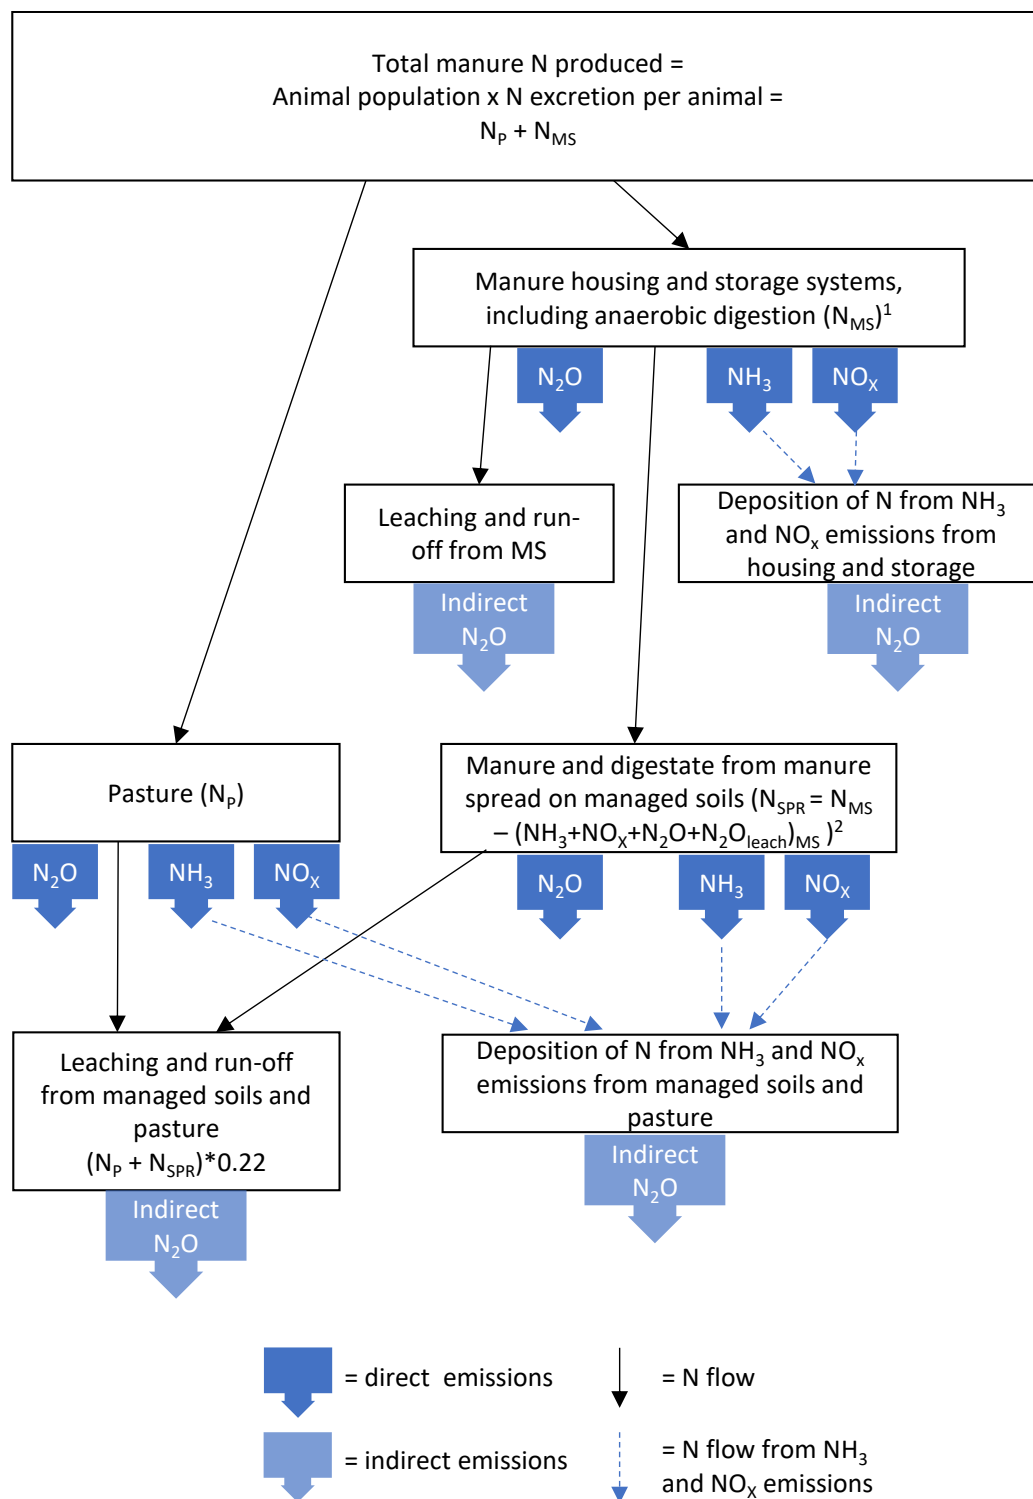

¹ For estimation of NH_3 and NO_x emissions from manure storage systems, emissions of NH_3 from housing are deducted from N excreted in housing. N_2O emissions (direct and indirect) are estimated directly from N excreted in housing.

² Emissions of N_2O , NH_3 and NO_x that have occurred prior to spreading of manure on managed soils (during housing, storage and production of biogas) are deducted before emissions of N_2O , NH_3 and NO_x from application to soils are estimated.

Figure 5.1: Overview of the manure nitrogen flows in the Norwegian greenhouse gas inventory.

5.1.3 Sector specific QA/QC and verification

In 2019, a technical committee on agricultural greenhouse gas emission (Teknisk beregningsutvalg for klimagassutslipp i jordbruk) on behalf of the Ministry of Agriculture and Food, published its final report³⁰. This document pointed out possible ways to improve the emission inventory to better reflect mitigation measures and where enhanced knowledge is needed. The Norwegian Government and the agricultural organisations have in 2019 entered into a letter of intent about reducing greenhouse gas emissions and increasing the carbon sink from agricultural activities with 5 million tonnes CO₂ equivalents for the period 2021-2030. As part of this deal, recommendations from the technical committee on agricultural greenhouse gas emission will be followed up on a yearly basis. In addition, information that can contribute to the improvement of the state of knowledge for activity data or emission factors in the national emission inventory will be pointed out/highlighted.

5.2 Emissions from enteric fermentation in domestic livestock - 3A

5.2.1 Category description

An important end product from ruminal fermentation is methane (CH₄). The amount of CH₄ produced from enteric fermentation is dependent on several factors, like animal species, production level, quantity and quality of feed ingested and environmental conditions. According to the IPCC, the method for estimating CH₄ emissions from enteric fermentation requires three basic items:

- The livestock population must be divided into animal subgroups, which describe animal type and production level.
- Estimate the emission factors for each subgroup in terms of kilograms of CH₄ per animal per year.
- Multiply the subgroup emission factors by the subgroup populations to estimate subgroup emissions, and sum across the subgroups to estimate total emission.

Enteric fermentation is identified as a key category.

Enteric fermentation contributed with 2270 ktonnes CO₂ equivalents in 2024, which is 51% of the GHG emissions from the agriculture sector. Emissions decreased by 9% in the period 1990-2024 and decreased by 1% in 2023-2024.

³⁰https://www.regjeringen.no/contentassets/0f1af0ca7efe493e8e48b46b6fba5ffd/rapport-tbu-jordbruk_siste.pdf

5.2.1.1 Methodological issues

A Tier 2 methodology is used for calculating CH₄ from enteric fermentation for the main emission sources cattle and sheep.

The following basic equation is used to calculate the enteric CH₄ emission factor for non-dairy cattle (IPCC 2006):

$$EF = (GE \times Y_m \times 365 \text{ days/yr}) / 55.65 \text{ MJ/kg CH}_4$$

Where:

EF = emission factor, kg CH₄/head/yr

GE = gross energy intake, MJ/head/day

This equation assumes an emission factor for an entire year (365 days). In some circumstances the animal category may be alive for a shorter period or a period longer than one year and in this case the emission factor will be estimated for the specific period (e.g., lambs living for only 143 days and for beef cattle which are slaughtered after around 540 days, varying from year to year).

For beef cattle the emission factor is based on recent studies from herds reflecting the variation in breeds, feeding practice and geography for beef cattle management in Norway. The method assumes that there are small annual variations in feeding practice and annual emissions depends on number of animals. The method is presented further in Aspeholen Åby et al. (2018) published in NIR 2019, Annex IX, section 2.2.2.

For young cattle the annual variations in emissions are based on slaughter weight, slaughter age and the number of animals. The methodology is described in Storlien and Harstad (2015) published in NIR 2019 Annex IX, section 2.2.1.

For dairy cows the estimation of CH₄ emission factor is based on the IPCC 2006 equation but takes into account the period of the year in which milk cows do not lactate (60 days typically), where methane emissions during the lactation period are calculated based on annual figures for milk yield, amount of concentrate feed in diet, and crude fat in the total diet. Methane emissions during the dry period where no lactation occurs are calculated with a fixed coefficient. The final emission factor for the whole year is therefore calculated as follows:

$$EF, \text{ kg CH}_4 / \text{ animal/yr} = (GEI \times 305 + 12.6 \times 60) / 55.65 \text{ MJ/kg CH}_4$$

Where:

$$GEI, \text{ MJ CH}_4/\text{ animal/day (lactation period)} = 12.89 + 0.243 \times EKM + 0.665 \times CF - 0.0504 \times Fat$$

Where:

EKM = Energy-corrected milk, kg per animal per day

CF = Concentrate feed in diet, kg per animal per day

Fat = Crude fat in diet, g per kg concentrate feed per day

The terms GE and Ym as used for the other cattle categories can also be derived from the new equation:

$$GE, \text{whole year} = (GEL \times 305 + 135.8 \times 60) \div 365$$

Where:

$$GEL, GE, \text{lactation period} = 135.82 + 4.31 \times EKM + 14.51 \times CF - 0.234 \times Fat$$

$$Ym = 100 \times GEI \div GE$$

A more detailed description of the new methodology is found in the report by Volden et al. (2023).

The methodology used for sheep is the tier 2 method described in 2006 IPCC Guidelines (IPCC 2006). The number of animals for the different subgroups of sheep and carcass weight by slaughter are updated every year. For goats, CH₄ from enteric fermentation is estimated using the Tier 1 method from the 2019 refinement to the 2006 IPCC Guidelines (IPCC 2019). The methodology for calculating CH₄ from enteric fermentation for the other animal categories is in accordance with the Tier 1 method from the IPCC guidelines (IPCC 2006). The numbers of animals of each category and average emission factors of tonnes CH₄ per animal and year for each category of animals are used to calculate the emissions.

The model used to estimate enteric fermentation from the Norwegian agriculture is described in more detail in Carbon Limits (2021).

5.2.1.2 Activity data

Emissions are estimated from the animal population. How the animal population is estimated is described in Section 5.1.1 and Annex 5.

The Tier 2 method of calculation which is implemented for cattle and sheep requires subdividing the cattle and sheep populations by animal type, physiological status (dry, lactating, or pregnant), live weight and age. Table 5-5 describes the animal categories used for cattle and sheep in the calculations, and Table 5-6 gives important input parameters in the estimations of enteric methane from cattle.

Table 5-5: Categories of cattle and sheep used in the Norwegian calculations of methane emission from enteric fermentation.

Categories of cattle and sheep
Dairy cows
Beef cows
Replacement heifers

Categories of cattle and sheep
Finisher heifers, < one year at time of slaughter
Finisher heifers, > one year at time of slaughter
Finisher bulls, < one year at time of slaughter
Finisher bulls, > one year at time of slaughter
Breeding sheep, > one year
Breeding sheep, < one year
Slaughter lamb, < one year. Jan- May
Slaughter lamb, < one year. Jun- Dec

5.2.1.3 Emission factors

Dairy cattle

For the yearly update of the emission factor for dairy cattle, information for milk yield and the amount of concentrate feed and fat in the diet is required.

Data for milk yield and amount of concentrate feed is obtained from the cow recording system at the dairy and agricultural data company Mimi³¹, while data for amount of crude fat in the diet based on data obtained from the feed ration program NorFor³². While data is limited on the amount of crude fat in the diet, it is assumed that it has increased since 1990, so values are calculated using linear interpolation, from 40 g/kg concentrate feed in 1990 to 55 g/kg concentrate feed in 2022. For 2023 and 2024 the 2022 value is used.

Table 5-6: Important parameter inputs in the calculations of GE and Ym for dairy cows.

	Daily milk production. dairy cows. kg/animal/day	Amount of feed concentrate in the rations of mature dairy cows, kg	Amount of crude fat in rations of mature dairy cows, g/kg concentrate
1990	20.72	4.82	40.00
1995	20.35	5.03	42.34
2000	20.18	4.99	44.69
2005	22.04	5.31	47.03
2010	24.17	6.24	49.38
2015	26.09	6.85	51.72
2016	26.43	6.71	52.19

³¹ Reported data from Mimi³¹ via Altinn, www.mimiro.no

³² Personal communication, NorFor

	Daily milk production. dairy cows. kg/animal/day	Amount of feed concentrate in the rations of mature dairy cows, kg	Amount of crude fat in rations of mature dairy cows, g/kg concentrate
2017	25.91	6.80	52.66
2018	25.70	6.97	53.13
2019	27.52	7.23	53.59
2020	27.75	7.36	54.06
2021	27.83	7.38	54.53
2022	27.21	7.18	55.00
2023	26.91	7.34	55.00
2024	28.6	7.80	55.00

Sources: Cow Recording System (Mimiro Annually), NorFor

Further discussion of the values are given in the report by Volden et al. (2023).

Beef cow

Based on data on feed management practices in Norwegian commercial beef cow herds a country-specific Tier 2 method has been developed for the estimation of enteric CH₄ emissions from beef cows. The data included 31 commercial beef cow herds keeping the main beef breeds in Norway, where individual feed intake had been estimated for all mature beef cows in the herds. Average daily dry matter (DM) intake per beef cow and proportion of various feed stuffs in the feed ration (% of DM) in the included herds was given.

The CH₄ conversion rate, Y_m, was adjusted to account for the digestibility of the dietary dry matter (DE):

$$Y_m = 0.1058 - 0.0006 \times DE$$

Based on this information an average GE and Y_m factor for Norwegian beef cows was estimated.

Table 5-7: Norwegian values for GE and Y_m for beef cows.

GE intake MJ/day	Y _m %	Methane kg per head and year
194	6.82	86

Source: Aspehølen Åby et al. (2017) published in NIR 2019, Annex IX, section 2.2.2

Further description of the determination of the variables GE and Y_m for beef cow and the values used in the calculations are given in NIR 2019, Annex IX, section 2.2.2. The method is based on data from one year, and there have been some changes in the composition of

the breed of the beef population in Norway since 1990. But we lack data for a good variable that we could use to get a trend for GE and Y_m for beef cow. Since the change in the composition of the population has been an increase of heavier breed, this can mean that there is an overestimation of the emissions for the earlier years. This is expected to be a minor source of error, since the population of beef cow was of less significance earlier.

Young cattle

The following equation was used to predict enteric CH_4 production from young cattle:

$$CH_4(GE \text{ Mcal/day}) = -0.056 + 0.0447 \times GEI + 0.0039 \times NDF - 0.033 \times EE + 0.00141 \times BW$$

GEI = gross energy intake (Mcal/day)

NDF = neutral – detergent fiber, percent in diet, DM basis

EE = ether extract, percent in diet, DM basis

BW = body weight, kg

Based on standard feed rations, daily intake of GE and Y_m for the different categories of young cattle were predicted. From the data set a multiple regression analysis were accomplished to develop equations that predict GE and Y_m from animal characteristics available for replacement heifers, growing and finishing cattle (bulls and heifers).

The following equations were developed to predict daily intake of GE:

$$\text{Slaughtered} < 1 \text{ year: } GE = 38.95 + 1.0558 \times CAW - 6.96 \times SLA$$

$$\text{Slaughtered} > 1 \text{ year: } GE = 112.99 + 0.3495 \times CAW - 4.696 \times SLA$$

GE = gross energy intake, MJ/d

CAW = carcass weight, kg

SLA = months of slaughter

The following equations were developed to predict Y_m for growing and finishing cattle:

$$\text{Slaughtered} < 1 \text{ year: } Y_m = 5.19 - 0.00482 \times CAW + 0.1465 \times SLA$$

$$\text{Slaughtered} > 1 \text{ year: } Y_m = 5.04 - 0.0054 \times CAW + 0.1453 \times SLA$$

Y_m = methane conversion rate, %

CAW = carcass weight, kg

SLA = months of slaughter

The same approach was used when predicting enteric CH_4 emissions from replacement heifers. Standard rations for the replacement heifers were calculated for age at calving of 24 and 26 months. Within age at calving, three live weights were used; 500, 530 and 560 kg. The following equation was developed to predict daily intake of GE:

$$GE = 85.43 + 0.1942 \times LW - 1.83 \times AAC$$

GE = gross energy intake, MJ/d

LW = live weight, kg

AAC = age at calving, months

The following equation is used to predict Y_m for replacement heifers:

$$Y_m = 4.08 + 0.0032 \times LW + 0.0447 \times AAC$$

Y_m = methane conversion rate, %

LW = live weight, kg

AAC = age at calving, months

Table 5-8: Important parameter inputs in the calculations of methane emissions from cattle over 1 year.

	Carcass weight at time of slaughter, heifer > 1 year. kg	Age at time of slaughter, heifers > 1 year. Months	Carcass weight at time of slaughter, bulls > 1 year. Kg	Age at time of slaughter, bulls > 1 year. Months
1990	185	21.6	255	19.7
1995	200	22.2	276	19.7
2000	202	22.3	269	18.8
2005	216	22.8	296	19.0
2010	221	22.8	302	18.0
2015	256	23.2	310	17.4
2016	260	23.2	317	18.2
2017	251	23.0	313	18.4
2018	233	22.2	306	18.0
2019	236	22.4	313	17.9
2020	225	22.5	318	17.9
2021	229	22.4	322	18.1
2022	230	19.2	321	18.2
2023	226	19.0	318	18.3
2024	226	19.0	313	18.2

Source: Estimations by Statistics Norway

Table 5-9: Important parameter inputs in the calculations of methane emissions from cattle under 1 year.

	Heifers < 1 year. Carcass weight	Heifers < 1 year. Average age, months	Bulls < 1 year. Carcass weight	Bulls < 1 year. Average age, months
1990	56	6.5	75.8	6.4
1995	70	7.0	93.8	6.9
2000	65	6.0	82.0	5.9
2005	93	7.9	115.6	7.5
2010	93	8.1	116.1	7.5
2015	107	8.2	125.5	7.5
2016	105	7.9	126.6	7.5
2017	103	8.2	125.9	7.6
2018	91	8.0	129.0	7.1
2019	110	8.3	131.2	7.7
2020	110	8.4	132.3	7.8
2021	113	8.4	132.4	7.8
2022	113	8.5	133.1	7.8
2023	103	8.1	120.1	7.5
2024	104	7.8	113.6	7.0

Source: Cow Recording System (TINE BA Annually) and estimations by Statistics Norway (values were amended during the 2021 revision of the model)

Further description of the determination of the variables GE and Y_m for young cattle are given in NIR 2019, Annex IX, section 2.2.1. Values for GE and Y_m used in the estimations are given in NID 2026, Annex 5 section 2.

Sheep

Prediction of methane emission from sheep is based on the intake of GE and the fraction of GE converted to CH₄ (the CH₄ conversion rate, Y_m). In the emission estimations default value 6.5 for Y_m from IPCC (2006) are used for breeding sheep > 1 year and breeding sheep < 1 year, while IPCC 2019 refinement value of 6.7 is used for lamb for slaughter, based on expert assessment from the Norwegian University of Life sciences³³ of what best represents Norwegian conditions. Gross energy intake (GE) is estimated from the net energy requirements (NE) and the energy availability of the feed, according to the equation 10.16 in the IPCC Guidelines (IPCC 2006).

³³ Expert estimate Bente Aspehølen Åby, NMBU, email 25.08.2025 and 22.10.2025.

The digestible energy (DE, expressed as the percentage of gross energy) is a key parameter in calculating GE. In the Norwegian inventory, the DE % is estimated based on a typical Norwegian sheep feed ration composition and assumptions regarding feed quality. The calculation of DE % has been done by an expert at the Norwegian University of Life sciences in 2025. More detailed information about the calculation is given in NID 2026, Annex 5, section 2.2. Values for GE and Y_m used in the estimations for sheep are also given in NID 2026 Annex 5.

Table 5-10: Important parameter inputs in the calculations of methane emissions from sheep. 2024.

	Carcass weight. kg	Age at slaughter. Months	Conversion factor for methane, Y_m %
Breeding sheep > 1 year	30.3	NA	6.5
Breeding sheep < 1 year	29	12	6.5
Lamb for slaughter, Jan.-May	18.5	11	6.7
Lamb for slaughter, June-Dec.	19.1	4.7	6.7

Source: Carcass weight from slaughter statistics, Statistics Norway, age at slaughter from Volden and Nes, 2006, see NIR 2019 Annex IX section 2.2.3. Y_m from IPCC (2006) and IPCC 2019 refinements (IPCC 2019). Values for carcass weight are annual

In Table 5-10 the carcass weights are updated annually except for Breeding sheep < 1 year which is kept constant. The ages and Y_m are also constant figures.

The emissions from poultry, domestic reindeer, deer and fur-bearing animals are also included in the Norwegian calculations. The Norwegian University of Life sciences has investigated and documented the national emission factors for poultry. Only hens and pullets have emissions of significance (Svihus 2015). For reindeer the emission factor 14.0 kg/animal/year is used and for deer 20.0 kg/animal/year. Both factors are expert judgments from the University of Life Sciences (Karlengen et al. 2012) and have been estimated based on the methodology described for cervidae in IPCC (2006). For goats, the IPCC default emission factor from 2019 refinement is used (IPCC 2019). Emission factor for fur-bearing animals has been developed by scaling emission factor for pigs, which are assumed most similar with regard to digestive system and feeding. The scaling is done by comparing average weights for fur-bearing animals and pigs and the factor is set to 0.1 kg/animal/year.

Pigs

Enteric methane from pigs is calculated using a Tier 2 method.

The swine population is divided into five different categories: piglets (weaners), young pigs for breeding (gilts), pigs for slaughter (finishers), sows and boars. Emission factors are calculated for each group based on the equations by Philippe and Nicks (2015) and the emission factors are derived from daily digestible residues intake (Daily dRes intake). Input data required for this estimation, as *daily energy intake FU*, expressed in feed units (FU) and *Daily live weight (LW) gain*, is collected from Ingris, the data collecting system for swine producers. The following equations were developed to predict daily rate methane per animal and day:

$$\text{Daily rate CH}_4 \text{ per (animal and day)} = \text{Daily dRes intake g} \times \text{dRes factor}$$

$$\text{Daily dRes intake} = \text{dRes percentage feed} \times \text{Daily energy intake FU} / \text{FU concentration feed}$$

$$\text{Daily energy intake FU} = \text{Daily LW gain} \times \text{FU per kg Daily LW gain}$$

Data sources:

- dRes factor, Philippe and Nicks (2015).
- dRes percentage feed, typical numbers from Norwegian feed producers.
- FU concentration feed, typical numbers from Norwegian feed producers.
- Daily LW gain, Ingris, the Norwegian Meat and Poultry research Centre.
- FU per kg Daily LW gain, Ingris, the Norwegian Meat and Poultry research Centre.

The emission factors for pigs in 2024 are shown in Table 5-11.

The methodology is further explained in Bonesmo and Gjerlaug-Enger (2022).

Table 5-11: Emission factors for CH₄ from enteric fermentation from pigs in 2024.

Animal	Emission factor 2024 (Tonnes CH ₄ /animal/year)
Piglets 4-10 weeks	0.0003
Young pigs for breeding	0.0009
Pigs for slaughter, animal places	0.0013
Sows	0.0036
Boar	0.0029

For the other animal categories, the Tier 1 default emission factors for each kind of animal are used. The factors used are shown in Table 5-12.

Table 5-12: Emission factors for CH₄ from enteric fermentation and different animal types estimated with the Tier 1 method.

Animal	Emission factor (Tonnes/animal/year)	Source
Horses	0.018	(IPCC 2006)
Goats	0.009	(IPCC 2019)
Hens	0.00002	(Svihus 2015)
Pullets	0.000036	(Svihus 2015)
Duck	0.00000003	(Svihus 2015)
Goose	0.0000015	(Svihus 2015)
Reindeer	0.014	(Karlengen et al. 2012)
Deer	0.02	(Karlengen et al. 2012)
Fur-bearing animals	0.0001	Estimate by Statistics Norway

Source: IPCC (2006), IPCC (2019), Karlengen et al. (2012), Svihus (2015).

5.2.2 Uncertainty assessment and time-series consistency

5.2.2.1 Activity data

The data is considered to be known within $\pm 5\%$ for animal population except for pigs where ± 7 is considered (Expert judgment, Statistics Norway 2024). There is also uncertainty connected to the fact that some categories of animals are only alive part of the year and the estimation of how long this part is.

5.2.2.2 Emission factors

Although the emissions depend on several factors and therefore vary between different individuals of one category of animal, average emission factors for each category are used in the tier 1 methodology for all animal categories except cattle, sheep, and pigs where a tier 2 methodology is used.

The standard deviation of the emission factors is considered to be $\pm 40\%$, which is the estimate from the IPCC guidelines (IPCC 2006). An uncertainty estimate of $\pm 27.6\%$ are used for dairy cows (Volden et al. 2023), $\pm 20\%$ for beef cows and pigs (IPCC 2006) and ± 25 for other cattle and sheep in the Tier 2 methodology (Storlien & Harstad 2015).

5.2.3 Category-specific QA/QC and verification

In the 2024 submission a new model for dairy cattle was implemented. The change in results between the old and new calculation is due to the inclusion of the dry period in the milk production cycle in the new model, in addition to updated terms for concentrate feed and fat content in the diet. These changes corrected for overestimations made in the previous model. A more detailed explanation is given in Volden et al. (2023).

In 2023, the animal count for pigs was changed to be based on slaughter data instead of data from production subsidies, where the number of slaughtered pigs (fattening pigs) per year is the basis for the number of pigs in other pig categories. Number of days animals in each production stage is the main variable used to derive animal numbers. This methodology is a result of a project from NIBIO and the swine production corporation Norsvin SA (Bonesmo & Gjerlaug-Enger 2022).

In the 2024 submission the enteric methane emission estimates for pigs are updated with a Tier 2 method. The update is based on a project from 2021 from NIBIO and the swine production corporation Norsvin SA (Bonesmo & Gjerlaug-Enger 2022). In the previous estimation, Tier 1 emission factors were used for all swine categories, while in the new model factors are estimated for piglets (weaners), young pigs for breeding (gilts), pigs for slaughter (finishers), sows and boars.

For goats, the updated emission factor from 2019 IPCC refinements to the 2006 Guidelines was used in 2024 submission (IPCC 2019).

In 2021, a technical revision of the model calculations of enteric methane was performed by Carbon Limits in close cooperation with the Norwegian University of Life Sciences (NMBU) (Carbon Limits 2021). The enteric fermentation model has been aligned with the outline and design of the manure models used in the inventory, and user input has been simplified. At the same time NMBU have reviewed the emission factors and the methodology used for all animal categories. Some minor adjustments in several underlying parameters used to calculate gross energy intake for sheep have been suggested and implemented in the updated model for calculation of emissions from enteric fermentation.

5.2.4 Category-specific recalculations

There have been recalculations performed for enteric fermentation from sheep this year, see chapter 10 for details.

5.2.5 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

5.3 Emissions from manure management - 3B

5.3.1 Category description

The relevant greenhouse gases emitted from this source category are CH₄ (IPCC 3Ba) and N₂O (IPCC 3Bb). Emissions from cattle are most important in Norway for both components.

Both CH₄ emissions from cattle manure management and N₂O emissions from manure management are identified as key category according to the key category analysis.

CH₄ emissions due to manure management amounted to 385 ktonnes CO₂ equivalents in 2024 whilst N₂O emissions amounted to 167 ktonnes CO₂ equivalents.

Manure management emitted 552 ktonnes of CO₂ equivalents in 2024, which are approximately 12% of the GHG emissions from agriculture.

Emissions of GHGs from manure management increased by 2% in the period 1990-2024 and decreased by 1% from 2023 to 2024.

Organic material in manure is transformed to CH₄ in an anaerobic environment by microbiological processes. Emissions from cattle (manure) are most important in Norway. The emissions from manure depend on several factors: type of animal, feeding, manure management system and weather conditions (temperature and humidity).

During storage and handling of manure, including use of manure for biogas production (i.e., before the manure is added to soils), some nitrogen is converted to N₂O. The fraction converted to N₂O depends on the system and duration of manure management. Liquid system is the most widespread storage system, and consequently the most important source. Indirect emissions of N₂O (atmospheric deposition and leaching) from manure storage are also estimated.

Emissions of NH₃ from manure depend on several factors, e.g., type of animal, nitrogen content in fodder, manure management, climate, time of spreading of manure, cultivation practices and characteristics of the soil. In the Norwegian emission inventory, yearly updated estimations for NH₃ volatilisation from manure are used. Like for NH₃, emissions of NO_x from animal manure led to indirect emissions of N₂O from deposition. The amounts of N from NO_x emissions from manure management systems, spreading of manure and droppings on pastures are however small.

Section 5.1.2 gives more information about nitrogen in animal manure as basis for emission estimates and an overview of the manure nitrogen flows in the Norwegian greenhouse gas inventory.

5.3.1.1 Methodological issues

5.3.1.1.1 CH₄

Emissions of methane are estimated using a model based on a stepwise approach which is illustrated in Figure 5.2.

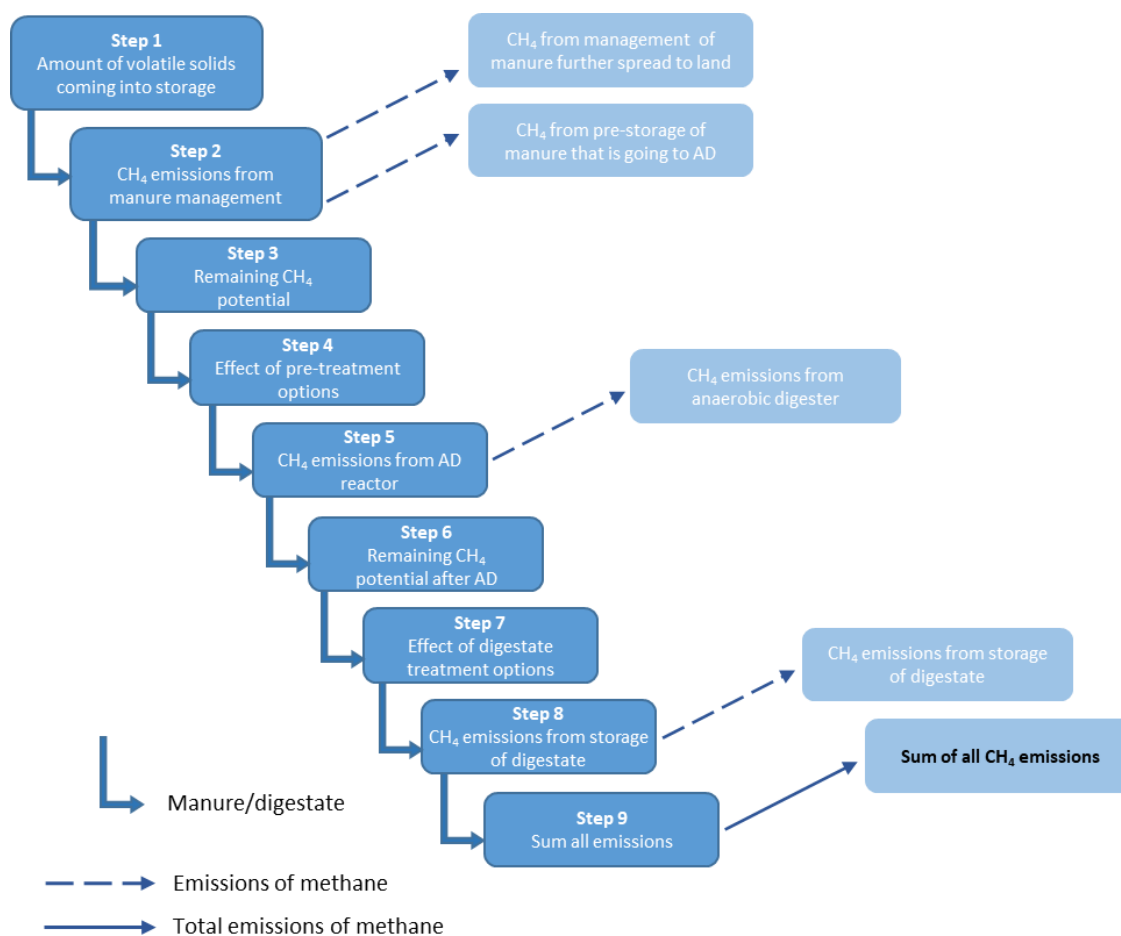


Figure 5.2: Summary of the stepwise approach of the model.

The model estimates emissions of methane from both management of manure that is further spread to land and from storage of manure prior to further treatment, specifically through anaerobic digestion (AD). The model determines methane emissions based on animal category, the share of different manure type (slurry, deep litter and solid manure), the share of the different options for the manure management system (MMS, e.g., manure cellar under slatted floor, manure cellar under solid floor, manure tank with tight roof) and the downstream fate of the manure (i.e., spread to land or anaerobic digestion).

The model is primarily based on IPCC 2006 Guidelines, in particular with respect to emissions from the majority of MMS options, with a special approach developed for quantifying methane emissions from AD. In Norway, there are currently only a few farm-fed AD plants.

For all animal categories emissions of methane from manure management are estimated using the equations presented below, in accordance with the IPCC Tier 2 method (IPCC 2006). The use of the Tier 2 method in the model results in a more consistent approach to estimation of CH₄ emissions from manure management systems in Norway, as well as better reflects the national manure management practices applied.

CH₄ Emissions = EF * Population

$EF_i = VS_i * 365 \text{ days/year} * Bo_i * 0.67 \text{ kg/m}^3 * \sum_{(jk)} MCF_{jk} * MS_{ijk}$

EF_i = annual emission factor for defined livestock population *i*, in kg

VS_i = daily VS excreted for an animal within defined population *i*, in kg

Bo_i = maximum CH₄ producing capacity for manure produced by an animal within defined population *i*, m³/kg of VS

MCF_{jk} = CH₄ conversion factors for each manure management system *j* by climate region *k*

MS_{ijk} = fraction of animal species/category *i*'s manure handled using manure system *j* in climate region *k*

The factors VS, B₀ and MCF are average factors meant to represent the whole country.

The model includes a total of nine steps³⁴. Step 1 determines the total amount of volatile solids (VS) which enters the MMS. Step 2 determines the emissions from storage of manure that is further spread to land, as well as emissions from pre-storage of manure that is then further treated by anaerobic digestion (either at the farm itself or at an off-site facility).

Step 2 therefore estimates a “sub-total” of emissions of methane, namely methane emissions from storage of manure which is further spread to land and emissions of methane from pre-storage of manure that is sent for anaerobic digestion. The methane emissions from storage as calculated in the step 2 reduce the CH₄ production of any manure going to an AD reactor (including the pre-treatment). Step 3 therefore estimates the remaining methane potential after storage of manure prior to AD. Step 4 is used to estimate the effect of various pre-treatment options (if any) on the overall methane potential of the manure going to AD. Step 5 estimates emissions from the AD reactor (“sub-total” of emissions of methane from AD). As in step 3, the methane emissions from the AD phase as calculated in step 5 significantly reduce the CH₄ production potential of the digestate. Step 6 therefore estimates the remaining methane potential of the digestate after AD. Step 7 estimates the remaining methane potential after digestate treatment (if any). Step 8 estimates emissions of methane from storage of digestate, resulting in the final “sub-total” of emissions of methane. In step 9 all “sub-totals” of emissions of methane summarized and summed.

³⁴ A technical description of the model is available in: “Greenhouse gas emissions from biogas production from manure in Norwegian agriculture”, Carbon Limits (2020b)

The populations of animals are consistent with the animal data used elsewhere in the inventory (see chapter 5.1.1 and Annex 5 for further details). For young cattle, this implies that the VS production is estimated for the whole average lifetime/time until first calving and not per animal year. The amount of volatile solids (VS) for other cattle is estimated directly as kg/animal/year. The VS factors are based on the same data sources used in the estimations of nitrogen excretion factors, that are used in estimations of N₂O from manure (Karlengen et al. 2012; Volden 2022). For beef cows, national factors for VS and nitrogen excretion factors were estimated by the Norwegian University of Life Sciences (NMBU) in 2018. National feeding data for beef cow under Norwegian circumstances from Wetlesen et al. (2018) Wetlesen et. al. (2018), the same as used for the estimation of enteric methane, has been used as a basis for the estimations. The method is described more in detail in Aspehølen Åby et al. (2018), (published in NIR 2019, Annex IX, section 4). For swine and poultry, country specific estimates of NMBU for the percentage of the manure in dry matter that are volatile solids are used. Background data used for the estimations of VS are given in Table 5-13 and in Annex 5, section 3.2. VS excretion rates for other animal categories (sheep, goats, horses, fur farming animals, deer, and reindeer) were based on a national study, where the dry matter excretion values were calculated using the IPCC 2006 Guidelines and VS share of dry matter was assessed using expert judgement (Morken et al. 2013).

The factor B₀ represents the maximum potential production of methane under optimum conditions. For dairy cows, the B₀ factors are based on Norwegian research and for pigs the factor is based on literature studies (Morken et al. 2013), for other cattle, poultry, sheep, goats, horses, fur-farming animals, deer and reindeer the default IPCC factors are used.

Table 5-13: Norwegian factors for amount of manure (in dry matter - DM), VS and Bo used to estimate CH₄ from manure management with the IPCC Tier 2 method. 2024.

	Manure		VS%	VS, kg per animal	VS, total, tonnes	Bo
	kg DM/ animal	kg DM/ day				
Non-Dairy Cattle	--	--	--			
Beef cows	--	--	--	1 461	154 058	0.18
Replacement heifer	--	--	--	605	61 952	0.18
Finisher heifer	--	--	--	1 191	50 770	0.18
Finisher bulls	--	--	--	911	145 798	0.18
Dairy cows	--	--	--	2 059	373 941	0.23
Poultry:						

	Manure		VS%	VS, kg per animal	VS, total, tonnes	Bo
	kg DM/ animal	kg DM/ day				
Hens	13.15	--	0.9	11.83	54 675	0.38
Chicks bred for laying hens, animal places	3.10	--	0.9	2.79		0.36
Chicks for, slaughter animal places	4.08	--	0.9	3.67	41 076	0.36
Ducks for breeding	30.00	--	0.9	27.9	79	0.36
Ducks for slaughter, animal places	8.12	--	0.9	7.31	503	0.36
Turkey and goose for breeding	30.00	--	0.9	27.9	448	0.36
Turkey and goose for slaughter, animal places	17.23	--	0.9	15.51	5 406	0.36
Swine:						
Piglets 4-10 weeks	38,5	--	0.9	16.57	4896	0.30
Young pigs for breeding	145,6	--	0.9	101.70	1259	0.30
Pigs for slaughter, animal places/årsdyr	140	--	0.9	118.21	42 176	
Sows	298	--	0.9	277.11	13 192	0.30
Boar	238	--	0.9	277.11	169	0.30
Sheep	--	0.33	0.9		128 977	0.19
Goats	--	0.37	0.9	123	7 607	0.18
Horses	--	4.65	0.9	1 528	131 418	0.30
Fur farming	--	NO	NO	NO	NO	NO
Deer	--	2.42	0.9	795	6 042	0.19
Reindeer	--	0.43	0.9	141	30 421	0.19

Sources: Manure, dry matter/animal, poultry : (Karlengen et al. 2012), Manure dry matter/animal year: Kjos (2023), Manure, dry matter/day, sheep, goats, horses, fur farming, deer and reindeer: Morken et al. (2013), VS%, Sheep, goats, horses, fur farming, deer and reindeer: Morken et al. (2013), poultry: expert estimate Birger Svihus NMBU, email 03.01.2013, swine: expert estimate Nils Petter Kjos, NMBU, email 03.01.2013. VS per animal, dairy cows:: Estimates based on Karlengen et al. (2012), beef cows: Aspeholen Åby et al. (2018), young cattle: Volden (2022). Bo: Non-dairy cattle, poultry, sheep, goats, horses, fur farming, deer and reindeer: IPCC (2006); Dairy cows, swine: Morken et al. (2013)

Updated national MCF for liquid manure was developed and the specific manure management system distribution for each animal category in Norway (based on manure surveys) was taken into account for all animal categories. National unabated MCF for liquid

manure has been developed using the methodology outlined by Andrew Vander Zaag (2018)³⁵. A separate spreadsheet takes into account average annual temperatures in various regions of Norway, the frequency of manure removal from storage (on a monthly scale), and the relative share of manure deposited in each of the regions in order to estimate weighted average national MCF. After a weighted average unabated MCF for liquid slurry has been developed, assumptions on emission reduction efficiency of different types of storage covers were made based on expert opinion and recommendations from the IPCC 2019 Refinement to derive MCFs for specific storage categories³⁶. MCFs for storage of solid manure (deep litter and solid manure) were based on default IPCC factors (IPCC 2019). MCFs for poultry were assumed constant irrespective of storage or manure type, according to a default IPCC factor. A summary of the values for MCF according to animal category, manure type and manure management system is presented in Table 5-14.

Table 5-14: MCF according to animal category, manure type and manure management system. 2024.

Animal category	Manure type	MMS	2024
Mature Dairy Cattle	Slurry Deep litter & solid manure	Liquid system	11.8%
		Solid storage	0.7%
		Pit storage	5.9%
		Dry lot	0.04%
		Deep bedding	20.1%
	Pasture	Pasture range and paddock	0.5%
	Manure going to AD	Digester - total	7.1%
Mature Non-Dairy Cattle	Slurry Deep litter & solid manure	Liquid system	12.2%
		Solid storage	1.8%
		Pit storage	1.1%
		Dry lot	0.2%
		Deep bedding	16.2%
	Pasture	Pasture range and paddock	0.5%
	Manure going to AD	Digester- total	6.6%
Young Cattle/Growing cattle	Slurry Deep litter & solid manure	Liquid system	12.2%
		Solid storage	1.6%
		Pit storage	1.6%
		Dry lot	0.2%

³⁵ Andrew Vander Zaag (2018) MCF Calculations and Example Spreadsheet

³⁶ 40% abatement for storage tank with tight cover / floating plastic cover / natural crust / animal pit below animal confinement with solid floor, 0% abatement for no cover / animal pit below animal confinement with slatted floor (except for swine manure, which won't form natural crust even if covered, and for poultry, for which a separate MCF factor based on IPCC (2006) is used)

Animal category	Manure type	MMS	2024
		Deep bedding	16.3%
	Pasture	Pasture range and paddock	0.5%
	Manure going to AD	Digester -total	7.1%
Sheep	Slurry Deep litter & solid manure	Liquid system	12.6%
		Solid storage	0.4%
		Pit storage	6.5%
		Dry lot	0.3%
		Deep bedding	15.6%
	Pasture	Pasture range and paddock	0.5%
	Manure going to AD	Digester -total	0.0%
Goats	Slurry Deep litter & solid manure	Liquid system	13.3%
		Solid storage	0.3%
		Pit storage	7.3%
		Dry lot	0.2%
		Deep bedding	17.2%
	Pasture	Pasture range and paddock	0.5%
	Manure going to AD	Digester -total	0.0%
Horses	Slurry Deep litter & solid manure	Liquid system	10.9%
		Solid storage	1.3%
		Pit storage	1.6%
		Dry lot	0.7%
		Deep bedding	7.3%
	Pasture	Pasture range and paddock	0.5%
	Manure going to AD	Digester -total	0.0%
Swine	Slurry Deep litter & solid manure	Liquid system	14.7%
		Solid storage	1.6%
		Pit storage	2.7%
		Dry lot	0.2%
		Deep bedding	16.1%
	Pasture	Pasture range and paddock	NA
	Manure going to AD	Digester – total	7.3%
Poultry	Slurry Deep litter & solid manure	Liquid system	1.5%
		Solid storage	0%
		Pit storage	0%
		Dry lot	0%
		Deep bedding	0%
	Pasture	Pasture range and paddock	NA
	Manure going to AD	Digester - total	0.0%
Deer	Slurry Deep litter & solid manure	Liquid system	9.0%
		Solid storage	1.2%

Animal category	Manure type	MMS	2024
		Pit storage	1.6%
		Dry lot	0.7%
		Deep bedding	7.3%
	Pasture	Pasture range and paddock	0.5%
	Manure going to AD	Digester - total	0.0%
Reindeer	Slurry Deep litter & solid manure	Liquid system	9.0%
		Solid storage	1.2%
		Pit storage	1.6%
		Dry lot	0.7%
		Deep bedding	7.3%
	Pasture	Pasture range and paddock	0.5%
	Manure going to AD	Digester -total	0.0%
Fur farming	Slurry Deep litter & solid manure	Liquid system	9.0%
		Solid storage	1.2%
		Pit storage	1.6%
		Dry lot	0.7%
		Deep bedding	7.3%
	Pasture	Pasture range and paddock	NA
	Manure going to AD	Digester -total	0.0%
Other animals (ostrich, alpaca)	Slurry Deep litter & solid manure	Liquid system	9.0%
		Solid storage	1.2%
		Pit storage	1.6%
		Dry lot	0.7%
		Deep bedding	7.3%
	Pasture	Pasture range and paddock	NA
	Manure going to AD	Digester - total	0.0%

Emissions from grazing have been estimated as a separate MMS category for all animal categories to take into account analysis from (Yanjiang Cai et al. 2017) that indicates that there was no significant difference in emission values for different animal categories regardless of the method of representing methane emissions or the climate zone. Thus, a single set of B_0 and MCF factors has been applied to all animal categories, and the default IPCC factor for pasture/Range/Paddock from IPCC (2019) are used for MCF. This factor has been used over the default factor from the 2006 IPCC Guidelines due to it being based on more recent data and research and is therefore expected to reflect emissions from grazing more accurately.

5.3.1.1.2 N₂O

In Norway, all animal excreta that are not deposited during grazing are managed as manure. N₂O emissions from manure are estimated in a revised nitrogen model which closely follows the stepwise approach proposed in the EMEP/EEA 2023 guidelines (EEA 2023). As the model is based on the nitrogen mass balance approach specified by EMEP/EEA, it allows estimates to be made of all the main nitrogen species, namely NH₃, NO and N₂ in addition to N₂O. The estimations are made in accordance with the IPCC tier 2 method (IPCC 2006), using Norwegian values for N in excreta from different animals according to Table 5-15 and Annex 5, section 3, section 4. The rationale for the Norwegian values for N in excreta is provided in Karlengen (2012). For beef cow, the nitrogen excretion factors were estimated by the Norwegian University of Life Sciences (NMBU) in 2018 based on national feeding data for beef cow (Wetlesen et al. 2018). The method is described more in detail in Aspehølen Åby et al. (2018) (published in NIR 2019, Annex IX, section 3.2.2). The N-excretion factors for cattle, poultry and pigs have been scientifically investigated, while the remaining categories have been given by expert judgements (Karlengen et al. 2012). For reindeer, N excretion factor from 2019 refinement to the 2006 IPCC Guidelines is used (IPCC 2019). Based on typical Norwegian feedstock ratios, the excretion of nitrogen (N) was calculated by subtracting N in growth and products from assimilated N. Comparisons have also been made with emission factors used in other Nordic countries and IPCC default factors.

The factors for cattle are based on equations using animal weight, production (milking cows), lifetime (young cattle) and protein content in the fodder as activity data. The equations for calculating the factors were evaluated by scientist at Norwegian University of Life Sciences in 2022 (Volden 2022).

The Nordic feed evaluation system (NorFor) was used to develop the nitrogen factors for dairy cows and young cattle. Excretions of N in the manure were calculated as the difference between their intake, and the sum of what is excreted in milk, fetus and deposited in the animal itself. The procedure used for calculating the excretion of faeces and N consisted of two steps:

1. Simulations in "NorFor" were conducted to gain values for the faeces/manure characteristics covering a wide variation of feed characteristics (N content) and production intensities (milk yield/meat production)
2. The results from the simulations were used to develop regression equations between faeces/manure characteristics and parameters related to the diet (N content) and animal characteristics (milk yield, weight, age etc).

Calculations of N-factors based on these equations have been made for all years back to 1990 for cattle. For beef cattle national feeding data is only available for one year. The breed composition of beef cattle in Norway has also changed since 1990, however we lack reliable data for variables that can be used to represent this trend. It is expected that this is

a minor source of error since the population of beef cow was of less significance earlier in the time series. Since the change in the composition of the population has been an increase in the use of heavier breeds, this can mean that there is an overestimation of the emissions for earlier years. For poultry, N-factors have been estimated for 2011 by Karlengen et al. (2012). The factors used until this update were estimated in 1988 (Sundstøl & Mroz 1988), and are regarded as still valid for 1990. A linear interpolation has been used for the years between 1990 and 2011. For sows, pigs for slaughter and young pigs for breeding factors from Karlengen et al. (2012) were used from 1990 to 2012. In 2023 the N-factors for pigs were updated (Kjos 2023). In the years between a linear interpolation has been used, while for boars and piglets factors from Kjos (2023) are used for the whole time series. For the remaining animal categories, N in excreta is considered constant throughout the time series. More background data for the calculations is provided in Annex 5, Section 3. The factors are shown in Table 5-15. The factors for total N excreted are used in the estimations of N₂O emissions, whilst ammonium N is used in the estimations of NH₃ and NO_x emissions. N₂O emissions from MMS are estimated based on total N excreted, while all other N emissions from MMS are estimated based on N available prior a specific MMS stage.

Norwegian values are also used for the fraction of total excretion per species for each management system (MS) and for pasture. The fractions are updated every year and are provided in Table 5-17 and Table 5-18. This is described in section 5.3.1.2.

Table 5-15: N in excreta from different animal categories¹. 2024. kg/animal/year unless otherwise informed in footnote.

	Total N	Ammonium N (TAN)
Dairy cattle	136.1	76.9
Beef cows	93.0	52.6
Replacement heifers²	91.6	57.2
Heifers for slaughter²	63.1	37.6
Bull for slaughter²	71.7	43.5
Sows	22.9	15.3
Boars	18.3	12.2
Piglets	2.7	1.8
Fattening pigs³	2.3	1.5
Young pigs for breeding	15	10.0
Laying hens	0.7	0.3
Chickens reared for laying³	0.05	0.02
Broilers³	0.03	0.01

	Total N	Ammonium N (TAN)
Turkeys for slaughter³	0.5	0.2
Ducks and geese for slaughter³	0.1	0.03
Turkeys, ducks and geese reared for laying	2.0	0.8
Horses	50.0	25.0
Dairy goats	16.9	10.1
Other goats	8.5	5.1
Sheep over 1 year old	11.6	6.4
Sheep under 1 year old	7.7	4.3
Mink	4.3	1.7
Foxes	9.0	3.6
Deer	12.0	5.4
Reindeer	5.4	2.4

Source: Karlengen et al. (2012), Aspeholen Åby et al. (2018), Volden (2022), Kjos (2023), IPCC (2019) and estimations by Statistics Norway.

¹ Includes pasture.

² Factors for excreted nitrogen apply for the whole lifetime of animals, and nitrogen is calculated when animals are slaughtered/replaced.

³ Per animal. For these categories, lifetime is less than a year. This means that the number of animals bred in a year is higher than the number of stalls (pens).

5.3.1.1.3 NH₃

Ammonia volatilized from manure storage represents, together with NO_x, the activity data in the estimations of indirect N₂O emissions from atmospheric deposition, source 3Bb5 (atmospheric deposition from manure storage). A model based on the stepwise approach proposed by the EEA (2023) is used for calculating the emissions of ammonia from manure management. The principle of the model is illustrated in Figure 5.3.

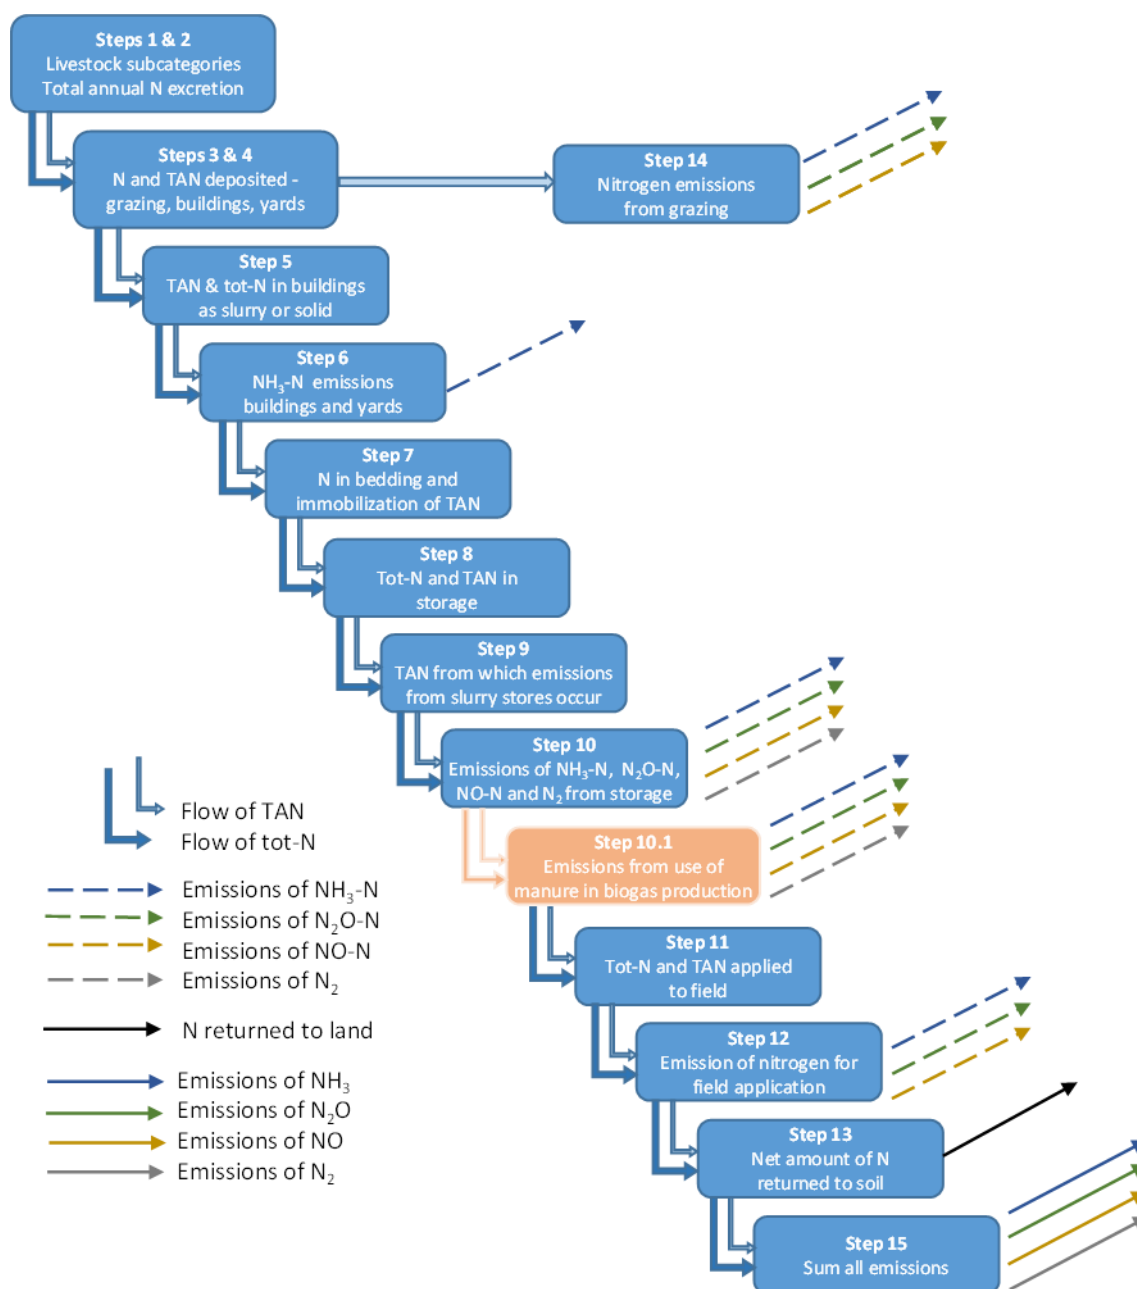


Figure 5.3: The principle of the nitrogen model.

The nitrogen model closely follows the stepwise approach proposed by the EEA (2019) guidelines, with all the 15 steps proposed in the former being followed in the Norwegian model. Emissions of NH_3 are determined from buildings and yards and from manure storage systems. Total NH_3 emissions from manure management are estimated by multiplying the amount of manure nitrogen (ammonium N) by the different emission factors for the housing and storage systems, taking into account the effect of any abatement measures and improved practices. In addition, the nitrogen added in bedding

(applicable only to solid manure) is taken into account, and the consequent immobilization of TAN in that bedding, in line with EEA (2023). The volumes of different bedding types used is based on Luostarinen et al. (2017). These volumes are converted into weights and thence tot-N added due to bedding as quoted in Grönroos et al. (2017).

Finally, the model accounts for NH₃ emissions from anaerobic digestion (AD), namely emissions from pre-storage of manure used for AD, emissions from the digester, separation, and storage of digestate. The nitrogen in digestate produced from manure is then assumed to return to land, together with the nitrogen in untreated manure. The amount of ammonium nitrogen in the manure is estimated by the number of animals and ammonium nitrogen excretion factors for each type of animal (see Table 5-15).

5.3.1.1.4 NO_x

Nitrous oxide volatilized from manure storage represents, together with NH₃, the activity data in estimations of indirect N₂O emissions from atmospheric deposition, source 3Bb5 (atmospheric deposition from manure storage).

NO_x emissions from manure management systems are estimated according to the methodology in EEA (2023). In Norway, all animal excreta that are not deposited during grazing are managed as manure. Norwegian values for N in excreta from different animals according to Table 5-15 are used. Norwegian values are also used for the fraction of total excretion per species for each management system (MS) and for pasture, see Table 5-17 and Table 5-18. The fractions are updated every year.

5.3.1.1.5 Indirect N₂O from manure management, 3Bb5

Deposition of nitrogen from manure management is assumed to correspond to the amount of nitrogen in the NH₃ and NO_x that volatilises from manure storage systems (including anaerobic digestion). The N₂O emissions are calculated by multiplying the amount of N from deposition with the climate adjusted IPCC default emission factor of 0.01373 kg N₂O-N/(kg NH₃-N+NO_x-N volatilized) (IPCC 2019). The factors are climate adjusted based on the distribution of 97% wet- and 3% dry climate in Norway. The climate distribution for Norway is given by National Forest Inventory data from NIBIO³⁷. The emissions factors are used according to Table 11.3 in IPCC 2019 refinements to the 2006 IPCC Guidelines (IPCC 2019).

Storage systems that are not watertight may cause leaching of manure nitrogen. It is assumed that leaching occurs from the storage systems solid storage (not including dry manure in manure cellars), cattle and swine deep bedding, dry lot, and poultry manure. The fractions that are assumed leached are based on expert judgement, see Table 5-16.

³⁷ Christian Mohr, NIBIO, personal communication 25.09.2023.

Table 5-16: *Fracleach* for storage systems that are assumed to have leaching.

	Frac_{leach}, %
Solid storage 1	25
Cattle and swine deep bedding	15
Dry lot	25
Poultry manure	25

Source: Expert judgement by Statistics Norway and the Norwegian Agricultural Agency³⁸.

¹ Solid manure stored in manure cellars are not assumed to have leaching.

The IPCC default emission factor of 0.011 kg N₂O-N/kg N lost to leaching/runoff is used (IPCC 2019).

5.3.1.2 Activity data

5.3.1.2.1 CH₄, N₂O, NO_x and NH₃

Emissions are estimated from the animal population. How the animal population is estimated is described in Section 5.1.1 and Annex 5.

Surveys for assessing use of manure management systems (MMS) have been carried out in 2000, 2003, 2013, 2018 and 2020.

In addition to collecting data on the MMS, the surveys aim to determine the fraction of manure from each animal category that is deposited in pastures as opposed to in animal housing, which is summarized in Table 5-17.

Norway has in 2018 developed a single model for estimating N₂O, NH₃ and NO_x emissions, which replaces two separate calculation models which were used for previous years. The previous models treated the basic data from the 2013 Manure Survey differently for estimating NH₃ emissions compared to N₂O and NO_x emissions due to different manure storage categories being used. For the development of a single model, manure quantities used in the previous N₂O model have had to be reassigned between different types of manure storage systems, in addition to re-categorization of manure types between slurry, FYM and solid manure. The fraction of total excretion per animal category for each

³⁸ Email from Jon Magnar Haugen, the Norwegian Agricultural Agency, 25.11.2015.

management system for 2020 onwards is based on Statistics Norway's Census of agriculture for 2020 (Statistics Norway 2021) and presented in Table 5-18.

Table 5-17: Percent of total excretion per species processed by a MMS (i.e. deposited in housing) and deposited on pasture. 2024.

	% manure to pasture	% manure to MMS
Dairy cattle	16%	84%
Beef cows	37%	63%
Young cattle	24%	76%
Swine	0%	100%
Laying hens	0%	100%
Broilers	0%	100%
Turkeys	0%	100%
Other poultry	0%	100%
Horses	26%	74%
Goats	29%	73%
Sheep	77%	23%
Fur animals	0%	100%
Deer	100%	0%
Reindeer	100%	0%

Source: Data for storage systems from Statistics Norway (2021), Statistics Norway (Kolle & Oguz-Alper 2020), (Gundersen & Heldal 2015), data for pasture times from (TINE BA Annually) (Dairy cattle, goat), (Statistics Norway 2002).

Table 5-18: Fraction of total excretion per animal category for each management system used in the estimations. 2024.

	In-house slurry pit [pit storage below animal confinements]	Tank without cover [Liquid/slurry]	Tank with cover [Liquid/slurry]	Heaps [solid storage]	In-house deep litter [Cattle and swine deep bedding]	Dry lot
Dairy cattle	0.67	0.01	0.32	0.00	0.00	0.00
Beef cows	0.53	0.00	0.16	0.13	0.14	0.04
Young cattle	0.67	0.01	0.23	0.04	0.04	0.01
Swine	0.52	0.31	0.13	0.02	0.01	0.00
Laying hens	0.51	0.06	0.03	0.36	0.03	0.01
Broilers	0.16	0.02	0.01	0.74	0.04	0.04

	In-house slurry pit [pit storage below animal confinements]	Tank without cover [Liquid/slurry]	Tank with cover [Liquid/slurry]	Heaps [solid storage]	In-house deep litter [Cattle and swine deep bedding]	Dry lot
Turkeys	0.16	0.02	0.01	0.74	0.04	0.04
Other poultry	0.1	0.02	0.02	0.74	0.04	0.04
Horses	0.20	0.01	0.00	0.58	0.07	0.14
Goats	0.82	0.01	0.0	0.04	0.10	0.02
Sheep	0.72	0.01	0.01	0.08	0.13	0.05
Fur animals¹	0.00	0.00	1.00	1.00	0.00	0.00
Deer	NA	NA	NA	NA	NA	NA
Reindeer	NA	NA	NA	NA	NA	NA

Source: Data for storage systems from Statistics Norway's Census of agriculture 2020.

¹ Based on expert opinion Norwegian Institute of Bioeconomy Research (NIBIO)

Data on storage systems for years other than those covered by the manure survey is not available. Separate estimations of the effects on emissions of the assumed changes in storage systems since 1990 show that these assumed changes do not significantly impact the emissions. For the intermediate years between the surveys of 2003, 2013, 2018 and 2020 the distribution of management system has been estimated using a linear interpolation of changes between 2003 and 2013, between 2014 and 2018 and between 2019 and 2020 for each system. The surveys on management systems do not usually include pasture, but for 2018 manure survey this was included and gave updated pasture data for other cattle and sheep. Data for pasture times for dairy cattle and dairy goat has however been annually updated in the Cow Recording System (TINE BA Annually) until 2013, while for the other animals, data from Sample survey of agriculture and forestry for 2001 at Statistics Norway (2002) is used.

In the CH₄ estimations, the share of the manure stored more respective less than one month in pit storage below animal confinement before spreading is based on expert judgement³⁹. It is assumed that 1/6 of the manure is stored less than 1 month, the rest more than 1 month.

In the manure surveys of 2000, 2013 and 2018 and the Census of agriculture 2020 the manure of each management system is distributed by all combinations of the following regions and productions:

Regions:

- South-Eastern Norway
- Hedmark and Oppland

³⁹ Personal communication John Morken, NMBU, 6.8.2014

- Rogaland
- Western Norway
- Trøndelag
- Northern Norway

Production⁴⁰:

- Cattle
- Swine
- Sheep
- Goats and horses
- Poultry

The activity data on the amount of manure used for biogas production data from the Norwegian Agriculture Agency is used⁴¹. The data covers all farmers who are applying for financial support for establishing biogas facilities. Mainly cattle and swine manure are currently used for anaerobic digestion in Norway. The figures are very modest, representing about 1 – 2.5% of the total volatile solids in all manure deposited in housing.

5.3.1.3 Emission factors

5.3.1.3.1 CH₄

Country specific tier 2 emission factors are used for all animal categories as described in section 5.3.1.1.

5.3.1.3.2 N₂O

The IPCC default values for N₂O emission factors from manure management from the 2006 IPCC Guidelines (IPCC 2006) are used and applied to total N excreted. In the 2025 submission 2019 refinements (IPCC 2019) factors are introduced for solid storage for all animal types except poultry. In addition, some changes based on recommendations in Rivedal et al. (2019a) are implemented to the N₂O emission factors for manure cellar with slatted floors, and manure tank with floating cover (natural crust) to better reflect national circumstances. The factors used in the inventory are given in Table 5-19. A more detailed description of the emission factors used is given in Carbon Limits (2020a).

⁴⁰ The grouping of animals is different in the two surveys. Cattle is one category in the 2000 survey and three categories in the 2013 survey. Goats are grouped with sheep in the 2000 survey, but with horses in the 2013 survey. Horses are grouped with other animals in the 2000 survey. Fur bearing animals are not included in the 2013 survey

⁴¹ Yearly data for manure used for biogas production from the Norwegian Agriculture Agency: [Utslipp til luft - Landbruksdirektoratet](#)

Table 5-19: Emission factors for direct N₂O emissions from manure management per manure management system, kg N₂O-N/kg N excreted.

	Manure cellar for slurry, under slatted floor	Manure cellar for slurry, under solid floor	Open manure tank for slurry	Manure tank with tight roof	Manure tank, floating cover (plastic, lecca)	Manure tank, floating cover (natural crust)	Indoor built up/deep litter	Outdoors built up/deep litter	Solid manure, outdoor storage
System as described in IPCC 2006 (all categories other than poultry)	For sheep, horses, goats - pit storage below animal confinements, for others - liquid / slurry without cover	For sheep, horses, goats - pit storage below animal confinements, for others - liquid / slurry with natural crust cover	Liquid/slurry, without natural crust cover	Liquid/slurry, with natural crust cover	Liquid/slurry, with natural crust cover	Liquid/slurry, with natural crust cover	cattle and swine deep bedding	dry lot	solid storage
Dairy cattle	0.0025	0.005	-	0.005	0.005	0.0025	0.01	0.02	0.01
Beef cow	0.0025	0.005	-	0.005	0.005	0.0025	0.01	0.02	0.01
Young cattle	0.0025	0.005	-	0.005	0.005	0.0025	0.01	0.02	0.01
Swine	0.0025	0.0005	-	0.0005	0.0005	0.0003	0.01	0.02	0.01
Laying hens	0.001	0.001	0.001	0.001	0.001	0.0010	0.001	0.001	0.001
Broilers	0.001	0.001	0.001	0.001	0.001	0.0010	0.001	0.001	0.001
Turkeys	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Other poultry	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Horses	0.002	0.002	-	0.005	0.005	0.0025	0.01	0.02	0.01
Goats	0.002	0.002	-	0.005	0.005	0.0025	0.01	0.02	0.01
Sheep	0.002	0.002	-	0.005	0.005	0.0025	0.01	0.02	0.01
Fur animals	0.0025	0.005	-	0.005	0.005	0.0025	0.01	0.02	0.01
Deer	0.0025	0.005	-	0.005	0.005	0.0025	0.01	0.02	0.01
Reindeer	0.0025	0.005	-	0.005	0.005	0.0025	0.01	0.02	0.01
Dairy cattle	0.0025	0.005	-	0.005	0.005	0.0025	0.01	0.02	0.01
Beef cow	0.0025	0.005	-	0.005	0.005	0.0025	0.01	0.02	0.01

	Manure cellar for slurry, under slatted floor	Manure cellar for slurry, under solid floor	Open manure tank for slurry	Manure tank with tight roof	Manure tank, floating cover (plastic, lecca)	Manure tank, floating cover (natural crust)	Indoor built up/deep litter	Outdoors built up/deep litter	Solid manure, outdoor storage
System as described in IPCC 2006 (all categories other than poultry)	For sheep, horses, goats - pit storage below animal confinements, for others - liquid / slurry without cover	For sheep, horses, goats - pit storage below animal confinements, for others - liquid / slurry with natural crust cover	Liquid/slurry, without natural crust cover	Liquid/slurry, with natural crust cover	Liquid/slurry, with natural crust cover	Liquid/slurry, with natural crust cover	cattle and swine deep bedding	dry lot	solid storage
Young cattle	0.0025	0.005	-	0.005	0.005	0.0025	0.01	0.02	0.01
Swine	0.0025	0.0005	-	0.0005	0.0005	0.0003	0.01	0.02	0.01
Laying hens	0.001	0.001	0.001	0.001	0.001	0.0010	0.001	0.001	0.001

Source: IPCC (2006) and Rivedal et al. (2019a)

NH₃

Emission factors vary with production and storage system; in the model there is no variation between regions for the manure management systems. The factors used are shown in Table 5-20. All emission factors in Table 5-20 are sourced from EEA (2023), since measurements of NH₃ losses in animal housing and manure storage have so far not been carried out in Norway.

Table 5-20: NH₃ emissions factors for various storage systems and productions. % losses of N of ammonium N.

	Housing		Storage	
	Slurry	Solid manure	Slurry	Solid
Dairy cattle	24%	8%	25%	32%
Suckling cows	24%	8%	25%	32%
Young cattle	24%	8%	25%	32%
Swine	27%	23%	11%	29%
Laying hens	41%	20%	14%	8%
Broilers	21%	21%	30%	30%
Turkeys	35%	35%	24%	24%

	Housing		Storage	
	Slurry	Solid manure	Slurry	Solid
Other poultry	57%	57%	24%	24%
Horses	22%	22%	35%	35%
Goats	22%	22%	28%	28%
Sheep	22%	22%	32%	32%
Fur animals	27%	27%	9%	9%
Deer	24%	24%	25%	25%

Source: EEA (2023).

As recommended in EEA (2023), the effect of the abatement measures and improved practices are described using a reduction factor, i.e., a proportional reduction in the emission estimate for the unabated situation. These reduction factors are summarized in Table 5-21.

Table 5-21: NH_3 abatement measures for manure management systems and corresponding emission reduction, % applied to NH_3 emissions factors presented in Table 5-20.

Abatement measure	Housing		Storage			
	In-house slurry pit, below slatted floor	In-house slurry pit, below solid floor	Tank with cover, "tight" lid	Tank with cover, plastic sheeting (floating cover)	Natural crust	"Low technology" floating cover
NH_3 emission reduction, %	30	60	80	60	40	40
NH_3 emission reduction, %	30	60	80	60	40	40

Source: Rösemann et al. (2017), UNECE (2014), Rivedal et al. (2019a).

To estimate losses, these unabated or amended emission factors are in turn multiplied with the amount of manure (based on number of animals and N-factors per animal) entering each of the different housing or storage category, as determined by the Statistics Norway survey of different storage systems in 2000 (Gundersen & Rognstad 2001), the Sample survey of agriculture and forestry 2003 (Statistics Norway 2004), data from the report *Use of inorganic and organic fertilizers in agriculture 2013* (Gundersen & Heldal 2015), Statistics Norway 2018 survey on manure management systems (Kolle & Oguz-Alper 2020) and Census of agriculture 2020 (Statistics Norway 2021). The changes in storage systems from 2003 to 2013, 2013 to 2018 and between 2019 and 2020 have been linearly

interpolated in the intermediate years. From 1990-2002 and from 2020, the number of animals is the only activity data that differs from year to year.

5.3.1.3.3 NO_x

The emissions factors used for NO_x emissions in manure management systems are shown in Table 5-22.

Table 5-22: NO_x and N₂ emission factors for manure management per manure management system.

	kg of N in NO or N ₂ (kg TAN)-1
NO_x Slurry storage	0.0001
N₂ Slurry storage	0.0030
NO_x Solid storage	0.01
N₂ Solid storage	0.30

Source: EEA (2023).

N excretions are estimated as total ammoniacal nitrogen (TAN), which is the same N excretion factor that is used in the estimations of NH₃ from manure management systems.

For estimating N₂ from storage the amount is estimated as ammonia-N (TAN) and the default values for the EFs given in EEA (2023) are used.

5.3.2 Uncertainty assessment and time-series consistency

Uncertainties estimates are provided in Annex 2.

5.3.2.1 Activity data

5.3.2.1.1 CH₄

The data for the number of animals is considered to be known within ±5% and ±7% for pigs. Other activity data are the different kinds of manure treatment (which will determine the emission factor), which have been assessed by expert judgments. This will contribute to the uncertainty.

5.3.2.1.2 N₂O and NH₃

The data for the number of animals is considered to be known within ±5% and ±7% for pigs.

For the emissions from manure management, Norwegian data for N in excreta is used (Table 5-15). The nitrogen excretion factors are uncertain, but the range is considered to be within $\pm 15\%$ (Rypdal 1999). The uncertainty has not been estimated for the revised nitrogen excretion factors from Karlengen et al (2012), and in the key category analysis is the uncertainty estimate for the country specific nitrogen excretion factors from 1999 still used as the best available estimate. This can be considered as a conservative estimate of the uncertainty since it is expected that the new nitrogen excretion factors have a lower uncertainty. The uncertainty is connected to differences in excretion between farms in different parts of the country, the fact that the survey farms may not have been representative, general measurement uncertainty and the fact that fodder and fodder practices have changed since the factors were determined.

There is also an uncertainty connected to the division between different storage systems for manure, which is considered to be within $\pm 10\%$, and the division between storage and pasture, which is considered to be within $\pm 15\%$.

5.3.2.2 Emission factors

5.3.2.2.1 CH₄

The emission factors, based on Tier 2 for all animal categories, are considered to have the uncertainty range $\pm 20\%$.

5.3.2.2.2 N₂O

For the emission of N₂O from different storage systems, IPCC default emission factors are used. They have an uncertainty range of a factor of 2 (IPCC 2006).

5.3.2.2.3 NH₃

All emission factors for NH₃ which have been used for both housing and storage are sourced from EEA (2023). As stated in EEA (2023), uncertainties with regard to NH₃ EFs vary considerably. EEA (2023) concludes that the overall uncertainty for the United Kingdom NH₃ emissions inventory, as calculated using a Tier 3 approach, was $\pm 21\%$ (Webb & Misselbrook 2004), while that for the Netherlands, also calculated using a Tier 3 approach, was $\pm 25\%$ (Wever et al., 2018, cited in (Bruggen 2018)).

5.3.2.2.4 NO_x

Uncertainty has not been assessed. According to EEA (2023), uncertainty is high, ranging between -50% to + 100%.

5.3.3 Category-specific QA/QC and verification

In the 2025 submission the factor for N₂O emission from manure management system was updated with the IPCC 2019 refinement value for outdoor solid storage from 0.5 per cent to 1 per cent.

In 2023, a project for evaluating and updating existing N_{ex} and VS factors for swine was performed by the Norwegian University of Life Sciences (NMBU) (Kjos 2023).

The N_{ex} factor for the young cattle group, heifer for slaughter, was also updated in the 2024 submission.

The 2019 IPCC refinements to the 2006 Guidelines emission factors were implemented for indirect N_2O from manure management in the 2024 submission. The emissions factors are used according to Table 11.3 in IPCC 2019 refinements to the 2006 IPCC Guidelines (IPCC 2019). The factors for atmospheric deposition are climate adjusted based on the distribution of 97% wet- and 3% dry climate in Norway. The climate distribution for Norway is given by National Forest Inventory data from NIBIO⁴².

In 2022, the VS factors for young cattle were updated as a result of the same 2021 project (Volden 2022). This resulted in 3% higher CH_4 emissions through the timeseries as an average.

In 2021 the N_{ex} and VS factors for cattle were evaluated by the Norwegian University of Life Sciences (Volden 2022). This led to updated VS factor for dairy cattle. The evaluation of the N_{ex} factors on the other hand, showed a high correlation with recent experimental data, both for dairy cattle and growing cattle.

5.3.4 Category-specific recalculations

There have been no recalculations performed for this source category this year.

5.3.5 Category-specific planned improvements

In the 2026 submission the Statistics Norway manure survey for 2024 will most likely be implemented with new activity data for manure management systems and spreading techniques.

5.4 Direct and indirect N_2O emissions from agricultural soils - 3D

5.4.1 Category description

The emissions of N_2O from agricultural soils in Norway in 2024 amounted to 1461ktonnes CO_2 equivalents. They accounted for about 33% of the total Norwegian GHG emissions from agriculture in 2024.

The emissions had minor fluctuations in the period 1990-2024. During the period 1990-2024, emissions decreased by 10%. From 2023 to 2024, the emissions increased by 3%.

⁴² Christian Mohr, NIBIO, personal communication 25.09.2023.

Table 5-23: Emission trends for 3D Direct and indirect N₂O emissions from agricultural soils (kt CO₂ equivalents).

Source category	1990	1990, % of Agriculture	2023	2024	2024, % of Agriculture	Trend 1990-2024 (%)	Trend 2023-2024 (%)
3D1a. Inorganic N fertilizers	719	15%	568	598	14%	-17%	5%
3D1b. Organic N fertilizers	124	3%	140	139	3%	12%	0%
3D1ca3. Urine and dung deposited by grazing animals	51	1%	45	45	1%	-12%	-1%
3D1d. Crop residues	74	2%	38	46	1%	-38%	21%
3D1f. Cultivation of organic soils	341	7%	356	355	8%	4%	-0.4%
3D2. Indirect N₂O Emissions from managed soils	315	6%	272	278	6%	-12%	2%
3D. Total	1 623	33%	1 419	1 461	33%	-10%	3%

Source: Statistics Norway and Norwegian Environment Agency

Different sources of N₂O from agricultural soils are distinguished in the IPCC methodology, namely:

- Direct emissions from agricultural soils (from use of synthetic fertilizers, animal excreta nitrogen, sewage sludge and other organic fertilizers applied to soils, droppings from grazing animals, crop residues and cultivation of soils with a high organic content).
- N₂O emissions indirectly induced by agricultural activities (N losses by volatilization, leaching and run-off).

The use of synthetic fertilizers, animal excreta nitrogen and sewage sludge used as fertilizer, and other organic fertilizers applied to soils also results in emissions of NH₃ and

NO_x that gives indirect N₂O emissions from volatilization. NH₃ volatilized from grazing animals are also included in the estimations of indirect N₂O.

Section 5.1.2 gives more information about nitrogen in animal manure as basis for emission estimates and an overview of the manure nitrogen flows in the Norwegian greenhouse gas inventory.

IPCC Tier 1 methodologies and disaggregated default emission factors (IPCC 2019) are used for estimating direct and indirect N₂O emissions from managed soils. The factors are climate adjusted based on the distribution of 97% wet- and 3% dry climate in Norway. The climate distribution for Norway is given by National Forest Inventory data from NIBIO⁴³. The emissions factors are used according to Table 11.1 and 11.3 in IPCC 2019 refinements to the 2006 IPCC Guidelines (IPCC 2019).

Emissions of N₂O from agricultural soils are key categories according to the key category analysis.

5.4.1.1 Inorganic N fertilizers, 3D1a

5.4.1.1.1 Methodological issues

N₂O

The direct emissions of N₂O from use of synthetic fertilizers are calculated from data on total annual amount of fertilizer sold in Norway and its nitrogen content. Before 2013 these figures are calculated by subtracting the amount of synthetic fertilizer applied in forest. The resulting amount that is applied on agricultural fields is multiplied with the climate adjusted IPCC default emission factor (IPCC 2019).

NH₃

The calculations of NH₃ emissions from the use of synthetic fertilizer are based on the amounts of nitrogen supplied and emission factors for the percentage of nitrogen emitted as NH₃ during spreading.

NO_x

The nitrogen in synthetic fertilizer applied to soil has been multiplied with the default tier 1 emission factor to estimate the nitric oxide (NO₂) emission from crop production.

5.4.1.1.2 Activity data

N₂O

The Norwegian Food Safety Authority calculates a total value for annual consumption of synthetic fertilizers in Norway based on sale figures (Norwegian Food Safety Authority Annually). For the data before 2013 the figures are corrected for the amount fertilizer used in forests which is provided yearly by the Norwegian Institute of Bioeconomy Research (NIBIO).

⁴³ Christian Mohr, NIBIO, personal communication 25.09.2023.

The calculation of emissions from use of nitrogen fertilizer is based on sales figures for each year. A strong price increase for nitrogen fertilizer caused a stock building in 2008 and corresponding lower sales in 2009. In addition, new fertilization standards may have brought about a reduction of the use of fertilizers. To correct for this, a transfer of fertilizer use has been made from 2008 to 2009.

NH₃

For the calculation of the emission of NH₃, the amount of total N in the fertilizer is used (the same as for estimating N₂O). For the calculation of the emission of NH₃, we need a specification of the use of different types of synthetic fertilizer since the NH₃ emission factor vary between the different types. This is given by the Norwegian Food Safety Authority for the years from 2000. Due to lack of data for the years before 2000, we have to assume that the percentual distribution between the usage of different fertilizer types is the same as in 1994 for these years.

The emissions of NH₃ from inorganic fertilizer was calculated taking into account the incorporation into soil when spreading. The practice here for Norwegian potato, vegetable and grain productions was evaluated in a report performed by Norwegian Institute of Bioeconomy Research (NIBIO) (Rivedal et al. (2019a) and Rivedal et al. (2019b)).

NO_x

For the calculation of the emission of NO_x, the amount of total N in the fertilizer is used (the same as for estimating N₂O).

5.4.1.1.3 Emission factors

N₂O

The climate adjusted IPCC default emission factor of 0.0157 kg N₂O-N/kg N applied from IPCC 2019 refinements has been used (IPCC 2019).

NH₃

Different types of synthetic fertilizers are used, resulting in different emissions of NH₃. Their respective share is based on sales statistics provided annually by the Norwegian Food Safety Authority for the years from 2000. For earlier years the distribution is based on data from 1994. For the 2025 submission the EEA Guidebook 2023 emission factors for NH₃ were implemented (EEA 2023). The factors for the different types of fertilizers are shown in Table 5-24.

Table 5-24: Emission factors for NH_3 for different fertilizers. kg NH_3 per kg N.

Fertiliser	Emission factor (kg NH_3 per kg N)
Urea	0.195
Ammonium sulphate	0.084
Ammonium nitrate	0.024
Liquid ammonia	0.020
Ammonium phosphate	0.084
Calcium ammonium nitrate and other nitrate types	0.024
NPK (Nitrogen, phosphorus, potassium)	0.084
Diammonphosphate	0.084
Other NP fertiliser	0.084
NK fertiliser	0.024
Other straight N compounds	0.024
N solutions	0.087

Source: EEA (2023).

More information about the calculation of $\text{frac}_{\text{gasf}}$ and the NH_3 emission factors for the different types of fertilizers is provided in Annex 5, section 4.

NO_x

The tier 1 default emission factor of 0.04 kg NO_2 / kg fertilizer-N applied (EEA 2023) has been used.

5.4.1.2 Animal manure applied to soils, 3D1bi

5.4.1.2.1 Methodological issues

N_2O

In Norway, all animal excreta that are not deposited during grazing are used as manure and applied to soils. Further, it is assumed that animals do not emit N_2O themselves. NH_3 emissions in housing and storage, and N_2O emissions in housing and storage and manure application are all estimated individually, and the emission estimates are based on the same nitrogen pool.

The emission of direct N_2O emissions from animal manure applied to managed soils is calculated by multiplying the total amount of N in manure used as fertilizer with the climate adjusted emission factor based on the IPCC default emission factors for wet and dry climate (IPCC 2019). This amount is equivalent to total N excreted from the animals deducted for the amount dropped during grazing.

NH₃

NH₃ emissions from spreading of manure depend on several factors, e.g., climate and time of spreading of manure, type of cultivation and cultivation practices and characteristics of the soil.

Emissions of ammonia are calculated for spreading of manure on cultivated fields and meadow. The total amount of manure nitrogen that is spread is estimated by the number of animals and nitrogen excretion factors for each type of animal and is thereafter distributed on different spreading methods based on national data. The nitrogen basis for the estimated amounts of nitrogen that volatilises as NH₃ during spreading takes into account the amount of nitrogen in the NH₃, NO_x, and N₂ that volatilises during housing and storage, as well as the N lost as N₂O and leaching during storage. Total emissions from spreading are estimated by emission factors for each different spreading method used multiplied by the amount of manure nitrogen spread with the respective method.

NO_x

The nitrogen in manure applied to soil has been multiplied with the default tier 1 emission factor to estimate the nitric oxide emissions.

5.4.1.2.2 Activity data

N₂O, NH₃ and NO_x

The amount of N in manure systems is calculated as total N in manure adjusted for the N that is dropped on pastures. Nitrogen in manure which is used for anaerobic digestion and then returned to soil is also included as part of the system.

Emissions of N₂O, NH₃ and NO_x during spreading are calculated from the amounts of N excreted minus losses due to housing and storage emissions.

There are several sources of activity data on spreading of manure. The main sources are manure surveys performed in 2000, 2013 and 2018 by Statistics Norway Gundersen and Rognstad (2001), Gundersen and Heldal (2015), Kolle and Oguz-Alper (2020) and Statistics Norway (2021), various sample surveys of agriculture and forestry 1990-2007 and the annual animal population.

Data from the manure survey only exists for 2000, 2013, 2018 and 2020, while the data from the sample surveys has been updated for several, but not all, years. The manner of spreading the manure affects the NH₃ emissions estimates, while the N₂O emission estimations are insensitive to methods of spreading.

How the amount of nitrogen in animal manure is estimated is further described in section 5.1.2 and 5.3.1.1. How the animal population is estimated is described in Section 5.1.1 and Annex 5.

Nitrogen factors are estimated by Karlengen et al (2012), Aspehølen Åby et al. (2018) and Volden (2022). In the estimations of NH₃ losses, the factors of N excretion correspond to the estimated nitrogen excreted in the urine.

Table 5-25: Sources for activity data for emissions from animal manure applied to soils.

	Sources
Number of animals	Statistics Norway (applications for productions subsidies, no. and weight of approved carcasses), The Cow Recording System (TINE BA Annually)
Nitrogen factors for manure, Annex 5, section 3.	Karlengen et al. (2012), Aspehølen Åby et al. (2018), Volden (2022) various sources, compiled by Statistics Norway
Distribution between manure storage systems	Sample Survey of agriculture and forestry 2003 (Statistics Norway 2004), manure survey in 2000, 2013 and 2018 (Gundersen & Rognstad 2001; Gundersen & Heldal 2015; Kolle & Oguz-Alper 2020) and Census of agriculture 2020 (Statistics Norway 2021).
Pasture times for different animal categories	TINE BA (Annually) (Dairy cows, goat), Statistics Norway's Sample Survey 2001 (Statistics Norway 2002) (non-dairy cattle, sheep), Statistics Norway's manure survey 2018 (Kolle & Oguz-Alper 2020) and expert judgements.

Table 5-26: Parameters included in the estimation of NH₃ emissions from manure.

	Sources
Area where manure is spread, split on cultivated field and meadow	Statistics Norway (Sample Surveys of Agriculture, various years), (Gundersen & Rognstad 2001), (Gundersen & Heldal 2015; Kolle & Oguz-Alper 2020) and Census of agriculture 2020 (Statistics Norway 2021)
Area and amount where manure is spread, split on spring and autumn	(Gundersen & Rognstad 2001; Gundersen & Heldal 2015),(Kolle & Oguz-Alper 2020)
Addition of water to manure	(Gundersen & Rognstad 2001; Gundersen & Heldal 2015), expert judgements, Statistics Norway's Sample Survey 2006 (Statistics Norway 2007)
Spreading techniques	(Gundersen & Rognstad 2001; Gundersen & Heldal 2015; Kolle & Oguz-Alper 2020), Census of agriculture 2020 (Statistics Norway 2021) and expert judgements

5.4.1.2.3 Emission factors

N₂O

The emission factor used is based on the disaggregated IPCC default factors for dry and wet climate (IPCC 2019). The factor 0.00597 kg N₂O-N/kg N applied has been used.

NH₃

Emission factors for spreading of stored manure vary with spreading method, water contents, type, and time of treatment of soil, time of year of spreading cultivation and region.

The basic factors used are shown in Table 5-27.

Table 5-27: Emissions factors for NH₃-N for various methods of spreading of manure. % of ammonium N.

Meadow			Spring	Summer	Autumn
Spreading method	Added water		kg NH ₃ -N/kg TAN		
Broadcast spreading	< 100%		0.4	0.7	0.7
	> 100%		0.24	0.35	0.35
Trailing hose	< 100%		0.3	0.5	0.4
	> 100%		0.18	0.25	0.2
Injection			0.15	0.30	0.05
Dry manure			0.7	0.9	0.7
Arable land		Incorporation time	Spring	Summer	Autumn
Spreading method	Added water	Hours	kg NH ₃ -N/kg TAN		
Broadcast spreading	< 100%	0-1	0.08	0.08	0.12
		1-4	0.20	0.20	0.30
		4-12	0.33	0.33	0.45
		12+	0.50	0.50	0.45
	> 100%	0-1	0.04	0.04	0.06
		1-4	0.10	0.10	0.15
		4-12	0.17	0.17	0.28
		12+	0.25	0.25	0.28
Trailing hose	< 100%	0-1	0.03	0.03	0.05
		1-4	0.12	0.12	0.17
		4-12	0.23	0.23	0.35
		12+	0.50	0.50	0.45

	> 100%	0-1	0.02	0.02	0.02
		1-4	0.06	0.06	0.09
		4-12	0.12	0.12	0.22
		12+	0.25	0.25	0.28
Dry manure			0.70	0.70	0.70

Source: Karlsson and Rodhe (2002), Morken and Nesheim (2004), Rösemann et al. (2017)

The factors in Table 5-27 are combined with data from the Sample survey of agriculture and forestry 2006 (Statistics Norway 2007) and a time series on mixture of water in manure. Emission factors for NH₃ emissions from spreading of manure are connected to activity data that is updated for the whole time series when new information is available, i.e., number of animals (amount of manure), time of spreading and type of cultivation of the areas where the manure is spread.

NO_x

The tier 1 default emission factor of 0.04 kg NO₂/kg fertilizer-N applied (EEA 2023) has been used.

5.4.1.3 Sewage sludge applied to soils, 3D1bii

5.4.1.3.1 Methodological issues

N₂O

The emission factor is based on the disaggregated IPCC default factors for dry and wet climate. The factor 0.00597 kg N₂O-N/kg N applied (IPCC 2019) is used from submission 2024 and is a result of 97% wet and 3% dry climate.

Data for the N₂O emission arising from sewage sludge applied on fields has been calculated by multiplying the amount of nitrate in the sewage sludge applied with the climate adjusted IPCC default emission factor.

NH₃

The NH₃ emissions from sewage sludge used as fertilizer is estimated by multiplying the total N in sewage sludge with the EEA Guidebook 2023 default emission factor for sewage sludge.

NO_x

The nitrogen in sewage sludge applied to soil has been multiplied with the default tier 1 emission factor to estimate the nitric oxide emissions.

5.4.1.3.2 Activity data

N₂O, NH₃ and NO_x

Statistics Norway (wastewater statistics) annually gives values for the amount of sewage sludge, and the fraction of the sewage sludge that is applied on fields. The N-content in the sludge is given in Statistics Norway (2001), and the same value of 2.82% is used for all years.

5.4.1.3.3 Emission factors

N₂O

The emission factor is based on disaggregated IPCC default factors for dry and wet climate. The factor 0.00597 kg N₂O-N/kg N applied (IPCC 2019) has been used.

NH₃

The EEA Guidebook 2023 default emission factor for sewage sludge of 0.13 kg NH₃/kg N applied has been used (EEA 2023).

NO_x

The tier 1 default emission factor of 0.04 kg NO₂/kg fertilizer-N applied (EEA 2023) has been used.

5.4.1.4 Other organic fertilizers applied to soils, 3D1biii

5.4.1.4.1 Methodological issues

N₂O

Emissions of N₂O from other organic fertilizers applied to soils are estimated by multiplying estimated amounts of N in organic fertilizers with the IPCC default emission factor for N applied to agricultural soils.

NH₃

The estimated amounts of N in organic fertilizers are multiplied with the EEA Guidebook 2023 default emission factor for other organic fertilizer applied.

NO_x

The amount of nitrogen in other organic fertilizers applied to soil has been multiplied with the default tier 1 emission factor.

5.4.1.4.2 Activity data

N₂O, NH₃ and NO_x

The annual amount of nitrogen in other organic fertilizers applied in agriculture during the period 1990-2013 was assessed in 2014 (Aquateam COWI AS 2014). Other organic fertilizer consists of compost and organic fertilizer from composting and biogas plants based on food waste, in addition of meat and bone meal (PAP) and sludge from land-based aquaculture facility in agriculture. This was a practically non-existent source of nitrogen before 2000. Since then, it has varied over the years. One important reason for the inter-

annual variations is changes in regulations for the usage of meat and bone meal as fertilizer on agriculture land, which has resulted in significant inter-annual variations.

Other organic fertilizers applied to soils is a small emission source. Emissions in 2022 were estimated to less than 0.01 ktonnes N_2O .

5.4.1.4.3 Emission factors

N_2O

The emission factor is based on disaggregated IPCC default factors for dry and wet climate. The factor 0.00597 kg N_2O -N/kg N applied (IPCC 2019).

NH_3

The EEA Guidebook 2023 default emission factor for other organic fertilizer of 0.08 kg NH_3 /kg N applied has been used (EEA 2023).

NO_x

The tier 1 default emission factor of 0.04 kg NO_2 /kg fertilizer-N applied (EEA 2023) has been used.

5.4.1.5 Urine and dung deposited by grazing animals, 3D1c

5.4.1.5.1 Methodological issues

N_2O

The fraction of the total amount of animal manure produced that is droppings on pastures is given by national data for the distribution of manure to different storage systems and data for pasture times (Table 5-18). The amount of N deposited during grazing is multiplied with emission factors based on the climate disaggregated IPCC default emission factor. The factors are climate adjusted and amounts to 0.00588 N_2O -N/kg N for cattle, swine and poultry and 0.003 N_2O -N/kg N for goat, deer and reindeer (IPCC 2019).

NH_3

Animal population data, data for pasture times, and factors for the nitrogen amount in excreta for different animal categories give the nitrogen amounts for the animal categories on pastures. Specific emission factors by animal category are used.

5.4.1.5.2 Activity data

N_2O and NH_3

Data for time on pasture and share of animals on pasture are collected from the Sample Survey in Statistics Norway 2001 (Statistics Norway 2002) and from TINE BA (TINE BA Annually). The data from TINE BA comprises pasture data for goats and milking cows. All other pasture data is from the Sample survey 2001 (Statistics Norway 2002).

How the amount of nitrogen in animal manure and the fraction of nitrogen amount that goes to pasture is estimated is further described in section 5.1.2 and 5.3.1. How the animal population is estimated is described in Section 5.1.1 and Annex 5.

5.4.1.5.3 Emission factors

N₂O

The emissions of N₂O from animals on pastures are calculated using the disaggregated IPCC default emission factors (IPCC 2019). The factors are climate adjusted and amounts to 0.00588 N₂O-N/kg N for cattle, swine and poultry and 0.003 N₂O-N/kg N for sheep, horse, goat, deer and reindeer.

NH₃

The emission factors used for the calculation of the NH₃ emissions from grazing animals are shown in Table 5-28. These are the same as the emission factors recommended in EEA (2023).

Table 5-28: Ammonia emission factors from droppings from grazing animals on pasture.

	NH ₃ loss,% of TAN
Dairy cattle	14%
Suckling cows	14%
Young beef cattle	14%
Swine	31%
Horses	35%
Goats	9%
Sheep	9%
Fur animals	9%
Deer	14%
Reindeer	14%

Source: EEA (2023). For deer and reindeer EF for dairy cattle is used

5.4.1.6 N₂O from crop residues, 3D1d

5.4.1.6.1 Methodological issues

N₂O emissions associated with crop residue decomposition are estimated using the IPCC tier 1 approach (IPCC 2019) but with some national factors. Some country specific factors are given for fraction of dry matter, fraction of total area that is renewed annually, ratio of above-ground and below ground residues to harvested yield, N content of above-ground and below-ground residues and fraction of above ground residues removed from the field. The national factors are documented in Grønlund et al. (2014) and (Carbon Limits 2024). In the development of national factors, residues from perennial grass and grass-clover mixtures were prioritized, in addition to the cereal species; wheat, barley and oats, which combined constitute about 85% of the total agricultural crop residues. For other

productions, the IPCC default factors (IPCC 2019) are assumed to be sufficiently representative.

The methodology for N₂O emissions from crop residues was updated for the 2024 submission, where it is now based on the updated equation detailed in the IPCC's 2019 refinement to the 2006 guidelines (described below) (IPCC 2019). Input data remains the same as in previous submissions.

The factors are calculated from the sale statistics for clover seeds, area statistics of meadows of different age classes, area statistics of renewed meadow, and research results on clover and N content in meadow, and yield and N content of straw in Norway.

Based on area statistics on renewed meadows the $Frac_{Renew}$ has been estimated to 0.1.

About 75% of the meadows have been renewed with a mixture of grass and clover seeds, but only about 55% of 1- and 2-year-old meadow areas can be considered as grass-clover mixtures with more than 5% clover. The mean clover share in the grass-clover mixtures has been estimated to about 20%. The clover share is lower in older meadow, but the content in the first years is more representative for the total crop residues produced during the lifetime of the meadow.

Above-ground crop residues contain both leaves and stubbles, while below ground residues are assumed to contain only roots. The N contents of above-ground and below-ground crop residues (N_{AG} and N_{BG}) have been estimated to be 0.015 and 0.011 respectively for meadow without clover and 0.019 and 0.016 respectively for meadow with 20% clover share. A possible higher clover shares in the beginning of the 1990s has not had a significant influence on N fractions of grass-clover mix in meadows.

Straw harvested for purposes as feed, beddings and energy ($FRAC_{Remove}$) has been estimated to 0.15 of the total straw production from 1990 to 2000, and 0.13 from 2001 to 2022 according to expert opinion.

For wheat and rye the ratio of above-ground residues (straw) to harvested grain yield (R_{AG}) has been estimated to 0.95 and 1.1 respectively, and the N fraction in the straw (N_{AG}) for wheat, barley, and oats has been estimated to 0.0042, 0.005 and 0.033 respectively (Grønlund et al. 2014). R_{AG} and N_{AG} values for all other crop types are taken from IPCC (2019).

The fraction of crop residue burned on field was updated in 2012 by the Norwegian Agricultural Authorities⁴⁴. This reduced the fraction for 2011 from 7.5 to 4%.

⁴⁴ Johan Kollerud, Norwegian Agricultural Agency, unpublished material 2012.

The updated formula used for N-content in crop residues as used in the 2024 submission is as follows:

$$F_{CR} = \sum_T \left[\left[AGR_{(T)} * N_{AG(T)} * \left(1 - Frac_{Remove(T)} - (Frac_{Burnt(T)} * C_f) \right) \right] + \left[BGR_{(T)} * N_{BG(T)} \right] \right]$$

Where:

F_{CR} = N in crop residue returned to soils (tonnes)

$AGR_{(T)}$ = Annual total amount of above-ground crop residue for crop T

$N_{AG(T)}$ = N content of above-ground residues for crop T, kg N (kg d.m.)

$Frac_{REMOVE(T)}$ = Fraction of crop residue removed for purposes as feed beddings and energy for crop T

$Frac_{BURN(T)}$ = Fraction of crop residue burned on field for crop T

C_f = Combustion factor

$BGR_{(t)}$ = Annual total amount of belowground crop residue for crop T

$N_{BG(T)}$ = N content of belowground crop residues for crop T

Noteworthy changes from updating to the newer formula include:

- The revised method to estimate above-ground N content gives slightly lower values for some crops
- The implementation of the combustion factor C_f , eliminating a source of underestimation in the N content of crop residues
- The use of area burnt only on above-ground residues in the new formula, as opposed to both above- and below-ground residues in the old model, eliminating another source of underestimation of N content.

Changes to emissions estimates as result of implanting the new formula are discussed in further detail in chapter 10.

Table 5-29: Factors used for the calculation of the nitrogen content in crop residues returned to soils.

	Share of meadows	Frac _{DM}	Frac _{RENEW}	R _{AG}	N _{AG}	Frac _{REMOVE}	R _{BG}	N _{BG}	C _f
Perennial grasses	0.45	0.9	0.1	0.3	0.015	0	1.04	0.011	0
Grass-clover mixtures	0.55	0.9	0.1	0.3	0.019	0	1.04	0.013	0
Wheat	--	0.85	1	0.95	0.0042	0.13	0.47	0.009	0.9

	Share of meadows	Frac _{DM}	Frac _{RENEW}	R _{AG}	N _{AG}	Frac _{REMOVE}	R _{BG}	N _{BG}	C _f
Rye	--	0.85	1	1.1	0.005	0.13	0.46	0.011	0.85
Rye wheat	--	0.85	1	1.09	0.006	0.13		0.009	0.9
Barley	--	0.85	1	1.20	0.005	0.13	0.39	0.014	0.85
Oats	--	0.85	1	1.30	0.0033	0.13	0.48	0.008	0.85
Rapeseed	--	0.85	1	1.3	0.006	0.15	0.46	0.009	0.85
Potatoes	--	0.22	1	0.4	0.019	0	0.22	0.014	0
Roots for feed	--	0.22	1	0.4	0.019	0		0.014	0
Green fodder (non-N fix)	--	0.9	1	0.3	0.015	0	0.70	0.012	0
Vegetables	--	0.22	1	0.4	0.019	0	0.22	0.014	0
Peas	--	0.91	1	2.10	0.008	0	0.40	0.008	0
Beans	--	0.91	1	2.10	0.008	0	0.40	0.008	0

Source: Grønlund et al. (2014), Carbon Limits (2023)

5.4.1.6.2

5.4.1.6.3 Activity data

As activity data for the estimations of emissions of N₂O from crop residues are annual crop yield statistics from Statistics Norway used.

5.4.1.6.4 Emission factors

The climate adjusted emission factor of 0.00597 kg N₂O-N/kg N applied has been used. This factor is based on the disaggregated IPCC default emission factors (IPCC 2019).

5.4.1.7 N₂O from mineralization/immobilization associated with loss/gain of soil organic matter, 3D1e

5.4.1.7.1 Methodological issues

Cropland remaining cropland result in positive SOC stock changes in the mineral soil pool; thus, no N₂O emissions are reported from this sub-category. For more information, see NID Chapter 6.13 Direct N₂O from N mineralization and immobilization – 4(III).

5.4.1.8 *N₂O from cultivation of organic soils, 3D1f*

5.4.1.8.1 Methodological issues

Large N₂O emissions occur as a result of cultivation of organic soils (histosols) due to enhanced mineralization of old, N-rich organic matter (IPCC 2006). The emissions are calculated using the IPCC default emission factors, and an estimation of the area of cultivated organic soil in Norway.

5.4.1.8.2 Activity data

The area estimates of cultivated organic soils is given from the Norwegian Institute of Bioeconomy Research (NIBIO) and are normally consistent with the area used in the LULUCF sector and includes all areas with organic soils of cropland remaining cropland, grassland remaining grassland, land converted to cropland and land converted to grassland. More information about the methodology used for estimation of this area is given in the LULUCF Chapter 6.3.2.

5.4.1.8.3 Emission factors

Emissions occurring as a result of cultivation of organic soils are calculated using the IPCC default emission factor of 13 kg N₂O-N/ha per year for cropland and 1.6 kg N₂O-N/ha per year for grassland (IPCC 2014).

5.4.1.9 *Indirect N₂O emissions from atmospheric deposition, 3D2a*

5.4.1.9.1 Methodological issues

Atmospheric deposition of nitrogen compounds fertilizes soils and surface waters and enhances biogenic N₂O formation. Deposition of nitrogen are assumed to correspond to the amounts of NH₃ and NO_x that volatilises during the spreading of synthetic fertilizers, manure, sewage sludge and other organic fertilizers, and NH₃ volatilisation from pastures. The N₂O emissions are calculated by multiplying the amount of N from deposition with the factor based on IPCC default emission factor (IPCC 2019).

5.4.1.9.2 Activity data

Information about the estimation of NH₃ and NO_x from spreading of synthetic and organic fertilizers and the estimation of NH₃ volatilisation from pastures are given in section 5.4.1.1- 5.4.1.5.

5.4.1.9.3 Emission factors

N₂O

The climate adjusted IPCC default emission factor of 0.01373 kg N₂O-N/(kg NH₃-N+NO_x-N volatilized) (IPCC 2019) is used to calculate indirect emissions of N₂O from volatilized NH₃ and NO_x.

5.4.1.10 Indirect N₂O emissions from leaching and run-off, 3D2b

5.4.1.10.1 Methodological issues

A considerable amount of fertilizer nitrogen is lost from agricultural soils through leaching and run-off. Fertilizer nitrogen in ground water and surface waters enhances biogenic production of N₂O as the nitrogen undergoes nitrification and denitrification. The fraction of the fertilizer and manure nitrogen lost to leaching and surface runoff may vary depending on several factors. A default value of 30% is proposed (IPCC 2006), but in the Norwegian inventory a national factor of 22% is used that is believed to better reflect Norwegian conditions (Rivedal 2022). This estimation was based on data from the Agricultural Environmental monitoring program (JOVA). The overall $Frac_{leach}$ estimated in this study was 22% of the N applied. This value is a median of $Frac_{leach}$ for every year during the monitoring period and for each of eight catchments with different production systems. The JOVA-program includes catchment and field study sites representing typical situations in Norwegian agriculture with regard to production system, management, intensity, soil, landscape, region and climate. The median for the catchments was 26%, but the weighted Norwegian factor based on area distribution and type of production condition was 22%.

The amount of nitrogen lost to leaching is multiplied with the IPCC default emission factor to calculate the emission of N₂O (IPCC 2019).

Nitrogen sources included are inorganic fertilizers, manure, sewage sludge and other organic fertilizers spread on fields, crop residues, and droppings from grazing animals.

5.4.1.10.2 Activity data

Information about the estimation of the nitrogen amounts from spreading of synthetic and organic fertilizers and from pastures and crop residues are given in NID section 5.4.1.6.

5.4.1.10.3 Emission factors

N₂O

The IPCC default emission factor of 0.011 kg N₂O-N/kg N lost to leaching/runoff is used (IPCC 2019).

5.4.2 Uncertainty assessment and time-series consistency

5.4.2.1 Activity data

There are several types of activity data entering the calculation scheme:

Sales of nitrogen fertilizer: The data is based on sales figures for one year (The Norwegian Food Safety Authority). The uncertainty in the sales figures is within $\pm 5\%$ (Rypdal & Zhang 2000). In addition, there is a possible additional error because sale does not necessarily equal consumption in a particular year due to storage.

Amount of nitrogen in manure: The figures are generated for each animal type, by multiplying the number of animals with a nitrogen excretion factor. The nitrogen excretion factors are uncertain. However, due to monitoring of nitrogen leakage in parts of Norway,

the certainty has been improved over time. The range is considered to be within $\pm 15\%$ (Rypdal & Zhang 2000). The uncertainty is connected to differences in excreted N between farms in different parts of the country, that the surveyed farms may have not been representative, general measurement uncertainty and the fact that fodder and feeding practices have changed since the factors were determined.

The uncertainty connected to the estimate of the amount of manure is higher than for the amount of synthetic fertilizer used.

Fate of manure: There is significant uncertainty connected to the allocation of manure between what is used as fertilizer and droppings on pastures.

Atmospheric deposition of agricultural NH_3 emissions: The data is based on national figures for NH_3 emission from agriculture. These are within $\pm 30\%$ (Rypdal & Zhang 2000)

Leakage of nitrogen: The upper limit for the leakage is the applied nitrogen. The uncertainty is roughly about $\pm 70\%$ (Rypdal & Zhang 2000).

5.4.2.2 Emission factors

N_2O

Uncertainty estimates used for the N_2O emission factors are given in Annex 2.

NH_3

The uncertainty in the estimate of NH_3 emissions from use of fertilizer is assessed to be about $\pm 50\%$ (EEA 2023). The uncertainty is higher for animal manure, $\pm 30\%$ (Rypdal & Zhang 2001). This is due to uncertainties in several parameters including fraction of manure left on pastures, amount of manure, conditions of storage, conditions of spreading and climate conditions (Rypdal & Zhang 2001). Other factors that could lead to uncertainty are variation in storage periods, variation in house types and climate, and variation in manure properties.

5.4.3 Category-specific QA/QC and verification

In the 2025 submission the emission factors for inorganic fertiliser were updated with EEA 2023 factors. This led to a change in the NH_3 basis for indirect N_2O emissions.

There have been changes in the model estimating N_2O from crop residues in the 2024 submission due to a new calculation model from IPCC 2019 refinements. The methodology is now based on the updated equation detailed in the IPCC's 2019 refinement to the 2006 guidelines (IPCC 2019).

In 2023, IPCC Tier 2 methodologies and disaggregated default emission factors (IPCC 2019) was implemented for estimating direct and indirect N_2O emissions from managed soils. The factors are climate adjusted based on the distribution of 97% wet- and 3% dry climate in Norway. The climate distribution for Norway is given by National Forest Inventory data from NIBIO⁴⁵.

⁴⁵ Christian Mohr, NIBIO, personal communication 25.09.2023.

N-factor for reindeer was updated in the 2024 submission. The IPCC 2019 refinement Equation 10.30 and Nex rate from Table 10.19 was used to estimate the factor.

In 2021, the national factor FracLEACH has been reviewed by NIBIO. The results of the revision is documented in (Rivedal 2022). The earlier used national factor for FracLEACH was 22% (Bechmann et al. 2012). This estimation was based on data from the Agricultural Environmental monitoring program (JOVA). The factor was a median of FracLeach for every year during the monitoring period and for each of eight catchments representing typical situations in Norwegian agriculture with regard to production system, management, intensity, soil, landscape, region and climate. The factor was in 2022 recalculated, and the median for the catchments was now 26%, but the weighted Norwegian factor based on area distribution and type of production condition was 22%, so the earlier used factor for FracLeach is kept in the inventory.

5.4.4 Category-specific recalculations

There have been recalculations performed for the source category N₂O emissions from organic soils this year, see chapter 10 for details.

5.4.5 Category-specific planned improvements

In the 2026 submission the Statistics Norway manure survey for 2024 will most likely be implemented with new activity data for manure management systems and spreading techniques.

5.5 Emissions from field burning of agricultural residues – 3F

5.5.1 Category description

Burning of agricultural residues gives emissions of standard non-fossil combustion products. The source contributed with 0.1% of the agricultural greenhouse gas emissions in 2024, and the emissions have decreased by 90% since 1990. The amount of crop residues burned in Norway has been investigated by the Norwegian Agricultural Authorities by questionnaires in 2004 and 2012. The results of the survey in 2012 resulted in that the fraction burned for 2011 was reduced to 4%. Reasons for the reduction was that in connection with the introduction of grants for changed tillage practice (RMP-Regional Environment Programme), it was also given requirements that the straw are prohibited to be burned or only allowed to be burn in the spring. Many municipalities have also banned the burning of straw, and in these cases, dispensation must be applied for before the farmers are allowed to burn crop residues.

5.5.2 Methodological issues

CH₄, N₂O

Emissions from the burning of crop residues are calculated in accordance with a Tier 1 approach (EEA 2023):

$$E_{\text{Pollutant}} = AR_{\text{residue_burnt}} * EF_{\text{Pollutant}}$$

Where:

$E_{\text{Pollutant}}$ = emission (E) of pollutant

$AR_{\text{residue_burnt}}$ = activity rate (AR), mass of residue burnt (dry matter)

$EF_{\text{Pollutant}}$ = emission factor (EF) for pollutant

5.5.3 Activity data

The calculation of the annual amount of crop residue burned on the fields is based on crop production data for cereals and rapeseed from Statistics Norway and estimates of the fraction burned ($Frac_{\text{BURN}}$) made by the Norwegian Crop Research Institute and Statistics Norway (chapter 5.4.1.6). For cereals, a water content of 15% is used (Statistics Norway). The activity data is consistent with the data used in the estimations of N_2O from crop residues.

Table 5-30: Emission factors for agricultural residue burning.

Components	Emission factors	Unit	Source
CH_4	2.7	kg/ tonnes crop residue (d.m.) burned	(IPCC 2006)
N_2O	0.07	kg/ tonnes crop residue (d.m.) burned	(IPCC 2006)

5.5.4 Uncertainty assessment and time-series consistency

Uncertainty estimates are given in Annex 2.

5.5.5 Category-specific QA/QC and verification

In 2002, the emissions of CH_4 and N_2O , from agricultural residual burning were included in the Norwegian inventory. The time series were included, but it should be noted that the figures for the earlier years have a higher uncertainty than the more recent years. The amount of crop residues burned in Norway has been investigated by questionnaires in 2004 and 2012.

5.5.6 Category-specific recalculations

There have been no recalculations performed for this source category this year.

5.5.7 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

5.6 Emissions from liming – 3G

5.6.1 Category description

Liming of agricultural soils and lakes gives emissions of CO₂. The source contributed with about 3% of the agricultural greenhouse gas emissions in year 2024, and emissions have decreased by 43% since 1990.

It is common to lime Norwegian soils because of the low buffer capacity of most soils. The use of limestone is more popular than dolomite. Also, for several years many lakes in the southern parts of Norway have been limed to reduce the damages from acidification.

Estimated emissions from liming on agricultural lands had had a strong reduction until 2017 but are now increasing. Liming of lakes has been relatively constant.

Emissions of CO₂ from liming is a key category according to the key category analysis.

5.6.2 Methodological issues

A Tier 1 method was used with specific emission factors for limestone and dolomite.

5.6.3 Activity data

Statistics on consumption of liming applied to agricultural soils are derived from the Norwegian Food Safety Authority. The statistics are based on reports from commercial suppliers of lime. The amount of lime applied to lakes was collected from the Norwegian Environment Agency. It was not possible to separate the amount of lime originating as limestone or dolomite for lakes for the whole time-series.

5.6.4 Emission factors

The default emission factor values provided by IPCC are 0.12 Mg CO₂ C Mg⁻¹ for limestone and 0.13 Mg CO₂ C Mg⁻¹ for dolomite. For limestone this is equal to emissions of 0.44 Mg CO₂ per Mg CaCO₃ applied. The emission factors are based on the stoichiometry of the lime types.

For emissions estimates for liming on lakes, the emissions factor for limestone is used (0.12 Mg CO₂ C Mg⁻¹), as only the total amount of lime was available.

5.6.5 Uncertainty assessment and time-series consistency

The amount of limestone and dolomite used is expected to be known with an uncertainty on ±5% and the emission factor with an uncertainty of ±10%.

5.6.6 Category-specific recalculations

There have been no recalculations performed for this source category this year.

5.6.7 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

5.7 Emissions from urea application – 3H

5.7.1 Category description

Urea application on agriculture soils is a minor source of CO₂ emissions in the inventory and contributes with about 0.01% of the agriculture greenhouse gas emissions in 2024.

5.7.1.1 Methodological issues

Application of urea results in an emission of CO₂. Norway uses a Tier 1 methodology.

Annual CO₂ emissions from urea fertilisation are estimated according to equation 11.13 (IPCC 2006):

$$\text{CO}_2\text{-C Emission} = M \cdot \text{EF},$$

where:

CO₂-C Emission = annual C emissions from urea application, tonnes C yr⁻¹

M = annual amount of urea fertilisation, tonnes urea yr⁻¹

EF = emission factor, tonne of C (tonne of urea)⁻¹

5.7.1.2 Activity data

Amount of urea used is received from Norwegian Food Safety Authority annually; total sale of synthetic fertilizer and is the same figure for the amount of urea used in the estimations of NH₃ from use of synthetic fertilizers. The amount used is very small, and consequently this is a very small source of CO₂ emissions.

5.7.1.3 Emission factors

The default emission factor of 0.20 is used (IPCC 2006).

5.7.2 Uncertainty assessment and time-series consistency

5.7.2.1 Activity data

The uncertainty that applies to use of mineral fertilizers on ±5% are used.

5.7.2.2 Emission factor

Using the Tier 1 method, it is assumed all C in the urea is lost as CO₂ from the atmosphere. This is a conservative approach (IPCC 2006). No uncertainty estimate is found, and Norway uses an uncertainty of ±10%.

5.7.3 Category-specific recalculations

There have been no recalculations performed for this source category this year.

5.7.4 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

6. Land-use, land-use change, and forestry (CRT sector 4)

This chapter provides estimates of emissions and removals from Land Use, Land-Use Change and Forestry (LULUCF), documentation of the implementation of guidelines given in *2006 IPCC Guidelines for National Greenhouse Gas Inventories (IPCC 2006)* (hereinafter referred to as IPCC 2006 Guidelines), selected parts of the *2013 Supplement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories: Wetlands* (IPCC 2014) (hereinafter referred to as IPCC 2013 Wetlands supplement) and the *2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories* (IPCC 2019), (hereinafter referred to as IPCC 2019 Refinement). The IPCC 2019 Refinement was accepted for use on a voluntary basis for the GHG inventory reports during COP 26 (Glasgow, Nov. 2021). A combination of the IPCC 2006 Guidelines methodologies and updated methodologies/emission factors from IPCC 2019 Refinement has been utilized. The respective implemented methodologies have been determined to most accurately represent the conditions found in Norway, given existing methodology, data, and resource limitations.

All calculations and analyses in this chapter, except the key category analysis (details in chapter 1.4), have been conducted by the Norwegian Institute of Bioeconomy Research (NIBIO).

6.1 Sector Overview

6.1.1 Emissions and removals in the latest reporting year

The LULUCF sector includes both emissions of the greenhouse gases (GHG) CO₂, N₂O, and CH₄ to the atmosphere and the removal of atmospheric CO₂. The balance of the two is net emissions or removals in the LULUCF sector. Positive numbers are used to report net emissions of GHGs, while negative numbers are used to report removals of CO₂.

In the latest reporting year (that is, 2024), the LULUCF sector achieved a net removal of -15 449 kt CO₂ equivalents. This constitutes approximately 35% of the total emissions from all other sectors than LULUCF in the Norwegian GHG accounting.

The main contributor to the net removals in the LULUCF sector was forest land with -19 051 kt CO₂ equivalents. The harvested wood products (HWP) pool also contributed with net removals of -342 kt CO₂. Grasslands added to the sum with - 55 kt CO₂ equivalents.

On the other hand, there were net emissions from cropland, settlements, and wetlands. The highest net emissions were from cropland, primarily drained organic soils, with 2 358 kt CO₂ equivalents. This was followed by net emissions from settlements amounting to 1 292 kt CO₂ equivalents. Wetlands reported the least net emissions with 349 kt CO₂ equivalents. In Norway,

the category "other lands" refers to wasteland areas with bare soil, rocks, and ice with no significant carbon pools, and therefore does not record any emissions.

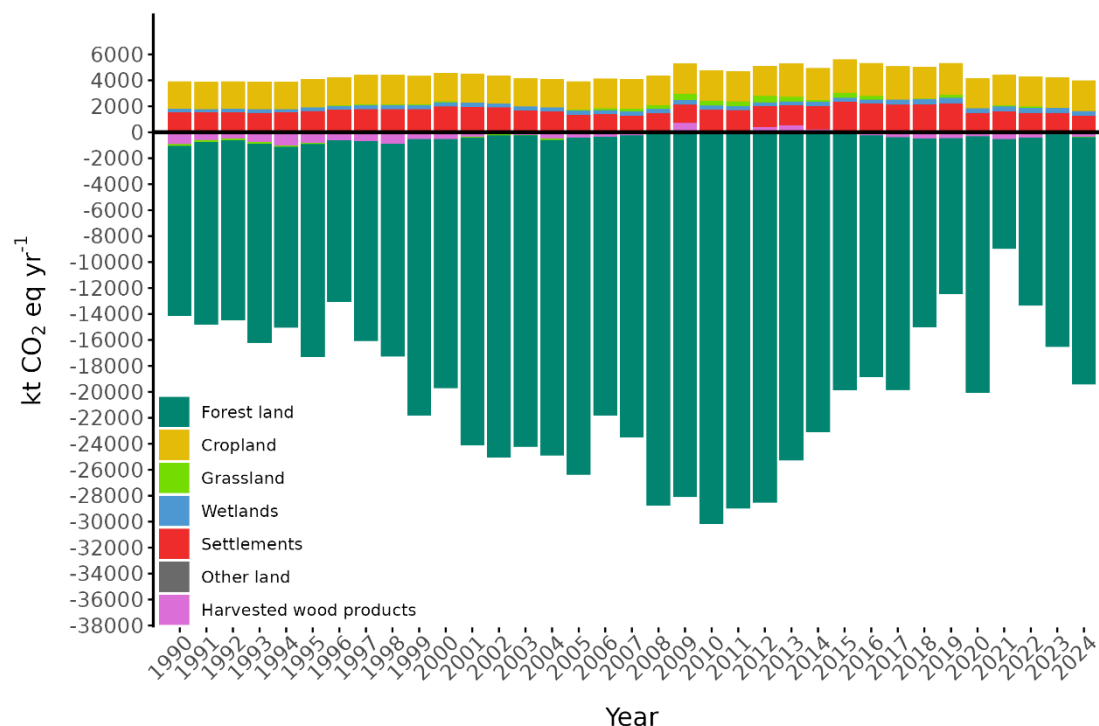


Figure 6.1: Net CO₂ emissions and removals (kt CO₂ equivalents per year) from the LULUCF sector by land-use category (forest land, cropland, grassland, wetlands, settlements, other land, and harvested wood products) from 1990 to the latest reporting year, including emissions of N₂O and CH₄. Negative values are net removals, and positive values are net emissions. Source: Norwegian Institute of Bioeconomy Research.

Within the category of **forest land remaining forest land**, the major contributors to net removals were living biomass, litter, and dead wood. Living biomass accounted for the largest share, contributing to -15 178 kt CO₂ of the total net removals. This was followed by litter and dead wood, contributing -3 293 kt CO₂ and -964 kt CO₂ to the total net removals, respectively. Mineral soils on the same land category removed -211 kt CO₂.

In addition, some carbon pools under **land converted to forest land** further added to the net removals, such as litter (-639 kt CO₂), living biomass (-155 kt CO₂), dead wood (-50 kt CO₂), and mineral soils (-19 kt CO₂).

However, not all activity on forest land resulted in net removals. Net emissions were recorded from drained organic soils, which amounted to 1 218 kt CO₂ in forest land remaining forest land, and 26 kt CO₂ in lands converted to forest land. See Figure 6.2 below.

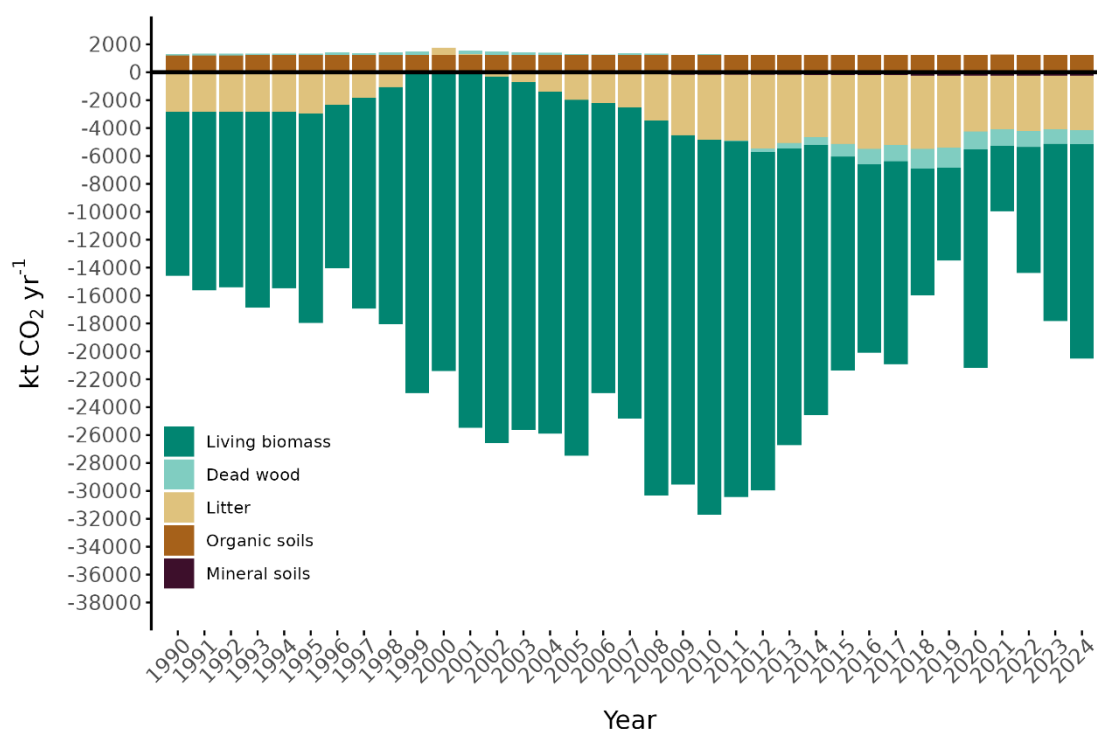


Figure 6.2: Net emissions and removals of CO₂ on forest land, including both remaining and land converted to forest land. The graph shows the aggregated net emissions and removals for both categories. Carbon pools can either act as a source or sink of CO₂, depending on the category, although this might not always be visible in the graph. Non-CO₂ emissions and removals are not included in the graph. Source: Norwegian Institute of Bioeconomy Research.

The category of **cropland remaining cropland** significantly impacted the net emissions of the LULUCF sector. The largest source of net emissions came from organic soils, with a considerable amount of 1 778 kt CO₂.

Regarding **land converted to cropland**, the dead organic matter (DOM) pool was the most significant contributor to net emissions with 252 kt CO₂. Organic soils also added to the net emissions, contributing to 93 kt CO₂. The living biomass and mineral soil pools emitted 72 kt CO₂ and 60 kt CO₂, respectively. See Figure 6.3 below.

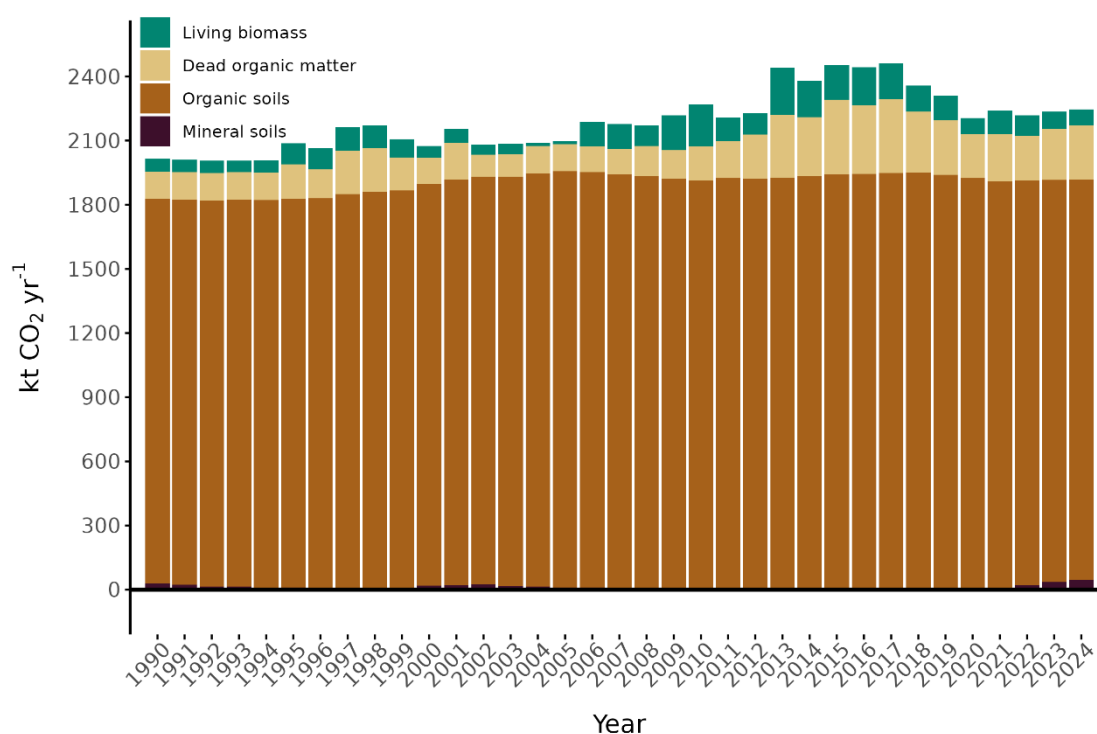


Figure 6.3: Net emissions and removals of CO₂ on cropland, including both remaining and land converted to cropland. The graph shows the aggregated net emissions and removals for both categories. Carbon pools can either act as a source or sink of CO₂, depending on the category, although this might not always be visible in the graph. Non-CO₂ emissions and removals are not included in the graph. Source: Norwegian Institute of Bioeconomy Research.

A large portion of the grassland net emissions came from the category of **land converted to grassland**, in which the DOM pool was the main source, releasing 331 kt CO₂. In contrast, **grassland remaining grassland** was primarily a site of net removals. The living biomass pool was the key contributor, removing as much as - 595 kt of CO₂, although net emissions from organic soils (69 kt CO₂) were also observed under this category. See Figure 6.4 below.

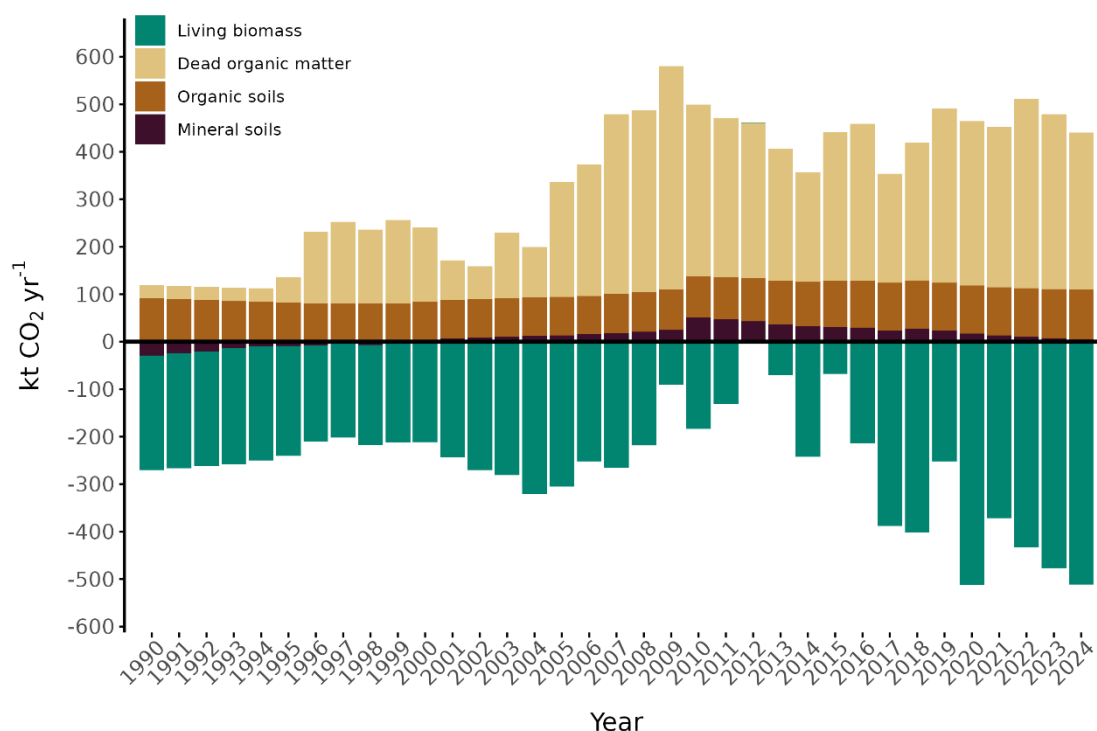


Figure 6.4: Net emissions and removals of CO₂ on grassland, including both remaining and land converted to grassland. The graph shows the aggregated net emissions and removals for both categories. Carbon pools can either act as a source or sink of CO₂, depending on the category, although this might not always be visible in the graph. Non-CO₂ emissions and removals are not included in the graph. Source: Norwegian Institute of Bioeconomy Research.

The category of **wetlands remaining wetlands** consists of peat extraction (only existing areas), wooded mires in managed and unmanaged wetlands, and mires with ditches in organic soil. The organic soils (mires with ditches and peat extraction) were the main net emission source, accounting for 263 kt CO₂ and 58 kt CO₂, respectively. The living biomass pool acted as a sink under wetlands remaining wetlands (- 82 kt CO₂) and as a source under **land converted to wetlands** (27 kt CO₂), resulting in small net removals when aggregating the data. In addition, net emissions from dead wood (28 kt CO₂) were associated with land conversion to wetlands. See Figure 6.5 below.

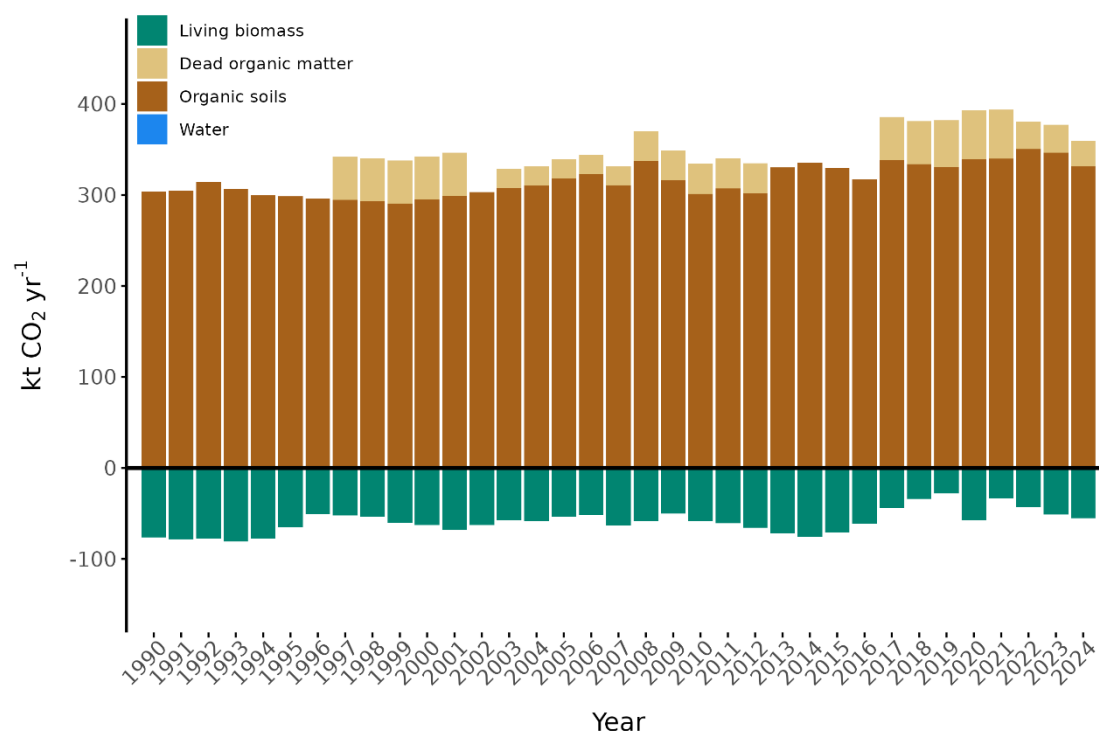


Figure 6.5: Net emissions and removals of CO₂ on wetland, including both remaining and land converted to wetland. The graph shows the aggregated net emissions and removals for both categories. Carbon pools can either act as a source or sink of CO₂, depending on the category, although this might not always be visible in the graph. Non-CO₂ emissions and removals are not included in the graph. Source: Norwegian Institute of Bioeconomy Research.

Lands converted to settlements resulted in net emissions of CO₂. The most significant emissions came from the DOM pool, releasing a substantial 488 kt CO₂, followed by the living biomass pool, emitting 252 kt CO₂. The organic soil pool contributed to net emissions in both **settlements remaining settlements** (178 kt CO₂) and lands converted to settlements (208 kt CO₂). See Figure 6.6 below.

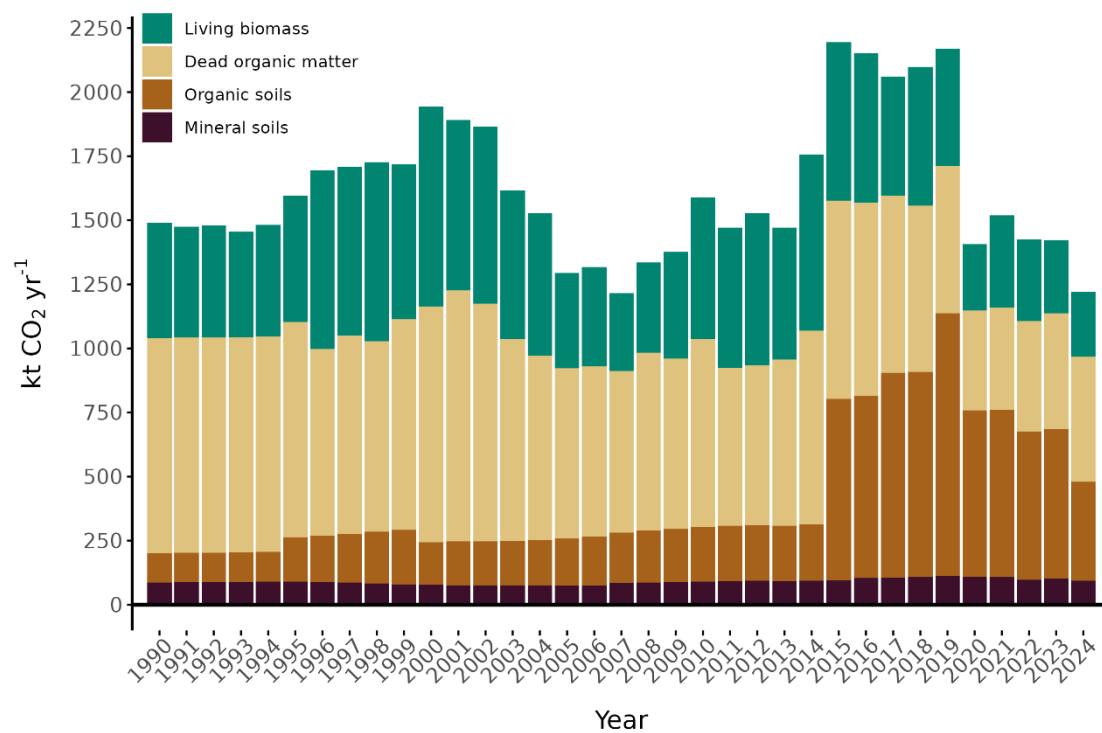


Figure 6.6: Net emissions and removals of CO₂ on settlements, including both remaining and land converted to settlements. The graph shows the aggregated net emissions and removals for both categories. Carbon pools can either act as a source or sink of CO₂, depending on the category, although this might not always be visible in the graph. Non-CO₂ emissions and removals are not included in the graph. Source: Norwegian Institute of Bioeconomy Research.

The **Other land sector** did not contribute to either CO₂ emissions or removals within the LULUCF sector. No emissions or removals were reported for both categories - other land remaining other land, and land converted to other land.

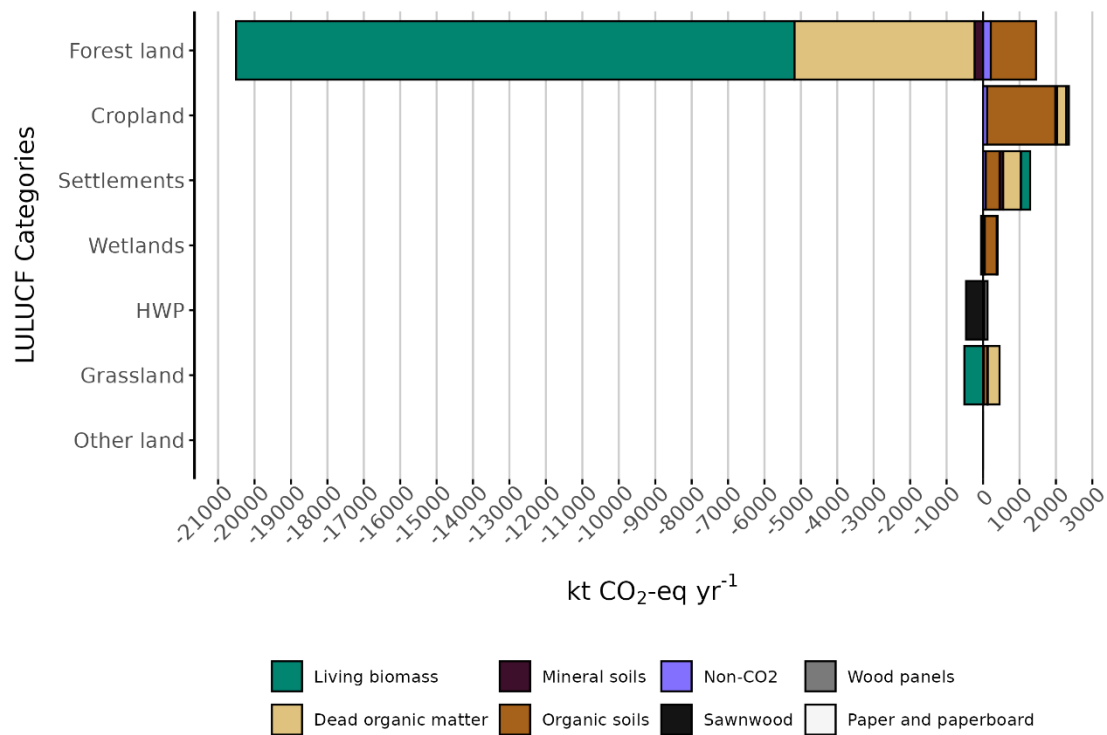


Figure 6.7: Net CO₂ emissions and removals (kt CO₂ equivalents per year) by land-use category (forest land, cropland, grassland, wetlands, settlements, other land, and harvested wood products) for the latest reporting year, including emissions of N₂O and CH₄. Negative values are net removals, and positive values are net emissions. Land-use categories are ordered from highest to lowest impact on the LULUCF sector. Source: Norwegian Institute of Bioeconomy Research.

6.1.2 Trends

Over the years, the LULUCF sector has undergone significant changes. Simply comparing the latest reporting year with 1990 does not capture the variability in net emissions and removals throughout this period (see Figure 6.1). Given the availability of data spanning more than 30 years, a linear regression was applied to each land-use change and remaining category to better understand long-term trends. The linear regression model used follows the equation:

$$Y = \beta_0 + \beta_1 X + \varepsilon$$

Where Y represents net emissions or removals for a given year, X is the reporting year, β_0 is the intercept, β_1 is the slope, which indicates the direction and rate of change over time, and ε represents the residual error.

This statistical method allowed for the calculation of a slope for each category, which indicates the direction and rate of change within each category over time.

The slope represents the average change in net emissions or removals per year. A positive slope indicates an increasing trend, while a negative slope suggests a decreasing trend. To ensure the reliability of the results, only categories with a significant trend (defined as a p-value below 0.05) were considered.

The categories were classified into two main groups: carbon sinks (where carbon is removed) and carbon sources (where carbon is released). Within these groups, the sign of the slope determined whether emissions or removals were increasing or decreasing over time. This approach resulted in four distinct trend categories: (1) increasing removals, (2) decreasing removals, (3) increasing emissions, and (4) decreasing emissions. The results are presented in Table 6-1.

Table 6-1: Trends in net emissions and removals from 1990 to the latest reporting year. The green upward arrow indicates a positive trend, with an increase in net carbon removals and storage over time; the yellow downward arrow represents a negative trend, showing that while the category remains a carbon sink, its net carbon removal has been declining; the red downward arrow reflects a negative trend, indicating a long-term increase in net carbon emissions or more frequent emission events; and the yellow upward arrow also represents a positive trend, demonstrating progress toward reducing greenhouse gas emissions, although the category remains a net carbon *source*.

Trend category	Land Use Change Category	Source/Sink	Impact trend	Average change per year - slope (kt CO ₂ eq)
increased removals	Forest land remaining forest land	Litter	↑	-99.6
	Forest land remaining forest land	Dead wood	↑	-49.1
	Grassland remaining grassland	Living biomass	↑	-11.1
	Forest land remaining forest land	Mineral soils	↑	-5.8
reduced removals	HWP - Export	Wood panels	↘	1.7
increased emissions	HWP-Export	Paper and paperboard	↓	16.5
	Forest land converted to grassland	Dead Organic Matter	↓	10.7
	Forest land converted to settlements	Organic soils	↓	7.2
	Cropland remaining cropland	Organic soils	↓	7.1
	Forest land converted to grassland	Living biomass	↓	6.6
	Cropland converted to settlements	Organic soils	↓	6.2
	Settlements remaining settlements	Organic soils	↓	4.9
	Forest land converted to cropland	Dead Organic Matter	↓	4.7

	HWP-Domestic	Wood panels	↓	4.6
	Forest land converted to cropland	Living biomass	↓	2.0
	Grassland remaining grassland	Mineral soil	↓	1.6
	Other wetlands remaining other wetlands	Organic soils	↓	1.3
	Wetlands converted to grassland	Organic soils	↓	1.0
	Forest land converted to other wetlands	Living biomass	↓	0.9
reduced emissions	Forest land converted to settlements	Dead organic matter	↗	-11.4
	Forest land converted to settlements	Living Biomass	↗	-6.1
	Wetlands converted to cropland	Organic soils	↗	-2.4
	Wetlands converted to forest land	Living biomass	↗	-1.6
	Forest land converted to cropland	Organic soils	↗	-1.0

Among the pools with **increasing carbon removals**, the most significant changes were observed in litter and dead wood within forest land remaining forest land. This trend is attributed to higher harvesting levels and increasing natural mortality, which transfer carbon from living biomass to dead organic matter. This trend is likely to continue in the near future. In addition, living biomass stocks in grassland remaining grassland have shown an upward trend, becoming more evident following the implementation of a Tier 3 method for extensive grasslands.

Conversely, in Harvested Wood Products (HWP), a **reduction in removals** was observed in wood-based panels. The downward trend in wood-based panels is likely due to production variability caused by the limited number of manufacturing facilities.

In terms of **increasing emissions** trends, the export of paper and paperboard has risen, primarily due to reduced production following the closure of factories from 2006 onwards. Emissions have also been observed in the dead wood and living biomass pools associated with increasing deforestation from 2010 – that is, conversions from forest land to grassland, cropland, and wetlands. Emissions from organic soil have significantly increased in remaining categories (cropland remaining cropland, settlements remaining settlements, and wetlands remaining wetlands - managed) as past conversions become consolidated into remaining categories after 20 years, as per IPCC rules. Emissions from organic soils in specific land conversion categories (cropland to settlements, and wetlands to grasslands) also appear as trends; however, these conversions are relatively recent, captured in only a few NFI cycles. Consequently, the regression may yield a great slope that does not necessarily represent a true trend, as explained at the end of the section. Finally, mineral soils in grasslands remaining grasslands went from a carbon sink to a carbon source, due to a steady decrease of the share of no-till cultivated grass pastures relatively to closed pastures, since the latter carbon stock factor is 12% lower.

On the other hand, a couple of pools have shown a **reduction in emissions**, which is a positive trend. Improvements in the dead wood pool have been observed in conversions from forest land to settlements, indicating reduced deforestation in this category. The living biomass carbon pool in wetlands to forest land conversions (afforestation) went from a carbon source to a carbon sink over the years, as a result of an increasing area under this category. In organic soils, the area of some land conversions (wetlands to cropland and forest land to cropland) has decreased over time, along with the associated emissions. Similarly, the living biomass emissions from forest land to settlements have diminished, following the same trend as the areas in this category.

When using the slope of a linear regression to assess trends in carbon emissions and removals, some uncertainty is always present. The slope evens out short-term ups and downs changes, but may miss changes in the trend that break with the assumed linearity. Moreover, the reliability of the slope depends on how often a category is recorded in the data series. While a low p-value increases confidence in the results, it doesn't eliminate the risk of random variations affecting the trend's accuracy. The uncertainty is underestimated, as the estimations are based on aggregated numbers, and the uncertainty in the underlying data is not accounted for.

6.1.2.1 Annual variation in CO₂ removals on forest land

Forest land is the largest land-use category with the largest annual variation in CO₂ removals. The carbon stock in tree living biomass on forest land has increased throughout the inventory period (Figure 6.8).

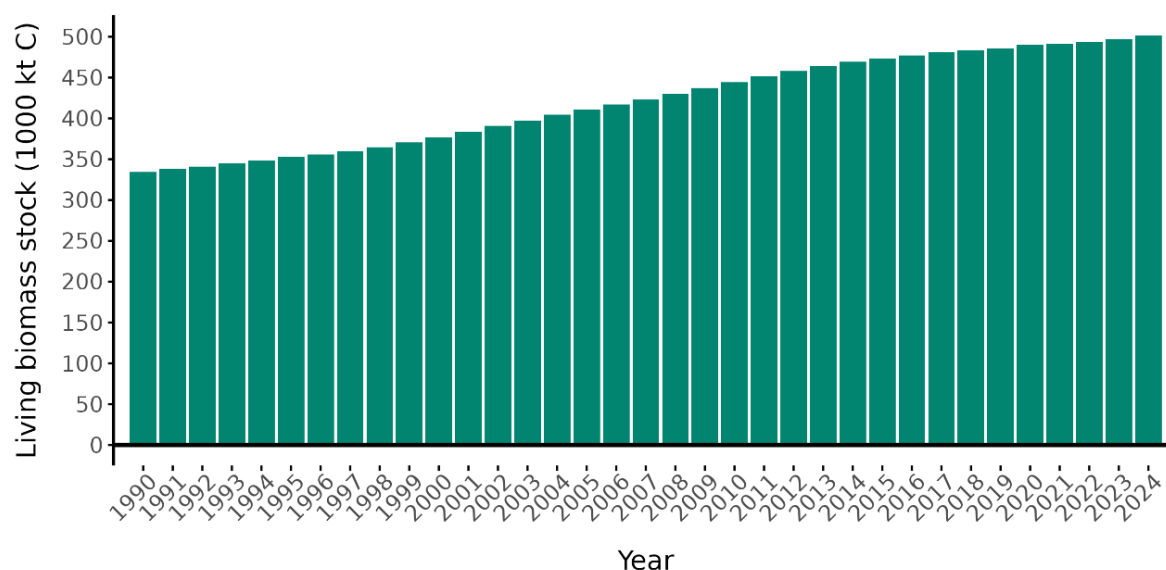


Figure 6.8: Development of the carbon stock in tree living biomass on forest land from 1990 to the latest reporting year. Source: Norwegian Institute of Bioeconomy Research.

Since 1989, the carbon stocks in living biomass in the LULUCF sector have increased by around 47% (Table 6-2). This increase is mainly due to the increase in the growing stock of forest land.

Table 6-2: Carbon stocks in 1989 and 2022 and differences in carbon stocks compared to 1989 as a total for all land-use categories, including associated uncertainties. The estimates are based on the sample plots in the lowland forest outside Finnmark (>16 000 plots). SE = standard error.

Year	Carbon stock (kt)	Carbon stock difference to 1989 (kt)	2 SE (%) of the carbon stock difference to 1989
1989	313 212		-
2022*	460 597	147 385	6

*The estimates are based on the last five years sampled in the National Forest Inventory (2020 – 2024). The estimate is, therefore, valid for mid-year 2022.

The increase in carbon stock in tree living biomass since 1990 is caused by several factors. The net increment increased all the years until around the year 2000, and both annual increment (Figure 6.9) and net CO₂ removals (Figure 6.2) peaked around 2009 but are still at a very high level compared to the conditions in the past 100 years. Since the middle of the last century, the levels of annual fellings have been much lower than the annual increment, causing an accumulation of tree-biomass.

The forest age-class structure is a main driver of the overall pattern of the increment. In Norway, industrial forest management combined with forest policy to rebuild the country after World War II led to intensive forest management and a large national effort to invest in forest tree planting. That led to an increase in productive forest areas and more productive forests in already existing forests. From 1955-1992, more than 60 million trees were planted annually, with a peak of more than 100 million planted annually in the 1960s. The number of planted trees decreased from 1990 to 2005. However, since 2006, the number of planted trees has steadily increased from 19 million to 48 million trees in 2024 (Statistics Norway 2023). Given rotation ages and stand dynamics of forests in Norway, the historic management can explain the overall pattern of a strong increase in increment in the period where a large proportion of the forest is in the prime production age (1970 - 2005) followed by a peak/stabilization of the increment when a large part of the forest start to mature and hence reduce increment (2005 - 2018) followed by a future decline that already is starting to be apparent in the data.

The climate also has a strong effect on forest growth and mortality. Since the 1980s, we have seen a strong warming trend over mainland Norway, which in most years is also associated with sufficient precipitation to make for significantly improved conditions for tree growth. The climatic effect on increment is expected to have further enhanced the already expected increase in increment from 1980 onwards. However, the exact contributions of climate versus age-classes effects are difficult to disentangle. Some of the fluctuations in increment over the past 15 years are also expected to be climate-driven. They can be attributed to both years with very favorable growing conditions and a few years with some summer drought.

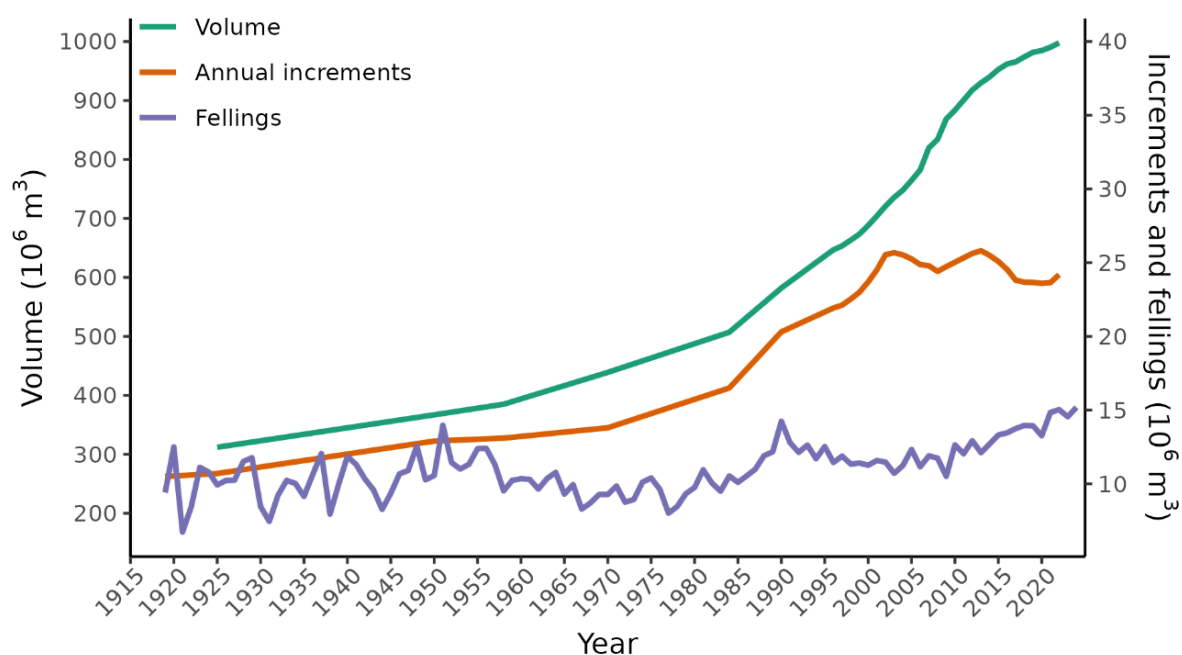


Figure 6.9: Forest felling, annual increments, and volume (without bark) from 1919 to the latest reporting year. Source: Norwegian Institute of Bioeconomy Research and Statistics Norway.

6.1.2.2 Cumulative net emissions from land-use change from 1990 to the latest reporting year

Most emissions related to land-use change are the result of deforestation. Cumulative deforestation accounts for approximately 79 million tonnes of CO₂ equivalent, representing approximately 97% of emissions related to land-use changes. Approximately 65% of deforestation emissions are from the loss of forest land to settlements. Most carbon removals are related to afforestation. Cumulative afforestation accounts for removals of approximately 18 million tonnes of CO₂, which is approximately 100% of all the removals associated with land-use changes. Around 40% of afforestation is from grasslands to forest land and is largely due to the shift of the forest line further up in elevation with warmer temperatures, reduced outfield grazing, and the abandonment of land previously used as intensive grassland. See Figure 6.10 for an overview of the distribution of cumulative net emissions.

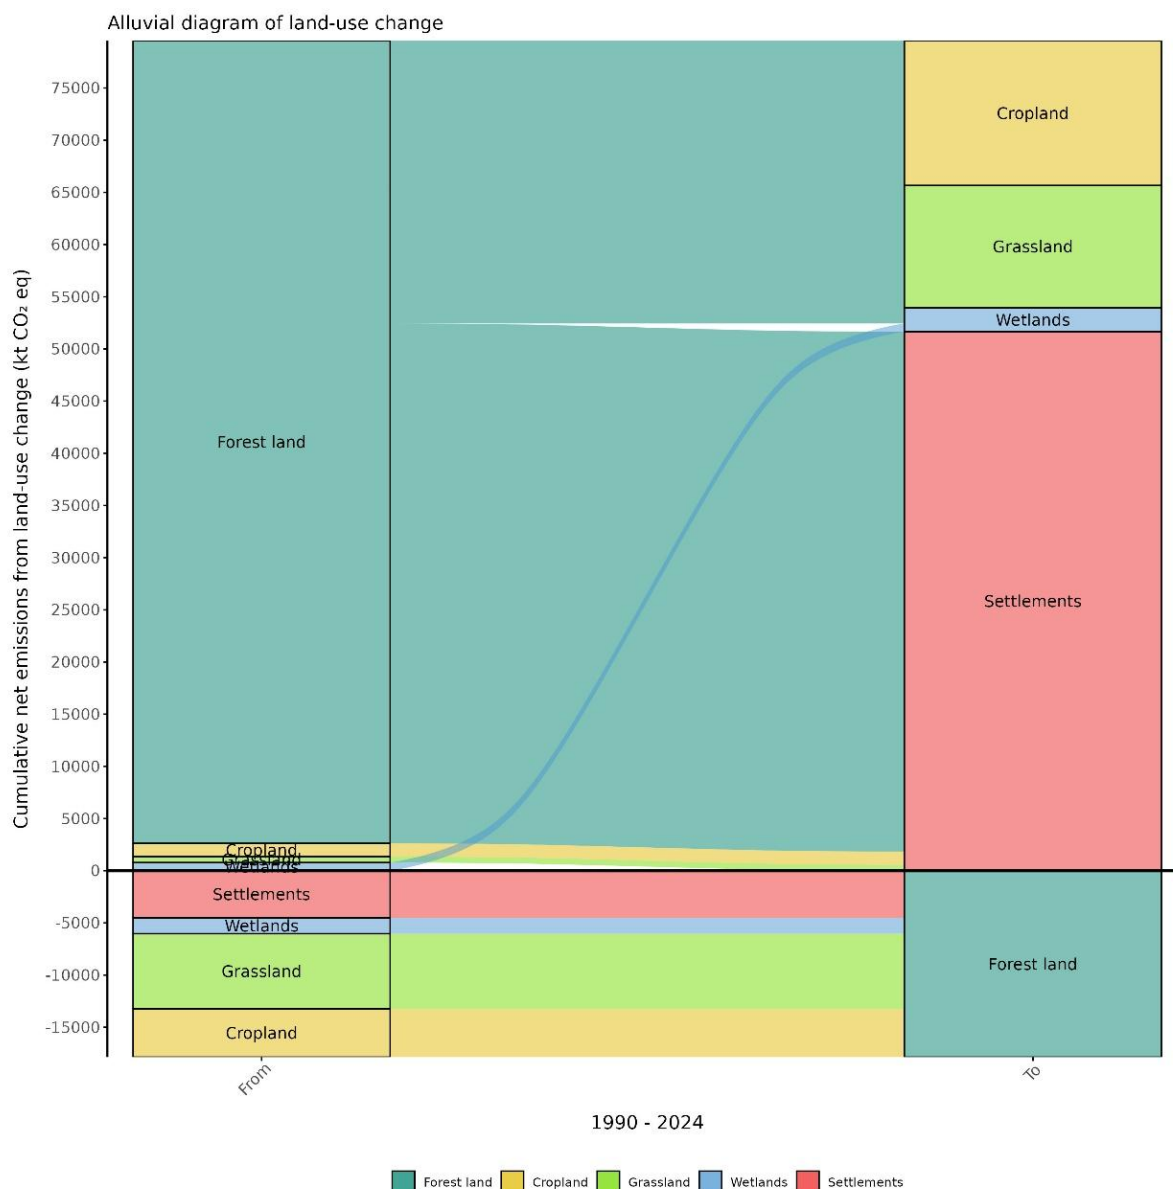


Figure 6.10: Distribution of cumulative net emissions and removals from land use transitions among IPCC land use categories from 1990 to the latest reporting year. Land-use changes with cumulative net emissions and removals less than 500 kt CO₂ equivalents are excluded from the figure as they are relatively small and not very visible. Source: Norwegian Institute of Bioeconomy Research.

6.1.3 Activity data

6.1.3.1 Data sources

Activity data is key for calculating emissions and removals in the LULUCF sector. The National Forest Inventory (NFI) provides estimates for forest land, cropland, grasslands, wetlands, and settlements. It also includes other land-use categories and land use changes between them. Supplementary data is provided by other sources and used to complement, enhance, or stratify


estimates. These varied data sources help build the Greenhouse Gas (GHG) inventory for the LULUCF sector. Table 6-3 lists these sources, the data provided, and the categories they apply to.

Table 6-3: Data sources of the LULUCF GHG inventory.

Data source	Data	Categories
National Forest Inventory (NFI)	Areas of various land categories and their sub-categories, and transitions between these land-use categories	Forest land, cropland, grasslands, wetlands, settlements, and other land
	Changes in Carbon (C) stocks in tree living biomass	Forest land, Grasslands, Wetlands, and deforestation
	Carbon stocks in tree living biomass and mortality for modelling changes in the carbon stock in Yasso07	DOM and mineral soil for forest land remaining forest land
Statistics Norway	Forest fertilizers, sludge application, area per crop type, manure statistics, areas of orchards, harvest statistics, proportion of no-till cultivated pastures	Forest land, settlements, cropland, grasslands
Norwegian Food Safety Authority	Volume of peat and emission factor for calculating emissions (off-site)	Wetlands
Directorate for Civil Protection (DSB)	Number and area of forest fires	Forest land
FAO Forestry Statistics	HWP volumes for each category	HWP
Global Forest Change	Tree cover loss	Forest land
Norwegian Mapping Authority	Total land area of Norway	All land uses
SeNorge	Meteorological data for IPCC climate zones	All land uses
	Meteorological data for FAO ecological zones	Forest land (to and from)
	Meteorological data for Yasso07 modelling	DOM and mineral soil for forest land remaining forest land

6.1.3.2 Land-use changes

Forest land is the largest land-use category, covering nearly 37% of the mainland area of Norway. Grassland has the second largest area covering as much as 35% of the mainland, with the vast majority categorized as extensive grasslands. Net land-use changes in Norway from 1990 to the latest reporting year are small compared to the total area. Overall, the area of settlements has increased. All the other land uses have shown a slight decline in area (Figure 6.11).

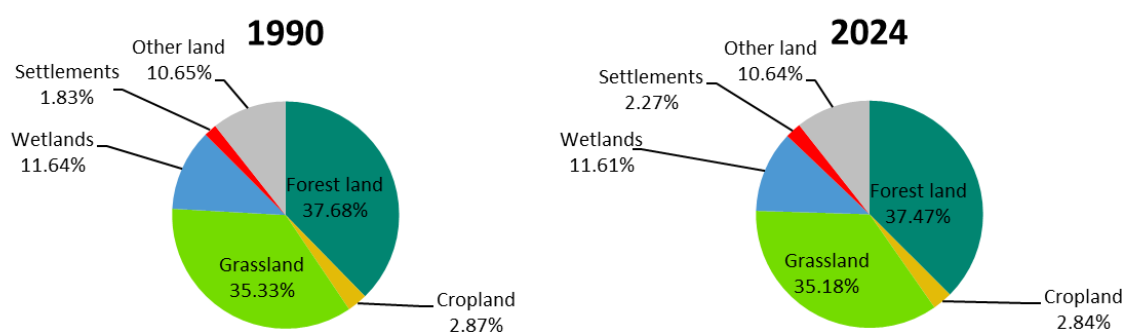

*Figure 6.11: Area distribution of the IPCC land-use categories for 1990 and the latest reporting year.
Source: Norwegian Institute of Bioeconomy Research.*

The land-use changes are illustrated in Figure 6.12 and shown in the land-use conversion matrix for the whole inventory period from 1990 to the latest reporting year (Table 6-4). Approximately 1% of the total land is in a "land-conversion" category, and the rest is in a "remaining" category. The largest changes were in the conversions from forest to settlements, and the net area of settlements has increased. Under the convention reporting, we apply a 20-year transition period, which means that areas are reported under conversion classes for 20 years before they are transferred to the remaining class.

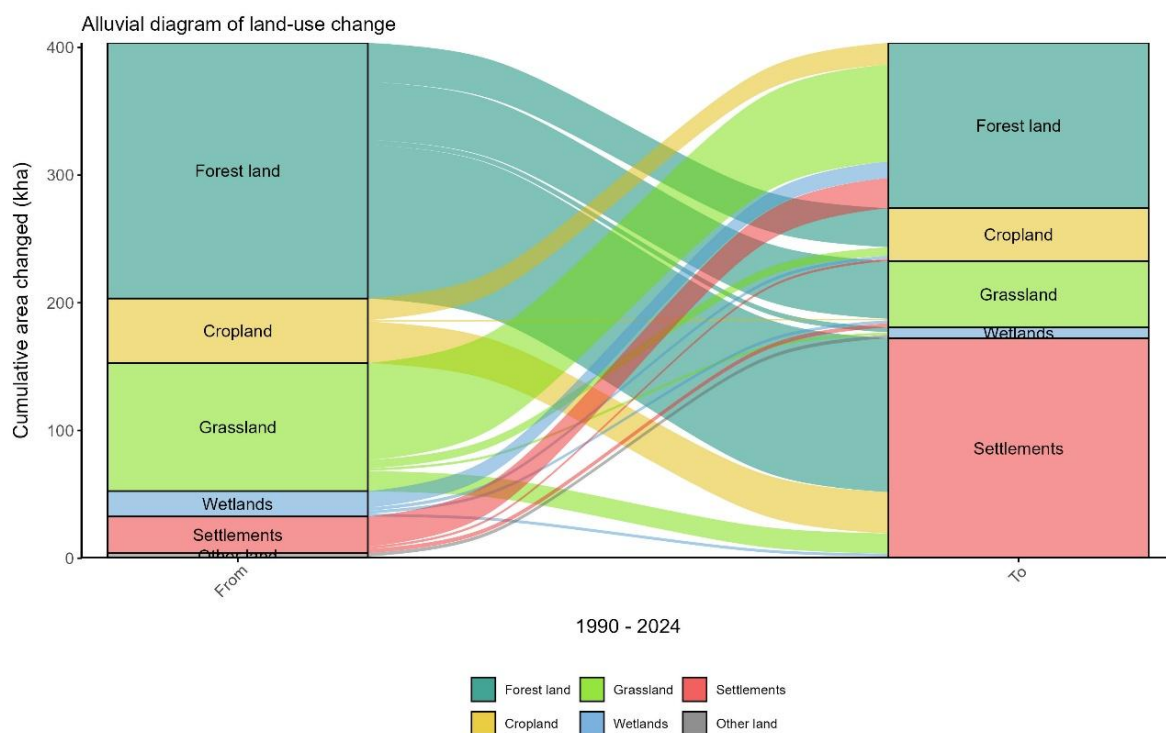


Figure 6.12: Distribution of cumulative area for land use transitions among all IPCC land use categories from 1990 to the latest reporting year. Source: Norwegian Institute of Bioeconomy Research.

Table 6-4: Land-use change matrix for the IPCC land-use categories from 1990 to the latest reporting year. The 20-year transition period is ignored in this table to give a full picture of all conversions that happened in the period. This results in differences in the specific area estimates in the CRT. The column Total* here is nonetheless the same as the sum of lands to and remaining in a category reported in the CRT.

	Land-use (kha)							
Year	2024							
1990	Land-use	Forest land	Crop land	Grass land	Wet lands	Settleme nts	Other land	Total*
	Forest land	12 002.9	30.5	45.3	3.9	120.5	0.0	12 203.1
	Cropland	16.9	878.6	1.1	0.0	32.4	0.0	929.1
	Grasslan d	76.1	6.6	11 339.4	1.9	15.8	0.0	11 439.7
	Wetlands	12.9	2.4	2.3	3 749.9	2.2	0.0	3 769.7
	Settleme nts	23.6	1.8	3.3	0.0	559.6	0.0	588.3

	Other land	0.0	0.0	0.0	2.7	1.3	3 444.2	3 448.3
	Total*	12 132.3	919.9	11 391.4	3 758.4	731.9	3 444.2	32 378.2

*Differences in totals and column or row sums are due to rounding.

6.1.4 Uncertainties

See Annex 2 for a detailed description of uncertainties for the LULUCF sector.

6.1.5 Key categories

See chapter 1.4 for an overview of key categories for the LULUCF sector and its identification criteria.

6.1.6 Quality assurance and quality control (QA/QC) for LULUCF

See Annex 4 for an overview of the QA/QC for the LULUCF sector.

6.2 Land-use definitions and classification system

6.2.1 Land-use definitions

National Forest Inventory (NFI) data are used to estimate the total area of forest land, cropland, grassland, wetlands, settlements, other land, and the land-use transitions between these. The NFI is used as activity data for all land-use categories because it covers the whole country by sample plots. In addition, the NFI is the most reliable data set available that can be used to determine transitions between different land-use categories during the whole reporting period in a consistent manner. The land-use categories are defined following the IPCC 2006 Guidelines. They are described below, using national terminology.

For a unit of land to be classified as separate from an adjacent land-use category, it must have a minimum area and width of 0.1 ha and 4 m, respectively, which is consistent among all land-use categories in Norway. The NFI land cover and land-use categories and their transcription into IPCC land-use categories are illustrated in Table 6-5. All forest land, cropland, grassland, and settlements are managed lands. The vast majority of wetlands and all of other lands are unmanaged. Wetland areas with direct human impact are considered managed. Because managed and unmanaged lands are reported for specific categories, total unmanaged lands are reported as included elsewhere (IE) (CRT Table 4.1).

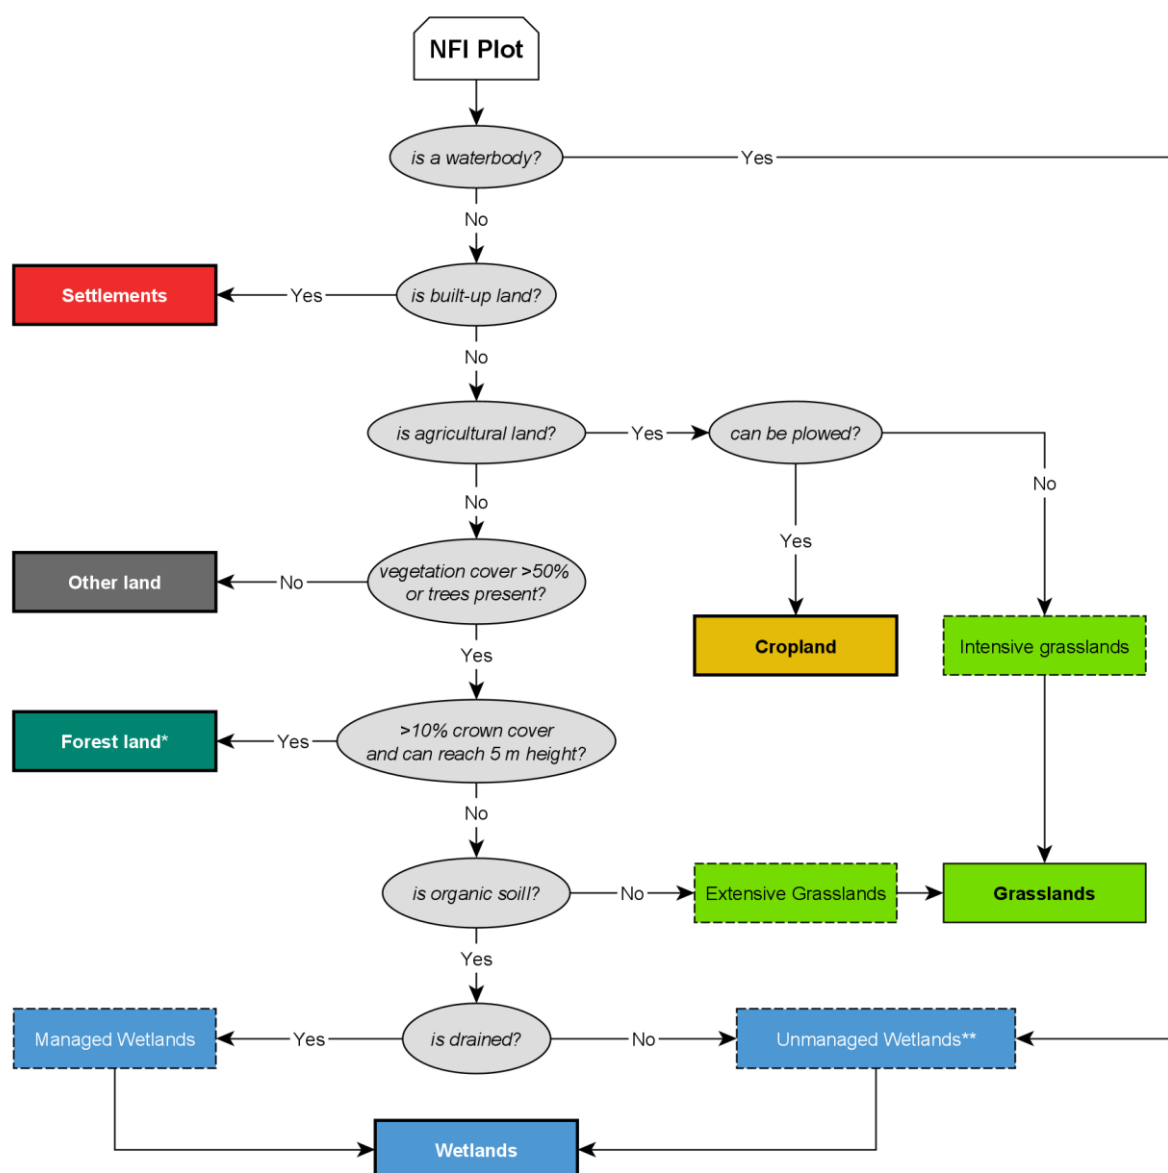


Figure 6.13: Decision tree for land-use classification. An area will remain in a land-use category until it meets the criteria for another land-use category (e.g., cropland areas will remain in the cropland category even though abandoned as long as they do not meet the forest definition or otherwise change land use). *Forest land classification rule exception: Forest land will remain forest land even if it is temporarily below <10% tree crown covers due to harvest or natural disturbances. A land where trees are planted for forest production will be classified as forest land even though they are temporarily below the <10% tree crown cover criteria. **Flooded lands (managed) are not currently included in the national inventory, and as such, all waterbodies, regardless of management status, are reported under unmanaged wetlands.

According to the IPCC 2006 Guidelines, managed land is “*land where human interventions and practices have been applied to perform production, ecological or social functions*”. Norway defines managed lands relative to unmanaged lands as follows:

- Croplands and Settlements are subject to clear human influence and thus are considered managed in their totality.
- Forest lands and Grasslands: Humans have inhabited and influenced the landscapes in Norway for thousands of years. There are long traditions of utilizing both forested and open lands for grazing and other resource use, influencing carbon stocks. Therefore, the Forest lands and Grasslands in Norway are also considered managed in their totality.
- Wetlands consist of both waterbodies and land that is water-saturated during all or most of the year (mires). Most wetland areas are considered unmanaged. Any grazing that may occur here is assumed not to influence carbon stocks significantly. However, wetland areas with direct human impact are considered managed. These are peatland extraction areas and mires with ditches. Further, water reservoirs built in connection with power stations are managed. However, Norway does not report on flooded lands, as these areas are currently not separated from natural waterbodies and are thus reported as unmanaged.
- Other lands are areas with no significant carbon stocks (bare soil, rock, ice), and human activities will thus not influence carbon stocks. These areas are considered unmanaged in their totality.

Table 6-5: NFI land cover and land-usage categories and their correspondence to the UNFCCC land-use categories. Empty cells indicate land usage and land cover combinations that do not exist.

Land Usage Land cover	Forestry, or no specific land usage	City, urban area Settlements of different kinds	Cabin area (6)	Recreation area	Military training field	Protected Area, Nature Reserve	Roads/Railroad Airport	Power line (7)	Other
Productive forest (1)	Forest land	Settlements	Forest land	Forest land	Forest land	Forest land	Settlements	Settlements	Settlements
Non-productive forest (2)	Forest land	Settlements	Forest land	Forest land	Forest land	Forest land	Settlements	Settlements	Settlements
Other wooded land with crown cover 5-10% (3)	Grassland (extensive)	Settlements	Grassland (extensive)	Grassland (extensive)	Grassland (extensive)	Grassland (extensive)	Settlements	Settlements	Settlements
Other non-wooded areas (4)	Grassland (extensive)	Settlements	Grassland (extensive)	Grassland (extensive)	Grassland (extensive)	Grassland (extensive)	Settlements	Grassland (extensive)	Grassland (extensive)

Wooded mire, crown cover 5-10%	Wetlands	Settlements	Wetlands	Wetlands	Wetlands	Wetlands	Settlements	Settlements	Settlements
Coastal heath	Grassland (extensive)	Settlements	Grassland (extensive)	Grassland (extensive)	Grassland (extensive)	Grassland (extensive)	Settlements	Grassland (extensive)	Settlements
Bare rocks & glaciers	Other land	Settlements	Other land	Other land	Other land	Other land	Settlements		Settlements
Non-wooded mire	Wetlands		Wetlands	Wetlands	Wetlands	Wetlands	Settlements		Wetlands
Lakes and rivers (not sea)		Wetlands		Wetlands	Wetlands	Wetlands	Wetlands		Wetlands
Closed pasture grazing land, not regularly cultivated						Grassland (intensive)			Grassland (intensive)
Arable land, regularly cultivated						Cropland			Cropland
Other areas (5)	Settlements	Settlements		Settlements	Settlements	Settlements	Settlements	Settlements	Settlements

1) Productive forested area is defined as a forest with crown cover that exceeds 10% and with a potential yield of stem wood, including bark of $> 1 \text{ m}^3 \text{ ha}^{-1} \text{ yr}^{-1}$.

2) Non-productive forested area is defined as a forest with crown cover that exceeds 10% and with a potential yield of stem wood, including bark of $< 1 \text{ m}^3 \text{ ha}^{-1} \text{ yr}^{-1}$.

3) Other wooded land is defined as land with sparse tree cover with crown cover between 5 and 10% and hosts trees that have the potential to reach a height of 5m or with a combined cover of shrubs, bushes, and trees above 10%. It is classified as other wooded land when found on mineral soil (organic layer $< 40 \text{ cm}$ deep) and as wooded mire, if found on organic soil (organic layer $> 40 \text{ cm}$ deep).

4) Land on mineral soil with no trees, or less than 5% crown cover, or less than 10% crown cover if a combination of shrubs, bushes, and trees.

5) Gravel pits, mines, gardens, halting places, skiing slopes, forest roads, etc.

6) Excluding the area covered by cabins themselves, including a 5 m buffer classified as settlements.

7) Only recorded for tree-covered land usage categories affected by different management under power lines.

Forest land (4A) is defined in the National Forest Inventory (NFI). The values used in the NFI are in accordance with the range of parameters in the definition from the Global Forest Resources Assessment 2005 (FAO 2006). Forest land is land with tree crown cover $> 10\%$. The trees must be able to reach a minimum height of 5 m at maturity in situ. The minimum area and width for forest land in the Norwegian inventory are 0.1 ha and 4 m. Forest roads are considered settlements. The minimum area and width are consistent among all land-use categories in Norway. Young natural stands and all plantations established for forestry purposes, as well as

forest land, which is temporarily unstocked due to, e.g., harvest or natural disturbance, are included under forest land. All forests in Norway are managed either for wood harvesting, protection (conservation of biodiversity and cultural heritage), protective purposes (reduction of damage risk to infrastructure and other land uses from natural hazards), recreation, and/or to a greater or lesser extent, hunting and berry picking. On more marginal and less productive forest land, the various management practices may be less intense but still be present. Hence, all forests in Norway are considered managed.

Cropland (4B) is part of agricultural land. It is defined as annually cropped lands, regularly cultivated, and ploughed. Both annual and perennial crops are grown. It also encompasses grass leys in rotations with annual crops, which may include temporarily grazed fields regularly cultivated. This category includes arable land that was previously annually cropped and regularly ploughed but has since been abandoned. These areas remain in the cropland category until they have regrowth of trees that make them unsuitable for ploughing. All cropland is considered managed.

Grassland (4C) is defined in two sub-categories:

(1) Intensive grassland is part of agricultural land. The areas are utilized for grazing on an annual basis. Over 50% of the area is covered with grass, which may be partly covered with trees, bushes, stumps, rocks, etc. The grass may be mechanically harvested, but the soil cannot be ploughed. An area will be classified as intensive grassland even though it meets the forest definition (> 10% crown cover) if grazing is the dominant land-use.

(2) Extensive grasslands are areas on mineral soil with significant carbon stock that do not fall into any of the other five land-use categories, such as heath and other wooded lands (i.e., land with sparse tree cover) and open areas with ground vegetation. Most of these areas are outfield grazing areas and are grazed to some extent.

All grassland is considered managed.

Wetlands (4D) are defined as lakes, rivers, mires, and other areas regularly covered or saturated by water for at least part of the year. Trees may stock mires, but with a tree coverage that does not meet the forest definition. All waterbodies are reported as having mineral soil, while mires are reported as having organic soil. Most wetlands are assumed to be unmanaged. Wetland areas with direct human impact are considered managed. These are peatland extraction areas and mires with ditches. Further, water reservoirs built in connection with power stations are managed. However, as these areas are currently not separated from natural waterbodies, they are reported as unmanaged.

Settlements (4E) include all types of built-up land: houses, gardens, villages, towns, cities, parks, roads, railways, golf courses, sports recreation areas, power lines within forests, areas close to cabins (< 5m), industrial areas, gravel pits, and mines. All settlements are considered managed.

Other land (4F) is defined as areas without significant carbon pools, such as bare soil, rocks, and ice, that do not fall into the other five land-use categories. Other land is considered unmanaged.

Table 6-6: Management status of different land-use categories. An area is only classified as belonging to one land-use category. The predominant national land cover and land use determine the assigned category.

Land-use category	Management status
Forest land	Managed
Cropland	Managed
Grassland	Managed
Wetlands	Unmanaged and managed (small area)
Settlements	Managed
Other land	Unmanaged

6.2.2 Consistency in areas and reporting categories

6.2.2.1 Area consistency

Until the 2010 submission, the area of the different land-use categories was based on sample plots below the growth limit of coniferous trees. To determine the land use at higher elevations and in Finnmark County, the NFI included the first complete set of sample plots for these areas from 2005 - 2010. That allows for assessment of the extent of forest area, other wooded land, and other land uses in these areas. The plots are incorporated into the ordinary management plan for the NFI. On plots without previous measurements, land use and biomass development were estimated back to 1990 (backcasting) using data from the NFI, maps, and aerial photographs for settlements, grassland, and cropland. That was done to improve the area estimates from 1990 for all new plots included in the system.

The definitions of land cover and land-usage categories have been consistent for most categories since the permanent plots were established in 1986 - 1993. There have, however, been some changes in definitions throughout this period that have affected the land-use change matrix. The most important change relates to the forest definition. In 2005, the NFI forest definition was adjusted to the definition of forest land (IPCC 2003), replacing a similar but not identical definition. The change in the forest definition did not result in an inconsistency in the time series because the new definition was also applied to NFI data acquired before 2005. Also, the category grassland had not been defined in the land-use classification in the first cycle of the NFI with permanent sample plots (6th NFI, 1986 - 1993). The land-use classes assessed in the 7th NFI (1994 - 1998) have been utilized for the corresponding plots in the 6th NFI. The Norwegian Mapping Authority provided the value for the total land area of Norway.

6.2.2.2 Land subject to multiple land-use changes

A few plots undergo multiple land-use change transitions within the 20-year period. Such plots create issues applying the 20-year transition rule and constructing the land-use change matrix (Table 6-4). The technical implementation of plot-wise instead of panel-wise (aggregation of multiple plots) interpolation and extrapolation for area estimates (see section 6.3.5) allows for each transition to be tracked yearly for the whole time series. The tracking then allows the possibility to capture which plots have undergone more than one land-use change and for which transitions the 20-year conversion rule should be applied.

6.2.3 Sink/source categories

Carbon stock changes (hereinafter referred to as CSC) are reported for the five main pools under the UNFCCC: living biomass (gains and losses), litter, dead wood, mineral soils, and organic soils. Litter and dead wood are summed for all land-use classes, except for forest land, and reported as the DOM pool. The pools are defined as follows.

- **Living biomass:** For all land-use categories, except cropland, tree living biomass is defined as the biomass of living trees with a breast height diameter > 50 mm. Table 6-7 describes in which land-use categories tree living biomass is measured by the NFI. The tree biomass is the sum of the biomass estimates of the tree fractions: stem wood, stem bark, living branches, dead branches, needles or leaves, stump, and roots down to a root diameter of 2 mm (see section 6.4.1). On cropland remaining cropland, CSC in perennial tree living biomass is calculated on areas with fruit trees. In addition, other non-woody forms of living biomass exist, such as the biomass of herbaceous plants, grass living biomass, and annual crop living biomass, which are considered in the case of land use changes.

Table 6-7: Measurements of tree parameters in the NFI given Norwegian land cover (No. Arealtype) and land-usage (No. Arealanvendelse) classes. Green cells indicate the measurement of trees (a = measurements since 2007, and b = measurements since 2010). Grey cells indicate that trees are not measured on that land-use class. Not all land use and land cover combinations exist (see Table 6-5).

Land cover	Land usage								
	Forestry (no other use or restrictions)	City urban area Settlements of different kinds	Cabin area	Re-creation area	Military training field	Protected Area, Nature Reserve	Roads, Railroad, Airport	Power line	Other
Productive forest land (1)								b	
Non-productive								b	

forest land (2)									
Other wooded land, crown cover 5-10% (3)								b	
Non-wooded, mineral soil								b	
Wooded mire, crown cover 5-10%								b	
Coastal heath								b	
Bare rocks and soil								b	
Mire without tree cover									
Lakes and rivers (not sea)									
Grazing land, not regularly cultivated	a	a	a	a	a	a	a	a	a
Arable land, regularly cultivated									

- Litter:** For forest land remaining forest land, the changes (model-generated) in the DOM pool are the changes resulting from the modelled input and decomposition of all dead organic material (woody and non-woody, aboveground and belowground; carbon input), regardless of size and stage of decomposition. Only the most recalcitrant material (humus) originating from root decomposition is allocated to the soil pool. The changes in the litter and the dead wood pools, respectively, are allocated according to the origin of the model carbon input (aboveground or belowground elements), the chemical quality, and the size of the carbon input elements – see details in section 6.4.1. For land converted to or from forest land, the litter pool entails the default carbon stocks, as presented in the IPCC 2019 Refinement for the ecological zones and forest types, which are most representative of the conditions found in Norway, as determined by expert judgment. Fine woody litter (dimension 1-7.5 cm) is included in the litter pool using Canadian data, as such data is unavailable for Norway (see details in section 6.4.2). Changes in the litter pool are computed (instant oxidation or accumulation over a specific length of time) according to the IPCC 2006 Guidelines.

- Dead wood:** For forest land remaining forest land, the estimates for CSC in the dead wood pool are modelled (see above for *litter*). For land converted to or from forest land, the dead wood pool entails nationally determined carbon stocks stratified by dominant tree species and site productivity – see details in section 6.4.2. Changes in the dead wood pool are computed (instant oxidation or accumulation over a specific length of time) according to the IPCC 2006 Guidelines.
 Mineral and organic soils: Because soil mapping was historically covered by three entities (mapping schemes), separating organic and mineral soils differs somewhat between forest land, cropland, and grassland. On forest land, wetland, and other wooded land, organic soils mapping was performed by the NFI and was defined as having an organic layer deeper than 40 cm with no requirement for minimum carbon content. On cropland and intensive grasslands, organic soils were partially mapped by a national soil survey (The Norwegian agricultural soil classification database). They were defined as organic when classified as Histosols, according to the World Reference Base WRB (2015). So far, the soil survey covers approximately 61% of all croplands and 6% of all intensive grasslands. The remaining non-covered area for cropland (39%) and intensive grasslands (94%) classification was derived from the national land resource map AR5 (NIBIO Annually) based on old economic maps, where organic soils were defined by a topsoil organic layer deeper than 20 cm (cropped land) or 30 cm with no requirement on minimum carbon content. Mineral soil types are areas not considered as either organic soils or barren lands (see above under “other lands”). For forest land remaining forest land, the estimates for CSC in the soil pool (mineral soil) are modelled (see above for *litter*). For land converted to or from forest land, the soil pool (mineral soil) entails the default carbon stocks as presented in the IPCC 2019 Refinement for the IPCC stratification zones relevant for Norway, with changes computed according to the IPCC 2006 Guidelines. As strict correspondence of national soil survey with the official organic soil definition of WRB (2015) would be impossible due to the lack of data required to apply the WRB definition (Table 6-8). Therefore, the general term “organic soil” is currently used consistently throughout this report to refer to the three definitions mentioned above. It should be noted, however, that Norway is currently revising the classification of organic soils by adopting a single, consistent definition across all land-use categories (see Planned Improvements, section 6.4.1.5).

Table 6-8: Organic soil definition for the three entities that participated in the Norway carbon mapping compared with the WRB definition.

Entities	Land use covered	Topsoil organic horizon	
		Thickness	C content%
NFI	Forest, other wooded land, and wooded mires	≥ 40cm	-

National soil survey	61% cropland 8% intensive grassland	≥ 40 cm	≥ 10%
AR5	39% cropland 92% intensive grassland	≥ 20 cm	-
WRB (Histosol)	All	≥ 10cm	Rare saturation: >20% in top 20 cm*
			Frequent saturation, clay = 0%: ≥12% in top 20 cm*
			Frequent saturation, clay > 60%: ≥18% in top 20 cm *

*The top 20 cm may partially include the mineral horizon if the organic layer thickness < 20 cm.

6.3 Land area representation and the National Forest Inventory

The area representation applied in the LULUCF reporting is based on the Norwegian National Forest Inventory (NFI). Land accounting is based on Approach 3 according to the IPCC 2006 Guidelines. Under the convention reporting, we apply a 20-year transition period. Hence, land stays in a conversion class for 20 years before transferring it to a remaining class.

6.3.1 Current NFI design

The NFI can be characterized as a single-phase, permanent, systematic, and stratified survey (Breidenbach et al. 2020). An interpenetrating panel design is used, where 1/5th of the sample plots are evenly distributed throughout the country using a Latin square design (the so-called “panel”), and are measured yearly. The same plots are resampled in a 5-year cycle, and all plots are assessed during a 5-year period. The Norwegian Institute of Bioeconomy Research (NIBIO) operates the NFI. Inventory work was started in 1919 with regular inventory cycles. The current system with permanent plots was put in place between 1986 and 1993 and made fully operational for the cycle covering the years 1994 through 1998. Because the strict 5-year re-sampling of field plots was not fully implemented before 1994, the method used to calculate annual emissions and removals is not the same throughout the time-period, and the methods have been bridged. The 13th inventory cycle started in 2025, and it will be completed in 2029.

The NFI divides Norway into four strata: lowlands (below the coniferous limit) except Finnmark county, mountain areas (above the coniferous limit) except Finnmark, lowlands in Finnmark, and mountain areas in Finnmark. The lowland strata contain the most productive forests, while the forests in the other strata consist mainly of low-productive birch forests. The NFI does not consider the Arctic island groups Svalbard and Jan Mayen.

NFI sample plots are placed on the intersections of grid lines to ensure a systematic distribution of the plots (Figure 6.14). The distance between neighboring plots is different between the different strata. A 3x3 km (Easting x Northing) grid is used in the lowlands, including Finnmark county; a 3x9 km grid is used in the mountains not located in Finnmark, and a 9x9 km grid is used in the mountainous area of Finnmark county (Figure 6.15). The lower sampling density in Finnmark, outside coniferous areas, reflects the predominance of unproductive birch forests and

the limited accessibility due to the lack of roads. Fieldwork in these areas is particularly costly, as helicopter transport is required to access the most remote plots. However, since forest type variation in this region is relatively low, the 9 x 9 km grid is considered to provide satisfactory statistical reliability for the inventory.

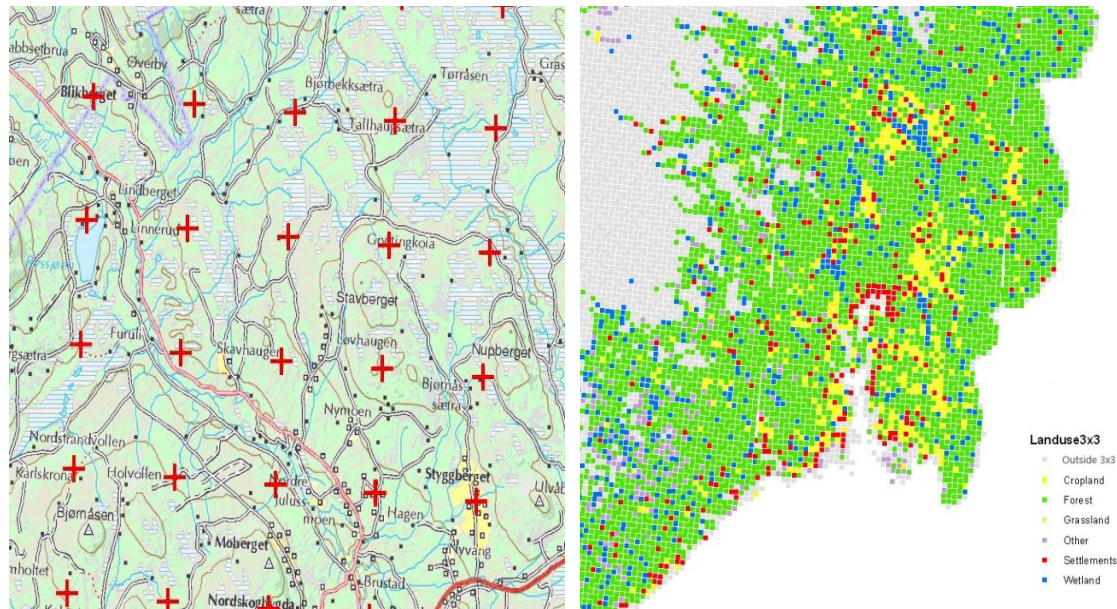


Figure 6.14: The sample plots cover all land-use categories. Plots are placed in the systematic 3x3 km grid in the example map to the left. On the right-hand side, we see the distribution of land use-categories in the southeastern part of Norway below the coniferous tree line (only 3x3 grid).

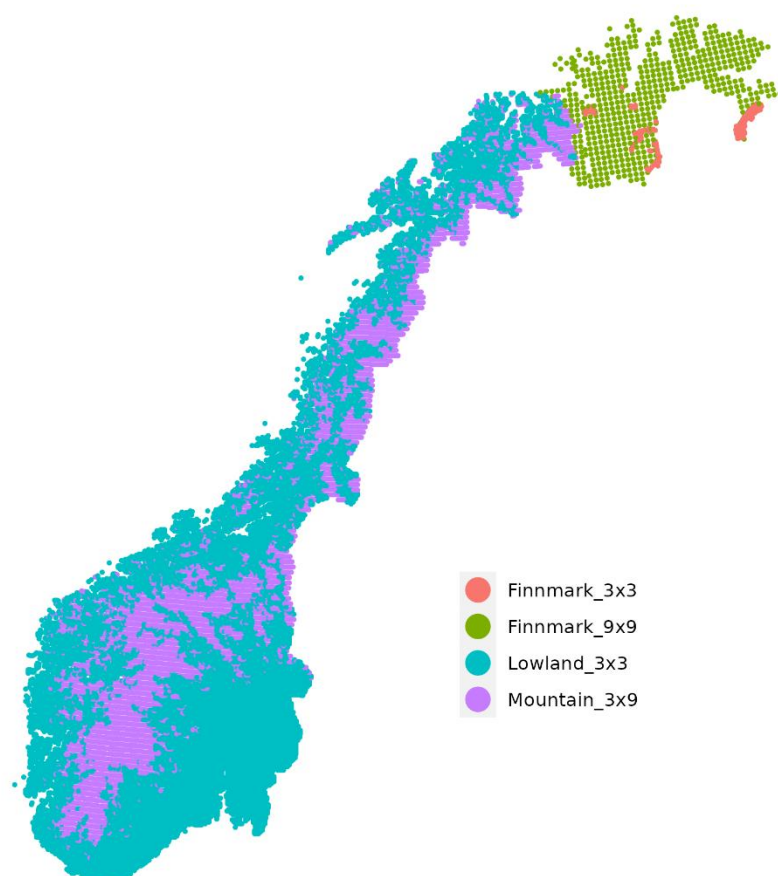


Figure 6.15: Spatial distribution (approximate locations) of the NFI sample plots in the four strata. The sample plots in Finnmark county, located on the 3x3 km grid, cover lowlands, while the sample plots on the 9x9 km grid cover mountainous areas.

As can be seen from the estimate of all land-use categories for 2010, most of the tree living biomass stock is allocated in the lowland forests outside Finnmark, followed by the mountain forest outside Finnmark, the mountain forest in Finnmark county, and the lowlands in Finnmark (Table 6-9).

Table 6-9: Area and estimates of carbon stocks in living biomass in 2010 (the reference year is based on observations from 2008 – 2012) by stratum and associated uncertainties. SE = standard error.

Stratum	Area (kha)	Carbon stock (kt C)	2 SE (%) carbon stock	Percent (%) of total carbon stock
---------	------------	---------------------	-----------------------	-----------------------------------

Lowlands outside Finnmark	14 988	463 832	2.2	94.3
Mountain forest outside Finnmark	12 528	18 586	12.1	3.8
Lowlands in Finnmark	135	2 135	24.1	0.4
Mountain forest in Finnmark	4 727	7 365	26.6	1.5
All	32 378	491 919	2.1	100.0

All forest plots are visited every five years, including those temporarily without trees. Non-forest plots with measured trees during the most recent inventory cycle are monitored using aerial imagery, captured approximately every five years across the entire country. These images are analyzed to assess land-use changes and the presence of trees. If the land-use category cannot be determined with certainty, or if there are indications that one or more trees have grown beyond the minimum measurement threshold, a field visit to the plot is conducted. Exceptions include cropland and settlements, where field visits for measuring tree parameters are not conducted.

Among other attributes, the positions, diameter at breast height (DBH, diameter measured at 1.3 m above ground), and tree species of all trees with DBH ≥ 50 mm are recorded on circular sample plots with a radius of 8.92 m (250 m²). All tree heights are measured using hypsometers on plots with 10 trees or fewer. On plots with more than 10 trees, heights are measured on a relascope-selected subsample with a target sample size of 10 trees per plot (NFLI 2008). The heights of the unmeasured trees are estimated using tariffs (models) calibrated at the plot-level with data from measured trees (Breidenbach et al. 2014).

The representation factor, also known as the design weight or the inverse of the sampling probability, determines how much area of Norway one sample plot represents. The representation factor of a sample plot is given by A_h/n_h , where A_h is the area of a stratum, estimated by multiplying the proportion of points on the 3x3 km grid that belong to the stratum h with Norway's land area, and n_h is the number of sample plots on the grid specific to the stratum.

If a sample plot covers two land-use classes, the sample plot, and consequently also the representation factor, are divided between the plot parts according to the proportion of the land-use classes covering the plots. A land-use class must cover at least 20% of the sample plot to be considered. Land-use class cover is recorded in 10% steps on the divided sample plots.

6.3.2 Land stratification to climate

The land area is stratified into IPCC climate regions using nationally available climate data (see below). Norway uses climate-region-dependent Tier 1 methodologies, which are applied in a spatially explicit manner (Approach 3), with each NFI plot designated to a climate region.

The IPCC 2006 Guidelines, Vol 4. Ch. 3, Figure 3A.5.2, provides climate classification schemes for determining the climate region based on criteria for mean annual temperature (MAT), mean monthly temperature (MMT), mean annual precipitation (MAP), potential evapotranspiration (PET), and elevation. Applying these criteria to the 30-year mean (1989 – 2018) of the annual values provides Norway with the six climate regions presented in Table 6-10.

Table 6-10: Area representation of Norway's IPCC climate regions based on NFI plots.

IPCC climate region	Area representation	
	(kha)	(%)
Boreal Dry	846	2.6
Boreal Moist	4 722	14.6
Cool Temperate Dry	352	1.1
Cool Temperate Moist	22 292	68.8
Polar Moist	4 166	12.9
Total	32 378	100.00

The IPCC climate regions for NFI plots with forest land can be further stratified into ecological zones. The ecological zone classification scheme provided by the Forest Resources Assessment (FAO 2012) uses the same variables to define IPCC climate regions but has slightly different and additional criteria. The ecological zones combined with the IPCC climate regions, along with additional information on dominant tree stand type, are used to derive IPCC default carbon stock estimates for litter in land-use changes to and from forest land, as described in section 6.4.2 (Bárcena et al. 2021).

Box 6.1 – The climate data

The source of the meteorological datasets used to produce the climate data for NFI plots is known as SeNorge. SeNorge is a collaboration between The Norwegian Water Resources and Energy Directorate (NVE), The Norwegian Meteorological Institute, and The Norwegian Mapping Authority, which provide climate, meteorological, and hydrological data, respectively, for Norway. The SeNorge data is available to the public through the web portal senorge.no. Full access to all the dataset products (intended for research) are available partially through FTP thread-servers (temperature and precipitation) or through contact with NVE (hydrological data).

The datasets consist of daily values on a 1 x 1 km UTM zone 33 projection grid over Norway. Daily mean (TG) and daily total precipitation (RR) can be found as part of the SeNorge_2018 dataset (Lussana et al. 2019). The daily time series, for the current published dataset used in this report is from 01/01/1957 to 31/12/2024. These datasets are aggregated to the required monthly and annual values. Furthermore, the temperature from the 1 x 1 km grid cell is adjusted for the elevation acquired from a high-resolution 10 x 10 m digital terrain model (DTM, provided by The Norwegian Mapping Authority), with a lapse rate of -0.65°C per 100 meters of altitude (Tveito & Førland 1999).

Potential evapotranspiration (PET) is not available from the SeNorge datasets. It was therefore calculated using the Thornthwaite method; an empirical model in which mean monthly temperature and mean monthly daylight (hours) are used as input (Thornthwaite 1948). Daylight hours are calculated using a solar calculator function from the R-package StreamMetabolism (Sefick 2016) based on the NOAA Solar Calculator (National Oceanic and Atmospheric Administration 2020) adjusted (downscaled) for the elevation acquired from a high-resolution 10 x 10 m digital terrain model (DTM, provided by The Norwegian Mapping Authority), with a lapse rate of -0.65°C per 100 meters of altitude (Tveito & Førland 1999).

6.3.3 Land stratification to soil classes

To determine the overall soil type (mineral or organic) across all land-use classes, multiple data sources were combined following a hierarchical approach. For NFI plots, soil type information was derived directly from NFI registrations on all land-use classes except Cropland, Intensive Grasslands, and Settlements. However, for sample plots without tree cover (that is, where the NFI does not survey), additional spatial datasets were required.

The primary additional dataset is the Norwegian Agricultural Soil Survey - Jordkartlegging, which contains soil survey data from ongoing field campaigns and currently covers approximately 61% of croplands and 6% of intensive grasslands. For areas not covered by Jordkartlegging, soil type was derived from the national land resource map AR5, updated by NIBIO (Annually). A baseline 1990 map was created by combining these two datasets (Jordkartlegging + AR5 = *map C*), where Jordkartlegging served as the base layer, and AR5 was applied as an overriding layer to fill in

gaps, see Figure 6.16. *Map C* classifies cropland, intensive grasslands, and settlements into mineral or organic soils.

Map C was then spatially linked to NFI plot locations lacking soil information, allowing each plot to be assigned a soil classification across all land-use categories (*map D*). In case of double information, the NFI registration has priority over *map C* regardless of the tree cover. *Map D* was updated in 2025.


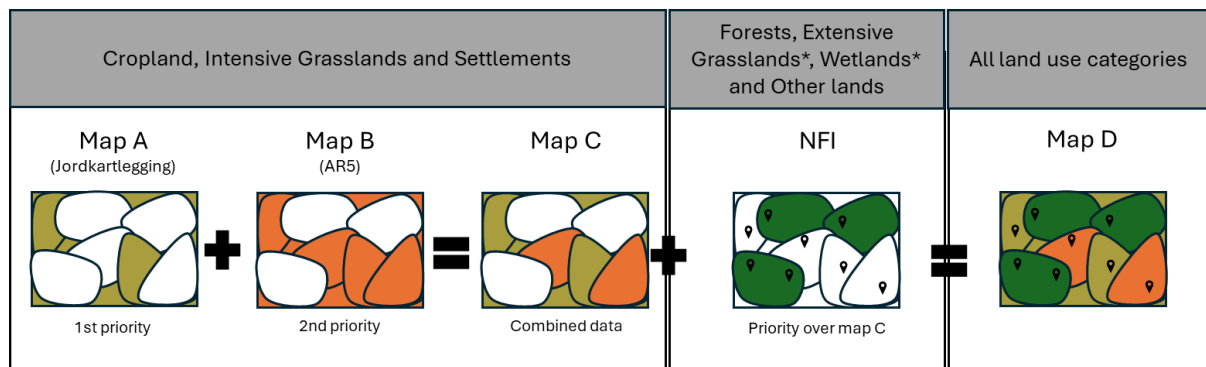


Figure 6.16: Hierarchical approach used to determine soil type in Norway. White areas represent land-use categories not covered by the respective maps. Pin symbols indicate plot locations. *Only wooded areas within these two land-use categories are surveyed by the NFI.

In case of land-use changes to and from land-use categories covered by the NFI (forest land, extensive grasslands⁴⁶, and wetlands⁴⁶), NFI-derived soil information is maintained or updated throughout the entire time series for the respective plot, ensuring a consistent soil classification over time, as shown in Figure 6.17.

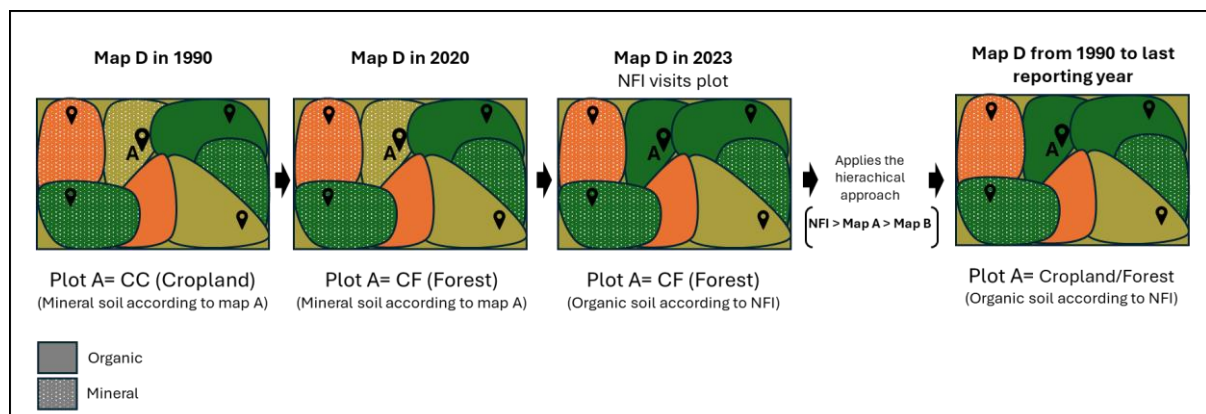

⁴⁶ Only plots with tree-cover.

Figure 6.17: Example of how the hierarchical approach ensures consistency in soil type classification during land-use changes. In this example, Plot A was initially used as cropland and classified as mineral soil based on map A (reference to Figure 6.16). After several years, the plot was converted from cropland to forest. During the first NFI survey (which covers areas with tree cover), the plot was identified as organic soil. Because NFI classifications have priority over all other data sources, the plot was subsequently reclassified as organic soil for the entire time series, regardless of land use.

It should be noted, however, that Norway is currently revising the classification of organic soils by adopting a single, consistent definition across all land-use categories (see Planned Improvements, section 6.4.1.5). Following implementation, the hierarchical approach currently used to harmonize definitions will no longer be required.

For NFI plots on mineral soil, soil categorization is further detailed by soil class. Soil class is determined from digital versions of two legacy soil maps from Rasmussen et al. (1991) and Låg (1983), respectively, and updated with modern data from the Norwegian agricultural soil classification where possible (Bárcena et al. 2021).

The mineral soil classes are used in combination with the IPCC climate regions to derive soil organic carbon (*hereinafter referred to as SOC*) reference values from both the IPCC 2006 Guidelines and the IPCC 2019 Refinement, as described in the Tier 1 methodology for the estimation of changes in SOC after land-use change on mineral soil (Bárcena et al. 2021).

Figure 6.18 displays Norway's land uses and stratification by overall soil type, IPCC climate region, and FAO ecological zones.

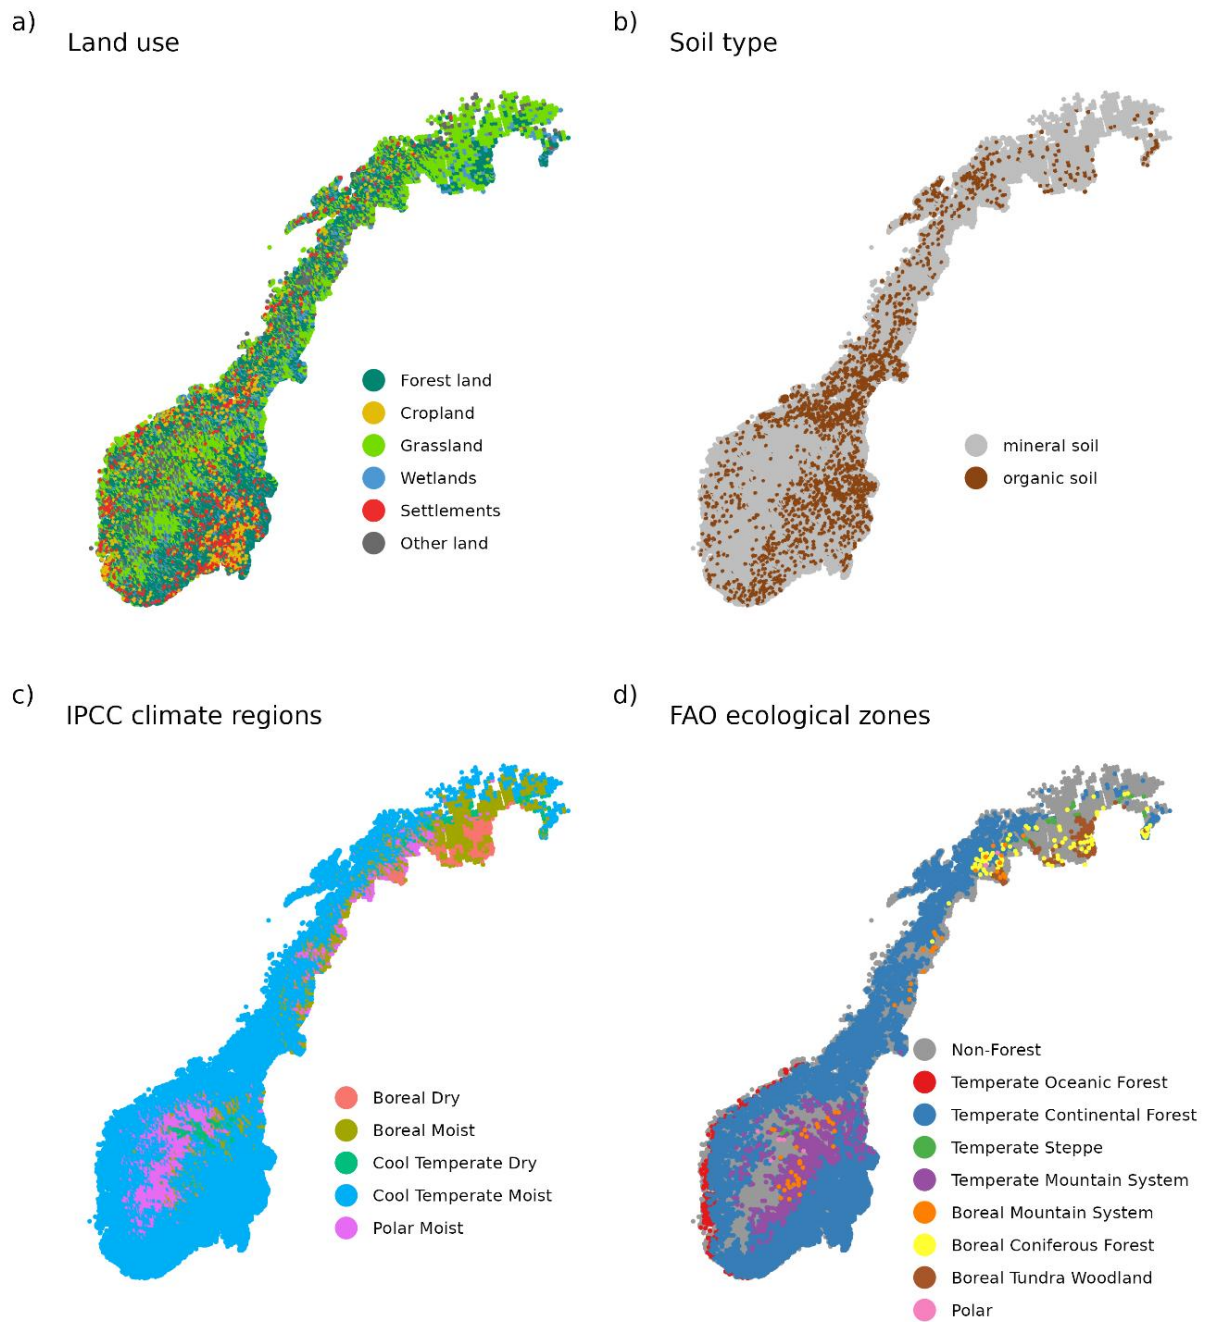


Figure 6.18: Map overview of NFI plot stratification: a) Current Land use categories; b) soil types; c) IPCC climate regions; d) FAO ecological zones for forest lands. The visual representation of each plot on the maps is altered to ensure the visibility of all categories, as the plotting order affects the visibility.

6.3.4 Changes in the NFI design

6.3.4.1 *Panels and plot size of the earliest permanent inventories*

The NFI consisted of temporary sample plots before 1986. Between 1986 and 1993, all lowland sample plots outside Finnmark were permanently marked. All sample plots within one to three neighboring counties were measured within one year. Annual estimates representative of the whole country were, therefore, complicated in those years. The current system with interpenetrating panels was made fully operational in the cycle covering the years 1994 through 1998.

Today, all sample plots are circular with a size of 250 m². However, in the inventory period between 1986 and 1993, concentric sample plots were used in some counties. All trees with a DBH $\geq$ 50 mm were measured on a circular sample plot with an area of 100 m². Trees with a DBH larger than 19.9 cm were measured on a larger sample plot. The area of the large sample plots was 200 m² in Østfold, Akershus, Oslo, and Nord-Trøndelag counties, whereas the area was 250 m² in all other counties. The sample weights of the trees on these plots were modified to bridge the methodological change in the subsequent inventory period, where all sample plots had a size of 250 m².

6.3.4.2 *Establishing the NFI strata in Finnmark and the mountain areas outside Finnmark*

The sample plots in the mountain stratum outside Finnmark were established between 2005 and 2009. The first re-measurements of these plots were consequently started in 2010. The sample plots in the two Finnmark strata were established between 2005 and 2011, with the first re-measurements starting in 2012. This made special methods for estimating changes at the plot-level necessary, as described in section 6.2.2. However, almost 95% of the carbon stock in tree living biomass is found in the lowland stratum outside Finnmark. The land use classes observed on the plots in Finnmark and the mountain plots established between 2005 - 2009 (2005 - 2011 for Finnmark) were backcasted to 1990 for each plot. Plots were assigned to one of the two Finnmark strata in the inventory cycle by assessing their location on the 3x3 km grid. In a number of western and northern Norwegian municipalities outside Finnmark, a height threshold separating lowland and mountain areas was set by local forest authorities. In the other parts of Norway, the stratum decision was made using auxiliary information and in the field. The strata classification can therefore be described as a two-phase procedure.

6.3.4.3 *Changes in tree height measurement methods and land use classification from those in early inventories*

Before 2005, the tree heights of three trees per species were measured on each sample plot. Since 2005, 10 trees per plot have been measured as described above. Until 1994, no differentiation between grasslands and croplands was made; both were considered agricultural land. Since 1994, this difference has been made, and the areas of croplands and grasslands were backcasted.

6.3.4.4 Limited information available during the establishment of mountain plots

No aerial photos were available in the first two years of establishing the mountain plots outside Finnmark (2005 and 2006). Maps (N50) were used to determine which plots could be forested. Those were visited in the field, while the remaining plots were given a land use class derived from an overlay of the maps (plot center). A plot with a center in a land use class was assumed to be that land use class on its full area (a circle of 250 m²). If the plot center was in the water, the sample plot was not visited, even if it was close to a forest. Between 2010 and 2011, all plots were checked against aerial images. Land use changes occurred to and from all land use classes. Most commonly, however, parts of the plots in water were then considered other land or wetland (mire), but in some cases, forest or other land use classes. The changed land use class and possible measurements of trees were backcasted to 1990 in those cases.

6.3.4.5 More details in registrations included for land-use classes other than forest

Until 2005, trees were not measured on land-use classes other than forest. Sample plots were only split if one of the parts was a forest. In other cases, the plots were categorized as fully covering the land-use class of the center coordinate. After that, tree measurements have also been included in other land-use classes than forest. From 2005, part of the land use categories, extensive grassland and wetlands with 5 - 10% crown cover (areas defined as Other wooded land and Wooded mire, see Table 6-5), were included in the area with tree measurement. Since 2007, trees have been measured on all land-use categories except cropland and settlements, and since 2010, also trees below power lines (part of the settlements category) have been measured. This resulted in splitting several sample plots between land use classes other than forest, which resulted in area changes of those land use classes. The changed land use class and possible measurements of trees were backcasted to 1990 in those cases.

6.3.4.6 Change of forest definition in 2005

The forest definition was changed to be in accordance with the FAO definition in 2005 to include crown cover. Until 2005, the forest definition was based on the potential productivity of the land, which had to be greater than or equal to 0.1 m³ ha⁻¹ yr⁻¹ to be considered a forest. Since 2005, the crown cover on a 0.1 ha area centered on the plot must be greater than 10% to be forest land. After harvests, areas may be temporarily unstocked but remain forest in the NFI classification system unless the land use changes later. For young productive forests, the stem number is also considered. All plots meeting the new definition of forest visited for the first time in the NFI period 2005 - 2009 (2005 - 2011 for Finnmark) were backcasted. All plots (not only new plots) meeting the new definition of forest were also considered forests in 1990. Plots with human-induced afforestation were exceptions. Exceptions were also made in productive forests if the plot had been assessed as "non-forest" in a previous cycle and the tree ages clearly allowed determining a year of change from another land-use class to forest.

6.3.5 Interpolation and extrapolation for the area and living biomass estimates

The NFI consists of five panels, each of which consists of approximately 1/5th of all 22 008 sample plots. Panel #1 was installed⁴⁷ in 1994, and the other panels in the following years, such that panel #5 was installed in 1998. After the panels were installed, all plots were re-measured every 5 years. However, all sample plots were visited for the first time and permanently marked between 1986 and 1993. Before the current panels were installed, the measurement intervals for the sample plots within a panel varied. The sample plot time interval between the first measurements (1986-1993) and the second measurement (1994-1998) results in different time intervals for each plot, ranging from 1 to 12 years.

All estimates are based on linear interpolation of areas and carbon stocks between plot-wise observations that are then aggregated to national levels. The first estimate for each panel is for 1989, based on sample plots measured between 1986 and 1993 in the respective panel. Towards the end of the reporting period, area estimates were extrapolated based on the last two estimates per plot. This way, the rate of land-use change area is projected based on the area observations of the last 10 years for each plot (Figure 6.19).

The extrapolation results in recalculations of estimates for the last four years in the forthcoming reports as new data becomes available. Once new data becomes available, interpolation can be used instead of extrapolation.

An example to illustrate the method: while no extrapolation was necessary for panel #4 in the 2014 reporting (2012 as the final year), four years of extrapolation were necessary for panel #5 (Figure 6.19). Measurements on panel #5 for 2013 became available in the 2015 reporting (2013 as the final year), which resulted in a recalculation of the years 2009 – 2012 for panel #5. The annual estimate for a source/sink reported is the sum of all plot estimates for that source/sink for a given panel measured in the reporting year and the interpolated or extrapolated estimates of the other panels in the reporting year.

⁴⁷ Installation in this context means that all sample plots within the panel were visited in one year. All sample plots (in the lowlands outside Finnmark) were visited and marked for the first time between 1986 and 1993.

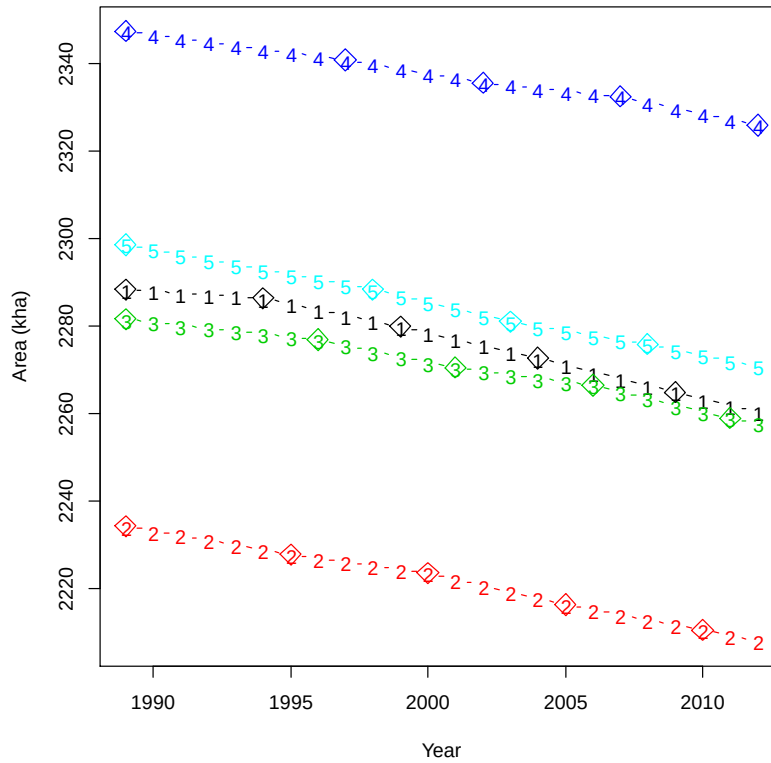


Figure 6.19: Estimated forest land remaining forest land area covering mineral soils within the five NFI panels, illustrated with data from 1989 until 2012. Diamonds indicate the measurement year of the sample plots in the respective panel (1 – 5). The estimated area was the sum of interpolated plots between two measurement years and extrapolated in the years after the last measurement year in each panel. Areas of land converted to forest land that will change their category to forest land remaining forest land after 2009, are not considered in the graphic.

More formally, the area of a land-use class (A_{LUC}) in a given measurement year (diamonds in Figure 6.19) is the sum over all $i=1, \dots, n_P$ sample plots within a panel

$$A_{LUC} = \sum_i p_{LUC,i} \cdot rf_i$$

where $p_{LUC,i}$ is the proportion (0,...,1) of a land-use class covering a sample plot, and rf is the representation factor (the area of Norway that the sample plot represents).

The majority of CSC emissions and removals are calculated for each plot individually (Approach 3). This means that emissions and removals are calculated for the time intervals for each NFI observation (see section 6.3.1). During the final steps of the emission and removals calculations, the emission/removals estimate for each plot is converted to emission/removals per ha per year for the timeseries. This dataset is combined with the plot-wise area inter-extrapolation dataset to

produce annual plot-wise emissions and removals for the timeseries. This dataset is then aggregated to national-level estimates.

For living biomass, the approach is slightly different: For each plot, living biomass gains and losses are calculated for each year there is an NFI observation. The change of living biomass carbon stock change (gains or losses) within a land-use class in a given measurement year (green diamonds in Figure 6.19) is the sum of changes over all sample plots within a panel.

$$c_{LUC} = \sum_i p_{LUC,i} r_{fi} c_{LUC,i}$$

where $c_{LUC,i}$ is the mean annual change of the living biomass carbon stock change per hectare on a sample plot per land-use class. The change $c_{LUC,i}$ can either be a gain (positive change) or a loss (negative change) of biomass. Net gains and losses can simultaneously occur in a sample plot. The estimates are interpolated and extrapolated directly from the estimated living biomass change (i.e., the method does not require the area inter-extrapolation dataset). Linear interpolation of stocks means constant changes (gains and losses) between two measurements.

However, for the extrapolation of clear-cut harvests/deforestation, additional surrogate data are used to improve the interpolated and extrapolated estimates for living biomass losses. The surrogate data are the remote-sensing product Global Forest Change (GFC) (Hansen 2013), which is used to determine which NFI plots have been harvested/deforested in the last 5 years, to help estimate biomass loss for plots that have not yet been surveyed in the last five years. By using the historic NFI data to estimate the fraction of living biomass loss after harvest or deforestation, estimates of the living biomass loss can be calculated for the plots where GFC has detected tree cover loss.

It is currently not possible to differentiate whether plots have tree cover loss due to clearcuts related to harvests or deforestation. To differentiate between loss from harvest (forest land remaining forest land) and deforestation (forest land converted to other land use types), living biomass loss rates (based on the last 5 years) for each of the land-use changes are used to distribute the clear-cut living biomass losses by the GFC extrapolation technique.

For the losses associated with natural mortality, thinning, and other harvest (small-scale harvest, not classified as clearcut harvest or thinning), living biomass loss rates for the last five years for each plot are used to extrapolate for the years without observations. It is assumed that due to the spatial resolution constraints of the GFC product, the tree cover loss in most cases of natural mortality and other harvest will not be detected. As such, using the 5-year average rate for these categories is still considered more reliable. For extrapolation of living biomass gains, the last 5 years' average rate is used.

Since both gains and losses are observed on a 5-year basis for each plot (except for 1986-1998), both the annual rate of gains and losses for each plot is constant between two observations. To

reflect the annual variability in harvests and deforestation, the interpolated and extrapolated biomass losses due to clearcuts have been adjusted for the actual year of the fellings on each plot. The years of the fellings are determined by the fieldworkers on-site, but are later checked and possibly adjusted when comparing with aerial and satellite imagery. Between the first field observations (1986-1993) and the second field observations (1994-1998), the time intervals can be as large as 12 years for some plots. For this reason, on-site estimated felling years between the first and second observation are considered unreliable, and national harvest statistics are used to produce the annual variability. The harvest statistics from (Statistics Norway Annually-b) describe timber use by assortment and municipality. This statistic was supplemented by the estimated use of domestic firewood (Statistics Norway 2020; Statistics Norway Annually-d). For the extrapolated period, the GFC year is used to determine the year of felling. The result of redistributing the inter-extrapolated losses is an increase in capturing the annual variability of carbon change related to clearcuts. For losses associated with thinning, other harvest and natural mortality, no adjustment in annual variability is applied to each plot. See Figure 6.20 for a workflow diagram illustrating the processing steps from interpolation-extrapolation to aggregation.

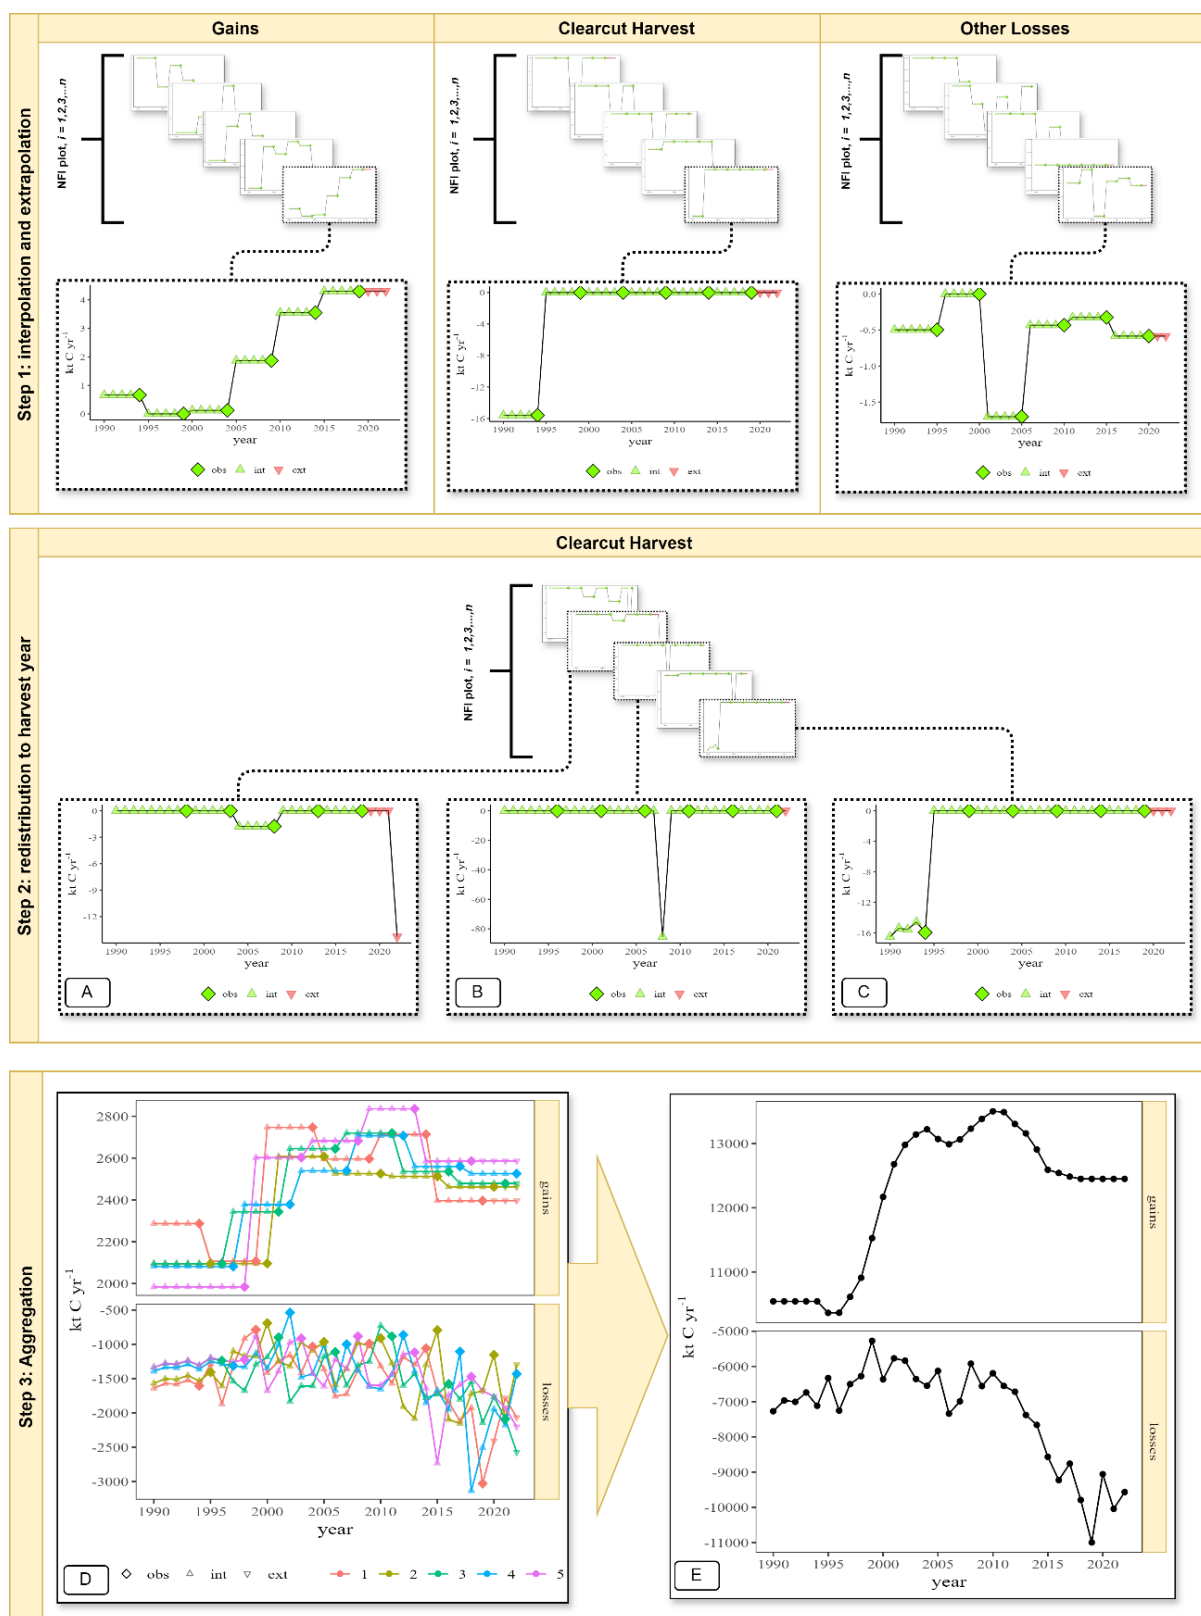


Figure 6.20: Workflow of interpolation-extrapolation processing steps. Step 1: linear interpolation (green triangles) is applied to observation (green diamonds) gains and losses for each NFI plot between each observation (green diamonds). Extrapolation (red upside-down triangle) is the average of the last 5 years (gains and other losses), except for plots with observed clear-cut harvest in the time series,

either from NFI registrations or Global Forest Change (GFC). In case of GFC-detected loss, the estimated biomass loss is calculated for the plot in the extrapolation period. Step 2: Living biomass losses associated with clearcut on a plot are redistributed from the interpolated or extrapolated period to the specific year of loss. Different examples are given for loss redistribution: A) the loss is in the extrapolation period and GFC year is used; B) the loss is in the interpolation period and NFI registered harvest year is used; C) the loss is in the interpolation period between the first and second NFI observation in the beginning of the time series (before 1995-1999 depending on the NFI panel) and harvest statistics from Statistics Norway (SSB) is used. Step 3: The interpolated-extrapolated values for each plot are aggregated: D) individual NFI plots are aggregated to their respective panel, illustrating living biomass stock change estimates for each panel (coloured points and lines). E) illustrates the final national aggregation over all 5 panels.

6.3.6 Backcasting correction of the area and estimates

All estimates were made from 1990 to the latest reporting year, with all land-use areas starting in the remaining category in 1989. However, a number of these areas would have been in a state of land-use change because of changes before 1990. Given the land use transition period (D) of 20 years, many of these areas would still be in transition until as late as 2009. To address this issue, an area correction methodology is applied to all areas and their emissions from 1990 to 2009.

Area correction is only applied to area estimates derived from the NFI. The correction is done by first calculating mean-land-use change rates from 1994 to 2003⁴⁸ without applying the 20-year transition rule for all converted land categories. Areas for mineral and organic soil are processed separately. The land-use change rates are then used to extrapolate the area in different land uses in 1969 under the constraint that all areas were in a remaining land-use category in 1969. The land-use change rates are then used to predict areas in land use transition forward from 1969, with the 20-year transition rule applied for lands in conversion. The first land-use changes occurring in 1970 will remain in a land-use change category until 1989, with a transition to the remaining category in 1990. Following this method for consecutive years, 1971 land-use changes will transition into the remaining category in 1991, 1972 land-use changes will transition into the remaining category in 1992, et cetera. This approach thereby ensures area correction until 2009. From 2010 to the current year, the backcasting land-use change rates are no longer required, and the backcasting correction is not applied.

The general method to correct the net emissions/removals estimates is to apply the implied emission factor (IEF) to the new corrected area for each year. Temporal mean IEFs are based on data from 1990 to the current year and applied for the whole period where backcasting correction is relevant. This procedure is applied to both mineral and drained organic soil

⁴⁸ The goal is to capture the national LUC rates closest to the year 1989. However, the NFI does not start with the regular 5-year cycle until 1994 (see 6.3.5). 1994 - 2003 (10 years) therefore provides the two NFI cycles closest to 1989.

emissions. For lands converted to forest land, CSC for litter and dead wood are estimated based on the corrected total area for each land-use change (see section 6.4.2).

In the case of tree living biomass on forest land, no correction is needed for the total estimates, as these are based on actual measurements on the forest land plots, irrespective of whether the plots are land converted to forest land (LF) or forest land remaining forest land (FF). However, because there is an underestimation of area converted to forest land due to the lack of information providing the correct land-use change designation before 1990 (i.e., we only know what forest land was in 1989, not how much is FF or LF), a redistribution of the living biomass between LF and FF is required. This is done similarly to the general method, where the IEF is first combined with the new corrected area. Second, the new estimates of CSC in living biomass are used to calculate the living biomass fraction for LFs and FF relative to each other. These fractions are then multiplied by the original estimate of total CSC in tree living biomass on forest land (FF+LF).

No correction is applied for DOM or living biomass for transitions from forest land to other land-use categories, as instantaneous oxidation is assumed for the initial year in transition. Similarly, gains and losses in the grass and annual crop biomass for transitions to and from grassland and croplands, respectively, occur instantaneously within the first year of land-use change observation. Hence, no backcasting correction is needed⁴⁹. From 1990 to 2009, the number of corrections declined as fewer and fewer pre-1990 land-use changes transferred into the remaining categories with increasing years in the time series.

6.3.7 Uncertainties in areas and living biomass estimates

Standard errors of area and biomass change estimates used in the key category analysis were estimated based on a 5-year moving average estimate for the mid-year of the last NFI cycle. For example, in NIR 2026, the last NFI cycle includes measurements from 2020 – 2024, which means that the mid-year was 2022. Model-related uncertainties resulting from interpolation and extrapolation are ignored. Also, model-related uncertainties resulting from using biomass models to estimate single tree biomass from diameter and height measurements were ignored since they can be assumed to be small for CSC compared to the sampling error (Breidenbach et al. 2014). Furthermore, the uncertainty from using an estimated instead of a measured tree height for some trees on the sample plots was ignored. Also, this source of variation can be assumed to be negligible compared to that of sampling. In addition, the variance estimators are conservative (slightly overestimate the uncertainty) because they assume a simple random sample (SRS), whereas the NFI collects a systematic sample (Magnussen et al. 2020).

The estimated proportion of a land-use class within a stratum is given by

⁴⁹ Because the exact year of land-use change is unknown (it is only known that it happened during the last 5 years before the observation), interpolation will evenly distribute the instant gains or losses over the time interval between the current and previous point in time (usually 5-years).

$$p_h = 1/n_h \sum_i y_{hi}$$

where $h = (1, \dots, 4)$ is the stratum identifier, n is the number of sample plots, y is the proportion of the NFI sample plot that belongs to a land-use class, which is 1 if the sample plot falls completely into the class, and $i = 1, \dots, n_h$.

The estimated variance of the proportion is given by

$$\text{var}(p_h) = \frac{s_h^2}{n_h}$$

with $s_h^2 = \frac{1}{n_h-1} \sum_i (y_{hi} - \bar{y}_{hi})^2$. The area estimate of a land-use class (A_{LUC}) over all strata is then given by the stratified estimator

$$A_{LUC} = A \frac{1}{N} \sum_h N_h p_h$$

where A is Norway's land area, N is Norway's land area divided by the NFI plot size (250 m²), N_h is the stratum (grid) area divided by the plot size, and p_h is the proportion of the respective land-use class. The estimated variance of the area estimate is given by

$$\text{var}(A_{LUC}) = A \sum_h \left(\frac{N_h}{N} \right)^2 \text{var}(p_h).$$

Similar to the area estimates, estimates of sampling errors of carbon gains or losses are based on the full set of NFI sample plots. The ratio estimator gives the estimate of the total biomass gain or loss within a stratum

$$T_h = \frac{N_h}{n_h} \sum_{i=1}^{n_h} y_{hi}$$

where n_h is the number of sample plots within a stratum and y is the average annual gain or loss that occurred during the last five years on a sample plot. An estimate of the variance is given by

$$\text{var}(T_h) = N_h^2 \frac{s_h^2}{n_h}.$$

The total biomass gain or loss estimate (T) over all strata and its variance ($\text{var}(T)$) is the sum over T_h and $\text{var}(T_h)$, respectively. Because random sampling is assumed, the variance estimates can be assumed to be conservative.

Post-stratification did not improve the precision of biomass gain and loss estimates. We tested climatic zones, counties, and forest districts as possible post-strata.

The estimation of biomass or carbon stocks is not required in the CRT. This report calculated stocks in analogy to the biomass change estimates.

The uncertainties of carbon estimates are given by

$$U(C) = \sqrt{U(T)^2 + U(CF)^2}$$

where U(T) is the uncertainty of the total biomass gain or loss estimate in percent of the estimate

$$U(T) = \frac{2\sqrt{\text{var}(T)}}{T} 100$$

and U(CF)=2% is the relative uncertainty in the carbon fraction.

6.3.8 QA/QC for the NFI data

Fieldwork is conducted by NFI field staff. Qualification requirements are forestry or natural management education at the college level or higher. Before a new employee can work independently, a training period of at least three weeks is conducted. All field staff undergoes a weeklong course before each field season. There are currently about 25 employees who perform fieldwork in the period from May to October. It has been a stable situation with few changes in the field personnel, and on average, the field workers have more than 15 years of experience.

All data is collected on handheld computers with software developed for the purpose. The field computer program has several features built in for quality assurance:

- The program ensures that everything that must be recorded is recorded.
- A series of tests on the logical values of measurements.
- Categorical variables are recorded with the help of menus.

The field computer contains data from the previous record for plots where previous inventories are registered. Depending on the character of the variable, quality checks are handled in three different ways:

- The old value is displayed and can be confirmed or amended.
- The old value is hidden, but a warning is given if the new value is not logical compared to the old value.
- The old value is displayed as information before a new registration is done.

Data is sent by email to the data reception center at the main office once a week. The data reception center keeps track of which sample plots have been registered and which plots remain, thereby ensuring that no plots are omitted. The data is then read into a database, and further quality checks are made. Incorrect data or questions are returned to the field worker for clarification.

Each field worker is usually visited by a supervisor for one day in the field. Control registrations are carried out by an experienced field worker who makes a second registration for approximately 5% of all sample plots. The control data is then analyzed to document the quality of field recordings, partly to clarify misunderstandings and correct any systematic errors. The results of control entries are published in a separate report.

During the winter months, there is a systematic data review with additional error testing and inspection of all codes and logic. This happens before the data is read into the final table structure.

The database is a relational database that is designed to ensure data quality. Primary keys and foreign keys prevent double accounting and ensure coherence in the data.

6.4 Forest land – 4A

6.4.1 Forest land remaining forest land, 4A1

Forest land remaining forest land covers 37% of the area of Norway. Forest ownership in Norway is dominated by private ownership, with many small properties. In 2024, there were 126 034 forest holdings with more than 2.5 ha of productive forest land in Norway (Statistics Norway Annually-e). Due to the ownership structure and specific terrain conditions, Norwegian forestry is diversified and characterized by small-scale activity. Approximately 90% of the harvesting is fully mechanized. Forest land is the most important land-use category concerning carbon removal in Norway.

6.4.1.1 Methodological issues

6.4.1.1.1 Living biomass (key category)

The sink/source category living biomass on forest land remaining forest land, is identified as a key category. Details on identification criteria can be found in chapter 1.4.

The annual changes in the tree living biomass carbon stock depend upon several factors, such as harvest levels and variable growing conditions, mainly due to temperature and precipitation. All these factors influence the reported annual net CO₂ removals from the atmosphere.

The stock change method is used to quantify these changes. The method implemented corresponds to Tier 3, which uses a combination of NFI data and models to estimate changes in biomass. The reported CSC refers to the biomass of all living trees observed on an NFI sample plot with a stem diameter larger than 50 mm at breast height (DBH). Thus, shrubs and non-woody vegetation are not included in the estimates. Since tree coordinates are measured on NFI plots, each tree can be attributed to a land use category. Single tree allometric regression models developed by Smith et al. (2016; 2014), Marklund (1988), and Petersson and Ståhl (2006) are

applied to DBH and height measurements from the NFI for estimating the tree biomass. Tree biomass is defined as the sum of aboveground and belowground biomass. The aboveground biomass of a tree is the sum of the estimates of the fractions of stem, stump, bark, living branches, and dead branches. The belowground biomass of a tree is the estimate of the fraction of stump and roots minus the estimate of the fraction of stump. Table 6-11 lists the models used to estimate the biomass of the different tree fractions. The biomass models are defined for Norway spruce (*Picea abies*), Scots pine (*Pinus sylvestris*), and birch (*Betula pendula* and *Betula pubescens*). These species constitute approximately 89% of the growing stock volume (Svensson et al. 2025). Other broad-leaved species constitute most of the remaining proportion. The birch biomass models are applied to all broad-leaved species. The tree living biomass is estimated consistently based on the same biomass models from the base year 1990 onwards.

Table 6-11: Biomass models for estimating living biomass. In Marklund's (1988) models, the notation "G (model number)" indicates Norway spruce and "T (model number)" Scots pine.

Component	Reference and specific model
Dead branches	Marklund (1988), G20, T22. Smith et al. (2014) birch/deciduous.
Living branches	Marklund (1988), G12, T14, Smith et al. (2014) birch/deciduous, includes needles.
Foliage	Smith et al. (2014) birch/deciduous
Bark	Marklund (1988), G8, T10. Smith et al. (2014) birch/deciduous
Stem	Marklund (1988), G5, T6. Smith et al. (2014) birch/deciduous
Stump	Marklund (1988), G26, T28
Stump and roots (>2 mm)	Petersson and Ståhl (2006), B i (for Norway spruce and Scots pine). Smith et al. (2016) birch/deciduous

6.4.1.1.2 Dead organic matter (key category)

The sink/source category dead organic matter (DOM) on forest land remaining forest land is identified as a key category. Details on identification criteria can be found in chapter 1.4.

For forest land remaining forest land on mineral soils, a model approach is used. The decomposition model, Yasso, is used for mineral soils to estimate total SOC, which includes the DOM (dead wood, litter) and soil pools. The annual fluctuation seen in the CSC of DOM and mineral soil is influenced by annual variation in the carbon input data to the model and climatic conditions. The current version of the Yasso model used is Yasso20 (Viskari et al. 2022), which is an updated version of Yasso (Liski et al. 2005) and Yasso07 (Tuomi et al. 2009; Tuomi et al. 2011a; Tuomi et al. 2011b). In the model, forest mineral soil and DOM carbon will undergo accumulation or loss depending on the balance between input (from vegetation) and output (decomposition, climate-driven). Carbon input in the Yasso model is from standing biomass (litter produced by the vegetation) and DOM from natural mortality and harvest residues, including but not limited to

stumps and roots from harvested trees. All these factors are influenced by the same natural, and man-made factors as stated in the tree living biomass section, causing annual changes.

The estimate of total SOC from the model entails all stages of decomposition and all carbon input elements regardless of size and origin (input is aboveground or belowground). As the output of the model is an estimate of total SOC, other approaches must be applied to differentiate between DOM and mineral soil. There is no precise method to determine what fraction of the original carbon input is at what stage of decomposition over time. An expert judgement has been used to derive a conceptual understanding of how the Yasso model chemical pools, the carbon input dimensions, and the location origin of the carbon input (aboveground or belowground) may best relate to dead wood, litter, and soil pools defined by the IPCC, see Table 6-12. Based on this conceptual fractionation scheme, the total SOC CSC was allocated to the dead wood, litter, and soil pools. Only the changes in the H pool (humus; Table 6-12) originating from the belowground carbon input elements were allocated to the changes in the UNFCCC mineral soil sink/source category. The remaining change in the total SOC stock was attributed to dead wood and litter. The distribution of litter, dead wood, and soil is dynamic with time and largely reflects the changes in the living biomass stock and mortality changes over time.

Table 6-12: Conceptual definitions of soil pools based on the chemical composition of the Yasso model output for total soil CSC. AWENH is defined as Acid-soluble, Water-soluble, Ethanol-soluble, Non-soluble, and Humus.

Origin	Aboveground					Belowground				
Chemical component	A	W	E	N	H	A	W	E	N	H
Non woody	LITTER									SOIL
Fine woody										
Coarse woody	DEAD WOOD									

For forests on organic soil, it is assumed that the DOM pools are in equilibrium and have zero net CSC on forest land remaining forest land following the Tier 1 methodology, according to the IPCC 2006 Guidelines.

6.4.1.1.3 Mineral soils (key category)

The sink/source category mineral soil on forest land remaining forest land, is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Choice of method

A Tier 3 method was applied. The emissions and removals of total SOC (dead wood, litter, and soil pools) from forest land on mineral soil are estimated using the decomposition model Yasso20 (Tuomi et al. 2008; Tuomi et al. 2009; Tuomi et al. 2011a; Tuomi et al. 2011b; Viskari et al. 2022). The Norwegian application of the previous version of the Yasso model, Yasso07, is described in Dalsgaard et al. (2016). The Yasso model represents processes for mineral soils down to a depth of 1 m and operates using five chemical soil carbon pools (Figure 6.21). Decomposition (CO_2 release) and fluxes among the chemical carbon pools are regulated by climatic input data and parameters governing carbon inputs' decomposition, transformation, and fractionation. The model is applied to the time series for each NFI plot. The model is run on an annual time step, but only estimates for the NFI registration years are used. The term “entry” below refers to any combination of an NFI plot and registration year.

For each NFI plot in the category forest land remaining forest land, carbon changes per hectare since the last measurement of trees on the plot were calculated using Yasso20, as described below. The calculated change was then up-scaled to country-wide estimates using the same method as for tree living biomass, which is described in section 6.3.5.

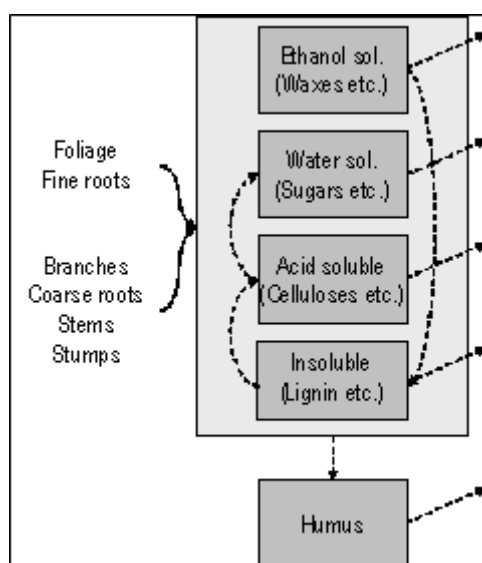


Figure 6.21: Flow diagram for chemical soil carbon pools in the Yasso model. Fluxes significantly different from 0 are indicated by the arrows (Liski et al. 2009).

The model is run for individual plots (or split plots if the plot is divided). For each entry (approximately 11 400 unique NFI plots), annual living tree carbon input to the model is estimated from tree registrations. On plots where the time series was not complete, NFI plot backcasting was applied (see section 6.3.4). Tree biomass models were used to estimate different

biomass components (Table 6-13), and annual turnover rates for roots, foliage, and branches were applied to estimate the annual carbon input (Table 6-14 and Table 6-15).

Tree biomass carbon input generated annually from mortality and residues from diffuse harvest (i.e., harvest not including commercial thinning or final harvest) was estimated on all entries as a percentage of the standing biomass, only when observations from the NFI plots are absent. Data from the 8th NFI (2000 - 2004) and the 9th NFI (2005 - 2009) were used to establish look-up tables for this purpose. Registrations of mortality and harvest on NFI plots started in 1994. The look-up tables are grouped by tree species (broadleaved or conifer), site-index (up to six classes), and age (up to nine classes). Harvest residues from commercial thinning and final harvest were estimated from plot-specific registrations (since 1994) of harvested volume. This carbon input was relevant for a total of 2013 entries.

The look-up tables mentioned above also contain factors (percentages) describing the biomass development between two inventories. These were used to establish a time series of tree living biomass and harvest residues (commercial thinning and final harvest) back to 1951 (model-input-backcast).

For the GHG inventory, a model-input-backcast was done assuming that all plots have always been forested. This assures no double-counting in mineral soil, and DOM pools in the transition between methods from “lands converted to forest land” to “forest land remaining forest land”.

Estimating carbon input from the model-input-backcast time series (including mortality and diffuse harvest) followed the same procedures as the NFI time series. However, it used the average distribution (from NFI) to biomass components, as individual tree information is not available in the model-input-backcasted part of the time series. The 1951 - 1985 time-series (model-input-backcast) is used to reduce the effect of the equilibrium assumption on the reported values of soil carbon change in the inventory period (see below).

Table 6-13: Allometry biomass models used in the simulations. When models from Marklund (1988) are used, the notation “G” is used for Norway spruce and “T” for Scots pine.

Component	Reference and specific model
Dead branches	Marklund (1988), G20, T22, Smith et al. (2014) birch/deciduous
Living branches	Marklund (1988), G12 and G16, T14 and T18, Smith et al. (2014) birch/deciduous
Foliage	Marklund (1988), G20, T22, Smith et al. (2014) birch/deciduous
Bark	Marklund (1988), G8, T10, Smith et al. (2014) birch/deciduous
Stem	Marklund (1988), G5, T6, Smith et al. (2014) birch/deciduous
Stump	Marklund (1988), G26, T28 (for Scots pine), Smith et al. (2016) birch/deciduous ^a
Roots (> 5 cm)	Marklund (1988), G28, T31, Smith et al. (2016) birch/deciduous ^a

Roots (2 mm–5 cm)	Petersson and Ståhl (2006), Bi (for Norway spruce, Scots pine) Marklund (1988), G28, G26, T31, T28, Smith et al. (2014) birch/deciduous ^a
Roots (< 2 mm)	0.3 × foliage biomass; Kjonaas et al. (Unpublished manuscript)

^a No distinct diameter limit is inferred between the two classes of deciduous coarse roots.

Table 6-14: Annual turnover rates applied for tree carbon input estimation. Compiled in Peltoniemi et al. (2004) and de Wit et al. (2006).

Component	Norway spruce	Scots pine	Broadleaved	Reference
Foliage	0.143	0.33	1	Tierney and Fahey (2002)
Live and dead branches, roots > 2 mm	0.0125	0.027	0.025	Muukkonen and Lethonen (2004) DeAngelis et al. (1981) Lehtonen et al. (2004)
Roots < 2 mm	0.6	0.6	0.6	Matamala et al. (2003)

The carbon input generated from the ground vegetation is estimated using models based on plot tree species and age (Muukkonen & Mäkipää 2006; Muukkonen et al. 2006). A distinction is made among Norway spruce, Scots pine, and deciduous (birch spp.), with an age span of 0-200 years (Norway spruce and Scots pine) or 0-100 years (deciduous). The output of aboveground biomass is generated for four layers of ground vegetation: i) moss, ii) lichens, iii) herbs and grasses, and iv) shrubs. For shrubs, herbs, and grasses, it is assumed that belowground biomass is twice the aboveground biomass (e.g., Poeplau (2016)). A compilation of studies documenting the above-to-belowground-ratio for biomass and the annual turnover rates for ground vegetation litter (Table 6-15) can be found in Peltoniemi et al. (2004).

Table 6-15: Annual turnover rates for litter from ground vegetation.

Component	Moss	Lichens	Herbs and grasses	Shrubs
Aboveground	0.33	0.1	1	0.25
Belowground	-	-	0.33	0.33

The chemical composition of tree carbon input was based on data used to develop the Yasso07 model. For ground vegetation litter, the values of carbon input in Peltoniemi et al. (2004) were used Table 6-16).

Table 6-16: The fraction of carbon input made up of acid soluble (A), water soluble (W), ethanol soluble (E), and insoluble (N). Multiple values for a given category mean that there exists more than one estimate for that category (multiple literature sources).

Component ^a	A	W	E	N
<u>Stem</u>				
Norway spruce	0.63, 0.7	0.03, 0.005	0, 0.005	0.33, 0.28
Scots pine	0.66, 0.68	0.03, 0.015	0, 0.015	0.29, 0.28
Deciduous	0.65, 0.78	0.03, 0	0	0.32, 0.22
<u>Roots (<2mm)</u>				
Norway spruce	0.5508	0.1331	0.0665	0.2496
Scots pine	0.5791	0.1286	0.0643	0.228
Deciduous	as foliage	as foliage	as foliage	as foliage
<u>Foliage</u>				
Norway spruce	0.4826	0.1317	0.0658	0.3199
Scots pine	0.5180	0.1773	0.0887	0.2160
Deciduous	0.4079, 0.46	0.198, 0.1929	0.099, 0.0964	0.2951, 0.2507
<u>Living and dead branches</u>				
Norway spruce	as stem 0.3997-0.5307	as stem 0.0105-0.0295	as stem 0.0382-0.1309	as stem 0.411-0.4608
Scots pine ^b	as stem	as stem	as stem	as stem
Deciduous				
Roots > 2 mm	as branches	as branches	as branches	as branches
Stumps	as stem	as stem	as stem	as stem
Bark	as foliage	as foliage	as foliage	as foliage
<u>Ground vegetation^c</u>				
Moss	0.74	0.0867	0.0433	0.13
Lichens	0.836	0.0747	0.0373	0.052
Herbs and grasses	0.27	0.4667	0.2333	0.03
Shrubs	0.56	0.2067	0.1033	0.13

^a The majority of values are from the Yasso07 user manual (Liski et al. 2009). ^b 25 observations were available. The range is given. ^c From Peltoniemi et al. (2004): W is 2/3 of "extractable"; E is 1/3 of "extractable".

The carbon input was either non-woody (foliage, fine roots, all ground vegetation input), fine-woody (living and dead branches, coarse roots, and bark), or coarse-woody (stems and stumps). The dimensions entering the Yasso model for each of the three size-groups are 0, 2, and 10 cm, respectively. The mean carbon input for all entries is found in Table 6-17.

Table 6-17: Mean values for carbon flux input (during spin-up), equilibrium carbon stock (post spin-up), and predicted carbon stock (for reporting period), all distributed by litter pools. Each entry is weighted

by its appropriate NFI area weight (which differs among the NFI strata). Empty cells mean that litter type (non-woody, fine-woody, coarse-woody) is not present in the respective category.

Category	Non-woody	Fine-woody	Coarse-woody	Total
Carbon input (tC ha⁻¹ yr⁻¹)				
Ground vegetation	0.397	-	-	0.397
Tree living biomass	0.873	0.215	-	1.088
Mortality	0.008	0.046	0.024	0.077
Commercial harvest	0.029	0.130	0.040	0.199
Other harvest	0.003	0.013	0.004	0.020
Total	1.310	0.405	0.067	1.782
Equilibrium stock (tC ha⁻¹)				
Ground vegetation	8.90	-	-	8.90
Tree living biomass	20.70	5.32	-	26.02
Natural mortality	0.18	1.11	1.07	2.36
Commercial harvest	0.65	2.97	1.66	5.28
Other harvest	0.06	0.31	0.15	0.52
Total	30.48	9.71	2.88	43.07
Predicted stock* (tC ha⁻¹)				
Ground vegetation	8.60			8.60
Tree living biomass	21.45	5.46		26.91
Natural mortality	0.21	1.33	1.49	3.03
Commercial harvest	0.73	3.24	1.83	5.81
Other harvest	0.08	0.39	0.20	0.68
Total	31.08	10.42	3.52	45.02

*Across all entries in the time-series, excluding backcast entries.

For each NFI plot, start values for the five chemical carbon pools (Figure 6.21) were obtained by a pre-simulation or spin-up. This was done in two steps: 1) running the model in 5000 annual time steps to equilibrium in all chemical pools⁵⁰ and 2) running the model for a carbon input time

⁵⁰ From previous a previous study with Yasso07 increasing the spin-up time to 15000 annual time steps resulted in CSC of 0.03% lower and carbon stocks of 0.09% higher than with the chosen standard of 5000 steps (mean values across all plots).

series 1951 - 1990 specifically constructed for this purpose (see above). The carbon input for the equilibrium spin-up was the mean carbon input estimated for the historical time series (1986 - 2016), grouped by tree species and site-index. For the model-input-backcast and inventory periods, the total SOC was estimated for each entry, i.e., each time a registration was available. Plot-specific total SOC was obtained as follows: the estimated annual carbon input of individual plots for each entry in the time-series was used as input. The carbon stock from the previous entry was used as the start value. A loop was applied to drive the model in as many years as was found between the entries (mostly five years, but this deviates in some cases in the early inventory years). For the first entry, a loop of five years was applied following the spin-up stock.

The carbon inputs and the simulated SOC stocks are kept in units of kg C m^{-2} . The parameters set for Yasso20 were applied (Tuomi et al. 2011b; Viskari et al. 2022). To return the reported time series, interpolation was done in a similar way to that for the tree living biomass estimates.

Climate data was also used as input for the Yasso20 model. Many of the same variables used to derive plot-specific IPCC climate regions were applied (see section 6.3.2 for technical specifications and references). The Yasso20 model uses monthly temperature ($^{\circ}\text{C}$) and mean annual precipitation (MAP, mm yr^{-1}). Climate data for the equilibrium spin-up was the plot-specific climatic normal for the last 30 years prior to observations. For most plots, the last 30-year period is from 1957 to 1992. For the remainder of the time series simulations, plot-specific climate data were applied, using backwards-looking dynamic 5-year moving average annual values from 1957 to the latest reporting year⁵¹.

The estimated total SOC changes between entries in the time-series have been distributed between the dead wood, litter, and soil sink/source categories described above under the section on dead organic matter.

Activity data

Various input data were used to estimate CSC in the DOM and mineral soil. This includes climate data (see above and section 6.3.2), area representation for plots (as described for the NFI), basic NFI registrations (as described for the tree living biomass), as well as site-index and stand age, complementary models and parameters including biomass models, turnover rates, chemical carbon input composition, and carbon input dimensions. The usage and values of input data are described under the section "Choice of method" above.

Plots recorded as forest land remaining forest land with no tree biomass for the entire time series, were excluded from the DOM and mineral soil estimates. These plots may have had tree biomass, but are not visited by surveyors for good reasons (military zones or other inaccessible areas). Hence, no tree biomass is registered. Additionally, plots lacking site-index or tree stand

⁵¹ From the establishment of the NFI permanent plots, the first observations (1986-1993), to the second observations (1994-1998), the time intervals vary from 1 to 12 years. For this reason, plot specific number of years backward-looking dynamic moving averages of climate data are used during this period to match the time interval between the first and second observation.

age were excluded from the DOM and mineral soil estimates due to the specific methods being used requiring such input. With no input for the model, these plots must be assumed to have a default net-zero change for DOM and mineral soil.

The registration of ditches on all NFI plots began in 2018. Approximately 4.5% of the forest land remaining forest land area in Norway contains ditches (here assumed to represent drained areas), while the remaining 95.5% is unditched.

Assumptions/justification

The current NFI definition of mineral soil is based on the depth of the organic layer (< 0.4 m). We assume that the decomposition processes in these areas are represented by the model structure and the parameters of the Yasso20 model obtained from data on mineral soils throughout the world.

No specific method is available in the IPCC 2006 Guidelines for estimating CSC in drained mineral forest soils. Therefore, CSC in all mineral soils under Forest Land Remaining Forest Land are estimated using the method described above, regardless of drainage status.

However, Norway is currently revising the classification of organic and mineral soils (see Planned Improvements, section 6.4.1.5). This work is expected to reduce the number of NFI plots classified as mineral soils with drainage ditches. Following this improvement, the need for a specific methodological approach to treat these areas will be re-evaluated.

The allocation to the dead wood, litter, and soil pools assumes no vertical transport of the chemical fractions from the aboveground pools to the mineral soil (belowground) (see Table 6-12). Thus, changes in SOC originating from aboveground litter, in all stages of decomposition, are assumed to be found in the organic layer above the mineral soil. While this is not strictly to be expected, all SOC is accounted for, and assumptions related to the distribution of the dead wood, litter, and soil pools do not affect the total emissions/removals. The assumptions result in a small part of the total change allocated to the soil pool. According to field studies, changes in the mineral soil are very slow and are often not significantly different from zero (Emmett et al. 2007; Peltoniemi et al. 2004).

6.4.1.1.4 Organic soils (drained) (key category)

The source category drained organic soil in forest land remaining forest land is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Choice of method

CO₂ emissions from drained organic soils on forest land are a key category. Due to the lack of national emissions factors, a Tier 1 method was chosen.

Activity data

Ditch records on the national scale are available from the 1950s (Statistics Norway, subsidy statistics). According to these data, there was an increase in the area drained annually in the 1950s, with a peak of approximately 13 kha yr⁻¹ in the early 1960s. Since then, establishing drainage ditches to facilitate forest production has become much less practiced, and establishing drainage ditches on mires with the aim of forest production was prohibited by law in 2007. Until 2007, a total accumulated area of 241 kha was reported as drained for forestry, according to Statistics Norway. Currently, 18.8% of the forest land remaining forest land areas on organic soils are ditched (here assumed to represent drained areas). All drained organic soil is found in the temperate cool climate zone, and accordingly, only the climate zone determines the default emission factor for CO₂ emissions (IPCC 2014).

The NFI routinely records the management activities conducted on the plots 5 years before each field visit (see section 6.3.1). Time of ditching was determined as follows; i) if “ditching” was recorded as a management activity in the NFI time series, then the presence of a ditch was assumed to go back as far as to the year of that record (thus not before the management activity record), ii) if a plot is split during the time series (to road, settlements or cropland, and the ditch is described as type “road-ditch” or “edge-ditch” directly bordering to croplands or settlements) then it is assumed that ditches were established in connection with the land-use change, i.e. the ditch is assumed to have been present since the year where the split occurred, iii) for cases where a ditch was recorded in 2016 or later but no NFI records before 2016 indicated management activities or land-use change, it was assumed that the ditch was also present in 1990, thus throughout the time series. This was the case for most plots where ditches were recorded in 2016 or later. In the field, the length and width of ditches were measured and used to establish a national factor, “frac ditch”, see section 6.12.2.

Emission factors

We used the default emission factor for temperate cool climate from the IPCC 2013 Wetlands supplement, 2.6 t C-CO₂ yr⁻¹ ha⁻¹, as it represents the most up-to-date information.

6.4.1.1.5 Organic soils (undrained)

Organic soil on forest land not subject to drainage was assumed to be in equilibrium. No methods are available for estimating the carbon emissions or removals in these areas. Based on NFI registrations, 81.2% of the forest land remaining forest land area on organic soil has no ditches and is therefore assumed to represent undrained areas. A study was conducted to survey existing empirical evidence on carbon emissions/removals from undrained organic forest soils. A total number of 30+ publications reporting on open and tree-covered bogs and fens in countries including Finland, Sweden, Canada, and Russia were included in the survey. The overall conclusion was that these areas have been long-term carbon sinks (for millennia, based on peat column studies), and contemporary rates (short-term studies 1-10 years) indicate that they, on average and in most years, act as sinks, but that they in some (dry) years may act as a source. Where comparisons have been made between open and tree-covered areas, there were no

indications that open areas had higher accumulation rates than tree-covered areas. Comprehensive studies include Tolonen and Turunen (1996), Turunen et al. (2002), Roulet et al. (2007), and Nilsson et al. (2008).

6.4.1.2 Uncertainties and time-series consistency

6.4.1.2.1 Living biomass

The estimation of uncertainties for CSC in tree living biomass on forest land is described in Annex 2.

The calculations of CSC in tree living biomass are conducted according to the stock change method and are based on data obtained from the NFI. More details are described in section 6.3.5.

6.4.1.2.2 Dead organic matter and mineral soils

The uncertainties for dead organic matter and mineral soil used in the key category analysis are based on Monte Carlo simulations (performed in 2024 with the Yasso07 model) of the national level of total SOC change (i.e., soil + litter + dead wood). The technique consists of running a thousand simulation loops, assigning random values within a specified range (see Table 6-18) to uncertain parameters to predict possible outcomes.

Table 6-18: Characteristics of the parameters used in the Monte Carlo simulations.

Parameter		Distribution [†]	Mean	Standard deviation	References
AWEN chemical composition (%)	Branch - pine	Normal	47.3; 1.9; 7.9; 43 ^a	3.7; 0.6; 2.9; 1.4 ^a	Expert judgment means and standard deviation (SD) are calculated from values in Table 6-16. For means based on a single value, SD is calculated for each component by calculating the mean relative standard deviation (RSD) for AWEN grouped by the woodiness category: non-wood, fine-woody, and coarse wood.
	Leaf - spruce		48.3; 13.2; 6.6; 32 ^a	4.3; 0.3; 0.1; 3.8 ^a	
	Leaf - pine		51.8; 17.7; 8.9; 21.6 ^a	4.7; 0.4; 0.2; 2.6 ^a	
	Leaf - birch		43.4; 19.5; 9.8; 27.3 ^a	3.7; 0.4; 0.2; 3.1 ^a	
	Stem - spruce		67.2; 1.8; 0.3; 30.8 ^a	4.9; 1.8; 0.4; 3.5 ^a	
	Stem - pine		68; 2.3; 0.8; 28.9 ^a	1.4; 1.1; 1.1; 0.7 ^a	
	Stem - birch		71.5; 1.5; 0; 27 ^a	9.2; 2.1; 0; 7.1 ^a	
	Fine root - spruce		55.1; 13.3; 6.7; 25 ^a	5; 0.3; 0.1; 3 ^a	

	Fine root – pine		57.9; 12.9; 6.4; 22.8 ^a	5.2; 0.3; 0.1; 2.7 ^a	
	Lichens		83.6; 7.5; 3.7; 5.2 ^a	7.5; 0.1; 0.1; 0.6 ^a	
	Moss		74; 8.7; 4.3; 13 ^a	6.7; 0.2; 0.1; 1.6 ^a	
	Herbs and grasses		27; 46.7; 23.3; 3 ^a	2.4; 0.9; 0.5; 0.4 ^a	
	Shrubs		56; 20.7; 10.3; 13 ^a	5; 0.4; 0.2; 1.6 ^a	
Fine woody litter dimension (cm)		Log-normal	$\ln(2) = 0.69^d$	$(\ln(6) - \ln(0.2))/2 = 1.70^d$	Expert judgment
Coarse woody litter dimension (cm)		Log-normal	$\ln(10) = 2.30^d$	$(\ln(12) - \ln(8))/2 = 0.20^d$	Expert judgment
Branch and coarse root turnover (yr⁻¹)		Normal	0.0125; 0.027; 0.025 ^b	20%; 25% ^c	Peltoniemi et al. (2006); expert judgment
Fine root turnover (yr⁻¹)		Log-normal	$\ln(0.6) = -0.51^d$	0.3 ^d	(Brunner et al. 2013) (Hansson et al. 2013); expert judgment
Foliage turnover (yr⁻¹)		Normal; uniform ^c	0.143; 0.33; 0.9- 1.0 ^b	15%	Peltoniemi et al. (2006); expert judgment
Ground vegetation turnover (yr⁻¹)		Normal	0.33; 0.1; 1.0; 0.25 (aboveground) ^e 0.33; 0.33 (belowground) ^f	40%	Peltoniemi et al. (2006)
Fineroot to foliage biomass ratio		Normal	0.3	50%	Expert judgement. A conservative estimate of uncertainty based on Finér (2011); Härkönen (2011), and Yuan (2010)
Biomass ratio for ground vegetation, below-to-above		Normal	2	20%	Peltoniemi et al. (2006)

¹Distributions for AWEN fraction and woody size are truncated by excluding random values from the distribution that are negative. Truncation for turnover rates is also applied, where negative values and zero are excluded. ^aAcid, water, ethanol, and non-soluble, respectively. ^bSpruce, pine, and deciduous, respectively. ^cConifers and deciduous, respectively. ^dnatural log-transformation. ^eMoss, lichens, herbs/grasses, and shrubs, respectively. ^fHerbs, grasses, and shrubs.

Uncertainty around the Yasso07 model parameters has been described in a number of parameter sets (Tuomi et al. 2011b), where covariance among model parameters is taken into consideration. A number of parameters related to model input were selected because they were assumed to have particularly large uncertainties for the carbon input parameters. The carbon input parameters were assumed to be independent of each other, but in cases where differences among species or specific components could not be documented, parameter values were drawn from the same distribution. Most parameters were assumed to be normally or log-normally distributed, and negative values were avoided by truncated distributions (resampling when negative values are drawn from the random distribution). Uncertainty was derived from the 2.5th

and 97.5th percentiles of the 1000 simulations (Figure 6.22). The result was an uncertainty estimate of the Yasso07 simulated CSC of 32.6% in 2022, which applied to both the DOM and mineral soil pools. Revised uncertainty estimate of DOM and mineral soil pools using the Yasso20 model has not yet been conducted, due to technical issues related to the size dependency algorithm in the Yasso20 model, which causes the simulation to crash for certain litter dimensions in combination with certain Yasso20 calibration parameters.

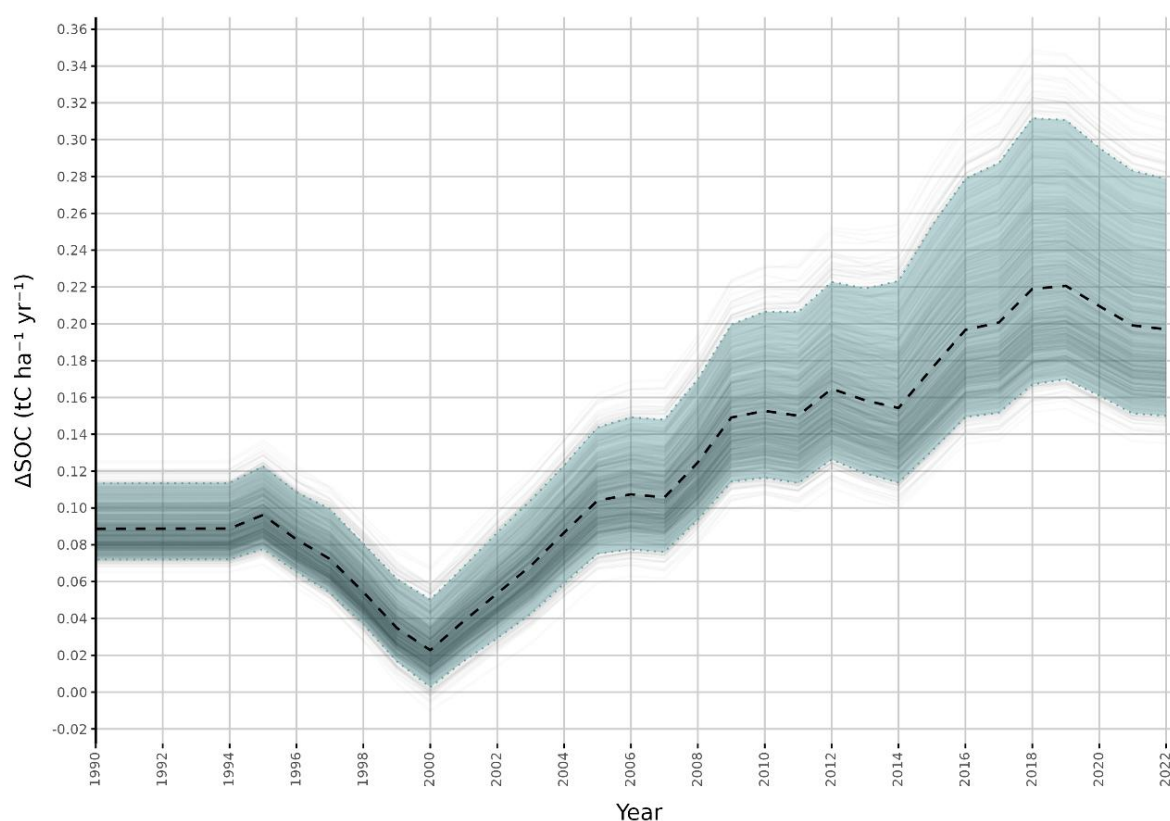


Figure 6.22: Uncertainty for CSC for SOC-derived Monte Carlo simulations ($n = 1\,000$, faint grey lines). The cyan band indicates the 95% confidence interval derived for each year from the 2.5th and 97.5th percentiles of the 1 000 simulations. The dashed line indicates the mean of the 1 000 simulations. Due to technical challenges with Yasso20, uncertainty estimates are still based on estimates from 2024 with the Yasso07 model.

Uncertainties in the biomass models (Table 6-18), the diffuse harvest and mortality frequencies underlying the carbon input estimates, and the temperature and precipitation are currently ignored, mainly for technical reasons. However, we presume that most of the uncertainty associated with the current methodology is captured.

6.4.1.2.3 Drained organic soils

Default uncertainties of the emissions factors from the IPCC 2013 Wetlands Supplement were applied, and uncertainties of the areas were estimated by sample error (see Annex 2).

6.4.1.2.4 Verification of litter, dead wood, and mineral soil

6.4.1.2.4.1 *Introduction and verification approach*

The model Yasso20 (Viskari et al. 2022) is a newer and improved version of the Yasso07 model (Tuomi et al. 2009; Tuomi et al. 2011a; Tuomi et al. 2011b) with a larger global dataset used for calibration of the Yasso model parameters, and uses mean monthly temperature instead of mean annual temperature with associated annual temperature amplitude used in Yasso07. Additionally, there is now a differentiation on the impact of climate on the parameters of the AWE, N, and H chemical pools. These improvements have made the model more applicable to a greater range of climate regions and forested and grassland ecosystems. The setup of the model makes it highly suitable to use with national forest inventory data in general. In Norway, the necessary model input can be generated using our NFI, and we believe it represents the most important drivers of short-term changes in C-pools of mineral soil, litter, and dead wood. There are currently no scientific studies that use the Yasso20 model to study soil carbon dynamics in Norway. The most detailed description of the Norwegian application of the Yasso07 model is found in (Dalsgaard et al. 2016). In a managed forest landscape, neither forest biomass, soil, nor DOM pools can be assumed to be in an equilibrium state, and using the Yasso model with the NFI-based input starting at about 1960 for estimating short-term changes in soil carbon and DOM ensures that non-equilibrium and effects of active forest management are accounted for in the reported estimates. An example is the direct link in the modelling framework between tree mortality and harvest on each NFI plot and the immediate effect observed in the input and storage of dead wood in the model. The Yasso model (version 07 or 20) is used for UNFCCC reporting for forests in Finland, Switzerland, and Austria⁵².

To perform model evaluation and validation, independent data on the relevant pools for a sufficient area and timespan must be available. Since 2022, Norway has been collecting data on soil carbon stocks in a subset of the NFI plots, and currently, 388 forested NFI plots have been sampled. Data collected during an earlier soil survey in 1988-1992 (Strand et al. 2016) does not qualify as a baseline for soil carbon due to the field methodology used at that time; thus, to provide a change estimate, the current soil monitoring program must visit each plot twice. Due to this and the scale of the Norwegian land area, we expect that the first field data for soil carbon changes on the national scale will be available earliest in 2035.

As an alternative approach for model evaluation (verification), Norway has carried out a comparison project (GJENFERD, 2022-2024). In GJENFERD Yasso07/20 simulated soil CSC using site-specific input data (living biomass, mortality, stand properties, and climate data) is compared

⁵² See publications in the next section and a list on the Yasso-homepage: <https://en.ilmatiiteenlaitos.fi/yasso-publications>).

to soil CSC measurements in the organic layer (forest floor) and upper layers of the mineral soil. The comparison was done on a total of six sites where baseline field data on soil carbon stocks in specific soil layers were collected in 2011-2013 (on two of these sites, field data were also collected in the late 1970's and 1980's) and where tree records and extensive observations of forest biomass development are available.

Two of the six sites (Nordmoen and Skiptvet) have been included in an earlier study (Kjønaas et al. (2017).

In this section, we provide three approaches for verification of the Tier 3 methodology used for mineral soil and DOM on forest land remaining forest land:

1. **Comparison of reported estimates (national scale) with those of other relevant member states:** We extract the implied emission factors from member states with similar climate and forest and/or the use of the Yasso model.
2. **Temporal dynamics of tree mortality from the NFI and model-simulated dead wood carbon stock:** We assess whether the Yasso20 model captures the dynamics in coarse woody input from observed tree mortality in the output describing dead wood stocks and stock changes on a national scale.
3. **Results from the GJENFERD project:** Measured SOC changes on the six sites (see above and Table 6-19) are compared to site-specific estimates of SOC changes from Yasso20 simulations. Measurements cover the carbon in the forest floor and mineral soil beneath the forest floor. We assess the representation of these sites on a national level.

6.4.1.2.4.2 Results: DOM and mineral soil comparison with other member states

An earlier study reported a national average estimate for Yasso07 for Norwegian forests (18 g C/m²yr; aggregated to national scale) to be within the range found for neighboring countries (Dalsgaard et al. 2017). The equivalent implied emission factor is now 7 g C/m²yr. A literature review was performed in 2017 showing:

- Finland at the national scale (11-12 g C/m²yr) (measurements (Rantakari et al. 2012); and the Finnish GHG inventory 2014 for the DOM and SOC pools)
- Sweden at the national scale (18-20 g C/m²yr) (SOC + DOM in the GHG inventory 2014)
- Sweden at the national scale (12-13 g C/m²yr and 6-7 g C/m²yr) (model estimates 1926-2000 using two alternative models (Ortiz et al. 2013; Ågren et al. 2008))
- Sweden (25 g C/m²yr) (humus layer (Berg et al. 2009)).

Based on the implied emission factors extracted from the GHG inventories of other member states (where soil, litter, and dead wood are combined, as they are estimated combined in Yasso20 for Norway), we find that Norway's estimates are in the same order of magnitude as the other countries (see Figure.6.23).

Until NIR 2020, Norway applied the Yasso07 model with a long-term average climate input (static climate), while the input to the model from vegetation (tree data in the NFI) reflected potential

effects of climatic changes on biomass and growth; the recent changes in climate in the decomposition model of Yasso07 per se were not reflected in the reported estimates. In NIR 2021, dynamic climate data (5-year backwards-looking moving average) were used with Yasso07. In NIR 2023, it was assured that the backwards-looking moving climate averages reflected the actual time interval between inventories, which in some early years of the NFI may vary from 1 to 12 years (see section 6.3.4.1). After changing the climate input to Yasso07, the estimated SOC accumulation estimates decreased and stabilized compared with previous submissions, as a historically increasing litter input is now at least partly balanced by the increase in temperature, leading to higher respiration. In NIR 2022 scripts for the Yasso07 litter were updated, and code was restructured. A change to the earlier script, to increase consistency with the reporting method for Afforestation (Tier1), ensured that all forest plots are initialized in Yasso07 to a SOC stock reflecting continuous forest cover (Forest Remaining Forest) regardless of whether they were young forests. This is to avoid double-counting in the transition of plots from the Afforestation to the Forest Remaining Forest categories. From NIR 2024, NFI plot-specific measurement-based biomass estimates of natural mortality and other harvest were used as input in the Yasso07 model, instead of mortality biomass estimates calculated as a fraction of the standing biomass. Issues related to some discovered double-counting of mortality introduced in the NIR 2024 were resolved in the NIR 2025. In NIR 2026, Yasso20 was implemented.

The development of the Tier 3 estimates of carbon stock changes for litter, dead wood, and soil for Norway is presented in Figure.6.23.

Yasso20-estimated changes for a selected region in south-eastern Norway (plots located within the boundaries latitude 59.2511 to 61.2351 and longitude 9.4486 to 13.4752), that are located close to Sweden, show that estimates are similar or closer to the Swedish measurement-based estimates than Norway's national average (see NOR2026-SE in Figure.6.23). Norway's climate and forest ecology vary from region to region. Plots found in south-eastern Norway are expected to be relatively similar to a large part of Sweden. The closer match indicates that the model can capture the regional variations well and provide comparable estimates with observed data.

The boxplots (Figure.6.23) show that estimates of carbon stock changes from Norway are within the span of all countries represented. Austria has the highest annual variability among the selected countries. This is likely due to the use of annual climate data. Overall, the boxplots suggest that the Yasso20 model can produce reasonable estimates for Norwegian climate and forests when compared with countries with similar environmental conditions.

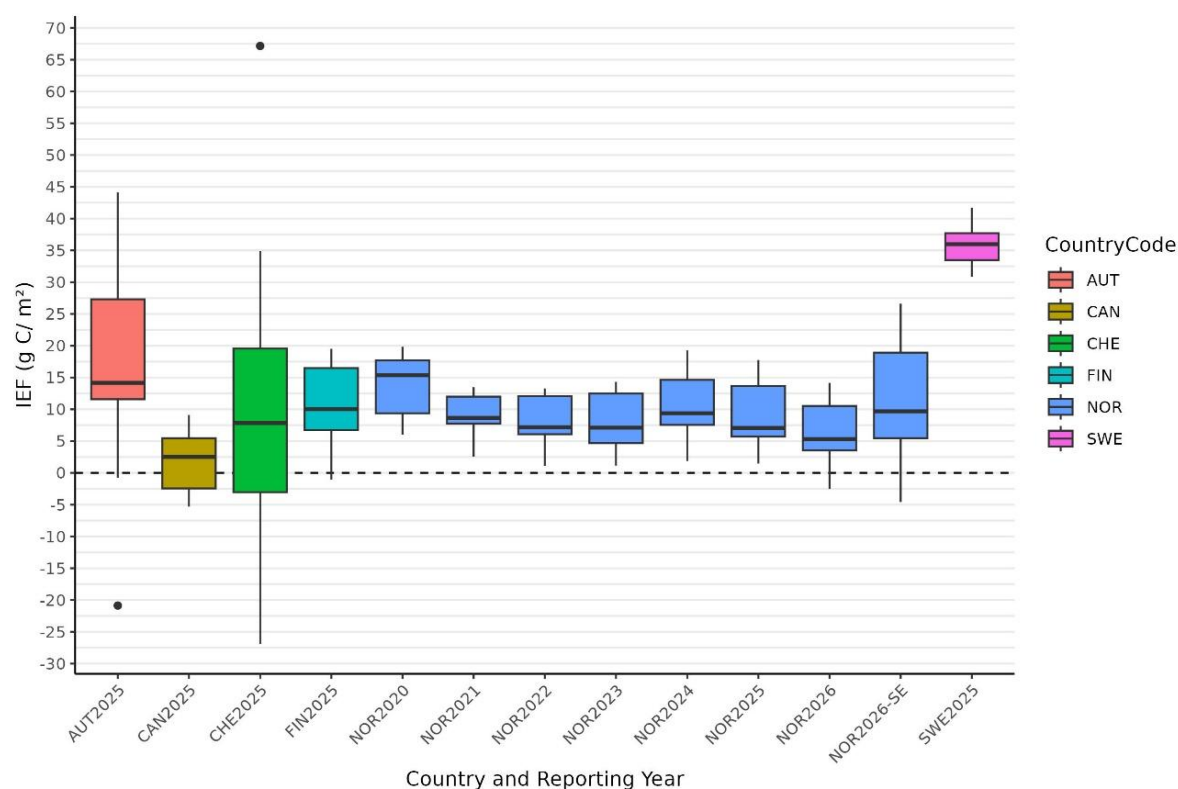


Figure.6.23: Boxplot of the sum of implied emission factors (IEF)⁵³ for dead wood, litter, and mineral soil for forest land remaining forest land from CRT tables for the countries Austria (AUT), Canada (CAN), Switzerland (CHE), Finland (FIN), Sweden (SWE), and Norway (NOR). Except for Sweden and Canada, all countries presented in the graph use the Yasso model (v07 or v20), either for dead wood, litter, and/or mineral soil CSC. Canada uses a carbon budget model, CBM-CFS3 (Kurz 2009), and Sweden uses soil and dead wood measurements. Each boxplot consists of IEF for all the years for a given reporting year (the number after the country abbreviation). For Norway reporting years 2020, 2021, 2022, 2023, 2024, 2025, and 2026 are presented for the whole country, and south-eastern Norway only for the year 2026.

6.4.1.2.4.3 Results: tree mortality and model dead wood pool dynamics

Living biomass loss on forest land remaining forest land are related to mortality and harvest. Coarse biomass components from mortality (stems, stumps) and harvest (stumps) are carbon input to the Yasso20 model, and the output is used to calculate net change in dead wood carbon stock. Living biomass loss from harvest was declining from 1990 to 2010. After 2010, the harvest has been continuously increasing. Mortality has remained stable from 1990 to 2000, after which point it has been steadily increasing. Yasso20 simulated estimates show an increasing dead wood carbon pool from 1990 onwards, with a slightly higher increase from 2000 and an even more

⁵³IEF from the CRT tables are not directly used in the figure for Norway. This is because ETF GHG inventory reporting tool calculates litter and dead wood IEF by dividing the reported CSC by the total area for forest land remaining forest land. However, Yasso07 is only run on land which is mineral soil. Henceforth, dead wood, litter, and mineral soil IEF presented for Norway have all be corrected by dividing the CSC with the mineral soil area.

pronounced increase from 2010. We can see that the dynamics of the Yasso20 net carbon stock change of dead wood follow the dynamics of living biomass losses (see Figure.6.24). Both input sources (mortality, harvest) tend to be more or less stable from 2020, which is also reflected in the Yasso20 output timeseries. The timeseries is subject to high uncertainties in the last years of the inventory due to the 5-year cycles of the NFI and gap-filling in plots not physically inventoried in the most recent years. The NFI carries out dead wood inventories, and such data may be used to provide an independent estimate of dead wood carbon stocks. A study is currently ongoing to directly estimate the carbon pool in dead wood by the use of dead wood inventories, but results are not yet available.

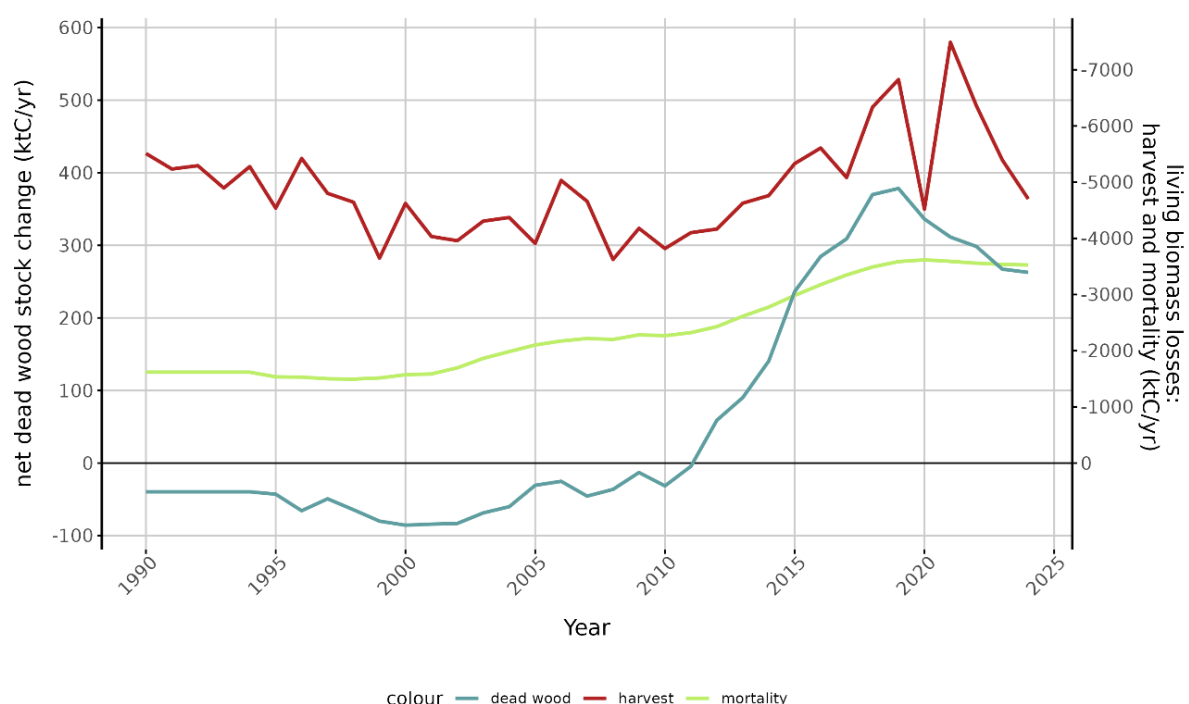


Figure.6.24: Temporal dynamics in mortality and harvest and Yasso20-simulated carbon stocks in the dead wood pool.

6.4.1.2.4.4 Results: GJENFERD project – site-specific model evaluation against measured soil carbon

6.4.1.2.4.4.1 Summary of methods

The six sites are located primarily in south-eastern Norway, but one site is found in Finnmark, far north and close to the Russian border (Figure 6.25). Spruce is the most frequent tree species, but sites with deciduous forest (birch) and pine are represented. The soil layers that are repeatedly sampled to reach an estimate for soil carbon changes do not cover the entire depth of the soil profile at any of the six sites (for Norway, such samples are nearly impossible to collect due to

stones, roots, etc.). For five of the six sites, layers include the organic layer (forest floor) and the uppermost layers of the mineral soil; for one site, only changes in the organic layer are included. Stand characteristics and methodological information, including specific depth of sampled soil layers, are summarized in Table 6-19. For more details, see Kjønås et al. (2025) and Dalsgaard et al. (Unpublished manuscript).

Soil sampling was carried out with cylindrical corers in a systematic sampling grid across each site and plot, and included the organic layer above the mineral soil (forest floor) as well as specified layers in the mineral soil. Field methodologies were consistent over time for each site. Many sites were stony and the depth to which repeated sampling was possible varied among sites (see Table 6-19). In four of six sites, samples were taken at fixed depths, and at one site at a combination of fixed depth and generic horizon. At one site, only results from the forest floor are included. Details of field methods, pretreatment of soil samples, laboratory methods, and upscaling to kg C / m² are described in Kjønås et al. (2025).

Yasso20 estimates the SOC stock change for a given site and plots to a depth of approximately 1 m (the rooted soil volume). Based on the type of input (coarse-woody, fine-woody, or non-woody), its origin (aboveground or belowground), and the chemical quality (AWEN or H), the output from the model is, in our application, grouped to the “litter”, “soil”, or “dead wood” pools. The scheme for distribution to the three reporting pools is identical for the GHG inventory (see section 6.4.1) and for the results shown here in the verification section. Comparisons between simulated and measured soil carbon stock changes use only the output from Yasso20 that are included in the reporting pools “litter” and “soil”.

16 different simulations with Yasso20 were performed for each site (except for a few cases that could only be performed on three sites due to data availability; see below). We used the same overall approach as that used for the GHG inventory (see mineral soils under section 6.4.1). A spin-up was performed to ensure the model pools reach a steady state, which is followed by a pre-simulation (backcast). Then the actual targeted time series was simulated. The pre-simulation assures that the stand dynamics are reflected in a realistic way 35 years before the beginning of the target time series, and that the modelled carbon pools are not in equilibrium at the beginning of the target time series. One of the 16 simulations uses the default methodology for generating the input data for the NFI plots in the GHG inventory (named “1: DEFAULT”). The remaining simulations were carried out to investigate the sensitivity of the results to five different aspects that are summarized below (see also Dalsgaard et al. (Unpublished manuscript)):

- Tree biomass models: we tested the significance of using either more simplistic (“2: Marklund T17/G15”) or more advanced (“3: Marklund T20/G17”) versions of the biomass models developed by Marklund (1988). These two simulations are carried out only for three sites where consistent data, particularly for the more advanced biomass models, were available. See also below (under results).
- The effect of annualization of litter input rates, based on annual biomass interpolation, and annual climate data (“4: Interpolated Biomass”; this is in contrast to using the same

litter input rate for the number of years between two field biomass observations, and a backward-looking moving average climate for the same time interval).

- Alternative model input used to compute the steady-state initialization of the model (plots categorized by vegetation zone instead of by tree species and site index as in the reported estimates, “5: Alt. spinup”).
- The effect of alternative assumptions to calculate fine root biomass, thus fine root litter input. Due to a general lack of measurements of this source of model input, it is characterized by a high uncertainty; therefore, a range of different alternatives is included.
 - Simulations 6-8 assume direct proportionality between fineroot- and foliage biomass throughout stand development, with proportionality ratios varying depending on site characteristics such as site index (7) or vegetation type (6 and 8).
 - Simulations 9-14 assume a constant fine-root biomass throughout stand development from age 30 years (thus, no fixed proportionality to foliage biomass) but with fineroot biomass depending on long-term climate and forest types (conifer vs. broadleaved; early vs. late successional, and an ensemble mean of the four variants).
- The effect of not including coarse woody input in the decades before soil sampling for either a relatively short time (25-80 years, depending on site; “14: coarsewood short”) or a long time (60-150 years, depending on site; “15: coarsewood long”). Soil coring cannot include the carbon present in dead stems and stumps when they are still incompletely fragmented/ decomposed. By leaving out coarse woody input, we increase the comparability between model output and measurements. These simulations were carried out as a supplement to the distribution to reporting pools (see above).

The latter of these points illustrates a challenge in model evaluation in general, as it is difficult to ensure perfect consistency between the carbon pools available through models and the carbon pools that are available through field methodologies of sampling.

Table 6-19: Sites used for comparing measured and Yasso20-simulated soil carbon development. Some methodological details are summarized. MAT (mean annual temperature), MAP (mean annual precipitation). Explanation of sampled soil layers: LFH (the organic layer above the mineral soil), O/Ah (a layer of organic material above the mineral soil but where there may be some mixing into the surface of mineral soil), E (a light-coloured carbon poor mineral soil layer typically found beneath the organic layer in podsol), Bx-y cm (a dark-coloured carbon rich mineral soil layer typically found beneath the E-layer).

	Asker	Nordmoen	Skiptvet	Hurdal	Osen	Svanhovd
MAT (°C)	3.9	4.65	6.30	3.29	0.68	-0.72

MAP (mm)	990	853	959	875	692	435
Tree species and site index (SI, stand height at age 40)	Norway spruce SI:17-21	Spruce SI:17-19 Pine SI:18-19 birch SI:19-23	Spruce, birch, and mixtures (SI ca. 24)	Norway spruce SI:17	Norway spruce and Scots pine SI:12.4	Scots pine SI:8
Sampling depth (repeated to quantify SOC changes)	LFH – 20 cm	Horizons: O/Ah, E, B3-8 cm and B18-23cm	Organic horizon - 30 cm	LFH	LFH – 15 cm	LFH – 15 cm
Stand age (years in 2020)	75	41-44	45-51	93	167	106
Site history/experimental setup	Long-term silvicultural trial	Experimental soil ecology study site	Long-term silvicultural trial	ICP forest monitoring site	ICP forest monitoring site	ICP forest monitoring site
Number of plots per site	8	4 birch, 4 pine, 4 spruce	6 birch-dominated, 4 spruce-dominated.	1 (4 pseudo rep.)	1 (4 pseudo rep.)	1 (4 pseudo rep.)
First and last soil sampling (no. campaigns)	2013-2022 (2)	1978-2012 (4)	1978-2012 (4)	2002-2023 (3)	2013-2022 (2)	2013-2022 (2)
First and last tree records	1976-2023	1978-2011	1976-2019	1996-2019	1986-2019	1986-2023

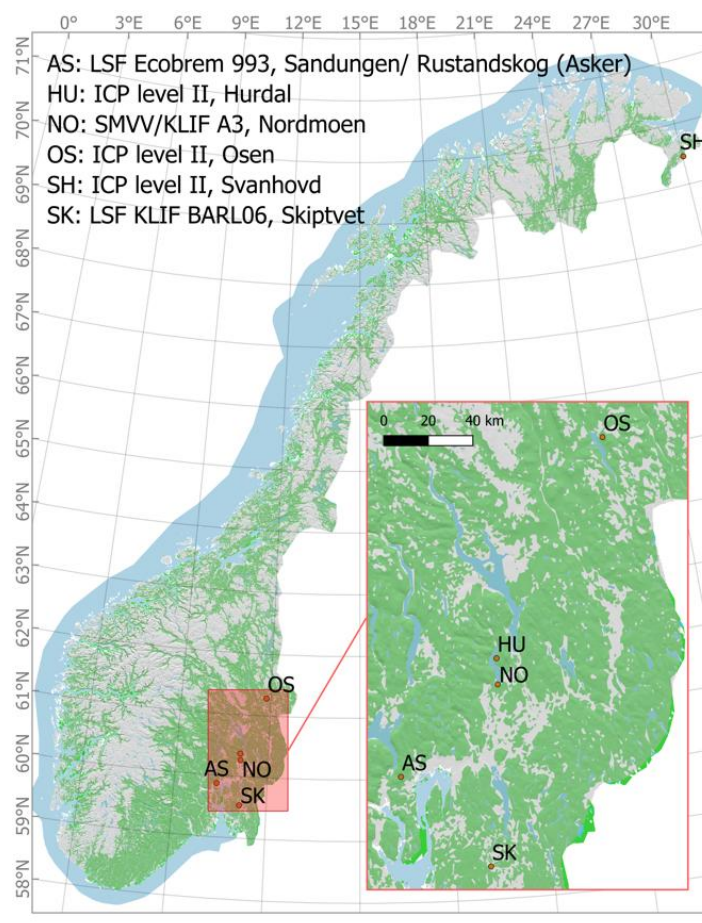


Figure 6.25: Forest sites where SOC changes are measured by repeated soil sampling and site-specific Yasso20-simulations are performed. The map is produced by the Norwegian Institute of Bioeconomy Research (J. Ralph).

The annual change rates estimated by measurements and by models and presented in the comparisons below were computed as follows: For sites with only two sampling occasions, change rates are the difference divided by the time-span. For sites with more than two observations of soil carbon over time, we express the change rate for each site (and tree species for sites where this is relevant) as the inclination parameter of a linear regression of SOC stocks over time. This was also done for simulated SOC (reflecting the same time span as the years of measurement). This method was chosen to capture the overall trend over time and to give equal weight to all observations at sites where more than two observations were available.

6.4.1.2.4.4.2 Summary of results

For the majority of sites, Yasso20 estimates for the SOC stock are higher than for measured stocks (Figure 6.26), which is expected as the measured stocks included for the verification only represent certain soil layers (Table 6-19 and descriptions above). Similarly, the variability that has been indicated represents a SOC estimate to ca. 1 m (simulations), but for observed estimates,

only the SOC stocks in the resampled layers, i.e., uncertainties in all soil layers of the soil profile, must be included (error propagation) to express the total measured uncertainty in measured total SOC stocks. Such error propagation has not been carried out for these measurements.

For simplicity, Figure 6.26 only shows simulated SOC stocks for the years where also measured data is available. Simulated and measured trends in SOC are similar at some sites and different at others. Figure 6.26 illustrates the results on soil carbon stocks in an intuitive way, but the resulting magnitude of SOC changes is easily masked as changes will be in the magnitude of 0-200 g of carbon annually (per m²), whereas the SOC stocks are meaningfully illustrated at the scale of 0-12 kg (per m²).

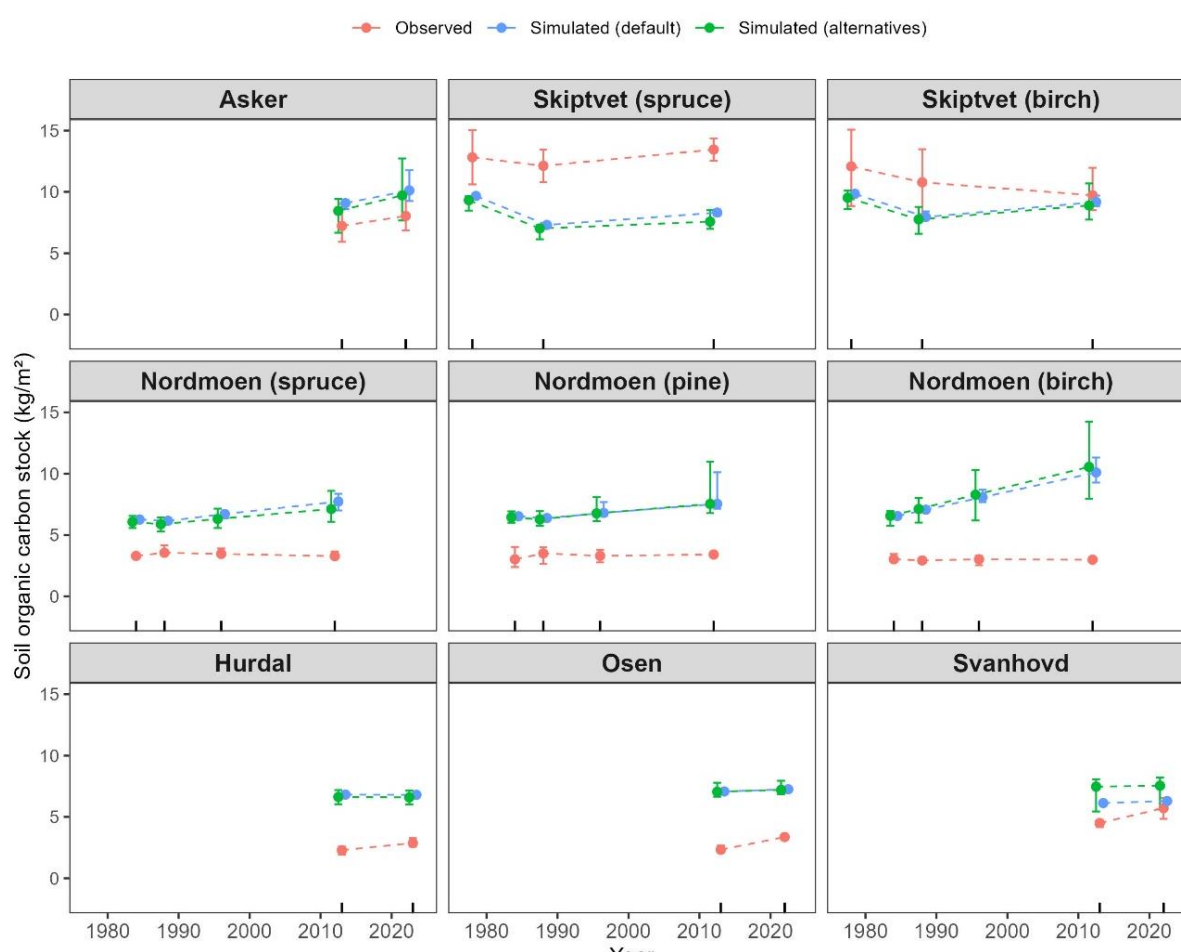


Figure 6.26: Development of soil organic carbon (SOC) stock for forest sites based on observed data and simulated predictions. Red data points represent the observed SOC stock, while blue data points show simulated SOC predictions based on the Yasso20 model of SOC dynamics, following the default methodology as used in the LULUCF reporting. Green data points represent SOC predictions using 15 alternative simulation methodologies (see text). Each data points indicate the median (50th percentile) SOC stock at the site-level. Error spans range from the 25th percentile (Q1) to the 75th percentile (Q3). Data points and error bars for Hurdal, Osen, and Svanhovd are based on bulked soil samples in four

soil "series" (pseudo-replicates) representing the same area, and thus do not represent the full extent of spatial variability in SOC at the site. Dashed lines illustrate the development of the SOC stock between measurement periods. Time points for observation and prediction are marked by inner tick marks.

For verification (model evaluation) for the national GHG inventory, we look at the data across sites. The model performance for each individual site is not our primary concern, but rather the ability of the model (in combination with the model input) to give an unbiased estimate of SOC changes across these sites as a whole.

As expected, the variability among sites for both observations and simulations of soil carbon changes was large (Figure 6.27). Median and mean values for the DEFAULT simulation appear higher than for observed values, but the range of estimated change rates across the sites was similar. For these selected sites (the only sites available in Norway currently), the data is too scarce to perform rigorous statistical tests. However, the magnitude of the standard error of the mean (SEM) indicates that a 95% confidence interval (ca. $2 \times \text{SEM}$) for the mean change estimates of observed and DEFAULT simulation would overlap with each other (as well as for the remaining simulations).

The low variability found for simulations no. 2 and 3 was most likely because they were performed only on the three ICP forest sites (due to data availability, see above), but it indicates that it does matter which specific biomass model is used. For the six data sets we have available, it also seems that the annualization of biomass data makes a large effect (simulation no. 4); this is likely to be the combined effect of field inventory year intervals and the stand development of the sites in question, but highlights the potential importance of temporal resolution. Variability among simulations (in addition to the DEFAULT) indicated that changing inherently uncertain assumptions on model input may affect model results. Changes to the calculation of foliage input were not among our 14 alternative simulations but were found, by comparison to measured litter fall at some sites, to be an additional aspect to consider (see details in Dalsgaard et al. (Unpublished manuscript)).

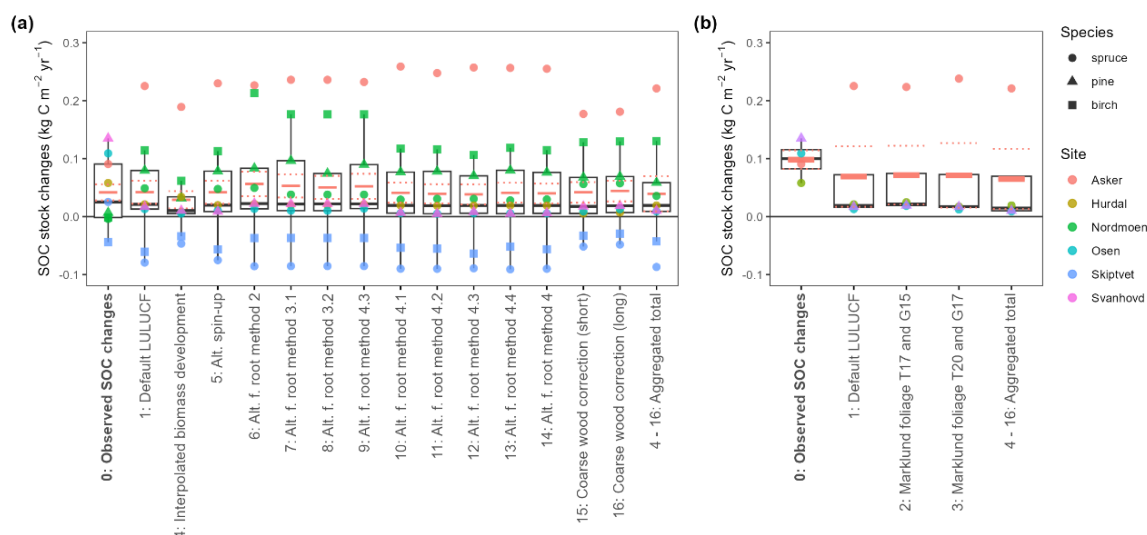


Figure 6.27: Boxplot of soil organic carbon (SOC) stock change for all sites grouped by observations, simulations (no. 1-16), and the aggregated total of simulations 4-16. Simulated SOC CSC are based on the Yasso20 model of SOC dynamics, while implementing (15) different methodologies for computing model input. The black and red lines in the boxplot indicate the median (50th percentile) and mean of estimates from plots across all sites, respectively. Each box represents the interquartile range of the data, spanning from the 25th percentile (Q1) to the 75th percentile (Q3). The lower and upper whiskers extend to the smallest and largest values within 1.5 times the interquartile range from Q1 and Q3, respectively. Data points beyond this range are considered outliers. The horizontal broken red lines in the boxes indicate $\pm$ one standard error of the mean (SEM). Each plot is represented as a point on top of each boxplot, with color grouped for each site, and shape for the dominant tree species. Boxplots for simulations 2 and 3 only include data for Asker, Hurdal, Osen, and Svanhovd, and are therefore separated out in plot (b) together with observations and the default simulation. The remaining simulations are found in plot (a) together with the observations and the default simulation.

It was evident that the DEFAULT model performed differently on the six sites (Figure 6.28): Where measured changes on Nordmoen were similar for the three stand types (tree species) and close to zero, simulations indicated high and species-specific accumulation rates. For Hurdal, Osen, Asker, and Svanhovd, both methods indicated accumulation but at different rates. For Skiptvet, the losses estimated by the model were backed up by measurements for birch-dominated plots, but not for spruce.

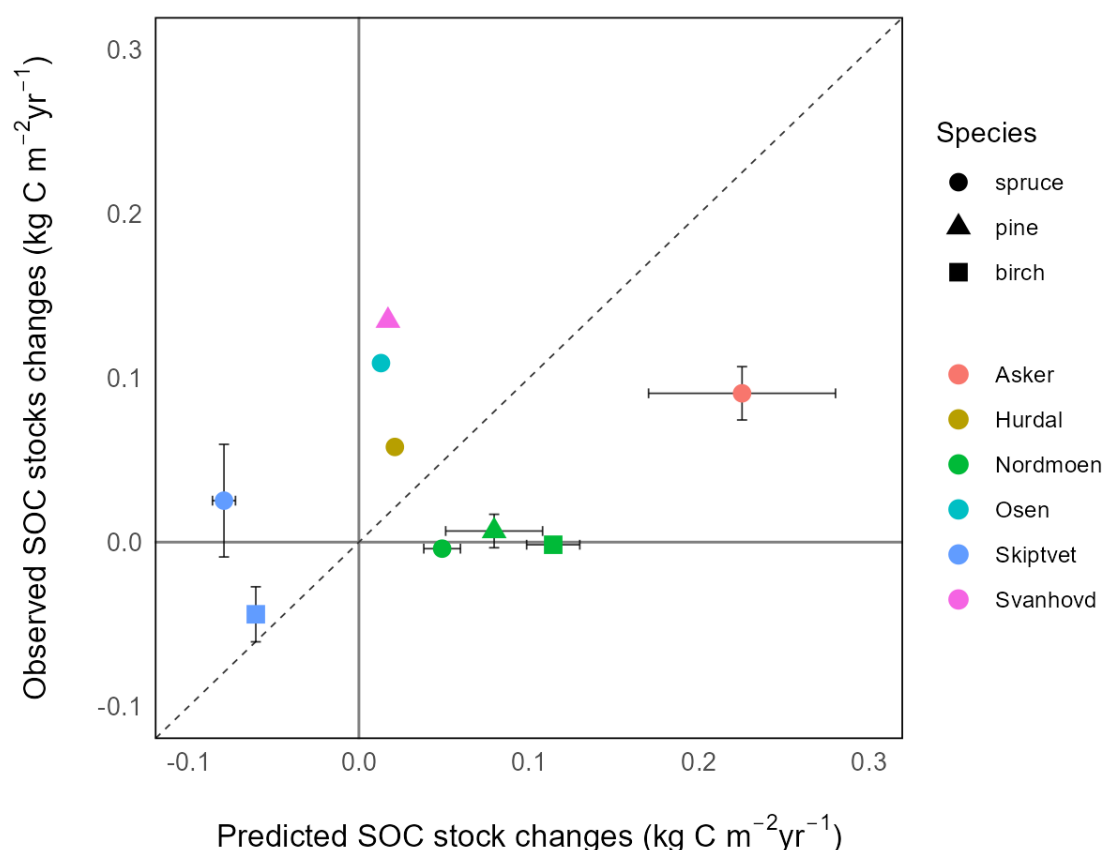


Figure 6.28: Relationship between observed and simulated changes in soil organic carbon (SOC) stocks for six forest sites. Simulated SOC CSC are based on the Yasso20 model of SOC dynamics and according to the default methodology of the LULUCF reporting (DEFAULT). Error bars represent the standard errors (SEM) of observed and simulated SOC CSC. In the plot, changes for the sites are shown separately for different dominant tree species by the shape of the point. For sites Osen, Hurdal, and Svanhovd, only the mean of pseudo-replicates is shown (mean over pseudo-replicates). The dashed line represents the line of equality: a 1:1 relationship between observed and simulated SOC changes.

Uncertainties are inherent for both observations and simulations. Both between sites and within sites. To some extent, these are illustrated in the figures above by presenting the percentiles or SEM at spatially different sites and spatially different plots within sites (where both soil samples and simulations were performed; sites Asker, Skiptvet, and Nordmoen). Due to the field protocol for ICP forest sites (Svanhovd, Osen, and Hurdal), the variability illustrated in the figure does not reflect the same spatial variability but rather “pseudo-replicates” representing the variability in sampling the same area consecutive times. Also, as mentioned above, uncertainties and SOC stocks for the total measured carbon in a profile are not presented. Variability in simulations reflects the spatial aspect (site and different plots within sites), and the 15 alternative simulations, in addition to the DEFAULT, illustrate the sensitivity to model results by use of different

assumptions for input data generation. The mean or median (across sites) for the range of alternative simulations included indicates that they may change by a magnitude of ca. 25-100% if assumptions for the generation of model input vary. At the national scale (GHG inventory) it was earlier estimated for Yasso07 (by Monte Carlo methodology, see uncertainties under section 6.4.1) that national change estimates for litter, soil and dead wood together have a 95% confidence band of approximately $\pm 33\%$; this estimate was found by a systematic approach taking the expected distributions of the model parameters as well as input rates into consideration (see Table 6-18).

Field sampling of soil carbon is challenging due to a very high spatial heterogeneity in forest soils (due to roots, stones, burrows, micro-topography, and moisture variations, etc.) and the difficulty of physically reaching deeper layers of mineral soil. Further, the temporal aspect makes it difficult to have consistency as personnel, weather, and tools may not always be the same from year to year. Our six sites present different challenges in terms of field sampling uncertainties. To some extent, uncertainties have been reduced by including only certain soil layers (Table 6-19). These are the layers close to the soil surface, where the vast majority of changes are expected to occur (see e.g. Kjønaas et al. (2021)). At the same time, this means that changes potentially taking place in the deep mineral soil layers are not represented in measurements. Measuring SOC change in deep mineral soil layers is very difficult due to slow changes and high spatial variability. Uncertainties in the observed values will also include the steps made in laboratory analyses. Calculations, uncertainties, and further details on the analyses can be found in Kjønaas et al. (Unpublished manuscript).

6.4.1.2.4.4.3 *National representation*

Given the few available sites for verification of the Tier 3 methodology, an important aspect is to assess how well the GJENFERD sites are represented nationally by the variety of forest types. Here we have stratified Norway by dominant tree species and forest productivity class (Table 6-20 and Table 6-21), and vegetation classification (Table 6-22 and Table 6-23). Each table presents the strata's national representation. National representation can be assessed by contribution to emissions or removals at a national level (Table 6-20 and Table 6-22), or area representation (Table 6-21 and Table 6-23). The GJENFERD sites are compared with different strata in order to assess their representation at a national level.

By stratifying the NFI sites used to generate the national GHG level change estimate, we find that GJENFERD sites represent about 53 % of SOC CSC (Table 6-20) and about 27 % of the area (Table 6-21) distributed over dominant tree species and site index classes on forest land remaining forest land on mineral soil. Further, we find that the GJENFERD sites represent about 59 % of SOC CSC (Table 6-22) and about 59% of the area (Table 6-23) distributed over vegetation types on forest land remaining forest land in mineral soil.

Table 6-20: Overview of national representation of SOC (mineral soil + litter fraction) carbon stock change (CSC) on forest land remaining forest land stratified by dominant tree species and productivity class, and which GJENFERD sites are covered. Representation CSC score is the percentage of the absolute value of the CSC means ($\text{kg C m}^{-2} \text{ yr}^{-1}$), thereby providing a ranking of the magnitude each strata contributes either with emissions (positive values) or removals (negative values) to the national GHG accounting. The table presents the largest sources/sinks, in descending order, that contribute up to 90% of emissions/removals. Estimates of SOC CSC are based on the mean for the last 25 years, with the upper and lower 95% confidence intervals capturing the sampling uncertainty of the mean for the plots of each strata.

Prod. class ¹	Dominant tree species ²	SOC CSC ($\text{kg C m}^{-2} \text{ yr}^{-1}$)			Representation CSC score (%)	Cumulative representation CSC score (%)	GJENFERD sites ³
		mean	upr95 CI	lwr95 CI			
H	spruce	0.035	0.03	0.041	21.3	21.3	AS, HU, NO, SK
M	spruce	0.007	0.004	0.011	14.4	35.7	OS
L	broadleaf	0.002	0.001	0.004	9	44.6	
M	broadleaf	0.012	0.009	0.014	7.8	52.4	
M	pine	0.007	0.005	0.009	6.2	58.6	
H	broadleaf-spruce	0.012	0	0.024	5.5	64.1	NO, SK
H	broadleaf	0.015	0.005	0.025	5.2	69.3	NO, SK
L	spruce	0.007	0.005	0.009	4.9	74.2	
L	pine	0.002	0.001	0.003	4.7	79	SH
U	broadleaf	0.001	0	0.001	4.1	83.1	
M	broadleaf-spruce	0.001	-0.007	0.01	4	87	
H	pine	0.011	0.002	0.019	2	89	NO

¹Productivity class: H = High productivity (SI >17), M = Medium productivity (SI = [11,14]), L = Low productivity (SI = [6,8]), U = Unproductive (SI < 6). Site index (SI) was defined as the mean height of the 100 thickest trees ha^{-1} at the reference age of 40 years, and it is estimated at each cycle of the NFI.

²Two dominant tree species indicate that both tree species have been dominant, in no particular order, within the 25 years.

³AS = Asker, HU = Hurdal, NO = Nordmoen, OS = Osen, SK = Skiptvet, SH = Svanhovd.

Table 6-21: Overview of national representation of SOC (mineral soil + litter fraction) carbon stock change (CSC) on forest land remaining forest land stratified by dominant tree species and site-index, and which GJENFERD sites are covered. The ranking in the table is done by area representation. The

table thereby provides insight into how Norway's forest land remaining forest land with mineral soil is represented in area by the different strata. Large areas don't necessarily contribute significantly to the national GHG accounting. The table presents the largest areas, in descending order, that contribute to 90% of forest land remaining forest land with mineral soil area. Estimates of SOC CSC are based on the mean for the last 25 years, with the upper and lower 95% confidence intervals capturing the sampling uncertainty of the mean for the plots of each strata.

Prod. class ¹	Dominant tree species ²	SOC CSC (kg C m ⁻² yr ⁻¹)			Area representation (%)	Cumulative area representation (%)	GJENFERD sites ³
		mean	upr95CI	lwr95CI			
U	broadleaf	0.001	0	0.001	15.7	15.7	
L	broadleaf	0.002	0.001	0.004	15.5	31.2	
L	pine	0.002	0.001	0.003	10.4	41.7	SH
M	spruce	0.007	0.004	0.011	8.9	50.6	OS
H	spruce	0.035	0.03	0.041	7.8	58.4	AS, HU, NO, SK
M	broadleaf	0.012	0.009	0.014	6.5	64.8	
U	pine	0.005	0.004	0.006	6.4	71.3	
M	pine	0.007	0.005	0.009	6.4	77.6	
L	spruce	0.007	0.005	0.009	6.2	83.9	
U	spruce	0.007	0.005	0.008	2.3	86.2	
M	broadleaf-spruce	0.001	-0.007	0.01	2.1	88.3	

¹Productivity class: H = High productivity (SI >17), M = Medium productivity (SI = [11,14]), L = Low productivity (SI = [6,8]), U = Unproductive (SI < 6). Site index (SI) was defined as the mean height of the 100 thickest trees ha⁻¹ at the reference age of 40 years, and it is estimated at each cycle of the NFI.

²Two dominant tree species indicate that both tree species have been dominant, in no particular order, within the 25 years.

³AS = Asker, HU = Hurdal, NO = Nordmoen, OS = Osen, SK = Skiptvet, SH = Svanhovd.

Table 6-22: Overview of national representation of SOC (mineral soil + litter fraction) carbon stock change (CSC) on forest land remaining forest land stratified by vegetation type, and which GJENFERD sites are covered. Representation CSC score is the percentage of the absolute value of the CSC means, thereby providing a ranking of the magnitude each strata contributes either with emissions (positive values) or removals (negative values) to the national GHG accounting. The table presents the largest sources/sinks, in descending order, that contribute up to 90% of emissions/removals. Estimates of SOC

CSC are based on the mean for the last 25 years, with the upper and lower 95% confidence intervals capturing the sampling uncertainty of the mean for the plots of each strata.

Vegetation type	SOC CSC (kg C m ⁻² yr ⁻¹)			Representation CSC score (%)	Cumulative representation CSC score (%)	GJENFERD sites ¹
	mean	upr95CI	lwr95CI			
Billberry Forest	0.007	0.006	0.009	31	31	AS, HU, NO, OS
Small Fern Forest	0.018	0.015	0.022	17.8	48.8	
Berry Heather Forest	0.003	0.002	0.004	15.9	64.7	SH
Herb-Rich Forest	0.017	0.012	0.022	11.7	76.3	SK
Tall Herb Forest	0.008	0.004	0.012	8.1	84.4	
Bog Whortleberry Forest	0.002	0.001	0.003	4.3	88.7	

¹AS = Asker, HU = Hurdal, NO = Nordmoen, OS = Osen, SK = Skiptvet, SH = Svanhovd.

Table 6-23: Overview of national representation of SOC (mineral soil + litter fraction) carbon stock change (CSC) on forest land remaining forest land stratified by vegetation type, and which GJENFERD sites are covered. The ranking in the table is done by area representation. The table thereby provides insight into how Norway's forest land remaining forest land with mineral soil is represented in area by the different strata. Large areas don't necessarily contribute significantly to the national GHG accounting. The table presents the largest areas, in descending order, that contribute to 90% of forest land remaining forest land with mineral soil area. Estimates of SOC CSC are based on the mean for the last 25 years, with the upper and lower 95% confidence intervals capturing the sampling uncertainty of the mean for the plots of each strata.

Vegetation type	SOC CSC (kg C m ⁻² yr ⁻¹)			Area representation (%)	Cumulative area representation (%)	GJENFERD sites ¹
	mean	upr95CI	lwr95CI			
Billberry Forest	0.007	0.006	0.009	26.6	26.6	AS, HU, NO, OS
Berry Heather Forest	0.003	0.002	0.004	25.7	52.3	SH
Bog Whortleberry Forest	0.002	0.001	0.003	13.1	65.4	

Small Fern Forest	0.018	0.015	0.022	10.3	75.8	
Herb-Rich Forest	0.017	0.012	0.022	6.6	82.4	SK
Tall Herb Forest	0.008	0.004	0.012	6.1	88.5	

¹AS = Asker, HU = Hurdal, NO = Nordmoen, OS = Osen, SK = Skiptvet, SH = Svanhovd.

6.4.1.2.4.5 Conclusions

National scale estimates of annual changes in the soil and DOM pools are within the same range as that found in Sweden (measurement-based) and EU member countries reporting with a similar methodology (Yasso models). Climates and forest types are, to some degree, similar but not identical among countries; however, all countries have active forest management, as is the case in Norway. We know from earlier simulation exercises that harvest is an important driver of SOC in the Yasso simulation results, and a direct representation of harvest in the methodology ensures that this is captured; like is the case for other member states. The importance of harvest as a driver of SOC is supported by the review by Nave et al. (2010).

Direct estimates of dead wood stocks in Norway based on inventory data are not yet available. However, decadal trends in coarse woody input to the Yasso20 model generated from increasing mortality and harvest living biomass estimates are mirrored in the increases in the dead wood pool from Yasso20.

Direct comparison of measured rates of soil carbon change (in specified soil layers) and simulated rates for a DEFAULT and 15 additional simulations (reflecting alternative data input assumptions) showed that measured and DEFAULT change rates for these six sites are in the same order of magnitude, show similar ranges across sites and from estimated standard error of the mean across sites, a 95% confidence interval was overlapping. We acknowledge that model performance differed for each site, but the overlapping 95% confidence interval for change estimates across sites indicates that on the regional scale, our current model application does not result in a systematic bias. We further acknowledge that six sites are not enough for a rigorous statistical comparison at a national scale and that the ongoing collection of soil carbon data in the national soil carbon monitoring program is necessary for a rigorous and national model evaluation. The sensitivity analyses (15 alternative simulations with Yasso20) illustrate that changes to (improvements in the quality of) the input data will potentially change the estimates also at the national scale. Currently, only these six sites are available for further exploring the consequences of modifying model input data, but such work will continue, and when new soil data is available, this will be included in the analyses. We assess that by categorizing by tree species and site index class, or vegetation type, the GJENFERD sites represent 27-59% of the forest land with mineral soil in Norway (by area or by absolute carbon change).

Overall, the Tier 3 methodology for forest land remaining forest land, dead wood, litter, and mineral soil suggests that there is long-term net carbon uptake (1990 until the current reporting

year). This trend is supported by the various verification means presented above, although there are still large uncertainties. It can therefore be concluded that Norway's forest land remaining forest land, dead wood, litter, and mineral soil carbon pool stocks are likely not in equilibrium, and the use of a Tier 1 methodology is not applicable here.

6.4.1.3 QA/QC

The QA/QC plan was performed according to the Tier 1 procedure. Similar to the area estimates, the carbon change estimates were carried out by two people independently and compared on an aggregate and a sample plot basis.

The NFI database has QA/QC procedures, as explained in Annex 4.

For the estimation of carbon changes in mineral soils on forest land, the unit from the input from the NFI database was changed into tC/ha (conversion to kgC/m² before running the Yasso20). When combined with other sources unit was tC/ha. Specific attention was given to unit conversions, particularly when data were moved from one platform to another. The input data were screened for inconsistencies, i.e., the occurrence of null data/missing data, the length of input objects, etc. Plot-specific carbon input, scaled expectedly with total plot standing biomass and plot-specific SOC changes, had the expected dynamics (i.e., on average, carbon change on the plot level was negative or low in young stands vs medium age stands). Average litter input and total SOC output time series were compared with those used in the previous year's NID.

The method (model combined with NFI data) for estimating carbon changes in soil and DOM for Forest Remaining Forest was completely re-coded in 2021-2022 to make this code fit better with scripts producing other parts of the inventory. The aim was to reproduce the functionality of the old code, potentially changing (improving) functionality in the future. Throughout the work with re-coding, comparisons were made for input data and output results between the old and the new code. Final upscaled output, i.e., reported changes, were close for the two codes with deviations most likely caused by: updates in meteorological data and choices in the gap-filling procedure for missing NFI-variables and choices associated with the pre-simulation (equilibrium before 1960 and time series before 1990). QC was performed by the compiler and an expert in collaboration.

6.4.1.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.4.1.5 Planned improvements

- Dead organic matter and mineral soils: Verification of the estimates on CSC in mineral soil and DOM (Yasso) is performed continuously and described in chapter 6.4.1.2.
- Dead organic matter on organic soils: Norway is currently developing Tier 2 emission factors for carbon stock changes in the dead wood pool for forest land remaining forest land in organic soils. This work aims to improve the completeness and

representativeness of the estimates by incorporating national data from the National Forest Inventory and dedicated analyses of dead wood dynamics on organic soils. The development of these estimates has been prioritized, and results are planned to be included in the NID2027 submission.

- Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in Forest Land Remaining Forest Land, following the methodology provided in the IPCC 2013 Wetlands supplement. The implementation of this improvement is planned for the NID2027 submission.
- Soil type reclassification: Norway is currently revising the classification of organic soils by adopting a single, consistent definition across all land-use categories. This change is expected to affect the distribution of mineral and organic soils across NFI plots. Implementation of this improvement is planned for future reporting cycles.
- Organic soils: Norway is working on a roadmap for the development and implementation of Tier 2 emission factors for organic soils in Cropland, Forest land, and Grassland, where this carbon pool is classified as a key category. In parallel, Norway is assessing the feasibility of regional emission factors through collaboration with other Nordic countries. Implementation of these improvements will be considered in future reporting cycles.

6.4.2 Land converted to forest land, 4A2

Land converted to forest land occurs from all land uses except other lands. The largest area changes come from extensive grassland, followed by settlements. In the case of settlements, many types of settlements have been converted to forest land in Norway. These can roughly be divided into four groups: power lines, roads, extraction (i.e., gravel, sand, and mining), and others. Estimates of CSC are provided for living biomass, DOM, mineral soils, and organic soils for all relevant conversions. Conversion from extensive grassland to forest land is almost exclusively due to natural succession.

6.4.2.1 Methodological issues

6.4.2.1.1 Living biomass (key category)

The sink/source category living biomass on land converted from intensive grassland, settlements, and unmanaged wetlands to forest land is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Choice of method, CSC factors, and activity data

Changes in living biomass associated with land converted to Forest are estimated by distinguishing between woody and non-woody biomass components.

Losses:

- Any woody biomass losses are estimated using the Tier 3 method described in forest land remaining forest land (see section 6.4.1). Losses can happen in conversions from land

uses where trees are present and measured by the NFI (Grasslands, Unmanaged and Managed Wetlands).

- Non-woody biomass losses are estimated using default Tier 1 factors from the IPCC Guidelines, as shown in Table 6-24. As the guidelines do not provide specific Tier 1 biomass stocks for all land-use categories, the grassland biomass values are applied to conversions from Grasslands and Settlements (with green space). Cropland converted to Forests will also result in non-woody biomass loss.

Gains:

- Woody biomass gains will happen (or continue to happen) whenever an area is converted to Forest. When trees reach the predetermined minimum width, size, and crown cover in the forest definition, the NFI measures the stand. Estimates of the CSC in this category are based on the same method as for the category forest land remaining forest land (see section 6.4.1).

Table 6-24: Woody and non-woody biomass carbon stocks change factors for conversion to forest land.

Conversion	Biomass type	IPCC Climate region	Biomass gain/losses (tC ha ⁻¹)	Reference
Extensive grasslands to Forest land (net change biomass*)	Woody	-	0.117**	NFI
Intensive grasslands to Forest land (net change biomass*)	Woody	-	0.924**	NFI
Cropland to Forest land (net change biomass*)	Woody	-	1.525**	NFI
Settlements to Forest land (net change biomass*)	Woody	-	0.559**	NFI
Grassland to forest land (biomass loss)	Non-woody	Boreal	-3.995	Values from IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4, divided by the default carbon fraction for herbaceous biomass (0.47 tC per tonne d.m.)
		Cool temperate dry	-3.055	
		Cool temperate moist	-6.392	
Cropland to forest land (biomass loss)	Non-woody	-	-4.7	IPCC 2019 Refinement, Vol. 4, Ch. 5, Table 5.9

* The net change biomass considers both woody biomass losses and gains associated with the land-use conversion.

** The woody biomass values represent the average net biomass change for that land-use conversion over the entire time series. Positive values indicate net gains, while negative values indicate net losses.

6.4.2.1.2 Dead organic matter (key category)

The sink/source category of dead organic matter on land converted from extensive and intensive grassland, settlement, cropland, and unmanaged wetland to forest land is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Choice of method

Dead wood (Tier 2):

From NIR 2021 until NID 2024, Norway used a Tier 1 methodology based on the IPCC 2019 Refinement figures to estimate dead wood CSC. The IPCC default values for dead wood stocks (Bárcena et al. (2021) - Table 9) reflect Canadian forest conditions. These Tier 1 values likely include stumps, roots, and buried wood and mostly represent minimally harvested forests. They are 10–20 times higher than the dead wood volumes typically observed in Norwegian managed forests, indicating that Tier 1 values are not realistic for Norwegian conditions.

By collecting and analyzing data from selected NFI plots and a field stump survey conducted in 2023, measurements of standing dead wood, lying dead wood, stumps, and large roots were obtained. These measurements were used to generate national dead wood carbon stock factors, which were then divided by the IPCC default period (20 years) to obtain carbon stock change factors. Based on these findings, the Tier 2 approach has been implemented, using nationally estimated CSC for dead wood, ensuring greater representativeness of Norwegian conditions. For details, see Box “National dead wood estimates method description” at the end of the section.

Litter (Tier 1):

For litter, Norway continues to use the Tier 1 approach. Reference carbon stock changes are taken from the IPCC 2019 Refinement. They are supplemented by information on the fine woody litter fraction from Canadian NFI ground plots and the Canadian Forest Ecosystem Carbon Database (Canada's National Forest Inventory 2008; Shaw et al. 2005). The most appropriate default values are selected by matching each NFI plot to its IPCC climate region, FAO ecological zone (see section 6.3.2), and dominant tree species type (deciduous or coniferous).

Carbon stock change factors

Dead wood:

As a good practice, the IPCC 2019 Refinement recommends stratifying areas based on characteristics that influence the magnitude and rate of CSC in the DOM pools. After testing various stratification approaches, dominant tree species and the productivity of the area (grouped into classes) were identified as the most relevant factors, as they showed considerable differences in CSC. Thus, the CSC factors for dead wood were stratified based on (1) dominant tree species (pine, spruce, and broadleaves) and (2) productivity class (low, medium, and high)

and applied to each NFI plot accordingly. Additionally, a specific factor was estimated for unproductive forests. Values are presented in Table 6-25.

Table 6-25: Dead wood annual CSC rates ($t\ C\ ha^{-1}\ yr^{-1}$) for land converted to forest land.

Dominant tree species	Productivity class	Site Indexes ⁵⁴	Dead wood ($tC\ ha^{-1}\ yr^{-1}$)
all	Unproductive	<6	0.032
spruce	low	[6,8]	0.151
spruce	medium	[11, 14]	0.241
spruce	high	[17,20, 23, 26]	0.424
pine	low	[6,8]	0.079
pine	medium	[11, 14]	0.157
pine	high	[17,20, 23, 26]	0.281
broadleaf	low	[6,8]	0.097
broadleaf	medium	[11, 14]	0.245
broadleaf	high	[17,20, 23, 26]	0.499

Litter:

For litter, the combination of IPCC climate regions with FAO ecological zones and dominant tree species (deciduous or conifers) produces 18 distinct factors for land use changes to (and from) forest land in Norway, each with its unique reference carbon stock for the litter pool. Annual CSC rates based on the IPCC 2019 Refinement are calculated assuming that DOM reference stocks accumulate over a 20-year period (default IPCC timeframe). A complete overview of all possible litter carbon stock values for ecological climate zones in Norway can be found in Bárcena et al. (2021). Table 6-26 presents the litter CSC rates for land converted to (and from) forest land currently found in Norway.

Table 6-26: Litter annual CSC rates ($t\ C\ ha^{-1}\ yr^{-1}$) for land converted to forest land.

IPCC climate zone	Ecological climate zones FAO	Litter ($t\ C\ ha^{-1}\ yr^{-1}$)	
		deciduous	conifers
Boreal Dry	Boreal Tundra Woodland	1.55	3.45
Boreal Moist	Boreal Coniferous Forest	1.05	2.1

⁵⁴ Site index was defined as the mean height of the 100 thickest trees ha^{-1} at the reference age of 40 years, and it is estimated at each cycle of the NFI. It serves as an indicator of site productivity, where higher site index values correspond to more productive growing conditions.

Cool Temperate Dry	Temperate Mountain System	0.35	0.4
Cool Temperate Moist	Temperate Mountain System	0.3	0.4
Cool Temperate Dry	Temperate Steppe	2	1.55
Cool Temperate Moist	Temperate Oceanic Forest	0.3	0.35
Cool Temperate Moist	Temperate Continental Forest	1.35	3.5
Polar Dry	Polar	1.55	3.45
Polar Moist	Polar	1.05	2.1

Activity data

The total area of land converted to forest land was estimated by using NFI data. The CSC rates (Table 6-25 and Table 6-26) are multiplied by the representative NFI plot area for a given land-use conversion. Interpolation, extrapolation, and aggregation follow, providing yearly national values.

Box 6.2 - National dead wood estimates method description

Norway's GHG inventory has historically relied on IPCC Tier 1 default emission factors to estimate carbon stock changes in dead wood following land-use change. However, these default values (largely derived from non-Norwegian forest conditions) have been shown to substantially overestimate dead wood carbon stocks in managed Norwegian forests. To improve accuracy, and national relevance in reporting, we developed country-specific Tier 2 emission factors for dead wood carbon stocks based on Norwegian data.

The analysis was based primarily on data from the Norwegian National Forest Inventory (NFI), which provides long-term, systematically sampled information on forest structure, mortality, and dead wood dynamics across Norway. Standing and lying dead wood were quantified directly from repeated NFI field measurements, while stumps and roots (components not directly measured) were estimated indirectly using tree-level data from successive inventory cycles combined with established allometric biomass functions and decay modelling. The dataset spans multiple inventory periods from the mid-1990s to 2019–2023.

Methodologically, the work is divided into two main components reflecting fundamental differences in data availability and processes. Standing and lying dead wood are treated as observed pools, with volumes derived from plot- and transect-based measurements and converted to carbon stocks using species- and decay-class-specific wood densities and carbon concentrations. In contrast, the stump–root system is treated as a dynamic pool driven by inputs from logging and natural mortality and reduced by decomposition over time, requiring explicit modelling of carbon inputs and decay.

A range of stratification variables recommended by IPCC good practice were tested to assess their relevance under Norwegian conditions. These included site productivity, dominant tree species, logging class, FAO ecozone, and soil type. The results show that site productivity and dominant tree species are the most consistent and influential predictors of dead wood carbon stocks, for both observed dead wood and the stump–root system. Based on the findings, Tier 2 emission factors were ultimately stratified by dominant tree species and site productivity, providing improved dead wood emission factors.

6.4.2.1.3 Mineral soils

Choice of method, CSC factors, and activity data

A Tier 1 method was used based on i) a national soil class map, ii) default IPCC climate regions, iii) IPCC 2019 Refinement default reference stocks for mineral soil, and iv) IPCC 2019 Refinement default stock change factors (SCFs). The resulting CSC rates are multiplied by the area pertaining to each land-use change, represented by areas of individual NFI plots. The method is described in detail by Bárcena et al. (2021), and an overview is given here.

Two legacy soil maps were combined with ongoing agricultural soil classification (primarily agriculture and intensive grassland areas) to identify soil classes for the entire land area (see section 6.3.3). These classes provide more detail than the overall categorization as “mineral soil”. As a result, a map with soil classes (large polygons) was produced, each characterized by a combination of specific soil types. Specific soil types refer to classifications typically found in modern soil taxonomy.

To estimate a given NFI plot's reference carbon stock (SOCREF), the mapped soil class in the NFI plot location was combined with the relevant IPCC 2019 Refinement default SOCREF for the relevant IPCC climate region. When the mapped soil class contained multiple specific soil types (in a taxonomic sense), the resulting SOCREF was determined through a weighted average of IPCC default SOCREF values, using information on soil type distribution from legacy maps. A SOCREF represents the SOC stock before management.

Annual CSC rates are calculated by dividing the difference between two soil carbon equilibrium stocks (SOCEQ) by 20, the default period for land-use conversions to transition from one equilibrium to another. For a given land use, SOCEQ is calculated by multiplying the SOCREF by the stock change factors (SCF). Each SCF is a product of three factors: a factor for land use (FLU), a factor for management regimes (FMG), and a factor for nutrient input (FI). Each of these factors can take on multiple values, and default IPCC SCF values are used. Thus, annual CSC rates depend on the mapped specific soil type distribution/soil class, IPCC climate region, and land-use specific SCFs. Each estimated CSC rate can be considered unique as it depends on location, climate, and the specific land-use conversion. Table 6-27 presents the national mean CSC rates for land uses converted to forest land and for different climate regions. No CSC occurs for wetlands and extensive grasslands converted to forest land on mineral soil due to common SCF (SCF=1).

The Tier 1 methodology for estimating carbon stock changes in mineral soils utilizes:

$$\Delta SOC = (SOC_0 - SOC_{0-T})/D \quad \text{Equation 2.25 (IPCC 2006)}$$

where ΔSOC is the change in soil organic carbon over time, SOC_0 is the soil organic carbon stock in the last year of an inventory time period (tonnes C ha⁻¹), SOC_{0-T} is the soil organic carbon stock at the beginning of the inventory time period (tonnes C ha⁻¹) and D is the default time period over which the change is estimated (20 years).

Soil organic carbon stock (SOC) is determined using

$$SOC = \sum (SOC_{REF} \times F_{LU} \times F_{MG} \times F_I \times A) \quad \text{Equation 2.25 (IPCC 2006)}$$

where SOC_{REF} is the reference carbon stock (tonnes C ha⁻¹), F_{LU} is the stock change factor for land-use systems or sub-systems for a particular land-use, F_{MG} is the stock change factor for the

management regime, F_i is the stock change factor for the input of organic matter, and A is the land area of the stratum being estimated.

Table 6-27: Annual mineral soil CSC rates (mean $\pm$ standard deviation in $t\ C\ ha^{-1}\ y^{-1}$) for land converted to forest land (1990 – to the latest reporting year).

IPCC climate region	Cropland	Intensive Grassland	Settlements
Cool Temperate Dry	-	-	0.186 ± 0
Cool Temperate Moist	0.692 ± 0.097	-0.075 ± 0.0064	0.08 ± 0.18

6.4.2.1.4 Organic soils (drained)

For land converted to forest land on organic soils, we used a Tier 1 methodology, applying the default emission factor of $2.6\ t\ C\ ha^{-1}$ for the temperate zone as listed in the IPCC 2013 Wetlands supplement. We assumed that organic soil in areas with previous land-use of intensive grassland, cropland, wetlands, and settlements is drained. The activity data (areas) for organic soils on land converted to forest land were derived from the NFI.

6.4.2.2 Uncertainties and time-series consistency

Generally, the uncertainties related to emission estimates for all sinks/sources were rather large, partly due to the uncertainty of the area estimate. Uncertainties are shown in Annex 2. The time-series were consistently estimated.

6.4.2.3 QA/QC and verification

In 2026, the Tier 2 methodology for estimating carbon stock changes in dead wood was submitted for external QA. The official methodological report will be published following completion of the external assessment. The Tier 1 method for mineral soil CSC estimates was further supplemented by a more detailed method (a subdivision of area classes) for settlement. This supplement to the method was sent to external QA in 2021.

6.4.2.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.4.2.5 Planned improvements

- Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in lands converted to forest Land, following the methodology provided in the IPCC 2013 Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission.
- Organic soils: Norway is working on a roadmap for the development and implementation of Tier 2 emission factors for organic soils in Cropland, Forest land, and Grassland, where

this carbon pool is classified as a key category. In parallel, Norway is assessing the feasibility of regional emission factors through collaboration with other Nordic countries. Implementation of these improvements will be considered in future reporting cycles.

- Litter: Norway has started a reassessment of the potential for developing Tier 2 emission factors for litter, aiming at ensuring greater methodology consistency with the estimates for dead wood. Relevant scientific publications are also being monitored and evaluated for their applicability to Norwegian conditions.

6.5 Cropland – 4B

Cropland covers about 3% of the area of Norway. Agricultural cropland in Norway includes annual crops, temporary grass leys, and horticulture. The area for agriculture was primarily of grass leys (61.5%) used as forage or green manure, cereals (37%), and a smaller area with root crops (1.5%), where potatoes and carrots are the most important crops (Statistics Norway 2022). Consequently, carbon is not stored for long time intervals in aboveground biomass. An exception is horticultural crops, where fruit trees can store large amounts of carbon. However, the area of perennial woody crops is a small fraction of the cropland area (approximately 0.3%).

Substantial amounts of carbon reside in the soil, affected by agricultural management practices such as tillage, crop residue input, and organic manure application (Paustian et al. 2000). DOM is not an important source category for cropland in Norway since agroforestry systems are uncommon. This is except for forest land converted to cropland, where emissions from DOM are reported. Throughout the time series, we initially observed a decrease in the total area of cropland. However, in the last decade, this trend has reversed with an increase, primarily due to conversions from forest land and, to a lesser extent, from wetlands in organic soils. CO₂ emissions from living biomass, DOM, mineral, and organic soils on croplands are reported in CRT Table 4.B as described below, and CH₄ emissions from organic soils on croplands are reported in CRT Table 4(II) as described in section 6.12.

6.5.1 Cropland remaining cropland, 4B1

The following emission sources were reported under cropland remaining cropland: CSC in living biomass of perennial horticultural crops (fruit trees), carbon emission from mineral soils due to agricultural management (crop rotations, carbon inputs, and tillage), and carbon emission caused by the cultivation of organic soils.

6.5.1.1 Methodological issues

Annual changes in carbon stocks on cropland remaining cropland (C_{CC}) can be estimated as the sum of changes in living biomass (C_{LB}) and soils (C_{SO}) by $\Delta C_{CC} = \Delta C_{LB} + \Delta C_{SO}$. Norway applies the Tier 1 steady state assumptions for DOM because agroforestry is generally not practiced. Thus, the agricultural systems have small amounts of DOM. Living biomass is reported for fruit trees, and emissions from soils are reported for mineral soils and organic soils.

6.5.1.1.1 Living biomass

Changes in carbon in living biomass are only considered for perennial woody crops, i.e., fruit trees. Orchards may be felled, but are considered to remain cropland. It is likely that orchards are replanted with fruit trees, but may be converted to annual crops, leys, or vegetables in some instances. Annual changes in the area of fruit trees fluctuate, leading to both net emissions and removals during the inventory period. However, CSC is relatively small.

Choice of method, emission factors, and activity data

Due to a general lack of national data on biomass and carbon content in Norwegian fruit trees, we apply the Tier 1 Gain-Loss method. In the default method, the change in carbon stock in living biomass (ΔC_{LB}) is equal to the absolute carbon gain (ΔC_G) minus the absolute carbon loss (C_L) by $\Delta C_{LB} = \Delta C_G - \Delta C_L$ (IPCC 2019 Refinement, Equation 2.7).

Statistics Norway collects data every year on the areas of fruit trees (apples, plums, cherries, sweet cherries, and pears). The data is available from 1990 to the latest reporting year and collected as a questionnaire survey to provide information about yields and production area. The area of fruit trees has generally decreased since 1990. Norway uses the Tier 1 default value from the IPCC 2019 Refinement for the above-ground biomass accumulation rate in the temperate zone, and the corresponding value for maximum above-ground biomass carbon stock at harvest (Table 6-28).

The default harvest/maturity cycle is 20 years. The yearly increase or decrease in areas is accounted for from 1990 to the latest reporting year, based on the annual fruit tree area estimates provided by Statistics Norway. The age class distribution in the area with fruit trees is taken into account, and the methodology is based on several assumptions:

- a. Before 1990, the fruit tree area remained constant.
- b. The maximum tree age is 20 years, representing the felling age.
- c. The age of the trees is evenly distributed over the area before 1990 in 1-year increment age-classes.
- d. The age class distribution in 1990 and later changes is as follows:
 - The area representing the age class of 21-year-old trees is removed and replaced with the age class of 1-year-old trees.
 - If there is a net increase in area in a given year, the increase is allocated to the age class of 1-year-old trees (biomass gain).
 - For instance, if there is a net decrease in area in a given year, the areas of the oldest age classes are reduced first (20-year age class before the 19-year age class, 19-year age class before the 18-year age class, and so on). When the area of a given age class is reduced, the corresponding biomass is assumed to be lost, reflecting the biomass accumulated at that age (e.g., 8.5 t C ha⁻¹, 8.07 t C ha⁻¹, 7.64 t C ha⁻¹, etc.).

Table 6-28: Default maximum above-ground biomass and above-ground biomass accumulation rate for perennial cropland monocultures.

Factor	Definition	Climate region	IPCC default
G	Above-ground biomass accumulation rate	Temperate	0.43 t C ha ⁻¹ yr ⁻¹
Lmax	Maximum above-ground biomass carbon stock at harvest	Temperate	8.5 t C ha ⁻¹

Assumptions/justification

Given the default method, we assume that: 1) there is a uniform age-class distribution for the total perennial living biomass for each age-class in the year 1989 (base year); 2) all orchard trees are less than ≤ 20 years old, and that above-ground biomass accumulates at the default rate; 3) all felled orchards are plantations with mature trees around 21 years of age and have the default maximum above-ground carbon stock at harvest; and 4) always new 1-year-old orchards are planted, replacing the removed 21-year-old orchards.

These assumptions may not completely represent Norway, as recommendations to Norwegian fruit growers are to harvest apples, plums, and sweet cherry trees after 20 years and pear trees after 25 years (Hovland 2020). However, the activity data does not provide information on the age of the trees when felled.

6.5.1.1.2 Mineral soils

Most (roughly 93%) of agricultural production occurs on mineral soils.

Choice of method

The Tier 2 methodology for estimating carbon stock changes in mineral soils utilizes

$$\Delta SOC = (SOC_0 - SOC_{0-T})/D \quad \text{Equation 2.25 (IPCC 2006)}$$

where SOC_0 is the stock in the last year of the inventory period, and SOC_{0-T} is the carbon stock at the beginning of the inventory period. The default value for D was adjusted to 30 years, given the slower decomposition rates under the cool temperate climate in Norway (Borgen et al. 2012).

Following the example given in the IPCC 2006 Guidelines, page 2.35, first paragraph, this instruction would translate as the following: from 1990 to 2020, SOC_{0-T} is calculated for 1989 based on the assumption that SOC was at equilibrium before 1990.

$$\Delta SOC = \frac{SOC_0(\text{year} = \text{current year}) - SOC_{0-T}(\text{year} = 1989)}{30 \text{ years}}$$

From 2020 onward, the year for estimating SOC_{0-T} increased from 1990 by one year every new year.

$$\Delta SOC = \frac{SOC_0(\text{year} = \text{current year}) - SOC_{0-T}(\text{year} = \text{current year} - 30)}{30 \text{ years}}$$

SOC stocks for any year of the inventory can be calculated as the product of the soil carbon reference stock (SOC_{REF}), the stock change factors (SCF), and the area under a given management practice (A), according to

$$SOC = SOC_{REF} \times SCF \times A. \quad \text{Equation 2.26 (IPCC 2006)}$$

We used the reference stock and stock change factors estimated by the Introductory Carbon Balance Model (ICBM) in a study where CO_2 emissions were estimated for Norwegian cropland from 1999 - 2009 (Borgen et al. 2012). The ICBM is an ecosystem model from Sweden developed by Andrén et al. (2004). Soil carbon reference stocks were estimated for 31 different climatic zones (agrozones), assuming that continuous grass ley cropping was the reference condition. Stock change factors were calculated for eight rotations with and without manure application (i.e., resulting in $2 \times 8 = 16$ management rotations) for each of the 31 agrozones, resulting in a total of 496 stock change factors. The rotations were 1:2 ley-grain, 1:1 ley-grain, 2:1 ley-grain, continuous grain (with and without straw removal), continuous ley, 1:2 roots-grain, and 1:2 roots-ley, where 1:2 means 1 year of root crops and 2 years of ley, and so on. Further details of the model application and the stratification are given in Borgen et al. (2012). We calculated annual SOC changes per agrozone and summarized the CSC for the whole country.

Stock change factors and soil carbon reference stocks

The stock change factors represent the annual response of SOC to a change in management from a reference condition and can be calculated as $F = SOC/SOC_{REF}$. The soil carbon reference stocks were estimated by solving the ICBM model for steady-state conditions using carbon input equal to continuous grass ley cropping with a moderate manure application (0.5 Mg C per hectare per year) for each Norwegian agrozone. Average national stock change factors for the 16 crop rotations and average soil carbon reference stocks per agrozone are listed in Borgen et al. (2012).

Activity data

Area per crop type and manure statistics are collected annually from the Norwegian Agricultural Authority (NAA) to determine the area under each of the 16 crop rotations. Norway was divided into 31 agrozones based on a combination of counties and climate-based production zones (defined by NAA for subsidy application) as described in Borgen et al. (2012), and the statistics are given for each agrozone.

Within each agrozone, the relation between the major crops of small grains (cereal and oilseeds), root crops (e.g., potato and rutabaga), and grass ley was used to allocate the areas under each of the eight crop rotations. The activity data on the quantity of manure applied to fields with annual crops per county were received from Statistics Norway. These data correspond to the data used for estimating non-CO₂ emissions related to animal manure for the agricultural sector. As it is not possible to differentiate between manure applied to perennial grass leys on cropland from the grass leys on grassland (intensive or extensive), we only include the manure applied to annual crops (i.e., all manure applied on cropland). Further information on assumptions regarding manure distribution is given in Borgen et al. (2012). The areas of cropland remaining cropland on mineral soils were estimated by the NFI for the whole time series.

Assumptions

The IPCC Tier 1 and 2 methods assume that the SOC change resulting from a change in management is linear between two steady states. Soil carbon changes are likely to be more dynamic, and it has been argued that the lower-tier methods overestimate net carbon removal, particularly where the soil was not in a steady state at the beginning of the inventory (Sanderman & Baldock 2010). However, at present, this method provides an acceptable approximation.

6.5.1.1.3 Organic soils (drained) (key category)

Organic soils make the largest contribution of CO₂ emissions within the source categories for cropland. It was identified as a key category. Details on identification criteria can be found in chapter 1.4.

The Norwegian definition of organic soils for cropland is described in detail in section 6.2.3, Table 6-8.

Choice of method and emission factor

A Tier 1 method is used for the estimation of CO₂ emissions from organic soils on cropland, where the IPCC Tier 1 method necessitates the use of the default emission factor (EF) to be multiplied by the area (A) of organically cultivated soil according to IPCC 2006 Guidelines, Equation 2.26 $C_{LOSS} = A \times EF$. Since the 2015 submission, Norway has used the default EFs from the IPCC 2013 Wetlands supplement for boreal/temperate cropland of 7.9 t CO₂ C ha⁻¹ yr⁻¹.

Activity data

The area of agricultural organic soil was estimated as described in section 6.3.3.

6.5.1.2 Uncertainties and time-series consistency

The uncertainty estimation is related to the tier level of the methodology used for each sink/source category and land-use category. For cropland remaining cropland, Tier 1 and 2

methods for emissions estimations were applied. The IPCC 2006 Guidelines include uncertainty estimates for default emission/removal factors.

For cropland remaining cropland, the total uncertainty is equal to the propagation of the uncertainty related to the living biomass (U_{CC_LB}), mineral soils (U_{CC_MS}), and organic soils (U_{CC_OS}) and is given by

$$U_{CC} = \sqrt{U_{CC_LB}^2 + U_{CC_MS}^2 + U_{CC_OS}^2}.$$

For each source category, uncertainty is a combination of uncertainties related to the emission factors U_{EF} and the activity data U_A , which is the uncertainty used in the Key Category Analysis (KCA) and can be calculated by

$$U = \sqrt{U_A^2 + U_{EF}^2}.$$

The uncertainty of the activity data may include errors in census returns and differences in the definition between agencies, sampling design, and interpretation of samples. The activity data used under cropland, i.e., areas per crop types and manure production, were collected through the subsidy application scheme administered by NAA and compiled by Statistics Norway. The data is based on a total national census. The NAA performs quality control on 5% of farms to determine if areas are provided correctly. These sample checks show very few errors. The area reported is based on a factor value multiplied by the last year's area. Thus, errors in previous years may accumulate. However, according to expert judgment given by Statistics Norway, the uncertainty of the activity data is estimated to be approximately 0%.

6.5.1.2.1 Living biomass

Sources of uncertainty for the Tier 1 method for living biomass include the degree of accuracy in the carbon accumulation and loss rates and the land-use activity data. The default uncertainty error for aboveground woody biomass accumulation in the temperate climate follows the IPCC 2019 Refinement. Statistics Norway estimated the uncertainty of the activity data to be negligible. The areas of orchards are used directly from the Norwegian Agricultural Authority and Statistics Norway data and are unrelated to the NFI database. Therefore, the uncertainty of the carbon biomass accumulation per unit area is equal to the total uncertainty of the carbon changes in living biomass on cropland remaining cropland.

Uncertainties for activity data, emission factors, and total values are described in Annex 2.

6.5.1.2.2 Mineral and organic soils

Uncertainty related to emission estimates from soils on cropland can currently only be precisely quantified for the area estimates based on the NFI data. For the area of mineral soils on cropland

remaining cropland, the uncertainty estimate was reported in Annex 2. For the mineral soil estimates, the areas per crop type used to determine the areas under individual crop rotations were collected and compiled by the Norwegian Agriculture Authority and Statistics Norway. Since the data are based on a census, it was assumed not to increase the area uncertainty. The uncertainties related to the stock change factors estimated by ICBM were estimated based on expert judgment. For organic soils, the area uncertainty was estimated, and default uncertainties were used from the guidelines.

Uncertainties for activity data, emission factors, and total values are described in Annex 2.

6.5.1.3 QA/QC and verification

The standard Tier 1 QC procedures described in Annex 4 were performed for both living biomass and soil estimates. Before the 2013 submission, the Tier 2 methodology applied to mineral soils on cropland remaining cropland underwent quality assurance through a standardized peer-review process (Borgen et al. 2012).

6.5.1.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.5.1.5 Planned improvements

- Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in Cropland remaining Cropland, following the methodology provided in the IPCC 2013 Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission.
- Organic soils: Norway is working on a roadmap for the development and implementation of Tier 2 emission factors for organic soils in Cropland, Forest land, and Grassland, where this carbon pool is classified as a key category. In parallel, Norway is assessing the feasibility of regional emission factors through collaboration with other Nordic countries. Implementation of these improvements will be considered in future reporting cycles.

6.5.2 Land converted to cropland, 4B2

Emissions and removals on land converted to cropland are reported from the CSC in living biomass, DOM, mineral soils, and organic soils. CSC in DOM on other land-use conversions than those to and from forest land can be considered insignificant and are reported with the notation key NO in the ETF GHG inventory reporting tool.

Land conversion to cropland primarily occurs from forest land and less from grassland, wetlands, and settlements. There were no conversions from other land to cropland during the inventory period, and NO is reported in the CRT Table 4.B. Conversion of land to cropland usually results in a net carbon loss from living biomass and soils to the atmosphere, as stated in the IPCC 2006 Guidelines.

6.5.2.1 Methodological issues

6.5.2.1.1 Living biomass (key category)

The sink/source category living biomass on forest land converted to cropland is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Choice of method, CSC factors, and activity data

Changes in living biomass associated with land converted to Cropland are estimated by distinguishing between woody and non-woody biomass components.

Losses:

- Woody biomass losses are estimated using the Tier 3 method described for forest land remaining forest land (see section 6.4.1). The same approach is applied to conversions from all land uses where trees are present and measured by the NFI (Forests, Grasslands, Unmanaged and Managed Wetlands).
- Non-woody biomass losses are estimated using default Tier 1 factors from the IPCC Guidelines, as shown in Table 6-29. As the guidelines do not provide specific Tier 1 biomass stocks for all land-use categories, the grassland biomass values are applied to conversions from Grassland and from Settlements (with green space) to Cropland.

Gains:

- All land conversions to Cropland result in an instant gain of non-woody annual crop biomass in the first year of conversion, following the default methodology in the IPCC 2019 Refinement, Vol. 4, Ch. 5, Table 5.9. Details are provided below.

Table 6-29: Woody and non-woody biomass carbon stocks change factors for conversions to cropland.

Conversion	Biomass type	IPCC Climate region	Biomass gain/losses (tC ha ⁻¹)	Reference
Grassland to cropland (biomass loss)	Non-woody	Boreal	-3.995	Values from IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4, divided by the default carbon fraction for herbaceous biomass (0.47 tC per tonne d.m.)
		Cool temperate dry	-3.055	
		Cool temperate moist	-6.392	
Forest to cropland (net change biomass*)	Woody	-	-1.912**	NFI
Managed wetlands to cropland (net	Woody	-	-0.017**	NFI

change biomass*)				
All lands to cropland (biomass gain)	Non-woody	-	4.7	IPCC 2019 Refinement, Vol. 4, Ch. 5, Table 5.9

* The net change biomass considers both woody biomass losses and gains associated with the land-use conversion.

** The woody biomass values represent the average net biomass change for that land-use conversion over the entire time series. Positive values indicate net gains, while negative values indicate net losses.

6.5.2.1.2 Dead organic matter (key category)

CSC in the dead organic matter pool on forest land converted to cropland was identified as a key category. Details on identification criteria can be found in chapter 1.4.

Choice of method, CSC factors, and activity data

DOM for forest land to cropland applies a similar Tier 1 (for litter) and Tier 2 (for dead wood) methodology as for lands converted to forest land (section 6.4.2). The difference is that instead of DOM gains, there are DOM losses. Furthermore, the losses occur instantly (instant oxidation) within the first year of conversion instead of being distributed over 20 years. Table 6-30 and Table 6-31 present the litter and dead wood carbon stock loss factors for forest land converted to cropland currently found in Norway.

Table 6-30: Instant litter carbon stock loss ($t\ C\ ha^{-1}$) for forest land converted to cropland.

Ecological climate zones	Litter ($tC\ ha^{-1}$)	
	deciduous	conifers
Cool Temperate Moist Mountain System	6	8
Cool Temperate Oceanic Forest	6	7
Cool Temperate Continental Forest	27	70

Table 6-31: Instant dead wood carbon stock loss ($t\ C\ ha^{-1}$) for forest land converted to cropland.

Dominant tree species	Productivity class	Site Indexes ⁵⁵	Dead wood ($tC\ ha^{-1}$)
all	Unproductive	[4]	0.646
spruce	low	[6,8]	3.018

⁵⁵ Site index was defined as the mean height of the 100 thickest trees ha^{-1} at the reference age of 40 years, and it is estimated at each cycle of the NFI.

spruce	medium	[11, 14]	4.818
spruce	high	[17,20, 23, 26]	8.476
pine	low	[6,8]	1.579
pine	medium	[11, 14]	3.132
pine	high	[17,20, 23, 26]	5.622
broadleaf	low	[6,8]	1.945
broadleaf	medium	[11, 14]	4.901
broadleaf	high	[17,20, 23, 26]	9.977

For grassland, wetlands, and settlements converted to cropland, we used the Tier 1 method that assumes no CSC in the DOM pool. Emissions are reported as NO.

6.5.2.1.3 Mineral soils (key category)

Mineral soils on forest land converted to cropland were identified as a key category. Details on identification criteria can be found in chapter 1.4.

Choice of method and CSC factors

The same Tier 1 methodology applied for lands converted to forest land is also applied here (see section 6.4.2). The national mean mineral soil CSC rate from 1990 to the latest reporting year for lands converted to cropland can be found in Table 6-32.

Table 6-32: Annual mineral soil CSC rates (mean $\pm$ standard deviation in $t\ C\ ha^{-1}\ yr^{-1}$) for lands converted to cropland (1990 – to the latest reporting year).

IPCC climate region	Forest land	Extensive Grassland	Intensive Grassland	Settlements
Cool Temperate Dry	-0.477 $\pm$ 0	-	-	-
Cool Temperate Moist	-0.709 $\pm$ 0.1	-0.724 $\pm$ 0.055	-0.624 $\pm$ 0.053	-0.2 $\pm$ 0.16

Activity data

Areas of land converted to cropland on mineral soils were estimated using the NFI data and the 1990 baseline map of soil types.

6.5.2.1.4 Organic soils (drained) (key category)

Forest land and unmanaged wetlands converted to cropland on organic soils are identified as key categories. Details on identification criteria can be found in chapter 1.4.

Choice of method and emission factor

We used a Tier 1 method to estimate emissions from organic soils on land converted to croplands. The default emission factor of $7.9 \text{ t C ha}^{-1} \text{ yr}^{-1}$ was applied, assuming similar emissions as for cropland remaining cropland, regardless of the previous land use.

Activity data

All areas were derived as described in section 6.3.3.

6.5.2.2 Uncertainties and times-series consistency

Uncertainties were estimated as described in Annex 2 and shown as total aggregated uncertainty (U_{total}) based on the uncertainties of the CSC and the area estimates for living biomass, DOM, mineral, and organic soils.

6.5.2.3 QA/QC and verification

The standard Tier 1 QC procedures were performed during the estimation of CSC for land converted to cropland.

6.5.2.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.5.2.5 Planned improvements

- Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in Land converted to Cropland, following the methodology provided in the IPCC 2013 Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission.
- Organic soils: Norway is working on a roadmap for the development and implementation of Tier 2 emission factors for organic soils in Cropland, Forest land, and Grassland, where this carbon pool is classified as a key category. In parallel, Norway is assessing the feasibility of regional emission factors through collaboration with other Nordic countries. Implementation of these improvements will be considered in future reporting cycles.

6.6 Grassland – 4C

Grasslands cover about 35% of the area of Norway. According to the IPCC 2006 Guidelines, grasslands are defined as grass areas with insufficient woody biomass to be classified as forest land that is not considered cropland. It may also include shrublands with perennial woody biomass. There are five types of grasslands identified in Norway, which are further categorized into intensive or extensive grasslands for GHG reporting (Table 6-33).

Intensive grassland

Closed pastures (Innmarksbeite) represented about 1.8% of the grassland area in Norway over the period 2015 – 2019. They are semi-natural areas covered by a minimum of 50% grasses or

grazable herbs enclosed by a fence or a natural barrier, and can locally include some areas meeting the forest definition (see box “Forested area in closed pastures” at the end of this section). For these areas, the topography (e.g., steepness or surface roughness) or the presence of trees prevents any mechanical harvest or species improvement; fertilization, however, seems to occur regularly in some areas. Closed pasture areas are directly estimated via the subsidy application scheme as they support a rather intensive grazing system for cattle and sheep.

No-till cultivated grass pastures (Overflatedyrka eng) represented only 0.2% of the grassland area in Norway over the period 2015 –2019. They are characterized by shallow and rocky soils unsuitable for mechanical ploughing that may be cultivated intensively via fertilization, mechanical harvesting, and improved species. No-till cultivated grass pasture areas are directly estimated via the subsidy application scheme as they support an intensive grass production system.

Extensive grassland

Other non-wooded land (Snaumark) represented $\geq 80.9\%$ of the grassland area in Norway over the period 2015 - 2019. This is land on mineral soil with no trees, or less than 5% crown cover, or less than 10% crown cover if a combination of shrubs, bushes, and trees. These are all the remaining natural areas with a minimum of 50% ground vegetation cover, as recorded in the NFI. Grazing by cattle, sheep, goats, horses, or reindeer can occur.

Other wooded land (annet tresatt areal) represented about 15.3% of the grassland area in Norway over the period 2015 - 2019. These are areas with a crown cover of 5 to 10% for trees higher than 5m or areas where the crown cover of trees and shrubs together has a cover of more than 10%. Shrub vegetation includes perennial shrubs and trees that are over 0.5 m high but are unable to reach a height of 5 m in the site. This area type will occur primarily on very low-productive land (lands with shallow soils) and on lands in a transitional phase on areas that are growing back to forest. Other wooded land can occur in areas with a ground vegetation cover $< 50\%$, as recorded in the NFI, and may therefore be associated with widely varying soil carbon stocks. Other wooded land does not meet the forest definition and is classified as extensive grassland.

Coastal heath (Lyngheilandskap) represented about 1.7% of the grassland area in Norway between 2015 and 2019. Coastal heath are coastal shrubland with high proportions of perennial woody biomass. Heath vegetation can be considered a transitional stage in succession from grass-dominated grassland to woodland. While succession tends to drive this change in one direction towards woodland, management by grazing and burning, and fertilization tends to reverse the trend. Excessive burning, grazing, and fertilization may change heath vegetation into grass-dominated grassland (Legg 1995; Nilsen 2004). The NFI operationally classifies coastal heath as areas in the lowlands along the coast from Aust-Agder to Finnmark, characterized by a specific plant community. While tree and shrub vegetation can occur locally, they would never meet the definition of “other wooded land”. More specifically, coastal heath is characterized by the absence of a tree layer and the presence of an atypical shrub layer made of juniper, dwarf

birch, eared willow, as well as birch, rowan, pine, and spruce at the beginning of the overgrowth. Common heather (*Calluna vulgaris*) dominates, but other heather species, grass, herbs, and ferns can also occur. Coastal heath often occurs in a mosaic with rocks; these areas must have more than 50% ground vegetation coverage as recorded by the NFI (of the defining vegetation types) to be classified as coastal heath. Land classified as coastal heath is limited by elevation, which decreases with increasing latitude as 200 m for Aust-Agder, Vest-Agder, and Rogaland; 150 m for Hordaland and Sogn og Fjordane; 100 m for Møre og Romsdal, Sør-Trøndelag, and Nord-Trøndelag; and 50 m for Nordland, Troms, and Finnmark. Coastal heath is classified as extensive grassland. Coastal heath is, by definition, on mineral soil.

Both extensive and intensive grassland areas are estimated from NFI plots. Statistics Norway provides information about the proportion of no-till cultivated pastures vs closed pastures within the intensive grassland category based on data collected through the subsidy application scheme. Subsidy support is given to grazed or harvested areas at least once a year. Extensive grasslands are only found on mineral soil.

Table 6-33: Identified Grassland types.

Grassland type	Grassland area (2015 – 2019)	Mechanically ploughable	Mechanically harvestable	Area enclosed	Shrubland
Intensive grassland					
Closed pastures	1.8%	No	No	Yes	No
No-till cultivated grass pastures	0.2%	No	Yes	-	No
Extensive grassland					
Other non-wooded land	≥ 80.9%	No	No	No	-
Other wooded land	15.3%	No	No	No	Yes
Coastal Heath	1.7%	No	No	No	Yes*

Yes and No: correspond to the requirement to meet the grassland category definition.

Yes* means "yes, but atypical".

The dash "-" symbolizes "no requirement" and therefore can be understood as "can occur".

Box 6.3 - Forested area in closed pastures

Between 2015 and 2019, 72.3 kha forested grasslands occurred in closed pasture (31% of intensive grasslands). These NFI plots have sufficient tree cover to meet at least the minimum threshold of forest in Norway (i.e., greater than 10% tree cover with the potential to reach 5 m height on a minimum area of 0.1 ha), but grazing, and not wood harvesting, is the dominant land use activity. Trees are either distributed in groups, widely spaced, or scattered across the grassland area. Forested grasslands are categorized as grasslands due to the determining effects of grazing pressure and land management, which hinder tree regeneration and maintains their dominant grassland character and ecology. There is evidence that the tree biomass sequestered in forested grasslands is small compared to the removals in forest land remaining forest land. From 1990 - 2021, the cumulative sum of net living biomass removed on forested grassland remaining forested grassland plots is approximately 0.2% (325 kt C) of the net living biomass removals in forest land remaining forest land. There is currently not enough empirical data or scientific literature to describe the entire C dynamics of forested grasslands in Norway. Expert judgement hypothesises is that the C dynamics are an intermediate condition between that of fully stocked forest land and pure grassland, but where the grassland C dynamics are dominant. Given that the tree living biomass is accounted for and the number of plots are few, the overall impact on the LULUCF GHG inventory is considered small.

6.6.1 Grassland remaining grassland, 4C1

For grassland remaining grassland, CSC are reported for living biomass, mineral, and organic soils.

6.6.1.1 Methodological issues

Emissions due to changes in DOM are assumed to be negligible for this category because little dead wood and litter are generated in grassland systems. Assuming that CSC in the DOM is in a steady state condition is in accordance with the IPCC 2006 Guidelines, and the notation key NO is used in the CRT tables.

6.6.1.1.1 Living biomass (key category)

The sink/source categories living biomass on intensive grassland remaining intensive grassland, and extensive grassland remaining extensive grassland are identified as key categories. Details on identification criteria can be found in chapter 1.4.

Choice of method

Living biomass on grassland has been measured in the NFI since 2007. Some plots, however, have been reclassified from forest to extensive grassland over the years, and measurements

have been taken for those plots for the whole time series. For plots that had always been extensive grassland and therefore only measured from 2007 onwards, gains and losses were backcasted to complete the time series. In this case, a Tier 3 methodology was used, similar to that used for forest remaining forest.

The same approach is not feasible for intensive grasslands, given the diverse management practices the areas have undergone over the years. In these cases, the average CSC (gains and losses) per hectare and year was calculated based on sample plots remeasured between 2012 and 2016. The average carbon gain and loss were then multiplied by the area of intensive grassland remaining intensive grassland for the years 1990 – 2011 to obtain total estimates (which represents a Tier 2 methodology). For 2012 onwards, actual NFI measurements (Tier 3) were used. In alignment with the guidelines on time series consistency as provided in IPCC 2019 Refinement Vol. 1, Ch. 5, splicing techniques such as surrogate data were examined. Yet, the significant variability in management practices across intensive grasslands made auxiliary data unsuitable for addressing the existing gap. The decision to employ two different Tiers within the same time series intends to "*...optimally utilize the most accurate emission parameters and other data collected within the relevant contexts*" as emphasized in the IPCC 2019 Refinement.

6.6.1.1.2 Mineral soils (key category)

Mineral soil on intensive grassland remaining intensive grassland, is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Choice of method

For intensive grasslands, a default Tier 1 approach was used for estimating CO₂ emissions from intensive grassland remaining intensive grassland on mineral soils. The default IPCC methodology estimates soil carbon changes based on default stock change factors specific to management and climate regimes, and soil carbon reference stocks specific to climate and soil type. The annual changes in SOC can be calculated as the difference between the SOC stock in the last year (SOC₀) and the beginning (SOC_{0-T}) of the inventory period (T), divided by the time dependency of the stock change factors (D = 20 years), and is given by:

$$\Delta SOC = (SOC_0 - SOC_{0-T})/D \quad \text{Equation 2.25 (IPCC 2006)}$$

From 1990 to 2010, SOC_{0-T} is calculated for 1989 based on the assumption that SOC was at equilibrium before 1990 (following the example given in the IPCC 2006 Guidelines, page 2.35, first paragraph).

$$\Delta SOC = \frac{SOC_0(\text{year} = \text{current year}) - SOC_{0-T}(\text{year} = 1989)}{20 \text{ years}}$$

From 2010 onward, the year for estimating SOC_{0-T} increased from 1990 by one year every new year.

$$\Delta SOC = \frac{SOC_0(\text{year} = \text{current year}) - SOC_{0-T}(\text{year} = \text{current year} - 20)}{20 \text{ years}}$$

SOC stocks for any year of the inventory can be calculated as the product of the soil carbon reference stock (SOC_{REF}), the stock change factors (SCF), and the area under a given management practice (A), according to

$$SOC = SOC_{REF} \times SCF \times A \quad \text{Equation 2.26 (IPCC 2006)}$$

The carbon reference stock is the soil carbon stock under the reference condition, which, in the default method, is native uncultivated soil. The reference stock is specific to the climate zone and soil type.

For mineral soil on grassland remaining grassland, CSC only occurs when a management change occurs. In the case of Norwegian grasslands, we introduced a few management change limitations that impacted the CSC calculation. These changes and their consequences include (1) management transition between no-till cultivated pastures and all extensive grassland is unlikely to happen, (2) management transition between No-till cultivated and closed pastures can happen, and (3) management transition between extensive grassland and closed pastures can happen.

For example, a land with a good grass yield could be converted to a closed pasture, but would unlikely be abandoned. And conversely, an open pasture could be fenced, but may not be good enough for cultivation. Therefore, all transitions between intensive and extensive grasslands occur between the closed pastures and the extensive grasslands categories. Because these grassland categories share the same combination of partial stock change factors (see Table 6-35), they do not incur any CSC (i.e., $CSC=0$). Similarly, management changes within the extensive grassland categories sharing the same SCF result in null CSC. Therefore, non-neutral CSCs are only generated by transitions within intensive grasslands, between no-till cultivated and closed pastures. To estimate soil carbon changes, the Tier1 methodology used is the same as that applied for all land use changes on mineral soil, see section 6.3.3 and Bárcena et al. (2021).

Conversions from extensive to intensive grasslands are reported under “intensive grasslands remaining intensive grasslands”. Conversions from intensive to extensive grasslands are reported under “extensive grasslands remaining extensive grasslands”.

Activity data

The areas of intensive grasslands on mineral soil and extensive grasslands (Coastal Heath, Other wooded land with crown cover and 5-10%, and Other non-wooded areas) are from the NFI. The area distribution between No-till and closed pastures (subcategories of intensive grasslands) was provided by Statistics Norway (Table 6-34). These data were collected from farmers' applications for subsidies. Areas for both grassland types are given per farm unit. Because farmers may not

always apply for subsidies, the area estimated by NFI is larger than that reported by Statistics Norway (Table 6-34). Statistics Norway data are therefore only used to assess the relative importance of both grassland types. From 1990 to 1997, the No-till cultivated grass pastures only accounted for fertilized pastures, while from 1998 onward, they accounted for all types of no-till cultivated pastures. This resulted in 12.7% artificial increases in the area concerned between 1997 and 1998, indicating that about 87.3% of the No-till cultivated grass pastures are fertilized.

Table 6-34: Areas (kha) of grassland remaining grassland on mineral soils in Norway from 1990 to the latest reporting year from two different sources (NFI and Statistics Norway).

Year	Statistics Norway (SSB)			NFI database	
	Intensive Grassland			Intensive Grassland	Extensive Grassland
	Closed pastures	No-till cultivated pastures	Total		
1990	88	22	109	226	11 207
1991	81	27	109	225	11 206
1992	85	27	112	225	11 206
1993	90	27	117	224	11 205
1994	94	26	120	223	11 205
1995	98	26	124	223	11 205
1996	101	26	127	222	11 204
1997	103	27	130	221	11 204
1998	108	25	133	220	11 203
1999	111	29	141	219	11 203
2000	122	30	151	217	11 202
2001	129	29	158	216	11 202
2002	132	28	161	215	11 201
2003	135	28	163	214	11 201
2004	137	27	164	214	11 200
2005	139	27	166	214	11 199
2006	142	27	169	213	11 198
2007	146	26	172	212	11 198
2008	149	25	175	211	11 197

2009	151	24	175	210	11 195
2010	152	22	175	209	11 193
2011	155	21	176	208	11 191
2012	156	20	177	206	11 186
2013	156	20	177	205	11 181
2014	156	20	176	204	11 176
2015	156	20	176	203	11 171
2016	156	20	176	203	11 167
2017	156	20	176	203	11 165
2018	161	20	181	203	11 162
2019	159	20	179	204	11 158
2020	159	20	179	204	11 155
2021	158	21	178	205	11 151
2022	156	21	177	205	11 147
2023	156	21	177	205	11 143
2024	155	21	176	206	11 139

The intensive grassland areas per management type were stratified into eight regions (Figure 6.29). The area data from Statistics Norway (distribution between No-till and closed pasture) is available on a municipality level, facilitating the stratification. Soil maps were collected to stratify the areas according to soil type and assign specific carbon reference stocks based on the soil type distribution within each region.

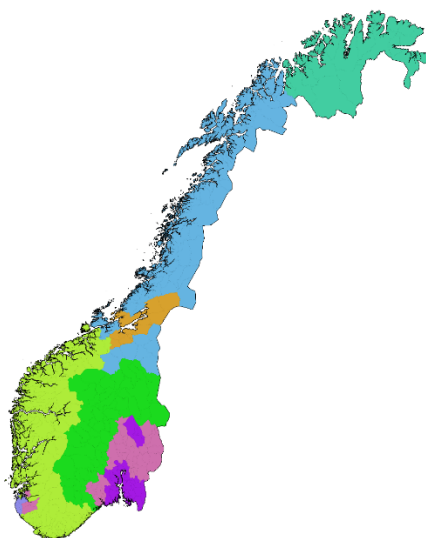


Figure 6.29: Eight regions of Norway were used to stratify grassland activity data for the Tier 1 application.

Stock change factors and soil carbon reference stocks

The general stock change factor SCF used in Equation 2.25 (IPCC 2006) to estimate the SOC stock at equilibrium under different types of intensive grassland is given by the following equation:

$$SCF = F_{LU} \times F_{MG} \times F_I$$

where F_{LU} is the stock change factor for land-use systems or sub-systems for a particular land-use, F_{MG} is the stock change factor for the management regime, and F_I is the stock change factor for the input of organic matter. Default partial stock change factors are directly provided by the Tier 1 methodology in IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6-2, simplified in the table below.

Table 6-35: Relative CSC factors (SCF) for grassland in a temperate/boreal climate regime.

Factor	Level	IPCC default	Definition
F_{LU}	All	1.00	All grasslands
F_{MG}	Non-degraded	1.00	Non-degraded, 0 improvements*
	Moderately degraded	0.95	Moderately degraded, reduced loss of productivity overgrazed, 0 improvement*

	Severely degraded [†]	0.70	Major long-term loss of productivity and vegetation cover due to severe mechanical damage to the vegetation and/or severe soil erosion, 0 improvement*
	Improved	1.14	Non-degraded, moderate grazing pressure, 1 improvement*
F_I	Medium input	1.00	0 or 1 improvement*
	High input	1.11	≥ 2 improvements*

Improvement*: 1) fertilization, 2) species improvement, 3) irrigation[†]. [†]: negligible.

Parametrizing the Tier 1 procedure consists of determining the F_{LU} , F_{MG} , and F_I combination for each intensive grassland category. For the land-use factor F_{LU} , the situation is simple, as it is fixed to ($F_{LU} = 1$) for all types of intensive grassland. Determining the factors for management F_{MG} and organic matter input F_I for each intensive grassland category is primarily related to the number of three possible improvements received by these categories: 1) mineral fertilization, 2) species improvement, and 3) irrigation (Table 6-35). Then, it depends on the general degradation of the intensive grassland category due to grazing pressure.

As grassland irrigation is generally not practiced in Norway and severe grassland degradation may only affect negligible areas (e.g., fence opening), we excluded these possibilities from determining the intensive grassland type stock change factors. Grazing pressure has an impact on the soil carbon stock. In Norwegian low alpine grasslands, Martinsen et al. (2011) showed that after 7 years of grazing, a sheep density of 25 animals km² would induce no change in the SOC storage (~ 5% increase). In contrast, a sheep density of 80 animals km² would induce a slight 16% decrease. In Norway, domestic grazing animals are largely dominated on average by sheep (87%), cattle (10%), goats (2.8%), and horses (0.2%) (SSB data 1990 – 2018). On average, the density of domestic grazing animals in Norwegian pastures is 14.5 animals km², which is below the animal density that would induce a SOC loss (<https://kilden.nibio.no>).

Table 6-36: Distribution of domestic grazing animals[†] density in Norwegian pastures (2018).

Density (head/km ²)	Grassland areas (%)
0-25	84.0
26-50	13.7
51-75	1.7
>75	0.6

[†]: Sheep, cattle, goat, horse. Source: <https://kilden.nibio.no>

Most of the grassland area in Norway exhibits sustainable animal stocking rates, as evidenced by the distribution of domestic animal density by area (Table 6-36). In the rare case of soil degradation, it would be restricted to the closed pasture area designed to maintain a higher density of animals. However, it will not likely occur in the open pastures in extensive grasslands. Considering reindeer would not change this conclusion as both wild and domestic stocking rates remain extremely low, ranging from 0.87 to 2.2 animals/km² (Reimers 1986; Tveraa et al. 2007). In both cases, severe land degradation responsible for a 30% loss of SOC is unlikely to occur in Norway in light of the available stocking rate data.

Considering all these elements, the CSC factors were attributed as follows:

No-till cultivated grass pastures (*overflatedyrka eng*): Most cultivated grasslands are fertilized annually but are seldom reseeded, except in cases of severe frost damage. Therefore, it is reasonable to assume that most No-till cultivated grass pastures receive only one improvement, qualifying them as improved grassland ($F_{MG} = 1.14$) with medium organic matter input ($F_I = 1$).

Closed pastures (*innmarksbeite*): As this grassland type is fertilized annually, it may qualify for an improved grassland ($F_{MG} = 1.14$); however, this grassland may also be the most susceptible to moderate degradation due to higher animal stocking rates ($F_{MG} = 0.95$). Because these two management categories correspond respectively to a loss and a gain of SOC, we decided to qualify the closed pastures as nominally managed (non-degraded) grassland ($F_{MG} = 1$) with medium organic matter input ($F_I = 1$).

Other wooded land with crown cover 5-10% (*annet tresatt areal*): Like for open pastures, other wooded land was considered nominally managed (non-degraded) grassland ($F_{MG} = 1$) with medium organic matter input ($F_I = 1$).

Open areas (Other non-wooded areas and coastal heath) (*åpne arealer*): These ecosystems are not cultivated and do not receive any improvements. Moderately degraded grassland may occur very locally, but because of the rather low animal stocking rate and the possibility for the animals to move freely to the less degraded areas, we considered that the open pastures were nominally managed (non-degraded) grassland ($F_{MG} = 1$) with medium organic matter input ($F_I = 1$).

Soil Carbon Reference values

For extensive grasslands remaining extensive grasslands, all SCFs are equal to 1; thus, no CSC will occur, and SOC_{REF} values are not required.

For intensive grasslands, to assign the SOC_{REF}, an analysis was made of the national soil classification (WRB 2015) database developed by the Norwegian Institute of Bioeconomy Research. The percentage of the total intensive grassland area sampled until now varies between the eight strata defined. The analysis results showed that high-activity clay (HAC) soils predominate in all climate zones, but spodic soils comprise almost one-third of the area in region 2 (Figure 6.30).

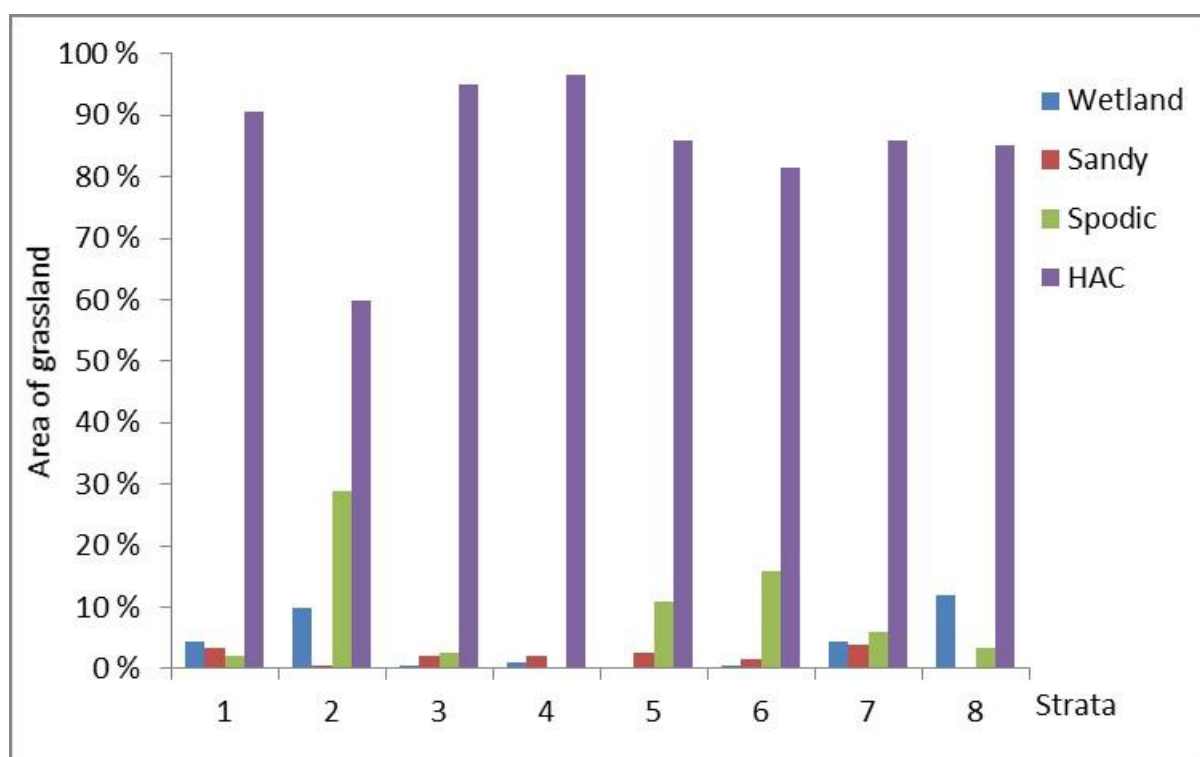


Figure 6.30: Distribution of soil types in intensive grassland areas for the eight strata. The IPCC soil types are high-activity clay soils (HAC): leptosols, fluvisol, phaeosem, albeluvisol, luvisol, umbrisol, cambisol, regosol; wetland soils: gleysols; sandy soils: arenosols; and spodic soils: podzol.

The soil carbon reference stock (SOC_{REF}) values are shown in Table 6-37. Soil CSCs were first calculated per stratum and soil type. The final stock changes were given by multiplying the carbon stocks per stratum and soil type by the fractions for each soil type.

Table 6-37: Soil carbon reference stock (SOC_{REF}) for different classes of soils.

Grassland type	SOC_{REF} (t C ha ⁻¹)	Climate zone	Reference
HAC	95	Cold temperate moist	IPCC 2006 Guidelines, Vol. 4, Ch. 2, Table 2.3
Sandy	71		
Spodic	115		
Wetland	87		

6.6.1.1.3 Organic soils (drained) (key category)

Organic soil on intensive grassland remaining intensive grassland is identified as a key category. Details on identification criteria can be found in chapter 1.4. Organic soils are only found on a fraction of the intensive grasslands, and do not occur on extensive grasslands.

Choice of method

We used the Tier 1 method described for organic soils in cropland remaining cropland (section 6.5.1).

Activity data

The area of organic soil on intensive grassland remaining intensive grassland was derived in the procedure described in section 6.3.3.

Emission factor

The default EF for shallow-drained, nutrient-rich grassland of $3.6 \text{ t C ha}^{-1} \text{ yr}^{-1}$ was applied following the IPCC 2013 Wetlands supplement. The choice of EF was based on inspection of orthophotos, where it was observed that most of the plots were either with too many trees to allow proper cultivation and thus overgrown drains or on fairly thin soil layers (visible bedrock in some places), such as surface cultivated grasslands. We found the shallow drainage factor to be more appropriate.

6.6.1.2 Uncertainties and time-series consistency

The uncertainties were estimated for all sink/source categories under the grassland remaining grassland and included in the key category analysis.

For living biomass, the uncertainty estimates of the CSC and the area were based on the sample variance and estimated as described in Annex 2.

For the mineral soil pool, a Tier 1 uncertainty assessment was made considering the uncertainty related to the carbon stock estimate (the stock change factors) using default values and the activity data using the sample variance. Firstly, we estimated the uncertainty of the SOC stock estimate (U_C) by propagating the uncertainty of the stock change factors and the SOC reference stock. The errors of the stock change factors are provided in IPCC 2006, Vol. 4, Ch. 6, Table 6-2. The default carbon reference stock is provided in IPCC 2006 Guidelines, Vol. 4, Ch. 2, Table 2.3. Secondly, the uncertainty of the activity data was combined with that of the CSC per hectare. The uncertainty in the activity data (U_A) covers both uncertainty in the estimates of the grassland management type (Statistics Norway data) and uncertainty in the areas of grassland remaining grassland determined in the NFI. The first source of uncertainty, which is related to the estimation of the grassland management system, was estimated to be close to zero by Statistics Norway. According to the sample validations routinely performed by the collection agency (NAA), farmers are unlikely to make errors (or false reporting), and very few of these errors exist. The second source of uncertainty in the activity data, i.e., the area estimate of grassland remaining

grassland, was determined by the sample error. Although the area included organic soils, we assume the uncertainty for the mineral soil area is similar. Uncertainties of the area estimates are quantified as described in section 6.1.4. The total uncertainty for the mineral soil estimate was propagated using Equation 3.1 of the 2006 IPCC Guidelines, Vol. 1, Ch. 3. The uncertainty for organic soils is based on default values for the emission factor and the sample error for the area estimate. Uncertainty estimates for both mineral and organic soils are shown in Annex 2.

6.6.1.3 QA/QC and verification

The standard Tier 1 QC procedures were performed during the estimation of CSC for grassland remaining grassland.

6.6.1.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.6.1.5 Planned improvements

- Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in Grasslands remaining Grasslands, following the methodology provided in the IPCC 2013 Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission.
- Organic soils: Norway is working on a roadmap for the development and implementation of Tier 2 emission factors for organic soils in Cropland, Forest land, and Grassland, where this carbon pool is classified as a key category. In parallel, Norway is assessing the feasibility of regional emission factors through collaboration with other Nordic countries. Implementation of these improvements will be considered in future reporting cycles.

6.6.2 Land converted to grassland, 4C2

Emissions from land converted to grassland were primarily caused by net carbon losses in the DOM pool on forest land converted to grassland. There were land-use conversions from forest land, cropland, wetlands, and settlements to grassland. For forest land converted to grassland, carbon emissions were estimated from changes in living biomass, DOM, and mineral soil. All areas of cropland and wetlands converted to grassland were on organic soils. Emissions were therefore estimated for stock changes in living biomass and organic soils for this land use conversion. The entire area of settlements converted to grassland was on mineral soils.

6.6.2.1 Methodological issues

6.6.2.1.1 Living biomass (key category)

The sink/source category living biomass on forest land converted to intensive grasslands is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Changes in living biomass associated with land converted to Grasslands are estimated by distinguishing between woody and non-woody biomass components.

Losses:

- Woody biomass losses are estimated using the Tier 3 method described for forest land remaining forest land (see section 6.4.1). The same approach is applied to conversions from all land uses where trees are present and measured by the NFI (Forests, Grasslands, Unmanaged and Managed Wetlands).
- Non-woody biomass losses are estimated using default Tier 1 factors from the IPCC Guidelines, as shown in Table 6-38. As the guidelines do not provide specific Tier 1 biomass stocks for all land-use categories, the grassland biomass values are also applied to conversions from Settlements (with green space) to Grasslands, which will result in no stock change. Cropland converted to Grasslands will also result in non-woody biomass loss.

Gains:

- All land conversions to Grasslands result in an instant gain of non-woody annual grass biomass in the first year of conversion, following the default methodology in the IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4. The Tier 1 biomass factor was evaluated by expert judgment and considered to be close to average Norwegian biomass values and, therefore, suitable for Norwegian conditions. Details are provided above.
- Woody biomass gains may also happen (or continue to happen) whenever an area is converted to Grasslands, as the NFI continues to measure trees in areas classified as Grasslands.

Table 6-38: Woody and non-woody biomass carbon stocks change factors for conversion to grassland.

Conversion	Biomass type	IPCC Climate region	Biomass gain/losses (tC ha ⁻¹)	Reference
Forest to Grasslands (net change biomass*)	Woody	-	-19.541**	NFI
Wetlands to Grasslands (net change biomass*)	Woody	-	-0.425**	NFI
Settlements to Grasslands (net change biomass*)	Woody	-	0.051**	NFI
Cropland to Grassland (biomass loss)	Non-woody	-	-4.7	IPCC 2019 Refinement, Vol. 4, Ch. 5, Table 5.9
All lands to Grassland	Non-woody	Boreal	3.995	Values from IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4, divided by the default
		Cool temperate dry	3.055	

(biomass gain)		Cool temperate moist	6.392	carbon fraction for herbaceous biomass (0.47 tC per tonne d.m.)
-----------------------	--	----------------------	-------	---

* The net change biomass considers both woody biomass losses and gains associated with the land-use conversion.

** The woody biomass values represent the average net biomass change for that land-use conversion over the entire time series. Positive values indicate net gains, while negative values indicate net losses.

6.6.2.1.2 Dead organic matter (key category)

The sink/source category of dead organic matter on forest land converted to intensive grasslands is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Method choice, CSC factors, and activity data

DOM for forest land to grassland applies a similar Tier 1 (for litter) and Tier 2 (for dead wood) methodology as for lands converted to forest land (section 6.4.2). The difference is that instead of DOM gains, there are DOM losses. Furthermore, the losses occur instantly within the first year of conversion instead of being distributed over 20 years. Table 6-39 and Table 6-40 present the litter and dead wood carbon stock loss factors for forest land converted to grassland currently found in Norway.

Table 6-39: Instant litter carbon stock loss factor ($t\ C\ ha^{-1}$) for forest land converted to grassland according to the IPCC 2019 Refinement.

Ecological climate zones	Litter ($tC\ ha^{-1}$)	
	deciduous	conifers
Cool Temperate Moist Mountain System	6	8
Cool Temperate Dry Steppe	40	31
Cool Temperate Oceanic Forest	6	7
Cool Temperate Continental Forest	27	70

Table 6-40: Instant dead wood carbon stock loss ($t\ C\ ha^{-1}$) for forest land converted to grasslands.

Dominant tree species	Productivity class	Site Indexes ⁵⁶	Dead wood ($tC\ ha^{-1}$)
all	Unproductive	[4]	0.646
spruce	low	[6,8]	3.018
spruce	medium	[11, 14]	4.818

⁵⁶ Site index was defined as the mean height of the 100 thickest trees ha^{-1} at the reference age of 40 years, and it is estimated at each cycle of the NFI.

spruce	high	[17,20, 23, 26]	8.476
pine	low	[6,8]	1.579
pine	medium	[11, 14]	3.132
pine	high	[17,20, 23, 26]	5.622
broadleaf	low	[6,8]	1.945
broadleaf	medium	[11, 14]	4.901
broadleaf	high	[17,20, 23, 26]	9.977

For cropland, wetlands, and settlements converted to grassland, we apply the Tier 1 method that assumes no net change in the carbon pool of DOM; thus, the notation key NO is used in the CRT tables.

6.6.2.1.3 Mineral soils

A Tier 1 method is used to estimate CSC on land converted to grassland.

Choice of method, CSC factors, and activity data

The same Tier 1 methodology applied for lands converted to forest land is also applied here (see section 6.4.2). The national mean mineral soil CSC rate for lands to grassland can be found in Table 6-41.

Table 6-41: Annual mineral soil CSC rates (mean $\pm$ standard deviation in t C ha⁻¹ yr⁻¹) for lands converted to grasslands.

Grassland subcategory	IPCC climate region	Cropland	Forest land	Intensive Grassland	Settlements
Extensive grasslands	Cool Temperate Moist	-	-	-0.07495 $\pm$ 0.00084	-
Intensive grasslands	Cool Temperate Moist	0.719 $\pm$ 0	0.0756 $\pm$ 0.0096	-	0.43 $\pm$ 0.42

6.6.2.1.4 Organic soils (drained)

Emissions from organic soils on land converted to grassland were estimated using the Tier 1 method.

Method choice, emissions factors, and activity data

The Tier 1 method was used, applying a default emissions factor of 3.6 t C ha⁻¹ yr⁻¹ for shallow-drained grasslands in the temperate zone from the IPCC 2013 Wetlands supplement. The NFI database was used to estimate the areas of wetlands converted to grassland on organic soils.

6.6.2.2 *Uncertainties and time-series consistency*

The total uncertainties for living biomass, DOM, mineral, and organic soils are shown in Annex 2. All methods were applied consistently for the entire time-series.

6.6.2.3 *QA/QC and verification*

The standard Tier 1 QC procedures were performed during the estimation of CSC for land converted to grassland.

6.6.2.4 *Recalculations*

See chapter 10.2.4. for numbers and explanations.

6.6.2.5 *Planned improvements*

- Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in Land converted to Grasslands, following the methodology provided in the IPCC 2013 Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission.
- Organic soils: Norway is working on a roadmap for the development and implementation of Tier 2 emission factors for organic soils in Cropland, Forest land, and Grassland, where this carbon pool is classified as a key category. In parallel, Norway is assessing the feasibility of regional emission factors through collaboration with other Nordic countries. Implementation of these improvements will be considered in future reporting cycles.

6.7 Wetlands – 4D

Wetlands in Norway cover almost 12% of the total land area. In the new ETF reporting system, wetlands are categorized into three groups:

1. **Peat extraction**: both on-site and off-site emissions are reported
2. **Flooded lands**: currently reported as NE (Not Estimated), with their areas reported under unmanaged wetlands, despite being managed by definition. Norway has not yet developed a methodology for estimating the net area of reservoirs (dams).
3. **Other wetlands**: includes both managed and unmanaged wetlands, covering unmanaged mires, bogs, fens, lakes, and rivers, as well as managed mires with ditches.

For land converted to Other wetlands, emissions and removals are reported for living biomass, DOM, and soils.

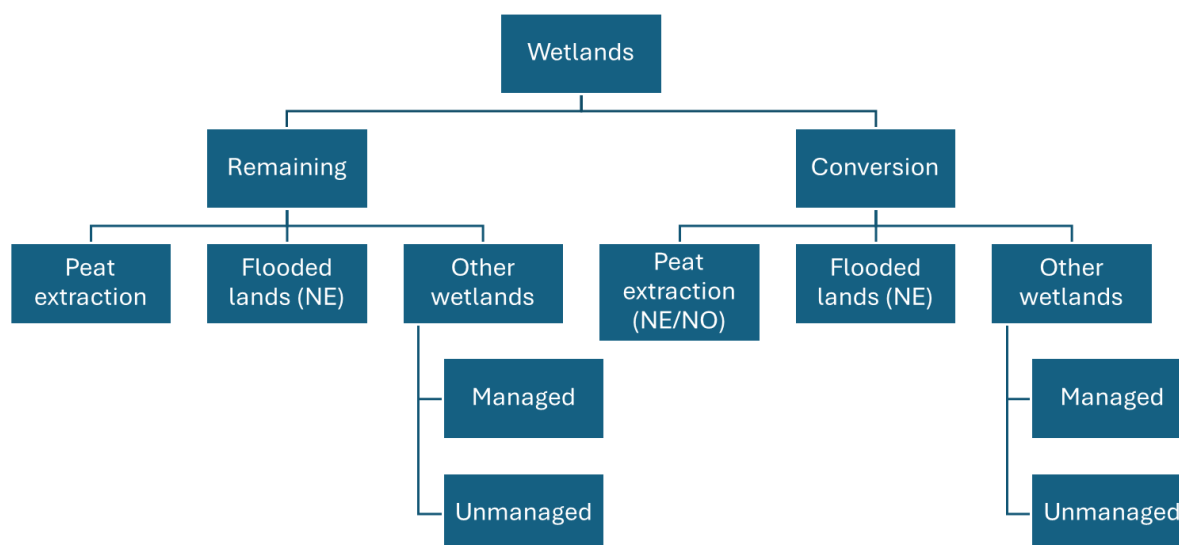


Figure 6.31: Reporting structure under Wetlands. The notation key NE “not estimated” is used for flooded land, as reporting is not mandatory for this category. The notation key NO means “not occurring”, which is the case of peat extraction in mineral soils.

6.7.1 Wetlands remaining wetlands, 4D1

The NFI contains data on CSC in living biomass (trees) on wooded mires, for which the associated emissions and removals have been reported. CSC in the DOM is considered at equilibrium for managed and unmanaged wetlands. Emissions from drained organic soil for peat extraction and mires with ditches (other managed wetlands) are estimated according to the IPCC 2006 Guidelines and IPCC 2013 Wetlands supplement. Organic soil in unmanaged wetlands not subject to drainage was assumed to be in equilibrium. No methods are available for estimating the carbon emissions or removals in these areas. All waterbodies are currently considered unmanaged; therefore, emissions are not reported in these areas.

6.7.1.1 Methodological issues

6.7.1.1.1 Living biomass - Other wetlands – managed and unmanaged

We report tree living biomass on both managed and unmanaged wetlands. To estimate CSC in living biomass, we applied the Tier 3 method (described in section 6.4.1).

6.7.1.1.2 Dead organic matter - Other wetlands – managed and unmanaged

CSC in dead organic matter on waterbodies (mineral soils by definition) do not occur and so are reported as NO. CSC in DOM on peat soil (organic soil) is considered at equilibrium and therefore reported as NO in accordance with the Tier 1 methodology of the 2013 Wetlands supplement.

6.7.1.1.3 Mineral soil - Other wetlands – unmanaged

CSC in mineral soils (waterbodies) is reported as NO.

6.7.1.1.4 Organic soil - Peat extraction (key category)

The source category peat extraction (on + off-site emissions) on organic soil is identified as a key category. Details on identification criteria can be found in chapter 1.4.

For wetlands subject to peat extraction, we use a Tier 1 method for on-site emissions and a Tier 2 method for off-site emissions. Under the default method, the activity data do not distinguish between peatlands under peat extraction and those converted to peat extraction (IPCC 2006; IPCC 2014). Therefore, the area of land converted to peat extraction is reported as NE (see below for estimation of non-significant sources). The emissions from removing trees during clearing are included under living biomass and reported as IE (included elsewhere). Other changes in carbon stocks in living biomass on managed peatlands are assumed to be zero (IPCC 2006; IPCC 2014).

The area utilized for peat extraction is estimated to be 2 kha for the entire time series. On-site emissions caused by peat extraction are thus constant over the inventory period. Off-site emissions vary over the years. Emissions from peat extraction (on-site + off-site) are shown in Table 6-42.

Table 6-42: On-site and off-site emissions for peat extraction for the latest reporting year.

Parameter	Gas	On-site (constant) kt	Off-site (vary) kt	Total kt
Emissions	CO ₂	20.5	37.0	57.5
	N ₂ O	0.0009	-	0.0009
	CH ₄	0.0658	-	0.0658
	Total CO₂ Eq	22.6	37.0	59.6

Choice of method, activity data, and emission factor

For wetlands subject to peat extraction, on-site emissions are estimated with default emission factors from the IPCC 2013 Wetlands supplement (boreal / temperate zone) and are hence

considered a Tier 1 method. Off-site CO₂ emissions are estimated using a national emission factor based on expert judgement, and it is a Tier 2 method.

Table 6-43: Emission factors used to estimate on- and off-site emissions from peat extraction and their estimated uncertainties.

Gas	Emission factor (EF)	EF uncertainty (% 2 SE)	Activity data uncertainty%	Total uncertainty%
On-site				
CO₂	2.8 t CO ₂ C ha ⁻¹ yr ⁻¹	50	100	110
CH₄ LAND	6.1 kg CH ₄ ha ⁻¹ yr ⁻¹	80	100	128
CH₄ DITCH	542 kg CH ₄ ha ⁻¹ yr ⁻¹	81	100	129
Frac_{ditch}	0.05			
N₂O	0.30 kg N ₂ O-N ha ⁻¹ yr ⁻¹	113	100	151
Off-site				
CO₂	0.05 t C m ⁻³ air-dry peat*	50	50	71

* Peat dry matter density of 0.1 t m⁻³ and a C content of 50%.

A survey was done among Norwegian peat producers to provide information on current and previous peat extraction production areas. In addition, a supplemental digital orthophoto study of identified ditched marsh areas where peat extraction was likely to have occurred was done. Off-site emissions from extracted peat volume were based partly on data from the Norwegian Food Safety Authority (1990 - 2007) and partly on information from a peat producer survey conducted in 2015 (covering the years 2008 - 2014), in 2021 (covering the years 2015-2021), after this a new survey has been conducted every second year to get a complete series. The data series is incomplete for all years (1994-1997 have data gaps), and interpolation has been done to ensure a consistent time-series. The peat extraction activity data are detailed in Søgaaard (2017).

6.7.1.1.5 Organic soil (drained) - Other wetlands – managed - Mires with ditches – (key category)
The source category mires with ditches on organic soil is identified as a key category. Details on identification criteria can be found in chapter 1.4.

These are mires with ditches where no land-use change has occurred. This could be, e.g., the result of drainage to achieve land-use change (whether successful or not) or mires where ditches occur for other purposes.

Choice of method, activity data, and emission factor

Due to the lack of national emissions factors, a Tier 1 method was chosen.

Activity data were available from the same NFI registrations as described for Forest land remaining Forest land (drained organic soils) (section 6.4.1). Drainage was historically carried out primarily to facilitate forest establishment or other land use changes. Many ditches in wetlands were established to drain surrounding areas (in other land uses). Further, we assume many results from “unsuccessful” afforestation/land use changes in the past. All drained organic soil is found in the temperate cool climate zone. Only the climate zone determines the default emission factor for CO₂ emissions according to the IPCC 2013 Wetlands supplement.

We used the default emission factor for temperate cool climate from the IPCC 2013 Wetlands supplement, 2.6 t C-CO₂ yr⁻¹ ha⁻¹, as it represents the most up-to-date information.

6.7.1.1.6 Organic soil (undrained) - Other wetlands – unmanaged

Organic soil in unmanaged wetlands not subject to drainage was assumed to be in equilibrium and reported with the notation key NO. No methods are available for estimating the carbon emissions or removals in these areas.

6.7.1.2 *Uncertainties and time-series consistency*

The estimation of the uncertainty of the area and the carbon stock of tree living biomass is described in section 6.3.7.

For peat extraction, on- and off-site CO₂ emission uncertainties were combined by the weighted sum of the variances (square of total uncertainty % in Table 6-43), assuming no (0) correlation between on- and off-site emissions. The assumption of no correlation is based on the fact that on-site emissions will occur for many years, even if no peat extraction is conducted, and off-site emissions would be 0. The weights (w) were given by squared proportions of the total emissions ($w = (40/53)^2 = 0.57$ for off-site emissions and $w = (13/53)^2 = 0.06$ for on-site emissions). Also, the uncertainties for CH₄ on land between and in ditches were combined for the Key Category Analysis (KCA). It was the weighted average of the variance of the emission factors for land between ditch and their covariance, assuming a direct correlation of 1. The correlation of 1 was chosen because of the increase in one area due to an increase in the other, and vice versa. The weight was given by the squared ditch proportion. Uncertainties for CO₂, CH₄, and N₂O emissions estimated from drained organic soils on wetlands used for peat extraction are shown in Annex 2.

For mires with ditches (Other wetlands - managed), uncertainties of the EF use the IPCC default uncertainty.

6.7.1.3 *QA/QC and verification*

The standard Tier 1 QA/QC procedures were performed for wetlands remaining wetlands. In addition, QA by a national expert was performed for the peat extraction off-site CO₂ emission factor (Søgaard 2017).

6.7.1.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.7.1.5 Planned improvements

- Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in Other Wetlands remaining Other Wetlands, following the methodology provided in the IPCC 2013 Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission.

6.7.2 Land converted to wetlands, 4D2

The area of land converted to peat extraction and soil-related emissions is considered negligible. CO₂, CH₄, and N₂O emissions from lands converted to peat extraction are reported as NE (see explanation in chapter 1.7). CSC in living biomass, DOM, and organic soils for forest land converted to Other wetlands are nevertheless reported in this chapter.

6.7.2.1 Methodological issues

6.7.2.1.1 Living biomass - Other wetlands – managed and unmanaged

Changes in living biomass associated with land converted to Wetlands are estimated by distinguishing between woody and non-woody biomass components.

Losses:

- Woody biomass losses are estimated using the Tier 3 method described in forest land remaining forest land (see section 6.4.1). The same approach is applied to conversions from all land uses where trees are present and measured by the NFI (Forests, Grasslands, and Unmanaged and Managed Wetlands).
- Non-woody biomass losses are estimated using default Tier 1 factors from the IPCC Guidelines, as shown in Table 6-44. As the guidelines do not provide specific Tier 1 biomass stocks for all land-use categories, the grassland biomass values are applied to conversions from Grasslands and Settlements (with green space) to Wetlands. Cropland converted to Wetlands will also result in non-woody biomass losses.

Gains:

- Woody biomass gains may occur in some Wetlands, specifically wood mires, where trees are present. In these areas, the Tier 3 method is applied, as the NFI measures tree biomass in Wetlands that contain tree cover.

Table 6-44: Woody and non-woody biomass carbon stocks change factors for conversion to wetlands.

Conversion	Biomass type	IPCC Climate region	Biomass gain/losses (tC ha ⁻¹)	Reference
Grasslands to wetlands (net change biomass)	Woody	-	0	NFI
Cropland to wetlands (biomass loss)	Non-woody	-	-4.7	IPCC 2019 Refinement, Vol. 4, Ch. 5, Table 5.9
Grassland to wetlands (biomass loss)	Non-woody	Boreal	-3.995	Values from IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4, divided by the default carbon fraction for herbaceous biomass (0.47 tC per tonne d.m.) IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4
		Cool temperate dry	-3.055	
		Cool temperate moist	-6.392	

6.7.2.1.2 Dead organic matter - Other wetlands – managed and unmanaged (key category)

The source category, dead organic matter on forest land converted to managed wetlands, is identified as a key category. Details on identification criteria can be found in chapter 1.4.

DOM for forest land to wetlands applies a similar Tier 1 (for litter) and Tier 2 (for dead wood) methodology as for lands converted to forest land (section 6.4.2). The difference is that instead of DOM gains, there are DOM losses. Furthermore, the losses occur instantly within the first year of conversion instead of being spread over 20 years. Table 6-45 and Table 6-46 present the litter and dead wood carbon stock loss factors for forest land converted to wetlands in Norway.

Table 6-45: Instant litter carbon stock loss (t C ha⁻¹) for forest land converted to wetlands.

Ecological climate zones	Litter (tC ha ⁻¹)	
	deciduous	conifers
Cool Temperate Continental Forest	27	70

Table 6-46: Instant dead wood carbon stock loss ($t\ C\ ha^{-1}$) for forest land converted to wetlands.

Dominant tree species	Productivity class	Site Indexes ⁵⁷	Dead wood ($tC\ ha^{-1}$)
all	Unproductive	[4]	0.646
spruce	low	[6,8]	3.018
spruce	medium	[11, 14]	4.818
spruce	high	[17,20, 23, 26]	8.476
pine	low	[6,8]	1.579
pine	medium	[11, 14]	3.132
pine	high	[17,20, 23, 26]	5.622
broadleaf	low	[6,8]	1.945
broadleaf	medium	[11, 14]	4.901
broadleaf	high	[17,20, 23, 26]	9.977

6.7.2.1.3 Mineral soil - Other wetlands – managed

The same Tier 1 methodology as applied for lands to forest land is also applied here (see section 6.4.2). Conversions to other wetlands – managed occur only from forest land and extensive grasslands. These land-use categories have the same stock change factors (SCFs) as Other wetlands – managed on mineral soil, and therefore are reported as NO.

6.7.2.1.4 Mineral soil - Other wetlands – unmanaged

In 2024, a plot surveyed by the NFI was converted from a glacier (classified as Other land) into a lake (classified as Other wetlands – unmanaged). Under the default classification, both land-use categories are considered mineral soils. As a result, the transition led to a change in area classification but did not generate emissions. It is therefore reported as NO, since no CSC resulted from this transition on mineral soil.

6.7.2.1.5 Organic soil – Peat extraction

All emissions from lands converted to peat extraction are reported as NE. Norway reports emissions for Lands Remaining Peatland Extraction, but not for Lands converted to Peatland Extraction. An assessment was made of the likely level of emissions from lands converted to peat extraction (Box 6.4).

⁵⁷ Site index was defined as the mean height of the 100 thickest trees ha^{-1} at the reference age of 40 years, and it is estimated at each cycle of the NFI.

Box 6.4 - Peat extraction

To gather information about peat extraction, surveys have been conducted. In 2015, 2021 and every second year after that. In the survey of 2015, the producers were asked to list the peatlands they used, with information about when they started using them, the area and if relevant when they stopped using them. In the survey of 2021, the producers were asked whether they had started using a new area of peatland since 2015. Only one producer answered yes to this and was asked directly how large the area was. The producers were not asked about the area they use from 2023 and onward. Based on the results from the two first surveys, the total area of peatland drained for peat extraction since 1990 was calculated to be 694 ha. Assuming an even conversion over the years, and a conversion time of 20 years, the average area being converted at any given moment has been calculated like this: $\text{Lands converted for peat extraction (ha)} = \text{total area (694 ha)} / \text{number of years (31 years)} * 20 \text{ years} = 447.7 \text{ ha}$

The peat extracted from lands converted for peat extraction was also calculated. It was assumed that it takes about 10 years from the initial conversion, until the first peat extraction and it was assumed that there is an even distribution of peat extraction on the areas used for peat extraction (estimated to be 2000 ha). Based on this the average peat extraction (m^3/ha) was calculated for each year. Then the peat extracted from land converted for peat extraction was calculated for each year: $\text{Peat extracted on land converted for peat extraction} = \text{Peat (m}^3/\text{ha)} * \text{Lands converted for peat extraction (447.7 ha)} / 20 * 10$

The numbers were then used to calculate the off-site and on-site emissions of land converted for peat extraction, using the same methods as for lands remaining peat extraction.

The emission estimate was considered "non-significant" by comparing it to Norwegian emissions from all sectors except LULUCF, as outlined in chapter 1.7.

6.7.2.1.6 Organic soil (drained) - Other wetlands – managed - Mires with ditches

For drained organic soils, we used the default emission factor for temperate cool climate on forest land, which is $2.6 \text{ t C ha}^{-1} \text{ yr}^{-1}$ according to the IPCC 2013 Wetlands supplement. The conversion of extensive grasslands to wetlands on organic soil cannot occur, and the notation key NO is therefore reported in the CRT.

6.7.2.2 QA/QC and verification

The standard Tier 1 QA/QC procedures were performed during the estimation of CSC for land converted to a wetland.

6.7.2.3 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.7.2.4 Planned improvements

- Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in Land converted to Other Wetlands, following the methodology provided in the IPCC 2013 Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission.

6.8 Settlements – 4E

Settlements cover a little more than 2% of the area of Norway. Settlements are a diverse land-use class consisting of, for example, residential areas, roads, recreation areas, powerlines within forests, gravel pits, mines, and industrial areas. The land-use class is especially important when it comes to the sub-group of land converted to settlements because of increased land-use conversions since 1990.

All settlement areas are classified into subdivision classes according to their surface properties (using NFI variables “area description”, “area type”, and “area use”). However, the application of sub-categories to estimate emissions is used differently for settlements remaining settlements and land converted to settlements (see sections 6.8.1 and 6.8.2).

For each NFI plot categorized as a Settlement, we know the proportion of greenspace area (the proportion of land area covered by *vegetation* or *turfgrass*). It is defined in 10% classes in the NFI and converted to a proportion of each plot, which is greenspace for the Tier 1 methods (Table 6-47).

The area within the settlements defined as infrastructure or paved over is estimated as the non-greenspace proportion of the total area by default. Currently, the NFI does not discriminate between the non-greenspace proportion area, which are man-made constructions, and naturally present bare rocks. The current assumption is to treat all non-greenspace on settlement plots as man-made constructions, thereby classifying the area as either *paved* or *infrastructure*.

Table 6-47: Total greenspace percentage. That is the proportion of land area covered by vegetation or open soil used for the Tier 1 methodology.

NFI range in % total greenspace	Total greenspace % as applied for the calculations in the GHG inventory (Tier1)
0 – 10%	0%
11 – 20%	15%
21 – 30%	25%
31 – 40%	35%
41 – 50%	45%
51 – 60%	55%
61 – 70%	65%
71 – 80%	75%
81 – 90%	85%

The IPCC 2006 Guidelines do not define clear subdivisions of the Settlements category. This inconsistency is underlined in the IPCC 2019 Refinement. In the IPCC 2006 Guidelines, Vol. 4, Ch. 8, it is stated that “*Settlement management classes could include turf grass (e.g., lawns and golf courses), urban woodlands, gardens, refuse areas (e.g., garbage dumps), barren areas (exposed soil), and infrastructure (e.g., roadways, houses, and buildings)*”. Further, regarding the choice of Tier 1 stock change factors for mineral soil, the IPCC 2006 Guidelines define four settlement subdivisions for lands converted to settlements, defined as the portion of settlement area that is paved over, turfgrass, cultivated, and wooded (IPCC 2006 Guidelines, Vol. 4, Ch. 8, section 8.3.3.2). This has been used as a base for defining subdivision classes of settlements for Norway, which reflect national conditions.

Based on the surface properties from the NFI, we can subdivide Settlements into four classes to reflect the degree of impact that settlement land use and management has on soil carbon stocks: (1) Infrastructure, (2) Paved over, (3) Turfgrass, and (4) Vegetated (Table 6-48). Turfgrass and vegetated mineral soil wooded areas were stratified into a fifth category (5) “wooded” (with trees). Figure 6.32 shows the area distribution of each category within the settlement's land use.

Table 6-48: Settlements subdivision classes.

Classes	Definition
Infrastructure (I)	Soil is totally removed in most cases (e.g., motorways, houses, and other buildings). ¹
Paved (P)	Soil is paved over (e.g., forest roads, sidewalks) ¹

Turfgrass (T)	Receives cutting and removal of vegetation and at least one improvement, such as fertilization, species improvement, and irrigation (e.g., golf courses, gardens, parks).
Vegetated (V)	Receives periodic cutting and removal of above-ground vegetation without significant management improvements (e.g., power lines, road edge zones).
Wooded (W)	The presence of trees is used to partition the greenspace area (T and V) into wooded areas and non-wooded areas. If at least one tree is present, the greenspace (T or V) is defined as wooded when on mineral soil.

¹ Bare rock (soil removed or bare rock before transition) may or may not be included in the category; the currently used data does not record it.

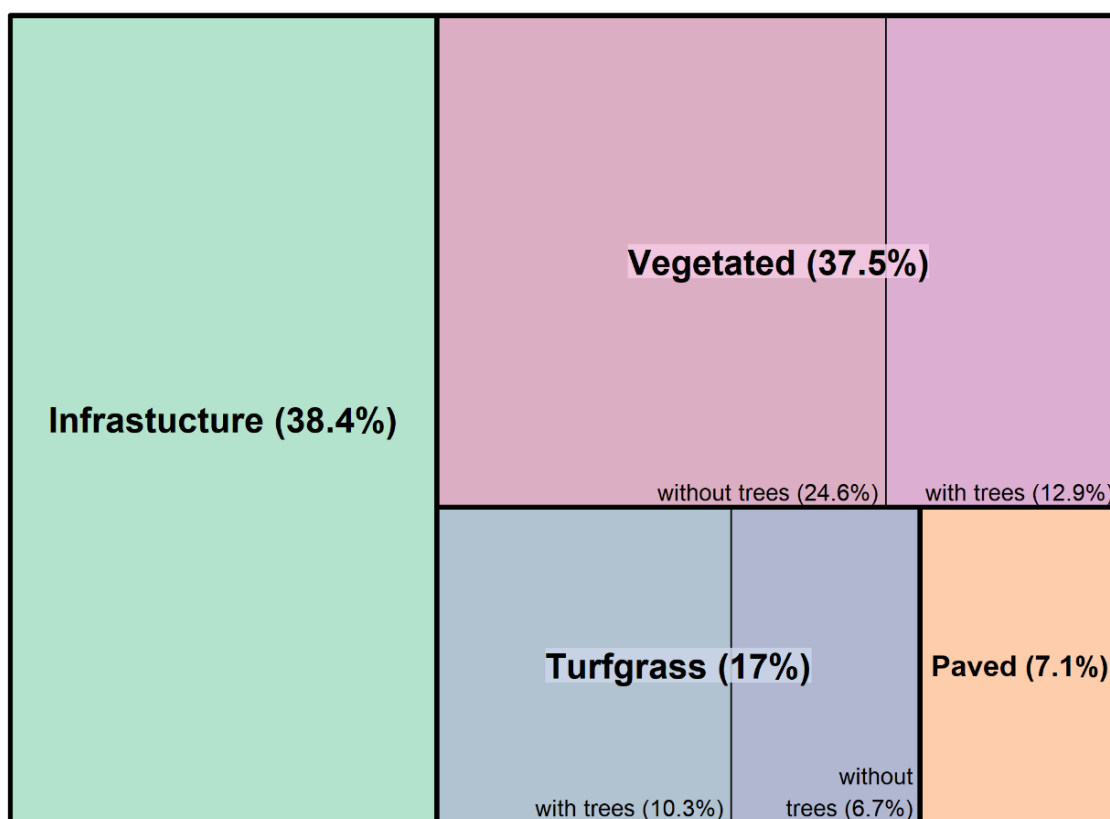


Figure 6.32: Settlement subcategory area distribution (2020 to the latest reporting year).

6.8.1 Settlements remaining settlements, 4E1

On settlements remaining settlements, we report CSC in living biomass, DOM, mineral, and organic soils using Tier 1 methods.

6.8.1.1 Methodological issues

6.8.1.1.1 Living biomass

To estimate CSC in the living biomass pool, a Tier 1 method is used, assuming no stock change and NO is reported. This is because trees are not measured in settlements in the NFI due to the relatively small amounts of living biomass in settlements (Løken et al. 2012).

In a specific study, trees were measured in land-use classes where trees are usually not measured in the NFI, including those within settlements (Løken et al. 2012). A panel of NFI plots visited in 2009, containing almost 900 plots within settlements, was used in the study. Settlements cover a marginal portion of the Norwegian land area and hold a negligible fraction of the total biomass stock (Løken et al. 2012). In 2023, the NFI plots within settlement areas were re-evaluated to record crown cover utilizing aerial photographs. Due to limited availability, aerial images from the years 1990, 2000, 2010, and 2020 were assessed. Upon analysis, no significant changes in crown cover were observed. Consequently, the Tier 1 method will continue to be employed, maintaining the assumption of no stock change.

6.8.1.1.2 tiDOM and mineral soils

CSC in DOM and mineral soil pools are also estimated using a Tier 1 method. This implies an assumption that no CSC occurs, and hence the notation key NO is used.

6.8.1.1.3 Organic soils (drained) (key category)

The source category organic soil on settlements remaining settlements is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Norway utilizes the Tier 1 methodology to estimate CO₂ emissions from settlements remaining settlements on drained organic soils. The Tier 1 method utilizes:

$$L_{\text{Organic}} = \sum (A \times EF)_c \quad \text{Equation 2.26 (IPCC 2006; IPCC 2014)}$$

where L_{Organic} is the annual carbon loss from drained organic soils (in tonnes C yr⁻¹), A is the land area of drained organic soils in climate type c (in ha), and EF is the emission factor for climate type c (in tonnes C ha⁻¹yr⁻¹). The differing subdivision classes on settlements necessitate different EFs applied to the area of drained organic soil on settlements.

The IPCC 2013 Wetlands supplement does not provide specific EFs for settlements. However, it states that it is “good practice to take the default EF of the land-use category closest to national conditions of drained organic soils under Settlements”. Following this guidance, we have assigned default EFs to the different Settlements subdivision classes, based on the most comparable land-use category in Table 2.1 of the IPCC 2013 Wetlands supplement. These assignments are described in Table 6-49.

Table 6-49: Settlements subdivision classes and their associated Tier 1 EF's on organic soils. EF for CO₂ (tC ha⁻¹ yr⁻¹) is from Table 2.1 in the IPCC 2013 Wetlands supplement.

Classes	CO ₂ (tC ha ⁻¹ yr ⁻¹)	Corresponding IPCC land use category ¹
Temperate climate zone		
Paved (P)	3.6	Grassland, shallow-drained, nutrient-rich
Turfgrass (T)	6.1	Grassland, deep-drained, nutrient-rich
Vegetated (V)	3.6	Grassland, shallow-drained, nutrient-rich
Boreal climate zone		
Paved (P)	5.7	Grassland, drained
Turfgrass (T)	5.7	Grassland, drained
Vegetated (V)	5.7	Grassland, drained

¹ We do not have information to separate nutrient-rich and nutrient-poor plots and assume all temperate plots to be nutrient-rich. For the boreal climate zone, default EFs are not differentiated between deep or shallow drainage.

6.8.1.2 Uncertainties and time-series consistency

Uncertainties for settlements use the Tier 1 uncertainties provided in the IPCC 2013 Wetlands supplement, Table 2.1. Uncertainties are shown in Annex 2.

6.8.1.3 QA/QC and verification

The standard Tier 1 QA/QC procedures were performed for settlements remaining settlements. External QA was carried out in 2021 for the settlement subdivision methodology.

6.8.1.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.8.1.5 Planned improvements

Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in Settlements remaining Settlements, following the methodology provided in the IPCC 2013 Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission.

6.8.2 Land converted to settlements, 4E2

The conversion of land to settlements is a significant source of emissions, primarily due to conversions from forest land.

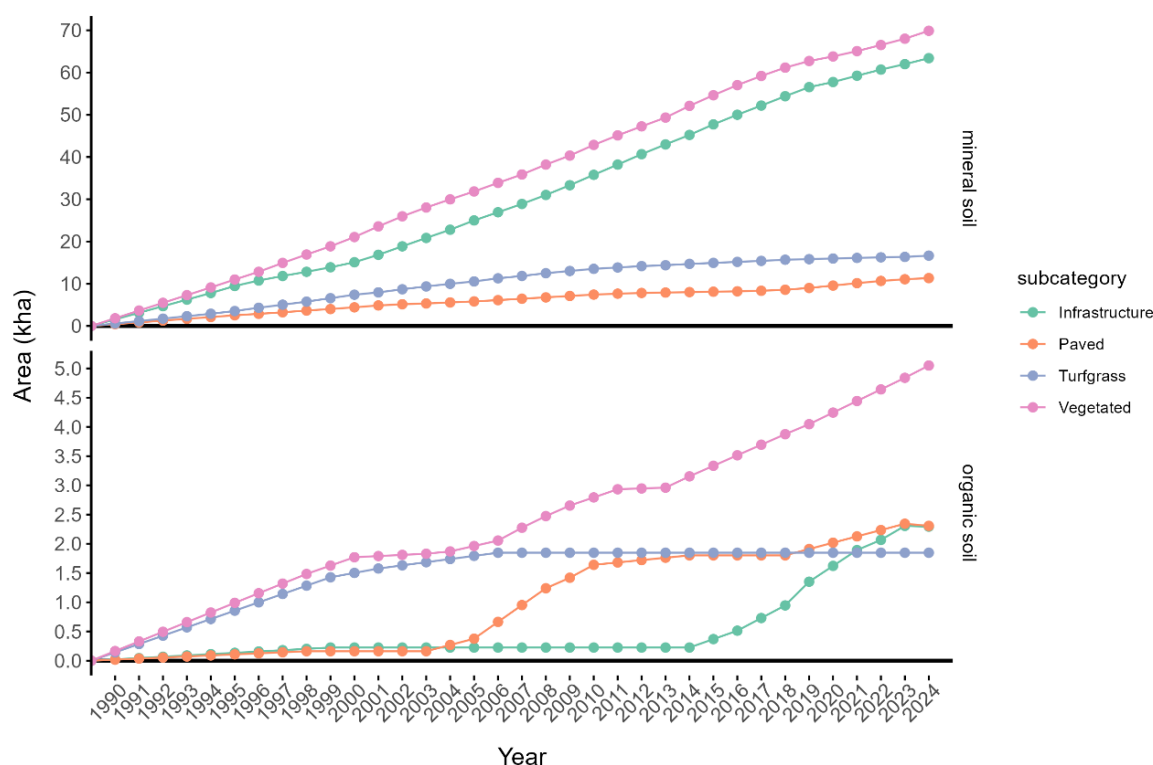


Figure 6.33: Cumulative land-use change area to settlement subcategories since 1990 (excluding 20-year transition rule to remaining category). The area separation between mineral and organic soil is based on what the soil of the area was originally classified as before the conversion, and not the classification after land-use change.

6.8.2.1 Methodological issues

6.8.2.1.1 Living biomass (key category)

The source category living biomass on forest land converted to settlements, is identified as a key category. Details on identification criteria can be found in chapter 1.4.

Changes in living biomass associated with land converted to Settlements are estimated by distinguishing between woody and non-woody biomass components.

Losses:

- Woody biomass in forest land and wetlands⁵⁸ converted to Settlements, are estimated using a Tier 3 methodology based on NFI measurements. Tree measurements are usually available before the conversion if the area is tree-covered. While trees are not measured on settlements, the NFI records which of the trees remain on the converted sample plot

⁵⁸ With at least 5% crown cover. At the latest since 2007, trees are measured independent of crown cover.

the first time the sample plot is visited after the conversion. Diameter and height measurements are, however, not carried out. Based on which trees were removed, the CSC on the converted sample plots is calculated using the last biomass measurement before conversion, assuming no increment. The carbon stock of the last measurement minus the carbon stock of the removed trees is then used as the carbon stock of the plot, assuming no changes in the future. The recording of which trees remain on a converted sample plot started in 2005. In the time-series before 2005, we assume that all trees were removed in the year when the land-use change was observed. An example of a situation where land is converted to settlements with remaining trees is a forested sample plot, of which the biggest part of the plot is converted to a house, while some of the trees are still alive inside what is now a garden.

- Woody biomass values have also been available for grassland since 2007, and a Tier 3/2 method is applied. Sample plots converted from grassland to settlements before 2007 did not have tree living biomass.
- Non-woody biomass losses are estimated using default Tier 1 factors from the IPCC Guidelines, as shown in Table 6-50. Conversions from Grassland to settlements with non-greenspace result in instant grass biomass losses in the first year of conversion. If the conversion to settlement includes greenspace, the grassland is maintained, and no non-woody biomass losses are recorded. Conversions from Cropland to any type of settlement result in instant annual crop biomass losses in the first year of conversion.

Gains:

- All land conversions (excluding Grasslands) to settlements with greenspace result in instant non-woody grass biomass gains in the first year of conversion, following the default methodology in the IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4. Details are provided above.

Gains and losses of non-woody biomass are calculated in proportion to the greenspace area of the plot (codes V – Vegetated and T -Turfgrass), as registered by the NFI.

Table 6-50: Woody and non-woody biomass carbon stocks change factors for conversion to settlements.

Conversion	Biomass type	IPCC Climate region	Biomass gain/losses (tC ha ⁻¹)	Reference
Forest to settlement (net biomass change*)	Woody	-	-1.894**	NFI
Wetlands to settlement (net	Woody	-	-0.609**	NFI

biomass change*)				
Grasslands to settlement (net biomass change*)	Woody	-	-0.026**	NFI
Cropland to settlement (net biomass change*)	Woody	-	-0.030*	NFI Obs.: Not common to have trees in cropland areas, but it might happen
Grassland to non- greenspace settlements (biomass loss)	Non-woody	Boreal	-3.995	Values from IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4, divided by the default carbon fraction for herbaceous biomass (0.47 tC per tonne d.m.) IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4
		Cool temperate dry	-3.055	
		Cool temperate moist	-6.392	
Cropland to settlements (biomass loss)	Non-woody	-	-4.7	IPCC 2019 Refinement, Vol. 4, Ch. 5, Table 5.9
Lands converted (excl. grasslands) to greenspace settlements (biomass gains)	Non-woody	Boreal	3.995	Values from IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4, divided by the default carbon fraction for herbaceous biomass (0.47 tC per tonne d.m.) IPCC 2006 Guidelines, Vol. 4, Ch. 6, Table 6.4
		Cool temperate dry	3.055	
		Cool temperate moist	6.392	

* The net change biomass considers both woody biomass losses and gains associated with the land-use conversion.

** The woody biomass values represent the average net biomass change for that land-use conversion over the entire time series. Positive values indicate net gains, while negative values indicate net losses.

6.8.2.1.2 Dead organic matter (key category)

The source category, dead organic matter on forest land converted to settlements, is identified as a key category. Details on identification criteria can be found in chapter 1.4.

DOM for forest land to settlements applies a similar Tier 1 methodology to lands converted to forest land (section 6.4.2). The difference is that instead of DOM gains, there are DOM losses. Furthermore, the losses occur instantly within the first year of conversion instead of being spread over 20 years. Table 6-51 and Table 6-52 present the litter and dead wood carbon stock loss for forest land converted to settlements in Norway.

Table 6-51: Instant DOM carbon stock loss (t C ha⁻¹) for forest land converted to settlements.

Ecological climate zones	Litter (tC ha ⁻¹)	
	deciduous	conifers
Boreal Dry Tundra Woodland	31	69

Cool Temperate Moist Mountain System	6	8
Cool Temperate Dry Steppe	40	31
Cool Temperate Oceanic Forest	6	7
Cool Temperate Continental Forest	27	70

Table 6-52: Instant dead wood carbon stock loss ($t\ C\ ha^{-1}$) for forest land converted to settlements.

Dominant tree species	Productivity class	Site Indexes ⁵⁹	Dead wood ($tC\ ha^{-1}$)
all	Unproductive	[4]	0.646
spruce	low	[6,8]	3.018
spruce	medium	[11, 14]	4.818
spruce	high	[17,20, 23, 26]	8.476
pine	low	[6,8]	1.579
pine	medium	[11, 14]	3.132
pine	high	[17,20, 23, 26]	5.622
broadleaf	low	[6,8]	1.945
broadleaf	medium	[11, 14]	4.901
broadleaf	high	[17,20, 23, 26]	9.977

No change in the DOM is considered for conversions from cropland, grassland, and wetlands to settlements, and the notation key NO is applied.

6.8.2.1.3 Mineral soil (key category)

The source category mineral soil on forest land and cropland converted to settlements, is identified as a key category. Details on identification criteria can be found in chapter 1.4.

The same Tier 1 Approach 3 methodology described in detail by Bárcena et al. (2021) for lands converted to forest land is also applied here (see section 6.4.2), with modifications to account for emissions specified for the settlement subdivision classes.

The area proportion of each subdivision class occurring on the plot is then assigned a Tier 1 stock change factor ($SCF = F_{LU} \times F_{MG} \times F_I$) (Table 6-53). Individual NFI plot areas can contain one or more subdivision classes, to which the appropriate default F_{LU} , F_{MG} , and F_I values are applied to the appropriate portion of non-greenspace and greenspace parts occurring on the plot (Table 6-53).

⁵⁹ Site index was defined as the mean height of the 100 thickest trees ha^{-1} at the reference age of 40 years, and it is estimated at each cycle of the NFI.

For infrastructure and paved-over areas, the IPCC 2006 Guidelines state that the product of F_{LU} , F_{MG} , and F_I should be 0.8 (we have assigned this to F_{LU} , keeping F_{MG} and F_I 1.0). Factors for turfgrass and vegetated areas are based on IPCC 2019 Refinement, Vol. 4, Ch. 6, Table 6-2. In addition, the IPCC 2006 Guidelines state that for the proportion of the settlement area that is wooded, assume all stock change factors equal 1 (thus F_{LU} , F_{MG} , and F_I all equal 1.0) in Tier 1. A green space area with at least one tree present is considered wooded.

Table 6-53: Lands converted to settlements subdivision classes, and their associated Tier 1 stock change factors for mineral soils.

Classes	Mineral soils		
	FLU	FMG	FI
Infrastructure (I)	0.8	1.0	1.0
Paved (P)	0.8	1.0	1.0
Turfgrass (T)	1.0	1.14	1.0
Vegetated (V)	1.0	1.0	1.0
Wooded (W)	1.0	1.0	1.0

The national mean mineral soil CSC rate for lands converted to settlement can be found in Table 6-54.

Table 6-54: Annual mineral soil CSC rates (mean $\pm$ standard deviation in $t\ C\ ha^{-1}\ yr^{-1}$) for lands converted to settlements.

IPCC climate region	Cropland	Forest land	Intensive Grassland	Extensive Grassland	Unmanaged Wetlands (waterbody)
Cool Temperate Dry	-	-0.04 $\pm$ 0.27	-	-	-
Cool Temperate Moist	0.669 $\pm$ 0.8	-0.37 $\pm$ 0.44	-0.41 $\pm$ 0.61	-0.47 $\pm$ 0.46	-0.364 $\pm$ 0

6.8.2.1.4 Organic soil (drained) (key category)

The source category organic soil on forest land and cropland converted to settlements, is identified as a key category. Details on identification criteria can be found in chapter 1.4.

In the IPCC 2006 Guidelines, Vol. 4, Ch. 8, it is stated that: “If the peat is removed, the carbon should be assumed to be released in the year of removal”. Thus, for the category infrastructure, where we

assume all peat to be removed, we calculate instant oxidation with emissions of CO₂. We apply different factors for instant oxidation (Table 6-55) according to soil depth classes (IPCC 2014). Depth classes of the organic soil were available from NFI and old map products (AR5, "Markslagskart") and are described: shallow 0.4-1 m; deep > 1 m. Instant oxidation of shallow and deep organic soils results in carbon loss (Table 6-55).

The IPCC 2013 Wetlands supplement does not provide specific EFs for settlements. However, it states that it is "good practice to take the default EF of the land-use category closest to national conditions of drained organic soils under Settlements". Following this guidance, we have assigned default EFs to the different Settlements subdivision classes where organic soil is drained and not removed, based on the most comparable land-use category in Table 2.1 of the IPCC 2013 Wetlands supplement. These assignments are described in Table 6-55.

Table 6-55: Settlements subdivision classes and their associated Tier 1 EFs on organic soils. EF for CO₂ (tC ha⁻¹ yr⁻¹) is from Table 2.1 in IPCC (2014).

Classes	C (t ha ⁻¹ yr ⁻¹)	Corresponding IPCC land use category ²
Infrastructure (I)¹		
Shallow (0.4 – 1 m)³	321.3	
Deep (> 1 m)³	918.0	
Temperate climate zone		
Paved (P)	3.6	Grassland, shallow-drained, nutrient-rich
Turfgrass (T)	6.1	Grassland, deep-drained, nutrient-rich
Vegetated (V)	3.6	Grassland, shallow-drained, nutrient-rich
Boreal climate zone		
Paved (P)	5.7	Grassland, drained
Turfgrass (T)	5.7	Grassland, drained
Vegetated (V)	5.7	Grassland, drained

¹These emissions are from instant oxidation and are only applied once for the initial transition.

²We do not have information available to separate nutrient-rich and nutrient-poor plots and assume all temperate plots to be nutrient-rich. For the boreal climate zone, default EFs are not differentiated between deep or shallow drainage.

³Based on a carbon density of 45.9 kg C/m² and an average depth of 0.7 m for shallow bogs and 2.0 m for deep bogs.

6.8.2.2 Uncertainties and time-series consistency

Uncertainties are shown in Annex 2 for living biomass, DOM, organic, and mineral soils. The time-series was consistently calculated.

6.8.2.3 QA/QC and verification

The standard Tier 1 QA/QC procedures were performed for land converted to settlement.

6.8.2.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.8.2.5 Planned improvements

- Off-site CO₂ emissions from drained organic soils: Norway plans to include off-site CO₂ emissions from drained organic soils in Land converted to Settlements, following the methodology provided in the IPCC 2013 Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission.

6.9 Other land – 4F

The land use category other land covers approximately 10% of the total land area in Norway and reflects a large amount of mountainous and rocky terrain. There were no land-use changes to other land. No CSC occurred on other land. It is only mandatory to report CSC for land converted to other land.

6.9.1 Other land remaining other land, 4F1

Reporting of emissions from other land remaining other land is not mandatory. Other land in Norway is wasteland areas with bare soil, rocks, and ice with no significant carbon pools.

6.9.2 Land converted to other land, 4F2

There were no land-use changes to other land in the latest reporting year, and all CSC is reported as NO.

6.9.3 Methodological issues

The area estimates are based on NFI data.

6.9.4 Uncertainties and time-series consistency

Area uncertainties are estimated as described in section 6.1.4.

6.9.5 QA/QC and verification

The standard Tier 1 QA/QC procedures were performed for other lands.

6.9.6 Recalculations

There have been no recalculations performed for this source category this year.

6.9.7 Planned improvements

There are no planned improvements.

6.10 Harvested wood products – 4G

Harvested wood products (HWP) are identified as a key category. Details on identification criteria can be found in chapter 1.4.

HWP extends the period during which carbon remains stored in wood products after it is removed from the forest. The HWP accounting includes carbon inflows to sawnwood, wood-based panels, and paper and paperboard. It does not account for all harvested wood, but only the fraction used for these three product categories.

Norway applies the production approach for HWP accounting, in accordance with the IPCC 2019 Refinement. Under this approach, carbon stocks and CSC track HWP produced from timber harvested in Norway, regardless of whether the products:

1. are consumed domestically, or
2. are exported.

The sum of these two categories constitutes the total HWP removals or emissions.

According to the current calculation approach, the total net HWP removals resulted in - 922 kt CO₂ in the base year 1990. This number declined to -342 kt CO₂ in the latest reporting year. HWP produced and consumed domestically resulted in net emissions of 108 kt CO₂, while HWP produced and exported resulted in net removals of -450 kt CO₂. The total removals from the HWP pool were -342 kt CO₂.

During the period 2008-2015, HWP became a net source of emissions (Figure 6.1). This shift was mainly linked to the economic recession in 2007-2009, which reduced timber production and inflows to the HWP pool. Similar trends were observed in other European countries. In addition, the shutting down of paper factories in Norway from 2006 onwards led to a decline in paper and paperboard stocks, contributing to increased emissions during that period. From 2016 onwards, the HWP pool shifted back to net carbon removals. Sawnwood contributed most to removals, while emissions were mainly associated with paper and paperboard.

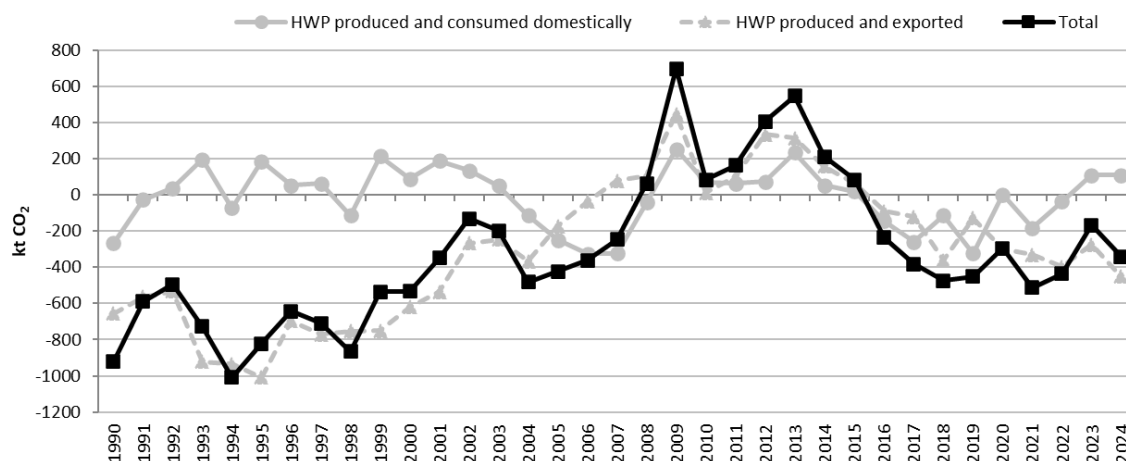


Figure 6.34: CO₂ emissions and removals in HWP (kt CO₂). Source: Norwegian Institute of Bioeconomy Research.

6.10.1 Methodological issues

6.10.1.1 Choice of method

Emissions and removals reported for HWP are estimated using a Tier 1 method from the IPCC 2019 Refinement, Vol 4, Ch. 12.4.2. The Tier 1 default options are applied, including the three default HWP categories sawnwood, wood-based panels, and paper and paperboard, and their associated half-lives and conversion factors from the IPCC 2019 Refinement.

To improve transparency and in accordance with the IPCC 2019 Refinement, the Norwegian estimates differentiate between domestically produced and consumed HWP and wood products that are produced and exported.

The activity data used starts in 1961 and is based on FAO statistics. Calculations have been performed using data from 1961 to the latest reporting year. We calculated the historic pool from 1950 to 1960 according to IPCC 2019 Refinement. Only emissions from 1990 onwards are reported.

The estimation of carbon stocks (C) and annual CSC (ΔC) for each HWP category was estimated using Equation 12.2 of the IPCC 2019 Refinement.

$$C(i+1) = e^{-k} \times C(i) + \left[\frac{(1 - e^{-k})}{k} \right] \times Inflow(i)$$

$$\Delta C(i) = C(i+1) - C(i)$$

where i is the year; $C(i)$ is the carbon stock (kt C) in the particular HWP category at the beginning of year i , with $i = (1961, \dots, 2023)$, but only emission estimates for $i = (1990, \dots, 2023)$ are reported; k

is the decay constant for the first-order decay for HWP category (i.e. sawnwood, wood-based panels or paper and paperboards) given in units yr^{-1} as $k = \ln(2)/\text{HL}$, where HL is the half-life of the HWP pool, which is constant and given in the unit years. $\text{Inflow}(i)$ is the inflow to the particular HWP category during year i ; $\Delta C(i)$ is the CSC of the HWP category during year i , kt C yr^{-1} .

The approximation of the carbon stocks in HWP pools at initial time $C(i = t_0 = 1961)$ was calculated according to Equation 12.4 of the IPCC 2019 Refinement,

$$C_{(t_0)} = \frac{\text{Inflow}_{\text{average}}}{k}$$

where

$$\text{Inflow}_{\text{average}} = \frac{(\sum_{i=t_0}^{t_4} \text{Inflow}(i))}{5}$$

The CSC for each of the three HWP categories (sawnwood, wood-based panels, paper, and paperboard) was estimated and summed to provide the total for Norway.

6.10.1.2 Activity data

All the activity data are from the FAO forestry statistics (FAO Annually). The initial unit is m^3 , except for the 'pulp for paper' and 'paper and paperboard', where the unit is the metric ton. Carbon conversion was performed using the default conversion factors given by the IPCC 2019 Refinement. Exported and domestically consumed HWP is calculated and reported separately. The domestically produced and consumed inflow data are based on consumption (Production – Export). Imported HWP is not included in the calculations (Production approach).

6.10.1.3 Assumptions

It is assumed that the Tier 1 method reflects the carbon flow in the HWP pool. The assumption of first-order decay (i.e., exponential decay) implies that loss from the stock of products is estimated as a constant fraction of the amount of stock according to the IPCC 2019 Refinement. It is assumed that the default half-lives are representative values for Norway.

6.10.2 Uncertainties and time-series consistency

The reported uncertainty estimates for half-lives are $\pm 50\%$, according to the IPCC 2006 Guidelines. In addition, the guidelines estimate 15% uncertainty related to the activity data – production and trade for countries with systematic census or surveys.

6.10.3 QA/QC and verification

The standard Tier 1 QA/QC procedures were performed for HWP.

6.10.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.10.5 Planned improvements

No planned improvements.

6.11 Direct and Indirect N₂O emissions from fertilizers – 4(I)

Direct and indirect N₂O emissions from managed soils are estimated from nitrogen (N) inputs of inorganic and organic fertilizers and reported following the IPCC 2019 Refinement.

Inorganic nitrogen fertilizer (F_{SN}) is applied only to forest land. It is not applied to managed wetlands (reported as NO). Any inorganic nitrogen fertilizer application in settlements is included in the agriculture sector and reported as IE in the LULUCF CRT tables. Inorganic nitrogen fertilizers on croplands and grasslands are reported as IE and included in the agriculture sector.

Organic nitrogen fertilizer (F_{ON}) is applied only to settlements. In Norway, livestock may graze in forests during the summer months. Emissions from organic nitrogen fertilizer, such as animal manure, applied on forest land remaining forest land, and land converted to forest are reported with the notation key IE and included in the agriculture sector. Livestock generally does not graze on peat extraction areas, mires with ditches, and flooded lands, and direct N₂O emissions from these areas are reported as NO. Organic nitrogen fertilizers on croplands and grasslands are also reported as IE and included in the agriculture sector.

Indirect N₂O emissions occur through two pathways: 1) the volatilization of nitrogen as NH₃ and NO_x and subsequent deposition of nitrogen compounds (atmospheric deposition), and 2) the leaching and runoff of nitrogen from land that has been subjected to excess nitrogen application from organic or inorganic fertilizers.

The IPCC 2019 Refinement methodology for estimating indirect emissions includes nitrogen inputs from several sources. However, the sources are split between the reporting in the LULUCF and the agriculture sectors. The indirect emissions reported in this section are derived from the nitrogen inputs coming from inorganic fertilizer on forest land (F_{SN}) and organic fertilizer on forest land and settlements (F_{ON}). Indirect emissions caused by nitrogen inputs from crop residues, urine, and dung application from livestock, and nitrogen fertilizers on agricultural lands (cropland and grassland) are reported in the agriculture sector.

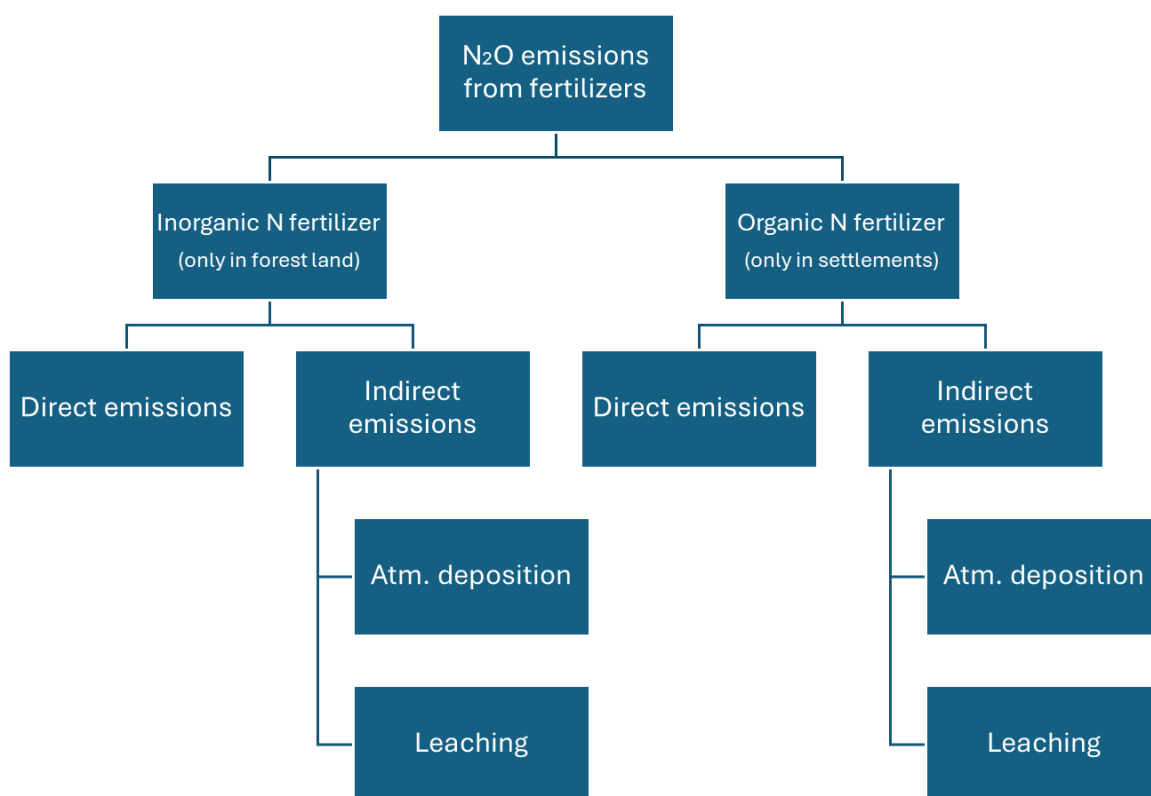


Figure 6.35: Reporting structure under Direct and Indirect N₂O emissions from fertilizers.

6.11.1 Inorganic fertilizer on forest land

6.11.1.1 Direct emissions

N₂O is produced in soil as a by-product of nitrification and denitrification. Fertilizer input is particularly important for this process. However, the fertilization of forest land is limited in Norway.

The area fertilized started as a modest size in 1990, with both the area and the net quantity of nitrogen applied experiencing a decrease during the inventory period. However, in the years following 2015, the fertilized areas saw an increase due to the implementation of a new subsidy scheme. In 2022, however, the amount of fertilizer applied to forests reduced significantly as a result of the price increase. The 2024 data shows that fertilizer application increased again, indicating a recovery after the previous decline caused by higher prices (Table 6-56).

Table 6-56: Estimated emissions from nitrogen fertilization of forest land.

Year	Fertilizer input (t N)		Net amount of nitrogen applied (t N)	N ₂ O emissions (t N ₂ O)
	Mineral soil	Organic soil		
1990	201.1	83.2	284.3	7.0
1991	369.9	93.9	463.8	11.4
1992	287.8	144.5	432.3	10.6
1993	205.5	93.9	299.4	7.3
1994	191.9	93.9	285.7	7.0
1995	199.7	69.0	268.7	6.6
1996	262.4	60.1	322.5	7.9
1997	276.7	41.4	318.1	7.8
1998	293.9	48.3	342.1	8.4
1999	264.3	62.0	326.4	8.0
2000	197.9	30.6	228.5	5.6
2001	172.0	27.9	199.9	4.9
2002	191.6	12.3	203.9	5.0
2003	87.1	1.6	88.7	2.2
2004	96.1	4.1	100.3	2.4
2005	76.9	33.3	110.2	2.7
2006	52.9	8.3	61.2	1.5
2007	89.7	2.5	92.2	2.3
2008	111.7	2.5	114.1	2.8
2009	116.2	1.3	117.6	2.9
2010	85.0	0.5	85.5	2.1
2011	86.5	0.2	86.7	2.1
2012	125.4	0.4	125.8	3.1
2013	176.7	1.7	178.4	4.4
2014	74.1	0.0	74.1	1.8
2015	104.9	0.0	104.9	2.5
2016	1 241.8	1.4	1 243.2	30.2
2017	1 344.8	4.0	1 348.8	33.0
2018	838.8	0.0	838.8	20.5
2019	557.8	0.0	557.8	13.5
2020	648.2	0.0	648.2	15.6
2021	663.1	0.0	663.1	16.1
2022	46.3	0.0	46.3	1.1
2023	313.1	0.0	313.1	7.5
2024	469.6	0.0	469.6	11.3

6.11.1.1.1 Methodological issues

Choice of method

The estimate is based on a Tier 1 method with default emission factors from the IPCC 2019 Refinement. Emissions are calculated according to

$$N_2O-N = F_{SN} \times EF_1 \times 44/28 \quad \text{Equation 11.1; (IPCC 2006; IPCC 2019)}$$

where F_{SN} is the annual amount of inorganic fertilizer nitrogen applied (kt N) to forest soil, and EF_1 are the emission factors for N_2O emissions from nitrogen inputs, kg N_2O-N /kg N input, split into dry and wet climate (IPCC 2019).

Activity data

Statistics Norway supplied unpublished data on the area of inorganic fertilizer application on mineral and organic soils from 1990 to 1996. During this period, the total amount of fertilizer used was computed using the average weight applied per hectare by helicopter. The nitrogen content depends on the type of fertilizer supplied by Yara, which provided numbers for forest fertilization. From 1993 to 1994 and onwards, calcium ammonium nitrate-based fertilizer dominated the market for fertilization of forests on mineral soils (Yara Norge AS 2013). The nitrogen content of calcium ammonium nitrate is 27% (weight percentage). From 1997 onwards, we gathered fertilization data from Statistics Norway (Annually-c) for each county. We then calculated the average proportion of fertilizer applied per county from 1997 to the latest reporting year. This data retrospectively estimated the distribution of the total fertilizer amount for the earlier years (1990 to 1996).

Emission factor

Once the data were split by county for the whole time series, we used the percentage of wet and dry climate within each county to apply the disaggregated emission factors, as recommended in the IPCC 2019 Refinement Vol. 4, Ch. 11, table 11.1. The disaggregated emission factors used are shown in Table 6-57.

Table 6-57: Emission factors to estimate direct N_2O emissions from forest fertilization.

Factor	Disaggregation	Default value	IPCC default
EF ₁	Inorganic fertilizer inputs in wet climates	0.016	IPCC 2019 Refinement, Vol. 4, Ch. 11, table 11.1
	All nitrogen inputs in dry climates	0.005	IPCC 2019 Refinement, Vol. 4, Ch. 11, table 11.1

6.11.1.2 Indirect emissions

6.11.1.2.1 Atmospheric deposition

This section estimates indirect emissions reported under atmospheric deposition from inorganic nitrogen fertilizer input on forest land (F_{SN}).

6.11.1.2.1.1 Methodological issues

Choice of method

We used the Tier 1 method of the IPCC 2019 Refinements in areas with inorganic N applied as fertilizer, according to

$$N_2O-N = (Frac_{GASF} \times F_{SN}) \times EF_4 \times 44/28 \quad \text{Equation 11.9; (IPCC 2019)}$$

where F_{SN} is the nitrogen input from inorganic fertilizer, and default values are applied where $Frac_{GASF} = 0.05$ (ammonium-nitrate-based) and $EF_4 = 0.014$ and $0.005 \text{ kg } N_2O-N (\text{kg N})^{-1}$ for wet and dry climate regions, respectively (IPCC 2019).

Activity data

The activity data (N input from inorganic fertilizers) used to estimate indirect emissions is the same as that used for estimating direct emissions, as described in section 6.11.1.

6.11.1.2.2 Nitrogen leaching and run-off

In this section, indirect emissions from leaching and runoff were estimated from the nitrogen inputs of inorganic fertilizers on forest land.

6.11.1.2.2.1 Methodological issues

Choice of method

The Tier 1 method was applied to areas with inorganic N applied as fertilizer, according to

$$N_2O-N = F_{SN} \times Frac_{LEACH} \times EF_5 \times 44/28 \quad \text{Equation 11.10; (IPCC 2019)}$$

where F_{SN} is the nitrogen input from inorganic fertilizer, the default value for $Frac_{LEACH}$ is 0.24, and the default emission factor is $EF_5 = 0.011 \text{ kg } N_2O-N (\text{kg N leaching/runoff})^{-1}$.

Activity data

The activity data (N input from inorganic fertilizers) used to estimate indirect emissions is the same as that used for estimating direct emissions, as described in section 6.11.1.

6.11.2 Organic fertilizer on settlements

Direct N₂O emissions from organic nitrogen fertilizer in settlements have been reported in the LULUCF sector since NIR 2015. Before 2015, emissions from the application of sewage sludge on urban lawns, roadside grass strips, and parks were reported in the waste sector. Emissions have increased slightly from 0.006 kt N₂O yr⁻¹ in 1990 to 0.011 kt N₂O yr⁻¹ in 2024 (1.84 to 2.99 kt CO₂ eq yr⁻¹).

6.11.2.1 Direct emissions

6.11.2.1.1 Methodological issues

Choice of method

A Tier 1 method was used, applying default emission factors disaggregated by wet and dry climate following the IPCC 2019 Refinement.

$$N_2O-N = F_{ON} \times EF_1 \times 44/28 \quad \text{Equation 11.1; (IPCC 2019)}$$

where F_{ON} is the annual amount of organic fertilizer nitrogen applied (kt N) to forest soil, and EF_1 are the emission factors for N₂O emissions from nitrogen inputs, kg N₂O-N/kg N input, split into dry and wet climate (IPCC 2019).

Activity data

Statistics Norway supplied unpublished data on the application of organic fertilizer in settlements from 1990 to 2001. From 2002 onwards, data stratified by county were obtained from Statistics Norway (Annually-a). Data on sewage sludge's total amount (dry matter) covers the following distribution types: parks and green areas, soil fertilizer production, cover on landfills, other use, and unknown use. To derive nitrogen inputs from organic fertilizer, the total dry matter amount of all types of sewage sludge applied was multiplied by a nitrogen content of 2.82% (Statistics Norway 2001). The data stratification by dry and wet climates followed the same procedure described in inorganic fertilizer on forest land (section 6.11.1).

Emission factor

The disaggregated emission factors used for organic fertilizer in settlements are shown in Table 6-58.

Table 6-58: Emission factors to estimate direct N₂O emissions from settlement fertilization.

Factor	Disaggregation	Default value	IPCC default
EF ₁	Other nitrogen inputs in wet climates	0.006	IPCC 2019 Refinement, Vol. 4, Ch. 11, table 11.1

	All nitrogen inputs in dry climates	0.005	IPCC 2019 Refinement, Vol. 4, Ch. 11, table 11.1
--	-------------------------------------	-------	--

6.11.2.2 Indirect emissions

6.11.2.2.1 Atmospheric deposition

This section estimates indirect emissions reported under atmospheric deposition from organic fertilizer nitrogen inputs on settlements (F_{ON}).

6.11.2.2.1.1 Methodological issues

Choice of method

We used the Tier 1 method of the IPCC 2019 Refinements in areas with organic N applied as fertilizer, according to

$$N_2O-N = (Frac_{GASM} \times F_{ON}) \times EF_4 \times 44/28 \quad \text{Equation 11.9; (IPCC 2006)}$$

where F_{ON} is the nitrogen input from organic fertilizer, and default values are applied where $Frac_{GASM} = 0.21$ and $EF_4 = 0.014$ and $0.005 \text{ kg } N_2O-N \text{ (kg N)}^{-1}$ for wet and dry climate regions, respectively (IPCC 2019).

Activity data

The activity data (N input from organic fertilizers) used to estimate indirect emissions is the same as that used for estimating direct emissions, as described in section 6.11.2.

6.11.2.2.2 Nitrogen leaching and run-off

In this section, indirect emissions from leaching and runoff were estimated from the nitrogen inputs of organic fertilizer on settlements.

6.11.2.2.2.1 Methodological issues

Choice of method

The Tier 1 method was applied to areas with organic N applied as fertilizer, according to

$$N_2O-N = F_{ON} \times Frac_{LEACH} \times EF_5 \times 44/28 \quad \text{Equation 11.10; (IPCC 2019)}$$

where F_{ON} is the nitrogen input from organic fertilizer, the default value for $Frac_{LEACH}$ is 0.24, and the default emission factor is $EF_5 = 0.011 \text{ kg } N_2O-N \text{ (kg N leaching/runoff)}^{-1}$.

Activity data

The activity data (N input from organic fertilizers) used to estimate indirect emissions is the same as that used for estimating direct emissions, as described in section 6.11.2.

6.11.3 Uncertainties

Direct

The IPCC 2019 Refinement, Vol. 4, Ch. 11, table 11.1 provides the uncertainty related to the default emission factor for N₂O from nitrogen additions from mineral and organic fertilizers. In addition, the uncertainty for the activity data associated with the estimation of inorganic nitrogen applied to forest land and organic nitrogen applied to settlements was estimated by expert judgment. The uncertainties of the emission factor, activity data, and total values are shown in Annex 2.

Indirect

The uncertainty associated with the default emission factor for N₂O emissions from volatilization and deposition has a major influence on the emissions from atmospheric deposition. In addition, the default values for the fraction of nitrogen that is volatilized from inorganic and organic fertilizer and the fraction lost by leaching have high uncertainties.

The uncertainties from the different emission factors are default values from the IPCC 2019 Refinement. Uncertainties for activity data, emission factors, and aggregated uncertainties for atmospheric deposition and leaching can be found in Annex 2.

6.11.4 QA/QC and verification

The standard Tier 1 QA/QC procedures were performed for Direct and Indirect N₂O emissions from fertilizers.

6.11.5 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.11.6 Planned improvements

No planned improvements.

6.12 Emissions and removals from drainage, rewetting, and other management of soils – 4(II)

In CRT Table 4(II), only emissions from drained organic soils are reported, as these categories are mandatory under the IPCC Guidelines.

- CO₂ emissions from drained organic soils are reported as IE in CRT Table 4(II), as they are already included as CSC in the organic soil pool in CRT Tables 4.A - 4.E.
- In CRT Table 4(II), CH₄ and N₂O emissions are reported for all land-use categories (both remaining and converted) where drained organic soils occur and where methodological guidance is available.
- For croplands and intensive grasslands, only CH₄ emissions are reported in Table 4(II). Following the IPCC 2006 Guidelines, N₂O emissions from drained organic agricultural soils (cropland and grassland) are reported in the Agriculture sector (3D).

The 2006 IPCC Guidelines do not provide methods for estimating emissions and removals from rewetting. Consequently, Norway reports rewetting as “NE” for organic soils, and “NO” for mineral soils (as these are by default considered waterbodies). Methodologies for rewetting are provided only in the 2013 Wetlands Supplement and the 2019 Refinement, which are encouraged for use but remain non-mandatory under current UNFCCC and Paris Agreement reporting requirements.

6.12.1 N₂O emissions from drainage of organic soils

The source category N₂O emissions from drained organic soils on forest land is identified as a key category. Details on identification criteria can be found in chapter 1.4.

6.12.1.1 Methodological issues

Choice of method

To estimate N₂O emission from drained organic soils on all land uses, we use a Tier 1 method based on Equation 11.1 of the IPCC 2006 Guidelines. The area is multiplied by an emission factor. To use the most recent scientific knowledge, we apply the emission factors from the IPCC 2013 Wetlands supplement (presented below).

Activity data

The mapping of drained forest soils and wetlands began in 2018 and is continuously updated in the Norwegian NFI, as described in section 6.4.1.

The land area under peat extraction is estimated as described in section 6.7.1. All areas of organic soil under settlements are assumed to be drained.

For croplands and intensive grasslands, the estimated areas of drained organic soils are described in section 6.5.1 and section 6.6.1. However, we only report the area of drained organic soils for these land-use categories, as their N₂O emissions are reported under the agriculture sector.

Emissions factors

All drained organic soils found on forest lands and wetlands are in the cool temperate climate zone. Emission factors for these two land uses are shown in Table 6-59. EFs for drained organic soils on settlements are shown in Table 6-62.

Table 6-59: Land uses and their emission factors (N₂O) for drained organic soils.

Land use	Emission Factor (kg N ₂ O-N ha ⁻¹ yr ⁻¹)	Climate zone	Reference
Forest land, drained	2.8	Temperate	

Wetlands (peatland managed for extraction)	0.3		IPCC 2013 Wetlands Supplement, Ch. 2, Table 2.5
---	-----	--	---

Table 6-60: Settlements subdivision classes and their associated Tier 1 EFs on organic soils.

Land use	Emission Factor (kg N ₂ O-N ha ⁻¹ yr ⁻¹)	Climate zone	Reference
Paved (P)	1.6	Temperate and Boreal	IPCC 2013 Wetlands Supplement, Ch. 2, Table 2.5
Turfgrass (T)	8.2		
Vegetated (V)	1.6		

6.12.2 CH₄ emissions from drainage of organic soils

The source category CH₄ emissions from drained organic soils on cropland is identified as a key category. Details on identification criteria can be found in chapter 1.4.

6.12.2.1 Methodological issues

Choice of method

To estimate CH₄ emissions, we used the Tier 1 method applying the EFs of the IPCC 2013 Wetlands supplement. The method accounts for methane fluxes both in the drainage ditches and on the land using the following equation

$$\text{CH}_4 = A \times ((1 - \text{Frac}_{\text{ditch}}) \times \text{EFCH}_{4_{\text{land}}} + \text{Frac}_{\text{ditch}} \times \text{EFCH}_{4_{\text{ditch}}}) \quad \text{Equation 2.6; (IPCC 2014)}$$

where A is the area of drained organic soil; Frac_{ditch} is the fraction of the area occupied with ditches; and EFCH_{4_land} EFCH_{4_ditch} are the emissions factor for the land and the ditch, respectively.

NFI registration of ditches (see activity data below) allowed the estimation of a mean national value for the Frac_{ditch} for forest land and wetlands. According to Søgård (2017), it is not possible to provide an accurate estimate for the fraction of ditches for cropland, grassland, settlements, and peat extraction in Norway. Therefore, based on the available data, the default value from IPCC (2014) appears to be adequate for use.

Activity data

The mapping of drained forest soil and wetland areas started in 2018 and is continuously updated in the Norwegian NFI, as described in section 6.4.1.

The land area under peat extraction is estimated as described in section 6.7.1. All areas of organic soil under settlements are assumed to be drained.

For cropland and intensive grasslands, the estimated areas of drained organic soils are described in section 6.5.1 and section 6.6.1. In contrast to N₂O, CH₄ emissions from these land-use categories are accounted for in CRT Tables 4.II.

Emission factor

For drained forests and wetlands on organic soils, the default EFCH_{4,land} and EFCH_{4,ditch} in the temperate climate zone from the IPCC 2013 Wetlands supplement are shown in Table 6-61. For settlements, factors are given in Table 6-62 depending on sub-categories.

Table 6-61: Fraction of areas occupied with ditches and emission factors (CH₄) for drained organic soils.

Land use	Frac ditch	Emission Factor EFCH _{4,land} (kg CH ₄ ha ⁻¹ yr ⁻¹)	Emission Factor EFCH _{4,ditch} (kg CH ₄ ha ⁻¹ yr ⁻¹)	Climate zone	Reference
Forest land, drained	0.06	2.5	217	Temperate	IPCC 2013 Wetlands Supplement, Ch. 2, Tables 2.3 and 2.4
Wetlands (organic soil)	0.04	2.5	217		
Wetlands (peat extraction)	0.04	6.1	542		
Cropland	0.05	0	1 165		
Grassland (shallow-drained, nutrient-rich)	0.05	39	527		

Table 6-62: Settlements subdivision classes and their associated Tier 1 EF's on organic soils.

Classes	Frac ditch	Emission Factor EFCH _{4,land} kg CH ₄ ha ⁻¹ yr ⁻¹	Emission Factor EFCH _{4,ditch} kg CH ₄ ha ⁻¹ yr ⁻¹ drainage ditches	Climate zone	Reference
Paved (P)	0.05	39	527	Temperate and Boreal	IPCC 2013 Wetlands Supplement, Ch. 2, Tables 2.3 and 2.4
Turfgrass (T)	0.05	16	1 165		
Vegetated (V)	0.05	39	527		

6.12.3 Uncertainties

The uncertainties associated with the emission factors of the IPCC 2013 Wetlands supplement are summarized in Annex 2.

To derive the total uncertainty of the emission estimate, we aggregated the uncertainty for the emission factor and the area estimate, respectively. Uncertainties for areas (for all categories relevant to organic drained managed soils) are derived from the sampling errors in the NFI. We assumed 100% for the area with peat extraction. Uncertainties for emissions in drained organic soils in settlements were determined by weighing each IPCC uncertainty by the magnitude of the respective EF.

6.12.4 QA/QC and verification

The standard Tier 1 QA/QC procedures were performed for emissions and removals from the drainage of organic soil. The methodology for organic soil on settlements was subject to external quality assurance in 2021.

6.12.5 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.12.6 Planned improvements

No planned improvements.

6.13 Direct and Indirect N₂O emissions from nitrogen mineralization and immobilization – 4(III)

In the IPCC 2019 refinements, direct and indirect N₂O emissions are estimated from nitrogen mineralization-immobilization turnover associated with loss of soil organic matter resulting from the change of land use or management of mineral soils on all types of land use. We estimate N₂O losses from all land uses with negative CSC in the mineral soil pool, and the areas reported in CRT Table 4(III) correspond to the areas with negative CSC and not the total area for all land-use conversions.

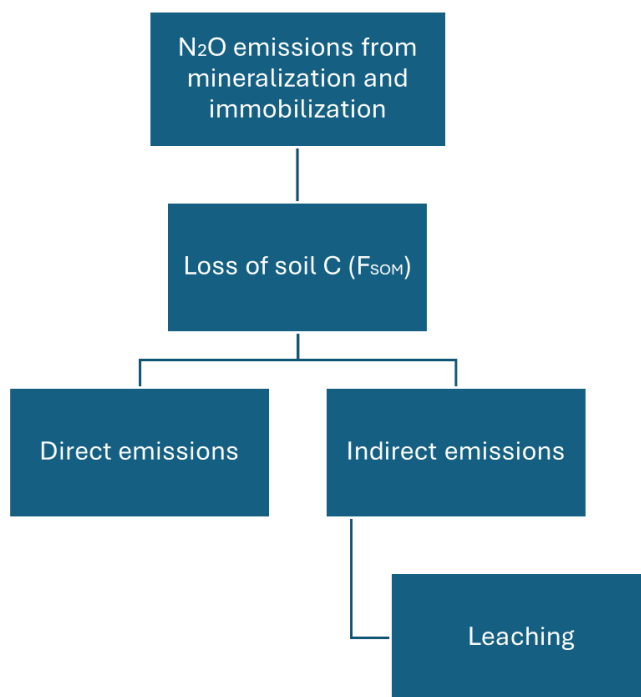


Figure 6.36: Reporting structure for Direct and Indirect N₂O emissions from nitrogen mineralization and immobilization.

6.13.1 Direct emissions

6.13.1.1 Methodological issues

Choice of method

To estimate N₂O emissions from nitrogen mineralization, we first calculate the net annual amount of nitrogen mineralized in mineral soils resulting from SOC loss (F_{SOM}) from

$$F_{SOM} = \Delta C \times 1 / CN \quad \text{Equation 11.8; (IPCC 2006)}$$

where ΔC is the average annual carbon loss from mineralization of soil for each land-use type for wet and dry climates (in kt C yr⁻¹), and CN is the C/N ratio for soils. F_{SOM} will be used as input for both direct and indirect emissions.

Then we multiply F_{SOM} with the default emission factors for the wet and dry climate, $EF_1 = 0.006$ and 0.005 N₂O-N (kgN⁻¹), respectively.

$$N_2O_{direct-N} = F_{SOM} \times EF_1 \times 44/28 \quad \text{Equation 11.1; (IPCC 2006)}$$

We consider the method a Tier 1 because we use the default IPCC (2019) C/N ratios (CN = 15 and CN = 10 for cropland remaining cropland), although most SOC losses were derived using a Tier 2

method. Certain land-uses and land-use changes (e.g., settlements converted to forest land) can result in positive SOC CSC in the mineral soil pool. Thus, no N₂O emissions are reported from these sub-categories.

Activity data

Activity data used for this source is the annual average carbon losses stratified by wet and dry climate. This data is reported aggregated in CRT Tables 4.A - 4.F for each land-use class. The CSC is estimated under the mineral soil pool for each land-use class.

Emission factor

We applied the disaggregated emission factors, as recommended in the IPCC 2019 Refinement Vol. 4, Ch. 11, table 11.1:

Table 6-63: Emission factors to estimate direct N₂O emissions from mineralization.

Factor	Disaggregation	Default value	IPCC default
EF ₁	Other N inputs in wet climates	0.006	IPCC 2019 Refinement, Vol. 4, Ch. 11, table 11.1
	All nitrogen inputs in dry climates	0.005	IPCC 2019 Refinement, Vol. 4, Ch. 11, table 11.1

6.13.2 Indirect emissions

6.13.2.1 Nitrogen leaching and run-off

This section calculates nitrogen mineralization immobilization in mineral soils associated with loss of soil carbon (F_{SOM}).

6.13.2.1.1 Methodological issues

Method choice

The Tier 1 method was applied to areas with loss of soil organic matter resulting from a change of land use or management on mineral soils, according to

$$N_2O-N = F_{SOM} \times \text{Frac}_{LEACH} \times EF_5 \quad \text{Equation 11.10; (IPCC 2019)}$$

where F_{SOM} is the nitrogen input resulting from mineralization of soil organic matter in mineral soil, the default value for Frac_{LEACH} is 0.24, and the default emission factor is EF₅ = 0.011 kg N₂O-N (kg N leaching/runoff)⁻¹

Activity data

The activity data used to estimate indirect emissions for nitrogen mineralized during soil carbon loss is the same as that used for estimating direct emissions, as described in section 6.13.1.

6.13.3 Uncertainties

The uncertainties from the different emission factors are default values from the IPCC 2019 Refinement. Uncertainties for activity data, emission factors, and aggregated uncertainties for atmospheric deposition and leaching can be found in Annex 2.

6.13.4 QA/QC and verification

The standard Tier 1 QA/QC procedures were performed for emissions and removals from direct and indirect N₂O emissions from nitrogen mineralization and immobilization.

6.13.5 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.13.6 Planned improvements

No planned improvements.

6.14 Biomass Burning – 4(IV)

For croplands, agroforestry is not normally practiced, and woody biomass is found mostly in fruit tree orchards, which are generally not burned. In addition, non-woody biomass is assumed to have equal gains and losses per year for annual crops, whether burned or harvested. For these reasons, CO₂ emissions from controlled burning in croplands are reported as NO. For N₂O and CH₄, the emission estimates are reported under the agricultural sector; hence, they are reported as IE here to avoid double-counting. Emissions from wildfires in cropland are reported as NO.

Regarding grasslands, the same notation key logic of croplands is used for reporting controlled burning emissions. However, grassland wildfires are reported as NE due to the lack of data and because emissions are considered negligible (details in chapter 1.7).

Burning of woody biomass does not occur in wetlands, settlements, or other lands. Therefore, we report NO for all gases in these land-use categories.

Controlled fires on forest land are reported as NE as very few fire drills are performed, and we expect the emissions to be negligible (details in chapter 1.7). Emissions from wildfires in forest lands are described in the next section.

6.14.1 Wildfires

6.14.1.1 Forest land

The area subject to wildfire varies considerably from year to year due to natural factors (e.g., variations in precipitation). As suggested in the IPCC 2006 Guidelines, CO₂ emissions from biomass burning in forest land remaining forest land should be accounted for through the NFI. These emissions are included in the estimate of carbon stock change in living biomass, calculated through the stock-change method. The results are reported in CRT Table 4A. Hence, estimates of CO₂ emissions from wildfires are reported as IE, since they are already reflected in the carbon stock change estimates. However, CH₄ and N₂O emissions from wildfires are estimated and reported in this section.

6.14.1.1.1 Methodological issues

Choice of method

To estimate emissions of non-CO₂ gases from forest fires, Norway uses a mix of national data (Tier 2) with emission factors from the IPCC 2019 Refinement (Tier 1). The following equation is used:

$$L_{\text{fire}} = A \times M_B \times C_f \times G_{\text{ef}} \times 10^{-3} \quad \text{Equation 2.27 (IPCC 2006)}$$

where L_{fire} = amount of greenhouse gas (CH₄, and N₂O) from fire (tonnes), A = area burnt (ha), M_B = mass of fuel available for combustion (tonnes ha⁻¹), C_f = combustion factor (dimensionless), and G_{ef} = emission factor (g kg⁻¹ dry matter burnt).

Activity data

The burned area estimates are based on country-level data. Information on areas affected by wild forest fires is available from the Norwegian Directorate for Civil Protection (DSB) for the period 1993 to the latest reporting year, including both the number of fires and the burned areas of productive and unproductive forests. For 1990-1992, only the number of fires was recorded. Burned area for these years was therefore estimated by applying the area-to-fire ratio from subsequent years. This method is uncertain, as fire size is very variable. Because the number of fires was higher in 1990–1992 than in later years, it was assumed that the area burned was proportionally higher (Rypdal et al. 2005).

Values used for M_B are derived from the national forest inventory and updated annually. They consider the mass of tree branches, crowns, needles, bark, and stems. In addition, we include the mass of dead wood and litter. Dead wood values are derived from the same national estimates used in the Tier 2 carbon stocks in transitions to and from forests (section 6.4.2). Litter values are based on IPCC 2019 Refinement and Canadian data (see 6.4.2 for details). Living biomass, dead wood, and litter were stratified into productive and unproductive forests when used in biomass-burning emission estimates. The IPCC (2003) estimates that 50% of the biomass is carbon.

Emission factors

The emission factors G_{ef} and the combustion factor C_f , along with other variables, are shown in Table 6-64.

Table 6-64: Variables and parameters used to calculate biomass burning emissions.

Variable/Parameter		Value	Unit	Reference
A (area burnt) in the latest reporting year		140.9 (productive forests) 285.7 (unproductive forests)	ha	Norwegian Directorate for Civil Protection (DSB)
M_B (mass of fuel available for combustion)	Living biomass	74.4 (productive forest) 17.3 (unproductive forest)	tC/ha	NFI
	Dead wood	4.21 (productive forest) 0.72 (unproductive forest)	tC/ha	NFI data adjusted
	Litter	26.9 (productive forest) 27.0 (unproductive forest)	tC/ha	IPCC 2019 Refinement + (Canada's National Forest Inventory 2008)
C_f (combustion factor)		0.15	-	IPCC 2019 Refinement, Vol. 4, Ch. 2, Table 2.6 (surface fire in boreal forests)
G_{ef} (emission factor)		4.70 (for CH ₄ emissions) 0.26 (for N ₂ O emissions)	g kg ⁻¹	IPCC 2019 Refinement, Vol. 4, Ch. 2, Table 2.5

Emissions from wildfires in land converted to forest land cannot be separated from those reported under forest land remaining forest land, and are therefore reported as IE.

6.14.1.2 Grassland

The Norwegian Directorate for Civil Protection (DSB) is the authority that holds statistics on landscape fires in Norway. The area statistics for "grassland" can include observations on settlements (for example, gardens) and cropland, which cannot be distinguished, and therefore are all considered under grassland.

A Tier 1 estimation method is used for non-CO₂ emissions, using emission factors from the IPCC 2019 Refinement:

$$L_{\text{fire}} = A \times M_B \times C_f \times G_{ef} \times 10^{-3} \quad \text{Equation 2.27 (IPCC 2006)}$$

Where: A = sum of area (ha) in each year; $M_B \times C_f = 11.5$ tonnes ha⁻¹ (shrublands vegetation type, subcategory *Calluna* heath (IPCC 2019 Refinement, Vol. 4, Ch. 2, Table 2.4); $G_{ef} \text{ CH}_4 = 4.7$ g kg⁻¹, $G_{ef} \text{ N}_2\text{O} = 0.26$ g kg⁻¹ (IPCC 2019 Refinement, Vol. 4, Ch. 2, Table 2.5 "Extra tropical forest").

For grassland wildfires, burned areas were not available before 2016. For earlier years, the time series was estimated using the average burned area for the period 2016-2024, while the observed annual areas were used when available.

The annual burned area ranged from 257 to 3054 ha. For fires recorded to have an extent less than 0.1 ha, an area of 0.09 ha was assumed.

The resulting emission estimate is presented in Chapter 1.7 and was considered "non-significant" when compared with total Norwegian emissions from all sectors except LULUCF.

Emissions from wildfires in land converted to grassland cannot be separated from those reported under grassland remaining grassland and are therefore reported as IE.

6.14.2 Controlled Burning

6.14.2.1 Forest land

All emissions from controlled burning in forest land remaining forest land are currently reported as NE. In Norway, controlled burning in forests is limited and associated with firefighting training exercises.

An assessment of the likely level of emissions from controlled burning in forests was nevertheless carried out. As no national statistics exist on the extent of controlled forest fires, an estimate of 7 controlled fires per year, each affecting approximately 5 ha, was applied based on expert judgment (DSB 2016). The Tier 1/2 method used for estimating non-CO₂ emissions from forest wildfires was applied to estimate the likely level of emissions from controlled fires in forest land (IPCC 2006 Guidelines, Vol. 4, Equation 2.27). The same average proportion of productive and unproductive forests affected by wildfires was assumed for controlled burning.

The resulting emission estimate is presented in Chapter 1.7 and was considered "non-significant" when compared with total Norwegian emissions from all sectors except LULUCF.

Emissions from controlled burning in land converted to forest land cannot be separated from those reported under forest land remaining forest land, and are therefore reported as IE.

6.14.2.2 Grassland

Since available data do not allow fires to be distinguished by fire type (controlled burning vs. wildfires) or by land-use category (Grassland Remaining Grassland vs. Land Converted to Grassland), all emissions are reported under Grassland remaining Grassland - Wildfires. The remaining categories are therefore reported as IE.

6.14.3 Uncertainties

The total uncertainty for wildfires in forest land remaining forest land was estimated at 75% based on the default uncertainty for the non-CO₂ emission factor of 70% IPCC (2003) and expert judgment on the activity data.

6.14.4 Recalculations

See chapter 10.2.4. for numbers and explanations.

6.14.5 Planned improvements

There are no planned improvements.

7. Waste (CRT sector 5)

7.1 Overview of the sector

This sector includes emissions from landfills (CRT 5A), Biological treatment of solid waste (CRT 5B), Incineration and open burning of waste (CRT 5C), and Wastewater treatment and discharge (CRT 5D). Waste incineration from plants with energy utilization is accounted for under Energy industries (CRT 1A1a). Waste incineration included in CRT 5C are emissions of greenhouse gases other than CO₂ from methane flared at landfills, and emissions from combustion of hospital waste in hospital incinerators. For delimitation toward the energy sector, see information in chapter 3.2.

The emissions of greenhouse gases from the waste sector have decreased by 51.7% (1.38 million tonnes CO₂ equivalents) from 1990 to 2024. The reductions were mainly due to decreased CH₄ emissions from landfills. Indeed, they decreased by 65,3% from 1990 to 2024, corresponding to 1.5 million tonnes CO₂ equivalents. Emissions from wastewater treatment decreased by 0.07 million tonnes CO₂ equivalents during the same period. Emissions from waste incineration without energy utilization and biological treatment of waste increased their emissions by 0.16 and 0.05 million tonnes CO₂ equivalents, respectively.

Solid waste disposal on land (i.e., in landfills) is the main emission category within the waste sector, accounting for, in 2024, 62.1% of the sector's total emissions. Wastewater handling in domestic and industrial sectors accounts for 18.7% and 2.3% of the sector's emissions. Biological treatment of waste accounts for 3.8% of emissions from the waste sector, and waste incineration, without energy recovery, accounts for 13.1%.

The waste sector accounted for 2.9% of the total GHG emissions in Norway in 2024. Table 7-1 presents the key categories included in the Waste sector.

Table 7-1: Key categories in level or trend in the Waste sector.

IPCC	Source category	Gas	Identification criteria	Method
5A1A	Managed Waste Disposal on Land, anaerobic	CH ₄	Level and trend approach 1, Level and Trend approach 2	Tier 2
5B	Biological treatment of solid waste	CH ₄	Trend approach 2	Tier 2
5C	Incineration and open burning of waste	CO ₂	Level in 2024 and trend approach 1 Level in 2024 and trend approach 2	Tier 2
5D1	Domestic wastewater treatment and discharge	CH ₄	Level approach 1, Level approach 2	Tier 1

Source: Statistics Norway/Norwegian Environment Agency

7.2 Anaerobic managed waste disposal sites, 5A1a

7.2.1 Category description

CH₄ and non-fossil CO₂ are emitted during biological decomposition of waste. This transformation of organic matter takes place in several steps. During the first weeks or months, decomposition is aerobic, and the main decomposition product is CO₂. When there is no more oxygen left, the decomposition becomes anaerobic, and methane emissions start to increase. After a year or so, CH₄ emissions reach a peak, after that the emissions will decrease over some decades (NCASI 2004; SFT 1999a).

The emissions of methane from landfills have decreased since 1990 due to reduction of the amount of degradable waste disposed at disposal sites. This emissions reduction is the result of several policies and measures introduced in the waste sector, particularly in the 1990s. With few exceptions, notably the mixed waste from households in municipalities with a source separation of food waste, it was then prohibited to dispose easy degradable organic waste, sewage sludge included, at landfills in Norway.

From 1999 to 2014, a tax was introduced on waste delivered to final disposal sites. In 2014, this tax was 294 NOK per tonne waste. From July 1st 2009, it was prohibited to deposit biodegradable waste to landfills. This results in further reduction of methane emissions. By 2014, the ban on landfilling had reduced the amount of biodegradable waste sent to landfill to such an extent that the tax was abolished, as it had outlived its role as a policy measure.

In addition to the policies and measures described above, landfills receiving biodegradable waste (waste containing degradable organic carbon (DOC)) are required to collect and treat landfill gas. In 2024, 61 landfills, which had installed a landfill gas extraction system, reported extraction of gas. 3 935 tonnes of methane were recovered, representing a 3.1% increase compared to 2023. Methane extraction increased until 1999 and then underwent fluctuations until 2008. The fluctuations were due to instability in the pipeline systems. Due to needs for maintenance of the pipeline system, methane extraction was reduced.

Since 2008, extraction has had a decreasing trend. This can be explained by the increased amounts of waste recycled. The total amount of waste generated has increased by almost 56% from 1995 to 2023, but due to the increase in material recycling and energy utilization, the amount disposed at landfills has dropped substantially since 2008. As a consequence of the prohibition against depositing of biodegradable waste of July 1st 2009, there has been a strong decrease in waste depositing.

Since building the necessary treatment capacity would take time, temporary exemptions were granted in certain cases during a transitional period. Many permits for disposal of biodegradable

waste had been given for one year extra, some extended out 2010, and a few within 2011. The transitional period ended on December 31st 2012.

In 2024, methane emissions from managed waste disposal sites were 0.8 million tonnes CO₂ equivalents.

According to the approach 1 and 2 key category analyses are emissions of CH₄ from Anaerobic Managed Waste Disposal sites (CRT 5A1a) a key category in level and trend assessment (1990-2024).

It should be noted that the IEF for CH₄ varies mainly due to the reduction in the amount of waste deposited and due to variation of the amount of extracted CH₄ from the landfills.

There are no known semi anaerobic disposal sites in Norway, according to expert judgment (Skullerud, Pers. Comm)⁶⁰, only managed anaerobe disposal sites.

Figure 7.1 shows the relative change (Index 1995=100%) in methane emissions from landfills, extraction of methane, solid waste disposed at landfills and total amount of waste generated in Norway.

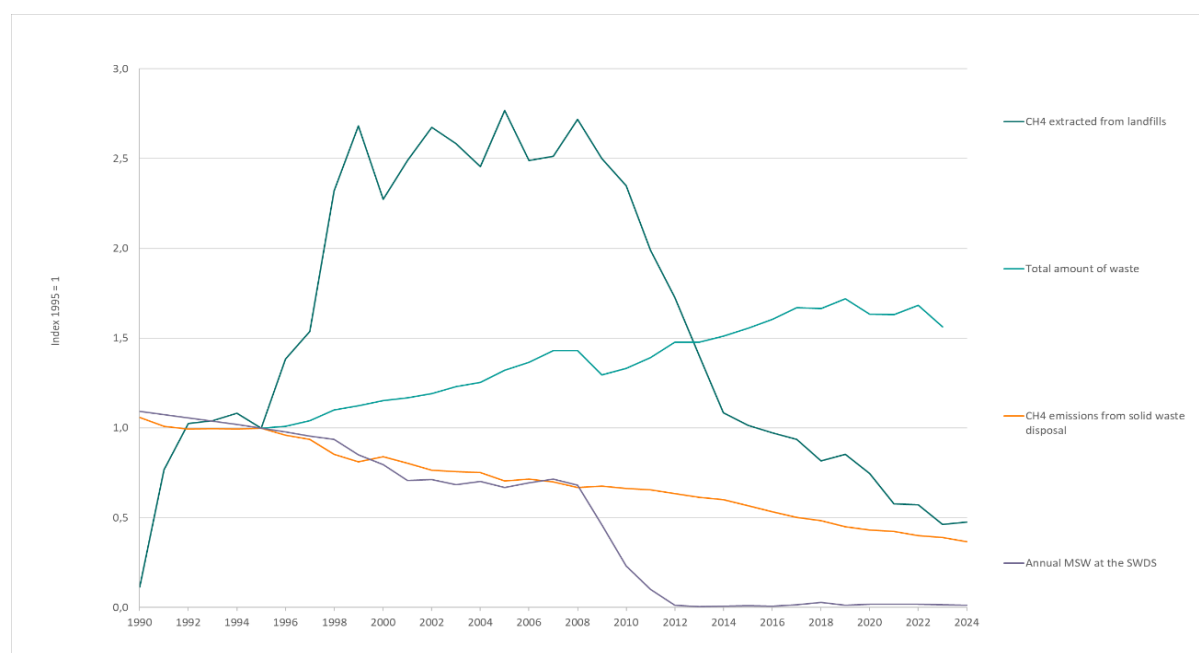


Figure 7.1: Relative change in methane emissions from solid waste disposal, annual MSW at the SWDS, methane extracted from landfills and total amount of waste generated in Norway. 1990-2024 Index

⁶⁰ Håkon Skullerud 2014: Personal communication by telephone. Statistics Norway

1995 = 1. Total amount of waste for 2024 is not included. Source: Statistics Norway/Norwegian Environment Agency.

7.2.2 Methodological issues

The model presented in the IPCC 2006 Guidelines has been used.

This model starts with the calculation of the amount of decomposing $DDOC_m$ (mass of decomposable organic carbon = the part of DOC (degradable organic carbon) that will decompose (degrade) under anaerobic conditions) contained in the material being landfilled.

As this is a first order reaction, the amount of product formed will always be proportional to the amount of reactant. This means that it is of no concern to the process when the $DDOC_m$ came into the landfill. As far as we know the amount of $DDOC_m$ in the landfill at the start of each year, all years can be considered individually in the calculations. This simplifies the model.

With the start of the reaction set to be January 1st the year following the landfilling, the “motor” of the new calculating model has been made from these two very simple equations:

$$(7.1) \quad DDOC_{mdiss} = (DDOC_{ma(ly)} + DDOC_{md}) \times (1 - e^{-k})$$

$$(7.2) \quad DDOC_{ma} = (DDOC_{ma(ly)} + DDOC_{md}) \times e^{-k}$$

Equation (7.1) calculates DDOC mass decomposing ($DDOC_{mdiss}$) as the sum of the not decomposed DDOC mass accumulated from the previous years ($DDOC_{ma(ly)}$), and the DDOC mass landfilled during the previous year ($DDOC_{md}$).

Equation (7.2) calculates the DDOC mass accumulated as not decomposed ($DDOC_{ma}$), which is then used as ($DDOC_{ma(ly)}$) for the following year’s calculations using equation (7.1).

The mass of decomposable organic carbon landfilled ($DDOC_{md}$) is estimated using equation (7.3).

$$(7.3) \quad DDOC_{md} = W \times MCF \times DOC \times DOC_f$$

The amount of decomposed $DDOC_m$ being estimated, CH_4 produced, and CH_4 emitted are estimated using the equations stated below ((7.4)-(7.9)).

If the reaction of decomposition is set to start during the year of landfilling and not on January 1st of the following year, equations (7.1) and (7.2) need to be adjusted.

Equation (7.1) must be replaced by equations (7.4) and (7.5).

$$(7.4) \quad DDOC_{mdi} = DDOC_{md} \times \left(1 - e^{-k \times \left(\frac{13-M}{12}\right)}\right)$$

$$(7.5) \quad DDOC_{mdiss} = DDOC_{ma(ly)} \times (1 - e^{-k}) + DDOC_{mdi}$$

Equation (7.2) must be replaced by equations (7.6) and (7.7).

$$(7.6) \quad DDOC_{ml} = DDOC_{md} \times e^{-k \times \left(\frac{13-M}{12}\right)}$$

$$(7.7) \quad DDOC_{ma} = DDOC_{ma(ly)} \times e^{-k} + DDOC_{ml}$$

The amount of methane produced from decomposition of DDOC is estimated using equation (7.8).

$$(7.8) \quad CH_{4\text{ prod}} = DDOC_{mdiss} \times F \times 16/12$$

Methane emissions are estimated from the amount of methane produced and the amount of methane recovered. Equation (7.9) details the calculations.

$$(7.9) \quad CH_{4\text{ emitted in year } T} = \left(\sum CH_{4\text{ prod}}(T) - R(T) \right) \times (1 - OX)$$

Where, in equations (7.1)-(7.9):

W	: amount landfilled
MCF	: Methane Correction Factor
M	: Month number for reaction start. (January 1, year after landfilling, M=13)
DOC	: Degradable Organic Carbon
DOC _f	: Fraction of DOC decomposing, anaerobic conditions
DDOC _m	: Mass of Decomposable Organic Carbon, anaerobic conditions
DDOC _{md}	: DDOC mass landfilled
DDOC _{ml}	: DDOC mass left not decomposed from DDOC _m landfilled, year of landfilling
DDOC _{ma}	: DDOC mass left not decomposed at end of year
DDOC _{ma(ly)}	: DDOC mass accumulated from last year
DDOC _{mdi}	: DDOC mass decomposed from DDOC _m landfilled, year of landfilling
DDOC _{mdiss}	: DDOC mass decomposed in calculation year
CH _{4 prod}	: CH ₄ produced
F	: Fraction of CH ₄ by volume in generated landfill gas
16/12	: Conversion factor from C to CH ₄
R(T)	: Recovered CH ₄ in year of calculation
OX	: Oxidation factor (fraction).

7.2.3 Activity data

Methane is formed by decomposition of biological waste in landfills. The decomposition time varies from material to material. Easily degradable waste (food, etc.) has shortest decomposition time, while wood waste has the longest decomposition time. Other materials do not emit methane at all, either because they are inorganic (metal, glass, etc.) or because they break down extremely slowly (plastic). It is therefore of vital importance for the calculations that the waste quantities used as input to the model are correct, both total quantity and the distribution by material.

Data over the amount of different waste materials is taken from Statistics Norway's waste accounts. The waste accounts consist of data from several sources, such as special surveys, register data and statistics, indirect data sources such as production statistics, foreign trade

statistics and different factors combined with activity data. Data from all these sources are combined in the waste accounts, which give an overview of waste quantities in Norway, divided into type of product, material, industry, and method of treatment. Waste incineration in the waste accounts includes export and is thus not comparable with the emission inventory as a substantial amount is exported to Sweden for incineration.

From 2012 onwards, data for the categories food waste, plastics, wood and paper are taken directly from the waste accounts. The amount of sludge deposited is taken from statistics on discharges and treatment of municipal wastewater. In addition, there is a category “other” in the waste accounts, of which content is not known. Due to the prohibition to deposit biodegradable waste to landfills it is assumed that no methane is formed from these materials.

Historic data up until 2011 have been estimated from the former waste category basis to a waste material basis. The amount of each material type deposited is estimated based on surveys and sorting analyses. The model is based on types of waste materials, for instance food waste (incl. garden waste), paper, wood, and textiles. All sources of waste, MSW, industrial, commercial, construction and demolition waste are accounted for in these annual surveys.

To ensure that Norway does not underestimate the emissions, a project was carried out in 2018/2019 to investigate the type of waste generated from the construction industry. The project confirmed that waste from the construction industry mainly consists of slightly polluted stone and masses, concrete, bricks, gypsum waste and insulation materials, as well as some waste containing glass, plastics, and wood. The waste is mainly burned, as part of mixed waste, and energy recovered. The construction and demolition waste that is likely to end up in landfills contain only minor amounts of organic waste.

Municipal landfills

Historical data for years before 1973 on municipal solid waste deposited are based upon:

1. New statistics on municipal waste, divided into household waste and industrial waste (1974 to 1997),
2. Estimates based on population,
3. Assumption that less people were connected to public waste management during the forties and fifties.

Since 1974, the amount of municipal waste is based upon questionnaires and linear interpolations. Surveys were held in 1974, 1980 and 1985. The amount of waste going to landfills is allocated to material based on sorting analyses. For the period 1995-2011 the amounts of waste are taken from the waste accounts, with three adaptations:

- Wood content in sludge deposited at industrial sites is added to the amount of deposited wood from the waste accounts,
- Textiles are supposed to consist of 50% plastic (SFT 2005b). The plastic fraction of deposited textiles is therefore subtracted from the amounts of deposited textiles and added to deposited plastic,

- The material category “Other materials” is assumed to contain degradable organic matter with an average half-life. This degradable share is added to the amount of paper. The amount is estimated by $0.2 * \text{landfilled 'other materials' from manufacturing} + 0.5 * \text{'other combustible' in landfilled mixed waste from all sectors}$.

Contaminated soils are assumed not to develop methane in landfills. The same applies to waste used as cover material, due to excess oxygen availability.

No bio-degradable hazardous waste is landfilled in Norway.

No organic waste is imported for landfilling, as it is prohibited.

Due to lack of data, linear interpolation of the amount of waste deposited has been applied to the period 1985-1995.

Table 7-2: Amounts deposited in municipal SWDS, 1945-2024. 1 000 tonnes.

Year	Food	Paper	Wood	Textile	Sewage sludge	Plastics
1945	75	148	120	3	7	11
1950	116	228	171	4	10	17
1955	131	256	207	5	11	19
1960	171	335	258	6	14	25
1965	258	422	270	8	18	50
1970	279	463	307	9	20	54
1975	305	513	318	10	22	59
1980	343	584	300	11	23	66
1985	357	635	280	11	24	68
1990	342	461	280	22	21	144
1995	327	286	279	33	17	219
2000	253	249	194	29	13	189
2005	218	195	169	26	4	164
2010	71	69	54	9	2	65
2011	29	33	23	3	2	28
2012	0	1	8	0	1	3
2013	0	1	0	0	2	2
2014	1	1	0	0	5	2
2015	3	2	2	0	3	3
2016	1	0	5	0	1	3
2017	1	2	2	0	8	4
2018	3	3	2	4	2	18
2019	1	0	0	0	2	12

Year	Food	Paper	Wood	Textile	Sewage sludge	Plastics
2020	1	0	1	0	4	14
2021	1	0	0	0	8	13
2022	0	0	3	0	6	11
2023	0	0	2	0	7	11
2024	0	0	0	0	3	12

Source: Statistics Norway/Norwegian Environment Agency

Industrial disposal sites

Historical data for industrial waste for years before 1970 are estimated by extrapolation using the same trend as for municipal waste. After 1970, literature studies and information from the industrial waste study from the years 1993, 1996, 1999 and 2003 have been used. Linear interpolation is used for the years where data is missing.

Data from each landfill site with methane recovery units are reported by the landfills via an electronic web portal and the Norwegian Environment Agency assembles these data in their own database. Further, these data are imported into the national model for calculating methane from landfills.

Table 7-3: Waste amounts deposited in industrial SWDS, 1945- onwards. 1 000 tonnes.

Year	Food	Paper	Wood	Textile	Plastics
1945	476	339	74 160	756	180
1950	735	524	101 108	1 167	277
1955	825	588	128 056	1 310	311
1960	1 077	767	155 004	1 710	406
1965	1 776	888	181 952	1 869	888
1970	2 000	1 000	208 900	2 000	1 000
1975	2 000	1 000	208 900	2 000	1 000
1980	2 000	1 000	173 872	2 000	1 000
1985	2 000	1 000	138 844	2 000	1 000
1990	2 000	1 000	103 817	2 000	1 000
1995	1 936	899	88 800	1 957	759
2000	0	200	677	0	0
2001	0	38	0	0	0
2005-onwards	0	0	0	0	0

Source: Statistics Norway/Norwegian Environment Agency

7.2.4 Emission factors

All parameters used in the Norwegian model are IPCC default values for Northern Europe. Table 7-4 shows some of the variables used in the calculations of methane emissions from solid waste disposals both municipal and industrial.

Table 7-4: Variables used in the calculations of methane from landfills.

Variables	Type of waste				
	Food waste	Paper	Wood	Textiles	Sewage sludge
t_{1/2} (half lifetime) (years)	3.7	11.6	23.1	11.6	3.7
DOC (Mg/Mg)	0.150	0.400	0.430	0.24	0.05
DOC_f (Part of DOC decomposing)	0.5	0.5	0.5	0.5	0.5
Ox. Methane oxidized in top layer	0.1	0.1	0.1	0.1	0.1
F. Part of methane in generated landfill gas	0.5	0.5	0.5	0.5	0.5

Source: IPCC (2006)

In Norway, all SWDS are considered well managed and covering including oxidising material shall apply according to the regulation on SWDS.

7.2.5 Uncertainties and time-series consistency

The amount of different waste materials is considered to be known within $\pm 20\%$. The emission factors used are considered to have the uncertainty range $\pm 30\%$. More information about the uncertainty estimates for this source is given in Annex 2.

The importance of the uncertainties in calculations of methane from landfills will decrease with decreased source contribution and improved IPCC default parameter values, but most likely it will remain among the main uncertainties in the Norwegian GHG inventory.

The methodology Statistics Norway/the Norwegian Environment Agency use to calculate methane emissions from landfills is consistent for the whole time series. The quality of the activity data used in the model has been improved in the last years. This is also the case regarding the data for recovered methane.

In 2014, a major revision of the methodologies of the waste accounts took place. The time series for waste amounts has not been recalculated to take this new information into account. There are several reasons for this, among others that many sources for the statistics do not have numbers for earlier years. Since 2012, publication divides waste into new categories, different from the previous categories. The category “mixed waste” is no longer separated into its different material types. See Statistics Norway’s documentation of the waste accounts for more details about the revisions (Statistics Norway Annually-h).

This change in the waste accounts introduces a certain degree of inconsistency in the time series of the activity data used for the calculation of methane emissions from municipal landfills. However, due to the measures described in 7.2.1, the amount of biological waste deposited at SWDS is currently very low, and the effect of the alterations in the waste accounts are thus considered to be negligible.

7.2.6 Source specific QA/QC and verification

Internal checks of time series for all emission sources are conducted every year along with the new inventory production.

Internal checks are carried out for time series of waste data, methane recovered at landfill sites and calculated methane emissions from the model. Corrections are made if necessary.

The Norwegian Environment Agency contacts landfill sites to discuss outliers and major changes in the trend of methane recovery. Corrections are made if necessary.

7.2.7 Recalculations

Updated activity data for 2022 and 2023. More details on the recalculation are given in chapter 10.

7.2.8 Planned improvements

Norway plans to implement waste-specific DOCf values from 2019 refinement. More details on this are given in chapter 10.

7.3 Unmanaged Waste Disposal Sites – 5A2

In Norway, landfilling of solid waste has been regulated and controlled for some decades, and unmanaged landfills date from before 1970. Furthermore, the methane emissions for all years have been calculated from the total amounts of landfilled materials. Therefore, unmanaged waste disposal sites are not occurring and hence Norway does not separately report emissions from unauthorized/unmanaged SWDSs.

7.4 Composting and Anaerobic digestion of organic waste – 5B1 and 5B2

7.4.1 Category description

This section covers the biological treatment of solid waste and wastewater.

Composting is an aerobic process. A large fraction of the degradable organic carbon (DOC) in the waste material is oxidized into carbon dioxide (CO₂). CH₄ is also formed during the process, in anaerobic sections of the compost, but is largely oxidized in the aerobic sections of the compost. Composting can also produce emissions of N₂O.

Anaerobic digestion of organic waste expedites the natural decomposition of organic material without oxygen, i.e., biogas production from municipal solid waste (5B2a) and wastewater (5B2b).

In the Norwegian inventory, emissions from compost production and biogas production without energy recovery are included in this category. CH₄, N₂O and CO₂ are emitted during this process. CO₂ emissions from compost production are biogenic.

According to the approach 2 key category analyses are emissions of CH₄ from Composting and Anaerobic digestion of organic waste (5B) a key category in trend.

7.4.2 Methodological issues

7.4.2.1 Composting

Emissions from composting of municipal waste have been calculated according to a Tier 2 methodology. The calculation is made separately for each composting plant. Different emission factors are used according to the composting methods used at the facilities, where the calculation is divided between:

- Open composting
- Open composting with green waste only
- Closed composting
- Closed composting with fresh compost only
- Partially closed composting

Further, all waste in the calculation for composting plants is given in dry weight. Waste amounts for home composting are given in wet weight. The solid biological waste includes:

- organic waste from households and other sources,
- garden and park waste (GPW),
- sludge,
- home composting of garden and vegetable food waste.

Methodological guidance available in the guidelines (IPCC 2006).

CH₄ and N₂O emissions from composting:

$$(7.10) \text{ Emissions}_j = \sum_{i,j} (M_i * EF_{i,j}) * 10^{-3}$$

Where:

Emissions_j: emissions of component j (CH₄ or N₂O) in inventory year, Gg
 i: composting facility plants
 j: component (CH₄ or N₂O)
 M_i: mass of organic waste treated by biological treatment type at a composting plant i, Gg
 EF_{i,j}: emission factor for treatment i, g/kg waste CH₄ or N₂O

Composting is performed with simple technology in Norway; this implies that temperature, moisture, and aeration are not consistently controlled or regulated. During composting, a large fraction of the degradable organic carbon (DOC) in the waste material is converted into CO₂. Anaerobic sections are inevitable and cause emissions of CH₄. In the same manner, aerobic biological digestion of N leads to emission of N₂O (IPCC 2006).

Emissions from compost production are considered to be complete; calculations include composting at all nationally registered sites (5B1a) and best available estimated data for home composting (5B1b).

7.4.2.2 Home Composting

Emissions from composting of municipal waste have been calculated according to a Tier 1 methodology.

The calculation is done using the same equation as for composting plants (7.10). However, as the amount of household waste composted is unknown, an estimate is calculated based on the average number of persons per household and household waste per inhabitant. It is assumed that 2.6% of all households have home composting and that the organic share in the waste is 24%.

7.4.2.3 Anaerobic digestion at biogas facilities

Emissions from anaerobic digestion at biogas facilities have been calculated according to a Tier 1 methodology. It is assumed that the process is without post-treatment. The calculation is based on the type of biogas facility, i.e. whether it utilizes waste (5B2a) or sludge (5B2b).

Emissions from anaerobic digestion at biogas facilities

$$(7.1) \text{ Emissions} = \sum_i (M * EF_i) * 10^{-3}$$

Where:

Emissions : total CH₄ or N₂O emissions in inventory year, Gg
 M : mass of organic waste treated without post-treatment, dry weight, Gg
 EF_i : emission factor for treatment i,

7.4.3 Activity data

All Norwegian waste treatment plants are obligated to statutory registration and reporting of all waste entering and leaving the plants. All waste streams are weighed, categorized according to waste type and type of treatment. Data is available for all years since 1995.

Activity data for the years since 1995 are collected from Statistics Norway's, waste statistics and in addition from the database Forurensning (Norwegian Environment Agency) from 2017. Data for 1991 is also available from the waste statistics. For the year 1990, activity data for 1991 have been used, while AD for 1995 is used for 1992 to 1994.

From 2017 and onwards, the calculation has used data from Forurensning to calculate detailed emissions for each composting site. This is possible as the database includes information on treatment methods as well as the amounts of waste in dry weight composed according to each given method. An overview of the detailed activity data for the composting-calculation in the recent years is provided in Table 7-5. Note that the composting figures are separated between the different treatment methods and given on a dry basis for the period after 2017, while in the previous years, they are given at an aggregated level and on a wet basis.

Table 7-5: Amount of waste biologically treated by composting method, 2017-2024. Tonnes of waste on dry basis.

Year	Open composting	Open composting with green waste only	Closed composting	Closed composting with fresh compost only	Partially closed composting
2017	74 999	23 744	3 753	27 321	5 237
2018	68 028	20 452	12 200	10 898	8 394
2019	64 478	24 596	8 638	12 749	5 974
2020	80 741	25 217	9 302	17 574	12 088
2021	73 782	29 078	14 515	18 085	17 188
2022	65 480	25 597	8 873	11 362	10 647
2023	73 038	21 915	12 580	17 326	11 450
2024	59 503	26 437	17 391	17 806	9 646

Source: **Forurensning**, Norwegian Environment Agency.

The activity data for the calculation of emissions from anaerobic digestion at biogas facilities has been collected from Forurensning for the period after 2018. By using this database, the activity data has become available on a dry basis.

Table 7-6: Amount of waste biologically treated with anaerobic digestion at biogas facilities, 2018-2024. Tonnes of waste on dry basis.

Year	Anaerobic digestion, solid waste	Anaerobic digestion, wastewater
2018	68 244	84 200
2019	82 066	84 004
2020	87 847	83 209
2021	94 528	90 376
2022	94 632	82 560
2023	103 566	94 359
2024	116 174	98 446

Source: Norwegian Environment Agency

Waste-information is not available on a dry basis for the years prior to 2017 (composting) and 2018 (Anaerobic digestion, solid waste), nor is the detailed composting method at the specified facility. Therefore, the total waste amounts in the period 1990-2016/2017 are given on a wet basis. For the calculation on anaerobic digestion from wastewater are the amounts of methane produced at the facilities used as activity data.

Table 7-7: Activity data for biological treatment at composting and biogas facilities, 1990-2016/2017.
Tonnes of waste on wet basis and tonnes CH₄.

Year	Composting, tonnes of waste on wet basis	Anaerobic digestion, solid waste, tonnes of waste on wet basis	Anaerobic digestion, wastewater, tonnes CH ₄
1990	21 000	0	172
1995	57 000	0	6 513
2000	234 000	0	8 798
2005	319 232	4 768	11 928
2010	359 384	86 616	13 821
2011	296 000	105 000	14 120
2012	407 000	57 000	13 605
2013	441 000	77 000	14 630
2014	328 000	80 000	14 402
2015	309 000	289 000	14 770
2016	357 000	226 000	15 360
2017	-	285 000	16 264

Source: Statistics Norway/ Norwegian Environment Agency

Table 7-8: Number of households with home composting and amount of organic waste composted, 1990-2024. Tonnes wet basis.

Year	Number of households with home composting	Amount of organic waste composted
1990	52 541	8 111
1995	55 407	10 129
2000	58 273	12 484
2005	60 330	15 563
2010	57 307	14 310
2011	57 479	13 703
2012	54 786	12 852
2013	58 848	14 135
2014	59 569	14 200
2015	60 356	14 390
2016	61 193	14 326
2017	61 927	14 214

Year	Number of households with home composting	Amount of organic waste composted
2018	62 768	13 808
2019	63 549	14 329
2020	64 485	15 279
2021	65 453	14 728
2022	66 328	13 320
2023	67 261	12 337
2024	68 180	13 361

Source: Statistics Norway

7.4.4 Emission factors

Emissions from composting, and anaerobic digestion in biogas facilities, will depend on the composition of waste composted, the amount and type of supporting material used (such as wood chips and peat), the temperature, the moisture content, and the aeration during the process.

Tier 2 emission factors differentiated between processes are not available in the 2006 Guidelines. The emission factors from Oonk 2017 study were implemented as these do differ between processes, and these emission factors are considered suited for Norwegian conditions.

Table 7-9 gives the factors for CH₄ and N₂O emissions from biological treatment for the Tier 1 and Tier 2 methods used in the Norwegian inventory (Hans Oonk 2017; IPCC 2006). The CO₂ produced and emitted during composting is short-cycled C and is therefore regarded as CO₂ neutral (Boldrin et al. 2009).

Tier 2 emission factors differentiated between processes are not available in the 2006 Guidelines. The emission factors from Oonk 2017 study were implemented as these do differ between processes, and these emission factors are considered suited for Norwegian conditions.

Table 7-9: Biological treatment of waste: emission factors.

	CH ₄	N ₂ O
Open composting, kg/tonnes dry basis	2.7	0.079
Open composting with green waste only, kg/tonnes dry basis	4.3	0.031
Closed composting, kg/tonnes dry basis	2.5	0.077
Closed composting with fresh compost only, kg/tonnes dry basis	0.63	0.087
Partially closed composting, kg/tonnes dry basis	3	0.092
Anaerobic digestion at biogas facilities, kg/tonnes dry basis	2.275	0.038
Home composting, kg/tonnes wet basis	4	0.24

Source: Hans Oonk (2017); IPCC (2006)

7.4.5 Uncertainties and time-series consistency

The amount of waste biological treated at composting and biogas facilities is considered to be known within $\pm 5\%$. The amount of waste composted at home is considered to be known within $\pm 100\%$. The emission factors used are considered to have the uncertainty range $\pm 50\%$. More information about the uncertainty estimates for this source is given in Appendix D.

As access to activity data varies throughout the timeseries, new information is used to ensure consistency. The methodology Statistics Norway/the Norwegian Environment Agency use to calculate emissions from biological treatment of solid waste is hence considered to be consistent for the whole time series.

7.4.6 Source specific QA/QC and verification

Internal checks of time series for all emission sources are conducted every year along with the new inventory production.

Internal checks are carried out for time series of waste data and calculated methane emissions. Corrections are made if necessary.

7.4.7 Recalculations

There are no recalculations for this category.

7.4.8 Planned improvements

Norway plans improvements on activity data for composting in order to implement a tier 2 method for the entire time series. More detail on this is given in chapter 10.

7.5 Waste incineration – 5C

7.5.1 Category description

Emissions from waste incineration in district heating plants are reported under energy industries (CRT 1A1a), as the energy is utilized, and therefore described in Chapter 3. In 2024, there were 17

waste incineration plants where household waste was incinerated. In addition, some incineration plants burn waste other than household waste, mainly wooden waste, paper, pasteboard, and cardboard. These emissions are reported and described under energy (CRT 1A1a). Waste, other than household waste, is also used as energy source in some manufacturing industries. These emissions are reported and described in the relevant subsectors under energy in manufacturing industries (CRT 1A2). Flaring offshore and in refineries are included under fugitive emissions (CRT 1B2c). Flaring in chemical industry is included under chemical process emissions (CRT 2B8a).

In this chapter, the focus will be on waste reported in IPCC sector 5C. This includes emissions from flaring of landfill gas at waste treatment plants, flaring of biogas in industry, hospital waste, incineration of municipal waste without energy recovery and incineration of the biogenic share in municipal waste. Incineration of municipal waste without energy recovery include both the facilities without energy recovery and the share of waste that is burned without utilization of the energy at district heating plants. Emissions of the biogenic share in incinerated municipal waste are reported as a total in IPCC sector 5C.

In Norway, the open burning of private yard waste is under different restrictions according to the respective municipality. These restrictions include what can be burned, but also the quantity, how, when and where it can be burned. In some municipalities, a complete ban is imposed. There is no registration of private waste burning and the activity data on this subject are difficult to estimate. Citizens are generally encouraged to compost their yard waste or to dispose of it through one of the many waste disposal/recycling sites. Emissions from open burning of waste are considered to be insignificant and have therefore not been included in the inventory.

According to the approach 1 and 2 key category analyses are emissions of CO₂ from Incineration and open burning of waste (5C) a key category in level for 2024 and in trend.

7.5.2 Methodological issues

Landfill gas

Emissions of CH₄ and N₂O from flaring landfill gas are estimated. Emissions have been estimated by multiplying the amount of gas flared with the emission factors shown in Table 7-13.

CO₂ emissions from flaring landfill gas are not included in the inventory, as these are considered as being of biogenic origin.

Municipal waste incineration – CO₂ and CH₄

Carbon emitted in compounds other than CO₂, e.g., as CO, CH₄ and NMVOC is also included in the CO₂ emission estimates. This double counting of carbon is in accordance with the IPCC guidelines (IPCC 2006).

Municipal waste incineration – N₂O

Emissions of N₂O are derived from the emissions of NO_x, which are reported from each plant to the Norwegian Environment Agency. More specifically, an estimated amount of 2.5% of this NO_x is subtracted and reported to UNFCCC as N₂O (SFT 1996). Accordingly, the net NO_x emissions constitute 97.5% of the emissions reported by the plants. For some years, emissions of NO_x have not been reported for a number of plants. In these cases, specific emission factors for the plants have been made, based upon earlier emissions and amounts of waste incinerated. These new factors have been used to estimate the missing figures.

Hospital waste

Emissions from combustion of hospital waste have been calculated based on an emission factor and the amount hospital waste incinerated. Since 2006, hospital waste has been incinerated in municipal waste incineration plants and emissions are then reported in CRT 1A1A / 5C1.

7.5.3 Activity data

Landfill gas

The total amount of landfill gas extracted each year is reported by landfill owners to the Norwegian Environment Agency and to Statistics Norway. The data are based on measurements of both amount of gas and CH₄ content. Most landfill owners are required to measure continuously, and as a minimum to report: Hours of operation, amount of gas extracted, volume percentage of CH₄, and amount of CH₄ used for flaring, heat, and electricity. The landfill operator reports the percentage of methane, along with the total amount of landfill gas (volume) to the Norwegian Environment Agency. The amount of recovered methane is then calculated. Statistics Norway subtracts the amount utilized for district heating and thermal power, which is given by the energy statistics in Statistics Norway. Information on the amount flared is given by the Norwegian Environment Agency and by surveys in Statistics Norway. Emissions from the amount of landfill gas flared is included under 5C1a, municipal solid waste. Emissions from landfill gas used for district heating and used in other sectors are reported in the relevant subsectors under Energy (CRT 1A1 and 1A4).

Table 7-10: Amount of landfill gas flared or used for energy purposes. Tonnes CH₄.

Year	5C. Flared	1A1a Public electricity and heat production	1A4a, Other sectors, commercial/institutional
1990	879	0	67
1995	5 732	208	2 324
2000	11 791	3 654	3 350
2005	10 224	7 095	5 549
2010	10 471	3 924	5 021
2011	8 797	3 093	4 565

Year	5C. Flared	1A1a Public electricity and heat production	1A4a, Other sectors, commercial/institutional
2012	7 370	2 949	3 948
2013	6 124	2 184	3 311
2014	4 850	1 350	2 763
2015	4 682	586	3 123
2016	4 232	1 201	2 602
2017	4 158	626	2 957
2018	3 717	236	2 785
2019	4 390	215	2 436
2020	3 959	178	2 022
2021	3 295	119	1 358
2022	3 150	152	1 438
2023	2 310	103	1 401
2024	2 160	93	1 687

Source: Statistics Norway/ Norwegian Environment Agency

Natural gas

The amount of natural gas flared by the production of methanol is, as recommended by the ERT, reported under 2B8.

Hospital waste

The amount of hospital waste was reported to Statistics Norway for the years 1998 and 1999. For the period 1990-1997, the average for 1998 and 1999 has been used. After 1999, as there has been no collection of hospital waste data, and due to the lack of better information, the waste amount of 1999 has been used to calculate the emissions for the subsequent years.

Hospital incinerators were gradually closed down, mainly due to new emission limit values. Since 2006, no hospital incinerator has been running, and hospital waste has been incinerated in incinerators for municipal waste.

Table 7-11: Estimated amount of hospital waste incinerated in hospital incinerators. 1 000 tonnes.

Year	Hospital waste incinerated
1990	0.63
1995	0.48
2000	0.24
2001	0.24
2002	0.14

Year	Hospital waste incinerated
2003	0.14
2004	0.14
2005	0.14

Source: Statistics Norway

Municipal waste

A description of the total amounts of incinerated municipal waste are given Table 7-13. Emissions from the amount of waste not utilized for energy are included in this chapter, as well as the biogenic CO₂-emissions from the non-fossil part of the waste.

Table 7-12: Total amounts of municipal waste incinerated, and the share of waste not utilized for energy purpose. 1 000 tonnes.

Year	Total amount of waste incinerated (1 000 tonnes)	Non-utilized amounts of waste incinerated (1 000 tonnes)
1990	225	27.6
1995	367	41.3
2000	524	159.0
2005	626	203.0
2010	1 044	358.4
2015	1 618	450.8
2016	1 562	436.3
2017	1 645	486.0
2018	1 677	472.0
2019	1 608	407.8
2020	1 643	439.2
2021	1 560	308.1
2022	1 596	360.6
2023	1 585	321.9
2024	1 557	294.9

Source: Statistics Norway /Norwegian Environment Agency

7.5.4 Emission factors

Table 7-13 presents the emission factors used for calculating emissions from flaring and hospital waste. Emission factor for the fossil part of incinerated waste is given in chapter 3. The emission factor for biogenic CO₂ is given in Table 7-13.

Table 7-13: Emission factors for flare and hospital waste incineration.

	Flare Landfill gas ¹ and biogas	Hospital waste
Component	kg/tonnes	Tonnes/tonnes
CO ₂	0	0.3
CH ₄	0.37	0.00023
N ₂ O	0.0015	0.000035

Source: ¹SFT (1996)

The CO₂ emission factor for the biogenic part of incinerated municipal waste in waste incineration plants in Norway was developed and implemented in 2024 (Mepex 2023). In the report by Mepex (2023) it was found that the emissions of biogenic CO₂ can be estimated to be 608 kg/tonnes of total waste in the period 2014-2019. An updated report by Lone et al. (2025) reduced the emission factor to 546 kg/tonnes for 2025.

In the development of the biogenic CO₂ factor in the years before 2014 it is used the assumptions on fossil-, biogenic- and inert share found in 2014 review of the fossil CO₂ emission factor (Fedoryshyn 2015). The emission factor is a time series that is based on the mean annual change in the biological share of combusted waste. This change is calculated using the data from Waste accounts Statistics (Statistics Norway Annually-h) in the period of 1995-2009. Linear interpolation is applied between 2010 and 2014. For all years before 1995, the emission factor from 1995 is used.

Table 7-14: Emission factors for waste incineration, biogenic, kg CO₂/tonnes incinerated waste.

Year	kg CO ₂ /tonnes waste
1990	778.9
1995	778.9
2000	750.3
2005	722.8

Year	kg CO ₂ /tonnes waste
2010	682.8
2015	608
2020	608
2024	577

7.5.5 Uncertainties and time-series consistency

Activity data

Uncertainty estimates for greenhouse gases are presented and discussed in Annex 2.

The total amounts of waste in municipal waste incineration at each facility are considered to be of good quality and with low variation. There may be some uncertainty in the categorization of the waste, but as the fossil share has small variations between the different waste sources it is considered to have a low impact (MEPEX 2020).

No new data on the amount of hospital waste has been reported since 1999. The amount of hospital waste incinerated in the subsequent years may vary from the data reported in 1999 currently used in the inventory for the period 2000-2005.

Uncertainty in the activity data has been estimated to $\pm 10\%$.

Emission factors

Uncertainty estimates for greenhouse gases are presented and discussed in Annex 2.

If the composition of the hospital waste is different from the one which the emission factors are based on, the calculated emissions will be incorrect. Combustion engineering and processes will also influence emissions. See Annex 2.

The emission factor for CO₂ from municipal waste incineration has uncertainty regarding the fossil share in the burned waste. There is access to sorting analysis at municipal recycling/incineration facilities in the period of 2012-2025. The uncertainty connected to the fossil share is increased due to large differences between different facilities, lack of control on industrial waste and few analysis on imported waste.

Uncertainty in the CO₂ emission factor has been estimated to $\pm 30\%$.

7.5.6 Source specific QA/QC and verification

Landfill gas recovered from sites with recovery is reported to the Norwegian Environment Agency. Each site reports on the use of the gas, that is, whether the gas is flared or used for energy purposes. The information is also checked against information collected from Statistics Norway regarding production.

Incineration of municipal waste is strongly regulated in Norway. All data concerning the waste incinerated is reported to the Norwegian Environment Agency per incineration plant; each facility has a unique identification code, thereby ensuring good-quality data without double counting.

The sections above secure potential problems regarding cross-sectoral issues and no double counting between waste and energy sectors.

See Section 1.2 for a description of the general QA/QC procedures of the Norwegian emission inventory.

7.5.7 Recalculations

Recalculations have been performed for this source category. More detail on this is given in chapter 10.

7.5.8 Planned improvements

Norway plans to develop a new method for distributing emissions between 5C and 1A1a. More detail on this is given under Energy in chapter 10.

7.6 Wastewater treatment and discharge – 5D

7.6.1 Overview

In 2024, wastewater handling accounted for 21.0% of the emissions in the waste sector. CH₄ and N₂O emissions from wastewater treatment and discharge have been reduced by 21.0% between 1990 and 2024. Emissions have been relatively stable since 2002.

Wastewater can be a source of methane (CH₄) when treated or disposed anaerobically. It can also be a source of nitrous oxide (N₂O). Carbon dioxide (CO₂) from wastewater is not considered in the IPCC Guidelines because of its biogenic origin and should not be included in national total emissions.

Sludge is produced in all wastewater handling. It consists of solids that are removed from the wastewater. This sludge must be treated further before it can be safely disposed of. In Norway, some of the wastewater sludge is treated aerobically, emissions are then included in composting (CRT 5B). Some facilities treat sludge anaerobically, producing biogas. During this process, CH₄ is produced. Emissions from the use of the produced CH₄ are included in the energy and industry sectors. Emissions of CH₄ from such facilities, due to unintentional leakages during process disturbances or other unexpected events, are included in the source category – 5B.

Emissions from flaring have been included in the waste incineration sector (CRT 5C).

N₂O emissions from sewage sludge applied on fields are not treated in this chapter and are included in the LULUCF sector according to the guidelines (IPCC 2006).

According to the approach 1 and 2 key category analysis are emissions of CH₄ from Domestic wastewater treatment and discharge (5D1) a key category in Level assessment (1990 and 2024).

The Norwegian wastewater treatment system is characterized by a few big and advanced aerobic wastewater treatment plants (WWTP) and many smaller WWTP. In 2024, 66% of Norway's

population was connected to high-grade treatment plants with biological and/or chemical treatment. Furthermore, 20% of the population was connected to mechanical or other types of treatment, 13% of the population was connected to small wastewater facilities (less than 50 pe) and less than 1% had direct discharges.

There are around 2 750 wastewater facilities with a capacity of more than 50 population equivalents (pe) in Norway which treated wastewater from 88% of the population in 2024

The source category 5D includes estimation of CH₄ and N₂O emission from wastewater handling, i.e., wastewater collection and treatment. CH₄ is produced during anaerobic conditions and treatment processes, while N₂O may be emitted as a by-product from nitrification and denitrification processes under anaerobic as well as aerobic conditions.

It is not possible to fully distinguish between emissions from industrial and domestic wastewater, as Norwegian industries, to a great extent, are coupled to the municipal sewer system. Wastewater streams from households and industries are therefore mixed in the sewer system prior to further treatment at centralised WWTP.

Industrial wastewater may be treated on-site or released into domestic sewer systems. If it is released into the domestic sewer system, the emissions are included in the domestic wastewater emissions (CRT 5D1). Norway estimates CH₄ emissions from on-site industrial wastewater treatment not connected to domestic sewer systems. Only industrial wastewater with significant carbon loading that is treated under intended or unintended anaerobic conditions will produce CH₄. Industries which have been considered are:

- Pulp and paper industry,
- Chemical industry,
- Food processing industries.

Norway has conducted investigations on industries with separate wastewater facilities in the chemical industry and has concluded that no company in this industry has anaerobic treatment of wastewater. In the food processing industry, all identified plants, except for one, have aerobic treatment. In this plant, the methane generated is flared.

Two companies in the pulp and paper industry have been identified as running anaerobic wastewater treatment facilities. The methane emissions generated from this treatment are either flared or used for energy purposes. Emissions from energy recovery have been included in energy combustion for Manufacturing Industries and construction (sector 1A2d) pulp, paper and print from 1991 when recovery began.

Emissions from flaring have been included in the waste incineration sector (CRT 5C).

7.6.2 Methodological issues

7.6.2.1 Domestic wastewater

7.6.2.1.1 CH₄

CH₄ from domestic wastewater treatment plants

Methane emissions from domestic wastewater have been calculated according to the IPCC default updated methodology (2019):

$$(7.2) \quad CH_4 \text{ Emissions} = \sum_j EF_j \times (TOW_j - S_j) - R_j$$

Where:

- U_i: fraction of the population in income group i
- T_{ij}: Degree of utilisation of treatment/discharge j, for each income group i
- EF_j: Emission factor for treatment/discharge j, kg CH₄ / kg BOD
- TOW_j: organics in wastewater of treatment/discharge pathway or system, j, in inventory year, kg BOD/yr.
- S_j: Organic component removed as sludge from treatment/discharge pathway or system, j (kg BOD / yr)
- R_j: Amount of CH₄ recovered from treatment/discharge pathway or system, j in the inventory yr.

Emissions have been estimated for all treatment types and for discharge into the environment. In Norway, all domestic centralized wastewater treatment plants are aerobic and are considered well managed. 88% of the population was connected to this type of treatment in 2024. The rest of the population was connected either to septic systems (for the most important part) or have direct discharge. CH₄ emissions are estimated according to IPCC updated methodology (2019).

7.6.2.1.2 N₂O

Emissions of nitrous oxide from domestic and commercial wastewater treatment have been estimated for both the part of the population connected to large wastewater treatment plants (WWTP) (>50 pe) and the part of the population not connected to large WWTP. The former includes the part of industries connected to the large.

N₂O emissions from domestic wastewater treatment

N₂O emissions from discharge of domestic wastewater and industries connected to large treatment plants (>50 pe) have been estimated based on nitrogen content in wastewater effluent.

For the largest plants with N-removal treatment, N₂O emissions occurring as a by-product in biological nitrogen-removal plants has also been included into the calculations.

N₂O emissions from domestic wastewater discharged have been calculated by multiplying the total amount of nitrogen discharged by the IPCC default emission factor of 0.005 kg N₂O-N/kg N produced. Emissions in N needs to be converted into N₂O using the conversion ratio of N into N₂O: 44/28. Emissions have been estimated using equation (7.3).

$$(7.3) \quad N_2O = N_{\text{supplied to pipelines}} \times 0.005 \times \frac{44}{28}$$

N₂O emissions in **biological nitrogen removal-plants** have been estimated using equation (7.4), assuming that 2% in SFT (1990) of the nitrogen removed from the plants will form N₂O.

$$(7.4) \quad N_2O = N_{\text{removed}} \times 0.02 \times \frac{44}{28}$$

The amount of N removed is multiplied by 2% and emissions are then converted using the conversion ratio of N into N₂O: 44/28.

Data on the amount of nitrogen removed in biological steps of the actual wastewater treatment plants is gathered from Statistics Norway's wastewater statistics.

7.6.2.2 Industrial wastewater

Organic material in industrial wastewater is often expressed in terms of COD (chemical oxygen demand). CH₄ emissions from on-site industrial wastewater treatment are estimated based on the amount COD discharged. Emissions of methane from industrial wastewater are calculated according to the IPCC default methodology described in equation (7.5):

$$(7.5) \quad CH_4 = COD \times B_0 \times MCF$$

Where:

COD: chemical oxygen demand (industrial degradable organic component in wastewater)

B₀: Maximum methane-producing capacity (kg CH₄/kg COD)

MCF: Methane correction factor

N₂O emissions from on-site industrial treatment are calculated according to the IPCC default methodology described in equation (7.6):

$$(7.6) \quad N_2O = N_{\text{Effluent}} \times EF_{\text{Effluent}} \times \frac{44}{28}$$

Where:

N₂O: N₂O emissions in inventory, kg N₂O/year

N_{Effluent}: content of nitrogen in the effluent

EF_{Effluent}: emission factor for N₂O emissions from discharge to wastewater

Emissions from the following industries are included in the Norwegian inventory:

- Pulp and paper industry
- Chemical industry
- Food processing industries

CH₄ and N₂O emissions from industries connected to large treatment plants (>50 pe) are included in domestic wastewater handling sector (CRT 5D1).

7.6.3 Activity data

7.6.3.1 Domestic wastewater

7.6.3.1.1 CH₄ emissions from domestic WWTP

Treatment

Norwegian population data are extracted from Statistics Norway's population statistics. A country-specific value of 60 g BOD/person/day has been used for the degradable organic component value in domestic wastewater, for all years (Berge & Mellem 2013). For the largest plants which also include industry wastewater has BOD been adjusted with the use of correction factor for additional industrial BOD discharged recommended in the IPCC guidelines (2006).

The total organic product for domestic wastewater is presented in Table 7-15.

Table 7-15: Total organic product treated in domestic wastewater.

Year	Total organic product, tonnes DC
1990	108 656
1995	111 990
2000	115 767
2005	120 300
2010	127 477
2011	126 954
2012	131 068
2013	132 900
2014	134 620
2015	136 401
2016	137 747
2017	139 061
2018	140 164
2019	141 051
2020	142 263
2021	143 012
2022	144 055
2023	145 805
2024	147 475

Source: Statistics Norway/ Norwegian Environment Agency

Discharge

Centralised wastewater treatment plants report degradable organic component discharged into the recipients to the authority. Reported data are directly used in the calculation. For the other wastewater treatment system degradable organic component discharged into the recipients is calculated based on the country-specific value of 60 g BOD/person/day and the removal fractions values recommended by the IPCC updated methodology (2019).

Table 7-16 presents the removal fractions values according to treatment type.

Table 7-16: Wastewater treatment organics removal fractions (TOWrem) according to treatment type.

Year	Total organic product, tonnes DC
Untreated system	0
Primary (mechanical treatment plants)	0.40
Primary + Secondary (biological treatment plants)	0.85
Primary + Secondary + Tertiary (advanced biological treatment plants)	0.90
Septic tank/septic system	0.625
Latrines – Dry climate, groundwater table lower than latrine, small family (3–5 persons)	0.1
Latrines – Dry climate, groundwater table lower than latrine, communal (many users)	0.5
Latrines – Wet climate/flush water use, groundwater table higher than latrine	0.7

Source: IPCC updated methodology (2019)

The total organic product discharged into the environment is presented in Table 7-17.

Table 7-17: Total organic product discharged into the environment from domestic wastewater.

Year	Total organic product, tonnes DC
1990	34 035
1995	34 773
2000	36 389
2005	35 106
2010	38 328

Year	Total organic product, tonnes DC
2011	45 910
2012	37 927
2013	39 860
2014	39 268
2015	40 805
2016	45 451
2017	38 782
2018	40 159
2019	39 026
2020	38 981
2021	39 626
2022	39 462
2023	40 813
2024	41 481

Source: Statistics Norway/ Norwegian Environment Agency

7.6.3.1.2 N₂O emissions from large, small WWTP and domestic wastewater handling

Data for the amount of nitrogen released into recipients are extracted from Statistics Norway's wastewater statistics.

Data is available from 1997. For the period 1990-1996 nitrogen released into recipients is estimated based on 1997 amount and protein intake per capita estimated by the Directorate for Health and Social Affairs (Johansson L. Solvoll 1999). In 1997, the daily per capita protein intake for Norway amounted to 86 grams, corresponding to 31.39 kilos per person per year.

For the years 1990 and 1995, the Norwegian Directorate for Health has estimated the potential protein intake for the population (Directorate for Health and Social Affairs 2013). Potential protein intake has been estimated using equation (7.7):

$$(7.7) \quad \text{Potential protein intake} = \text{production} + \text{import} - \text{export}$$

This estimation assumes that all the products are eaten and does not take into consideration the food ending up as waste. To avoid overestimations, potential protein intake is not used directly as protein intake in the inventory. Indeed, the trend of potential protein intake has been extrapolated to the protein intake estimated for 1997 (1.39 kilos per person) so as to build the time series from 1990 to 1996. These estimations rely on recommendations from the Directorate for Health and Social Affairs (Johansson, pers. Comm.⁶¹). Table 7-18 presents the potential

⁶¹ Johansson, L. (2005): Personal information by telephone, Directorate for Health and Social Affairs

protein intake in both g/person/day and kg/person/year and the estimated annual protein intake per capita.

Table 7-18: Potential protein intake, and estimated protein intake, in g/person/day, kg/person/year, for the years 1990-1997.

Year	Potential protein intake g/person/day	kg/person/year	Index 1997 =100	Estimated protein intake kg/person/year
1990	94	34.3	100.5	31.56
1991	93.8	34.2	100.3	31.49
1992	93.6	34.2	100.1	31.42
1993	93.4	34.1	99.9	31.36
1994	93.2	34.0	99.7	31.29
1995	93	33.9	99.5	31.22
1996	93.3	34.0	99.7	31.31
1997	93.5	34.1	100	31.39

Numbers in bold come from the Norwegian Directorate for Health and Social Affairs

Non-consumed protein has been taken into account in the estimation of protein added to wastewater. It has been set to 10% of consumed protein. Therefore, Fncp, the factor for non-consumed protein added to wastewater has been set equal to 1.1.

7.6.3.2 Industrial wastewater

7.6.3.2.1 CH₄ emissions from industrial WWTP

The amount COD discharged is reported by industries to the Norwegian Environment Agency.

Table 7-19: Reported COD discharged by industries, in tonne/ year, for the years 1990-2024.

Year	COD released into recipient from industrial WWTP (tonne)
1990	143 446
1995	124 982
2000	90 503
2005	87 333
2010	86 914
2011	78 168
2012	68 579

Year	COD released into recipient from industrial WWTP (tonne)
2013	63 307
2014	55 498
2015	55 396
2016	55 266
2017	59 774
2018	55 652
2019	50 949
2020	49 208
2021	48 949
2022	50 460
2023	44 998
2024	39 118

Source: Statistics Norway/ Norwegian Environment Agency

7.6.3.2.2 N₂O emissions from industrial WWTP

N₂O emissions from industries connected to large treatment plants (>50 pe) are included in domestic wastewater handling sector (CRT 5D1) while N₂O emissions from industries with their own WWTP are calculated by a tier 2 method. The activity data are amounts of nitrogen in the effluent reported to the Norwegian Environment Agency.

Table 7-20: Reported Nitrogen discharged by industries, in tonne/year, for the years 1990-2024.

Year	Nitrogen released into recipient from industrial WWTP (tonne)
1990	417
1995	625
2000	760
2005	724
2010	844
2011	951
2012	798
2013	1 093
2014	855
2015	918
2016	992
2017	969

Year	Nitrogen released into recipient from industrial WWTP (tonne)
2018	990
2019	919
2020	871
2021	886
2022	958
2023	883
2024	781

Source: Norwegian Environment Agency

7.6.4 Emission factors

7.6.4.1 CH₄ emissions from domestic WWTP

The default emission factor for B₀ of 0.6 kg CH₄/kg BOD is used (IPCC 2006). The methane correction factor (MCF) is, according to good practice, given by the fraction of BOD that will ultimately degrade anaerobically. MCF values are taken from IPCC updated methodology (2019).

For treatment, MCF is assumed to be equal to 0.5 for the population connected to tanks with anaerobic conditions, 0.03 for the part of the population connected to centralized aerobic treatment plants and 0,1 for the part of the population connected to latrines.

For discharge, MCF is assumed to be equal to 0.11.

Information on the part of the population connected to the different types of treatment are taken from Statistics Norway (wastewater statistics). Table 7-21 gives an overview of the part of the population connected to centralized treatment plants, tanks with anaerobic conditions and other types of treatment (latrines, direct discharge) used in the Norwegian emission inventory.

Table 7-21: Part of the population connected to tanks with anaerobic conditions for the period 1990-2024.

Year	Part of the population connected to centralised treatment plants	Part of the population connected to tanks with anaerobic conditions	Part of the population connected to other type of treatment
1990	75%	23%	2%
1995	77%	22%	2%
2000	78%	20%	2%
2005	82%	17%	2%

Year	Part of the population connected to centralised treatment plants	Part of the population connected to tanks with anaerobic conditions	Part of the population connected to other type of treatment
2010	83%	15%	2%
2011	83%	15%	2%
2012	84%	15%	2%
2013	84%	14%	2%
2014	84%	14%	2%
2015	85%	14%	2%
2016	85%	14%	2%
2017	85%	14%	2%
2018	85%	13%	2%
2019	85%	13%	2%
2020	86%	12%	2%
2021	86%	12%	2%
2022	87%	13%	1%
2023	87%	13%	1%
2024	87%	13%	1%

Source: Statistics Norway

7.6.4.2 CH₄ emissions industrial WWTP

The default emission factor for B₀ of 0.25 kg CH₄/kg COD is used (IPCC 2006). The methane correction factor (MCF) is assumed to be equal to 0.1 as the reported COD corresponds to amounts discharged by the plant, it is assumed untreated.

7.6.4.3 N₂O emissions from large WWTP

N₂O emissions in **biological nitrogen removal-plants** have been estimated assuming that 2% of the nitrogen removed from the plants will form N₂O. This country-specific emission factor is given in SFT (1990). This assumption is based on measurements in plants and comparisons to factors used in Sweden. This emission factor is used for all plants except for two.

It has been hypothesized that two plants have a much higher performance, i.e., a lower percentage of processed N emitted as N₂O.

For the first plant N₂O emissions were measured in 2011 at various spots within the treatment plant, as well as the concentrations of N₂O in the liquid phase throughout, including the exit water. The results verified that the performance of this process, with respect to N₂O emission, is much better than the emission factor used for the other treatment plants. On the average, the emission of N₂O -N to air from the entire plant (through the chimney) amounted to 0.2% of the processed N. If the N₂O lost as dissolved N₂O in the exit water is included, the percentage increases to 0.3 (Bakken et al. 2012). For this WWTP, it has then been assumed that 0.3% of the

nitrogen removed from plants will form N_2O . This emission factor has been used for that plant for all years since 1996, the year when the nitrification and denitrification reactors were fully operational. For the period 1990-1996, the default emission factor of 2% has been used.

The second plant uses a different technology for N-removal, however the emissions of N_2O were found to be in the same range. This plant has a slightly lower amount of nitrogen removed and it was found that it emits 0.32% of the N removed as N_2O -N to the atmosphere and, as for the first plant, 0.1% of the nitrogen is emitted with the effluent. As a result, for this plant an emission factor of 0.42% was used. The plant opened in 2001, and the emission factor is used for the whole time series.

7.6.4.4 N_2O emissions from other domestic wastewater handling

For the part of the population that is not connected to large WWTP, IPCC default emission factors have been used:

- EF_6 : 0.005 kg N_2O /kg sewage-N produced has been used.
- $Frac_{NPR}$, the fraction of nitrogen in protein, has been set equal to 0.16 kg N/kg protein.

7.6.4.5 N_2O emissions from on-site industrial WWTP

IPCC default emission factor has been used for industries with on-site WWTP.

- $EF_{Effluent}$: 0.005kg N_2O /kg sewage-N produced has been used.

7.6.5 Uncertainties and time-series consistency

Uncertainty estimates for greenhouse gases are presented and discussed in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the emission estimates for this category.

7.6.6 Source specific QA/QC and verification

See Section 1.2 for the description of the general QA/QC procedure.

In connection with the calculation of the 2021 emissions there were a thorough review of the population of industry units with emissions of CH_4 and NMVOC. The population consists of the units that rinse their own wastewater. During the review a system was designed to ensure that there are no fluctuations between years in future calculations.

7.6.7 Recalculations

Recalculations have been performed for this source category, see chapter 10 for more details.

7.6.8 Planned improvements

There are no planned improvements.

7.7 Other emissions sources from the waste sector – 5E

7.7.1 Description

No GHG emissions are currently included in this category.

7.7.2 Recalculations

No recalculation has been made in this category.

7.7.3 Planned improvements

There is currently no planned improvement for this source category.

8. Other

Norway does not report any emissions in the *Other* source category.

9. Indirect carbon dioxide and nitrous oxide emissions

9.1 Description of sources of indirect emissions in the GHG inventory

9.1.1 Indirect carbon dioxide emissions

According to the IPCC's 2006 Guidelines, most of the carbon emitted in the form of non-CO₂ species eventually oxidises to CO₂ in the atmosphere. The 2006 Guidelines further states that this can be estimated from the emission estimates of the non-CO₂ gases and that these CO₂ inputs could be included in national inventories. Norway includes such CO₂ inputs in its inventory, and these are referred to as indirect CO₂. The indirect CO₂ emissions from non-combustion sources originating from the fossil part of CH₄ and NMVOC are considered and calculated based on average carbon content. Fossil carbon in the emissions of CH₄ and NMVOC from several non-combustion sources are included in the Norwegian emission inventory, see Table 9-1. The NMVOC emission estimates used to estimate indirect CO₂ emissions for the national GHG inventory are the same as those reported under the Convention on Long-Range Transboundary Air Pollution.

These indirect CO₂ emissions are reported in CRT summary tables 2, 6 and 10.

Table 9-1: Source categories in the inventory where indirect CO₂ emissions are calculated for CH₄ and NMVOC.

CRT code	Source category
1.B.1.a	Coal Mining and Handling
1.B.2.a.3	Oil and Natural Gas and Other Emissions from Energy Production; Oil; Transport
1.B.2.a.4	Oil and Natural Gas and Other Emissions from Energy Production; Oil; Refining/Storage
1.B.2.a.5	Oil and Natural Gas and Other Emissions from Energy Production; Oil; Distribution of Oil Products
1.B.2.b.5	Oil and Natural Gas and Other Emissions from Energy Production; Natural Gas; Distribution
1.B.2.b.6	Oil and Natural Gas and Other Emissions from Energy Production; Natural Gas; Other (Gas terminals)
1.B.2.c	Oil and Natural Gas and Other Emissions from Energy Production; Venting and Flaring (Includes diffuse emissions from oil and gas exploration and production (1.B.2.a.1-2, 1.B.2.b.1-2))
2.B.5	Carbide Production
2.B.8.a	Petrochemical and Carbon Black Production; Methanol
2.B.8.b	Petrochemical and Carbon Black Production; Ethylene

CRT code	Source category
2.B.8.c	Petrochemical and Carbon Black Production; Ethylene Dichloride and Vinyl Chloride Monomer (included in 2.B.8.b in the reporting)
2.B.8.g	Petrochemical and Carbon Black Production; Plastic
2.C.2	Ferroalloys Production
2.D.3	Solvent use
2.D.3	Road paving with asphalt

Indirect CO₂ emissions from CO is not included in the inventory as all carbon is included in the emission factors and hence additional estimation of indirect CO₂ emissions of CO would imply double counting.

9.1.2 Indirect nitrous oxide emissions

Indirect emissions of N₂O can occur by several pathways. The agriculture sector covers indirect emissions from deposition of NO_x and NH₃ from agriculture sources as well as indirect emissions from leakage and runoff (see chapter 5.4.1.1.5, 5.4.1.9 and 5.4.1.10). This chapter covers indirect emissions of N₂O from deposition of NO_x and emissions of N₂O resulting from NH₃ emissions from other sectors than agriculture and LULUCF. The coverage of the indirect N₂O emissions in CRT Table 6 is listed in Table 9-2 below and the energy sector is the primary source.

Table 9-2: Source categories in the inventory where indirect N₂O emissions are reported in CRT Table 6.

CRT sector	Source category
1. Energy	Indirect N ₂ O from all emissions of NO _x and NH ₃ in the energy sector
2. IPPU	Indirect N ₂ O from all emissions of NO _x and NH ₃ in the IPPU sector
3. Agriculture	Indirect N ₂ O from emissions of NO _x and NH ₃ in source category 3F Field burning of agricultural residues. All other indirect N ₂ O emissions from agricultural NO _x and NH ₃ are included in the inventory in source category 3B and 3D.
4. LULUCF	No estimated NO _x emissions and thus no indirect N ₂ O emissions.
5. Waste	Indirect N ₂ O from all emissions of NO _x and NH ₃ in the waste sector <i>except</i> NH ₃ emissions from composting. Indirect emissions from composting are assumed to be covered in the agriculture sector.

9.2 Methodological issues

9.2.1 Methodological issues for indirect carbon dioxide emissions

The indirect CO₂ emissions from oxidised CH₄ and NMVOC are calculated from the content of fossil carbon in the compounds. For CH₄, the factor for indirect emissions is simply calculated on

basis of mass of molecules. For NMVOC the average carbon fraction is also taken into account. The value for carbon fraction, 0.85, is used. This leads to the emission factors 2.75 kg CO₂/kg CH₄, and 3.12 kg CO₂/kg NMVOC. The NMVOC factor is used for most source categories with the exceptions of the following sources:

- Sources with specific emission factor of 3.13 kg CO₂/kg NMVOC
 - 1B2a5 gasoline distribution (same as the emission factor as for combustion of gasoline)
- Sources with specific emission factor of 3 kg CO₂/kg NMVOC (from CMR Instrumentation (CMR 2011))
 - 1B2a3 transport
 - 1B2a4 refining/storage
 - 1B2b6 gas terminal
 - 1B2bc venting
 - 2B8b ethylene/VCM
 - 2B8g plastic
- Sources with specific emission factor of 2.2 kg CO₂/kg NMVOC
 - 2B8a methanol
 - 2D3 solvent use
 - 2D3 road paving with asphalt

More details for the relevant source categories are found in the relevant chapters of the NID.

9.2.2 Methodological issues for indirect nitrous oxide emissions

The indirect N₂O emissions from deposition of NO_x and NH₃ are estimated according to the method in 2019 Refinement to the IPCC 2006 Guidelines vol. 4 ch. 11, Table 11.3 (IPCC 2019). The IPCC default emission factor of 0.01373 kg N₂O-N/(kg NH₃-N+NO_x-N volatilized) is used to calculate indirect emissions of N₂O from volatilized NH₃ and NO_x. The factor is taken from the methodology for indirect emissions in the agriculture sector, considering shares of 3% dry and 97% wet climate in Norway.

9.3 Uncertainty assessment and time-series consistency

Uncertainty estimates for greenhouse gases are given in Annex 2. A general assessment of time series consistency has not revealed any time series inconsistencies in the estimates for this category.

9.4 Category-specific QA/QC and verification

The general QA/QC methodology is given in Annex 4 and the specific QA/QC carried out for indirect CO₂ emissions in the relevant source categories in Energy and IPPU are found in chapters 3 and 4 of the NID.

The indirect N₂O emissions are based on NO_x and NH₃ emissions as reported under the UNECE Convention on Long-range Transboundary Pollution. The QA/QC methodology for this reporting is found in the annual Informative Inventory Report (NEA 2024).

9.5 Category-specific recalculations

The indirect CO₂ emissions from 2D3 (solvent use) and 2D3 (road paving with asphalt) were previously reported in the IPPU sector but were reallocated starting from the inventory submission in 2026.

9.6 Category-specific planned improvements

There are no planned activities this year that will improve the data quality or the documentation for this source category.

CMR (2011). Måle- og beregningsprogram for bestemmelse av utslipp av NMVOC i forbindelse med bøyelasting. Only in Norwegian.

IPCC (2019). 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories.

NEA (2024). Informative Inventory Report (IIR) 2024. Norway - Air Pollutant Emissions 1990-2023., Norwegian Environment Agency.

10. Recalculations and improvements

10.1 Explanations and justifications for recalculations, including in response to the review process

Every year, the Norwegian greenhouse gas emission inventory is calculated for all years in the time series, starting in 1990, and for all components and sources. This recalculation is done in order to account for new knowledge on activity data and emission factors, and to correct for discovered errors in the calculations.

There is a continuous process for improving and correcting the inventory and documentation of the methodologies employed, based on questions and comments received in connection with the reviews performed by the technical expert review teams. The figures in this inventory are, as far as possible, consistent throughout the whole time series.

The driving force for making improvements in the emission inventory is to meet the reporting requirements. In addition, it is important for decision makers and others to have accurate emission estimates as basis for making decisions of what measures to introduce to reduce emissions.

This section provides detailed descriptions of recalculations for each sector and gas. Even though the inventory as a whole is calculated every year, this does not imply that all sectors and gases will have changes in estimated emissions that result from changes in methodologies, changes in the manner in which EFs and AD are obtained and used, or the inclusion of new sources or sinks. Most emission estimates remain unchanged between production cycles. Further, small differences in estimates of emissions and removals are not considered to be recalculations. Therefore, all changes in estimates greater than 2 percent are explained in this section. Changes of smaller magnitude are also included, if they are a result of changes in methodology or data sources or otherwise deemed significant enough to be classified as recalculations by the inventory group.

The overall impacts of these recalculations on total emission levels and trends are given in section 1.2 and 1.3. An overview of issues identified by the UN review team and Norway's responses to these issues can be found in the section 1.4.

10.1.1 Specific description of the recalculations

10.1.1.1 Energy

Most of the recalculations have been performed for the inventory year 2023, because some of the energy figures in the inventory are preliminary due to data availability in the energy balance. There will always be some changes in the energy figures, mainly because more detailed energy

data results in changes in allocation between sectors. For petroleum products, corrections in one sector will lead to adjustments in other sectors, as total use of oil products must sum up to national sales. Changes in the emission figures due to such changes in the energy statistics will not be commented on specifically under each CRF code.

10.1.1.1.1 1A1AI Public electricity

Correction of error. Following the recommendation from the EU technical expert review team that reviewed the inventory in 2024 and 2025, the activity data for natural gas has been corrected for the years 2010 – 2023. This change results in a small increase of methane emissions but has no effect on the CO₂ emissions since these emissions are reported from the plants. However, it does affect the implied emission factors for this source, which now are within the limits of IPCC guidelines.

10.1.1.1.2 1A1AIII Heat plants

Revised emission factor. The emission factor for fossil CO₂ from waste incineration has been updated in the period of 2019-2023. The update is based on a report from Mepex. This report has reviewed sorting analyses of various waste fractions in 2020 and 2025, and the results have provided updated information on the fossil carbon content. Linear interpolation has been used to provide updated factors in the years without sorting analysis. Updated information on the imported waste fraction has had a major impact. The updated factors lead to a reduction in the CO₂ - emissions from waste incineration by approx 1% in 2019, increasing to a 5% reduction in 2023 compared to the previous submission. The factors are updated according to the information in Table 10-1 below.

Table 10-1: Emission factors for fossil CO₂ as provided in NID 2025 and NID 2026.

	Fossil emission factors, kg CO ₂ /tonnes incinerated waste	
	NID 2025	NID 2026
2019	592.0	586.0
2020	592.0	580.0
2021	592.0	574.4
2022	592.0	568.8
2023	592.0	563.2

10.1.1.1.3 1A2D Pulp, Paper and Print and 1A2GIV Wood and wood products

Updated emission factor. The CO₂ emission factor for municipal solid waste was updated as described in 10.1.1.1.1 resulted in a decrease in CO₂ emissions for the years 2019–2023. The recalculations for 1A2D range from a decrease in CO₂ emissions from 0.14kt - 0.53 kt and for 1A2GIV a decrease in the range of 0.06kt – 0.1kt.

10.1.1.1.4 1.A.2.F Non-metallic minerals

Updated activity data. The emissions for the years 2013-2023 have been recalculated due to revised activity data under the EU ETS for a cement producer. This is due to new information concerning a source stream for the use of coal mix. The recalculation ranges from a decrease in emissions of 9 kt CO₂ to an increase of 18 kt CO₂.

10.1.1.1.5 1A3A Aviation

CH₄ and N₂O emission factors on aviation gasoline were updated in 2023 due to an error.

10.1.1.1.6 1A3B Road transport

The activity data was revised from 2015-2023 due to updated energy content and density on bioethanol and biodiesel. This affected fossil fuels and biomass.

The activity data was also affected to a small extent by revised activity data on snow scooters in households (1A4BII).

10.1.1.1.7 1A3C Railways

The activity data in 2023 was revised due to updated energy content and density on biodiesel. This affected fossil fuels and biomass. Reported coal consumption in museum railways in 1990-2023 was transferred to commercial off-road machinery (1A4AII).

10.1.1.1.8 1A3D National navigation and 1A4CIII Fishing

Updated activity data and correction of error.

The activity data for LNG in ships was revised for the years 2010 – 2017 and 2022 – 2023, resulting in an increase of emissions of CO₂ and CH₄ in 1A3D.

The distribution of marine gas oils was revised for the years 2020 – 2023 resulting in reallocation of CO₂ and CH₄ emissions between 1A3D, 1A4CIII and international navigation.

An error in the CRT-coding for 1A4CIII was found and corrected, resulting in a decrease in the emissions of CO₂ and CH₄ in the period 1990 - 2023.

10.1.1.1.9 1A4AI Stationary Combustion – liquid and gaseous fuels

Revised figures from the energy balance for heating kerosene, natural gas, and LPG caused slightly higher emissions from 2018 compared to the previous submission.

10.1.1.1.10 1A4AII Off-road vehicles and other machinery – commercial

Coal consumption in museum railways in 1990-2023 was moved here from railways (1A3C).

10.1.1.1.11 1A4BII Off-road vehicles and other machinery - residential

The activity data on snow scooters in households was revised from 2015-2023.

10.1.1.1.12 1A4CI Stationary Combustion – Liquid fuels

Revised figures from the energy balance gave higher emissions from heating kerosene in 2010 and 2012, and slightly lower emissions from LPG in 2023 compared to the previous submission.

10.1.1.1.13 1A4BI Residential – Biomass

The factor for energy content in firewood used in households was adjusted down from 4.66 KWh/kg (16.8 MJ/kg) to 4.3 KWh/kg (15.48 MJ/kg). This was done to better reflect typical water content and tree species used in Norwegian households. This change has no effect on emissions estimates; however, it does affect the implied emission factor for this source through the entire time series.

10.1.1.1.14 1B2AII/1B2BII Production and upgrading of oil, and production and gathering of natural gas

Revised data on CO₂, CH₄, and NMVOC emissions have been incorporated for the years 1990-2023. This update results from small adjustments in reported emission figures for later years, and consequentially small adjustments in the emission factors for earlier years.

10.1.1.1.15 1B2C Venting and flaring

Revised data on CO₂, CH₄, and NMVOC emissions have been incorporated for the years 1990-2023. This update results from small adjustments in reported emission figures for later years, and consequentially small adjustments in the emission factors for earlier years.

10.1.1.1.16 1B2AV Distribution of oil products

Revised data on NMVOC emissions have been incorporated for the years 2004-2023.

10.1.1.2 Industrial processes and product use

10.1.1.2.1 2B6 Titanium dioxide production

Correction of data. The CO₂ emissions for 1990-2004 and 2016-2023 have been recalculated. Some of the reported emissions by the plant in these years that have been reported in IPPU are emissions from the combustion of propane and heating oil that are already included in the Energy sector. The recalculation results in lower IPPU emissions in the range of 0.27-4.21 kt CO₂.

10.1.1.2.2 2B8a Methanol production

New data. The time series for CO₂ for the years 1997-2023 has been recalculated due to new information about a source stream under the EU ETS. The years 2013-2023 are based on corrections under the EU ETS while the changes for 1997-2012 are based on estimates by the Norwegian Environment Agency based on the change in 2013 and production levels for 1997-2012. The changes vary from an increase of 8.3 kt CO₂ to a decrease of 6.8 kt CO₂.

10.1.1.2.3 2B8b Ethylene production

Correction of data. The time series for CO₂ for the years 2017 and 2018 have been recalculated due to correction of activity data for a source stream under the EU ETS. The changes are 0.3 kt CO₂ for 2017 and 0.5 kt CO₂ for 2018 respectively.

10.1.1.2.4 2B8g Plastic

Correction of data. The time series for CO₂ for the years 2017 and 2018 have been recalculated due to correction of activity data for a source stream under the EU ETS. The changes are 0.5 kt CO₂ for 2017 and 0.006 kt CO₂ for 2018 respectively.

10.1.1.2.5 2C2 Ferroalloys

Correction of data. The time series for CO₂ for the year 2013 and 2014 has been recalculated due to correction of activity data for two source streams under the EU ETS. The change results in an increase in emissions of 2.2 kt CO₂ for 2013 and 0.1 kt for 2014 respectively. The time series for CO₂ for the year 2018 for another producer has been recalculated due to correction of activity data for a source stream under the EU ETS. The change results in an increase in emissions of 0.0095 kt CO₂ for 2018.

10.1.1.2.6 2C3 Aluminium

CO₂

Correction of data. The CO₂ emissions of three plants have been recalculated due to corrections in emissions from some source streams under the EU ETS. The corrections are due to errors in reported emission factors or activity data. The aggregate recalculations are a decrease of 0.1 kt CO₂ in 2014, a decrease of 15.2 kt CO₂ in 2016, an increase of 0.8 kt CO₂ in 2021 and a decrease of 66.7 kt CO₂ in 2022.

PFCs

Correction of data. The PFC emissions of two plants have been recalculated due to corrections in emissions under the EU ETS. The corrections are due to errors in reported values. The aggregate recalculations result in a decrease of emissions of 0.2 kt in 2013 and increased emissions of 4.0 kt, 1.9 kt and 1.0 kt CO₂ eq. in 2020, 2021 and 2022 respectively.

10.1.1.2.7 2D3a Solvent use

Reallocation. Following the recommendation from the technical expert review team that reviewed the 1990-2022 inventory in 2025, the indirect CO₂ emissions from 2.D.3.a have been reallocated to CRT Table 6. The reallocated emissions are in the range of 80-100 kt CO₂.

Updated activity data. The amounts of NMVOC reported as activity data in CRT have been calculated by an updated methodology and emission factors. In a project that has been carried out over several years the emission factors for combinations of chemicals, industry and area of application are quality checked and updated if needed. The previous emission factors originated from before 2010 and new requirements for handling of chemicals since then have had a great impact on the emissions. To implement the effect of the measures are some of the emission factors reduced. Some areas of application have a higher reduction than other.

As the amount of emitted NMVOC from solvent use are reduced, are the indirect CO₂ emissions reduced as well. The reductions are varying throughout the timeseries, between 5% and 33%.

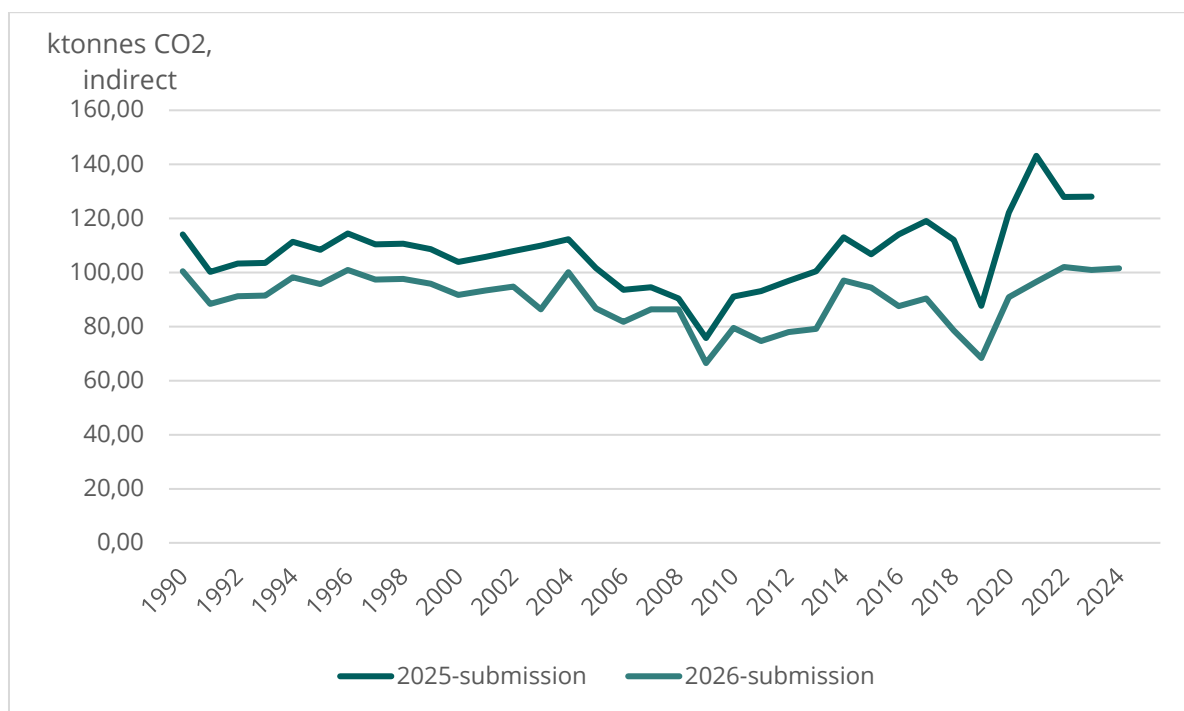


Figure 10.1: Illustration of recalculated indirect CO₂ emissions from solvent use due to updated activity data. Emissions reported in CRT Table 6.

10.1.1.2.8 2D3b Road paving with asphalt

Reallocation. Following the recommendation from the technical expert review team that reviewed the 1990-2022 inventory in 2025, the indirect CO₂ emissions from 2.D.3.b have been reallocated to CRT Table 6. The reallocated emissions are in the range of 10-19 t CO₂.

10.1.1.2.9 2F1e Mobile air-conditioning

Correction of data. An inaccuracy in the activity data for HFC-125 in 2014 have been corrected according to review finding (EU). Previously, the amount of refilled gas was higher than the amount of leakage, hence the product life factor was out of range. The calculation has been corrected and has given a reduction in the emissions from stock of 0.1t HFC-125.

Updated activity data. The imported amounts of HFC-125 and HFC-134a have been updated according to new information leading to a minor increase in the emissions.

10.1.1.2.10 2G1 Electric equipment

Updated activity data. The emissions of SF₆ have been revised in 2021-2023 due to updated activity data from the industry. The new information has led to a reduction in the emissions of

13% in 2021 and 27% in 2022, this corresponds to a decrease of 0.2 tonnes and 0.5 tonnes SF₆ respectively. The updated emissions in 2023 have increased by 0.8%.

10.1.1.2.11 2G3BI N₂O from Aerosol Cans

Correction of error. The emissions of N₂O have been revised in 2023 due to correction of the imported amount of N₂O in aerosol cans. The correction results in a reduction of 22 tonnes of N₂O in 2023.

10.1.1.3 Agriculture

10.1.1.3.1 3A Methane from enteric fermentation

In the 2026 submission the emission factor for enteric fermentation for sheep has been updated. The gross energy intake (GE) is now calculated according to the IPCC 2006 Guidelines equation 10.16. In earlier calculations a national equation (Volden et al. 2006) were used. Furthermore, the digestible energy, expressed as percentage of gross energy (DE) has been updated to better reflect the typical Norwegian sheep feed ration composition and assumptions regarding feed quality. More detailed information about the calculation of the DE is given in Annex 5.

In the 2026 submission the Y_m factor for breeding sheep was also changed from 6.7 to 6.5 due to ruminant expert recommendations⁶².

The factor N_{em}, the net energy for maintenance for adult sheep were also corrected due to the male/female ratio. In earlier calculations the ratio was 50-50 male- female, but the Norwegian adult sheep population only 4% is male. This also gave lower emissions.

These changes led to an average decrease in emissions of CH₄ for enteric fermentation for sheep of 28% per year in the period 1990-2023. For enteric fermentation in total the decline was 6% per year from 1990 to 2023 compared to the 2025 submission.

10.1.1.3.2 3D1f Cultivation of organic soils

In the 2026 submission updated activity data for the whole time series was used for the estimation. This led to a recalculation and 1-2% higher annual emissions compared to earlier estimation.

10.1.1.4 Land use, Land use change and Forestry

All emissions related to the Norwegian National Forest Inventory (NFI) estimated areas are recalculated every year as well as for the 2026 submission. This is due to the interpolation and extrapolation method used to estimate the areas. Since the 2014 submission, areas have been estimated using linear interpolation between the 1/5th of the NFI sample plots that are surveyed every year¹. For any given year (after 1993) one fifth of the area estimates are therefore based on measured sample plots, and four fifths of the estimates are based on interpolation, or

⁶² Expert estimate Bente Aspeholen Åby, NMBU, email 25.08.2025 and 22.10.2025.

extrapolation in the final years. Extrapolation affects the four final reporting years and requires a recalculation of these years in the subsequent submissions.

Therefore, there will always be recalculation in the last few years of the time series. Area-related emissions are affected by this and comprise all C stock changes estimated for living biomass, litter, dead wood, DOM, mineral and organic soils in all land uses (CRF Tables 4.A-4.F). Non-CO₂ emission sources are also indirectly affected by the area estimates: CRF Table 4(II) Emissions and removals from drainage and rewetting of organic soils, and CRF Table 4(III) Direct N₂O emissions from N mineralization/immobilization.

In addition to the interpolation and extrapolation method affecting area estimates, NFI sample plots are surveyed either in the field (for forest land, wetlands, and grasslands when there are trees that can be measured) or using aerial images. Corrections of previously attributed land-use categories that are not due to actual land-use changes therefore occur if new information becomes available. This can result in revised area estimates among all categories for the full time series.

Tree living biomass gains and losses recalculations also occur due to extrapolation of the carbon stock change. Living biomass losses from clearcut harvest in the last four years use the Global Forest Change dataset for loss prediction. Annual updates to this dataset in addition to annual updates of the NFI observations will result in recalculations for the last four common years.

Every year, the whole time series is recalculated for all C emission sources and sinks due to the revised activity data (mainly areas and tree living biomass). In addition, there were recalculations related to methodological changes.

The largest recalculations usually occur for the last four common years (2020 – 2023) mainly due to extrapolation updates. However, for this year's submission, large recalculations have occurred throughout the time series due to changes in activity data and methodologies:

- Tier 3 method for forest rem. forest deadwood, litter, and mineral soil has been updated. The soil model version has been changed from Yasso07 to Yasso20.
- Correction in living biomass losses estimates for forest to settlement and forest to grasslands.
- The HWP equation for annual stock change has been corrected.
- Reclassification of some plots has increased the drained organic soil area, which in return has increased emissions.

Additionally, minor changes in the estimates occurred during the period 1990-2009 as a result of improvement to the back casting area and emission correction methodology.

The difference in total GHG removals from the LULUCF sector was 2 789 kt CO₂ eq less in the 2026 NID (latest submission) compared to the 2025 NID (previous submission) for the recalculated year 2023 (Table 1-2). The largest changes in estimated C stock changes occurred for forest land, where the estimated CO₂ removals for the same reference year decreased by 2 949 kt CO₂ eq in the latest submission compared to the previous one.

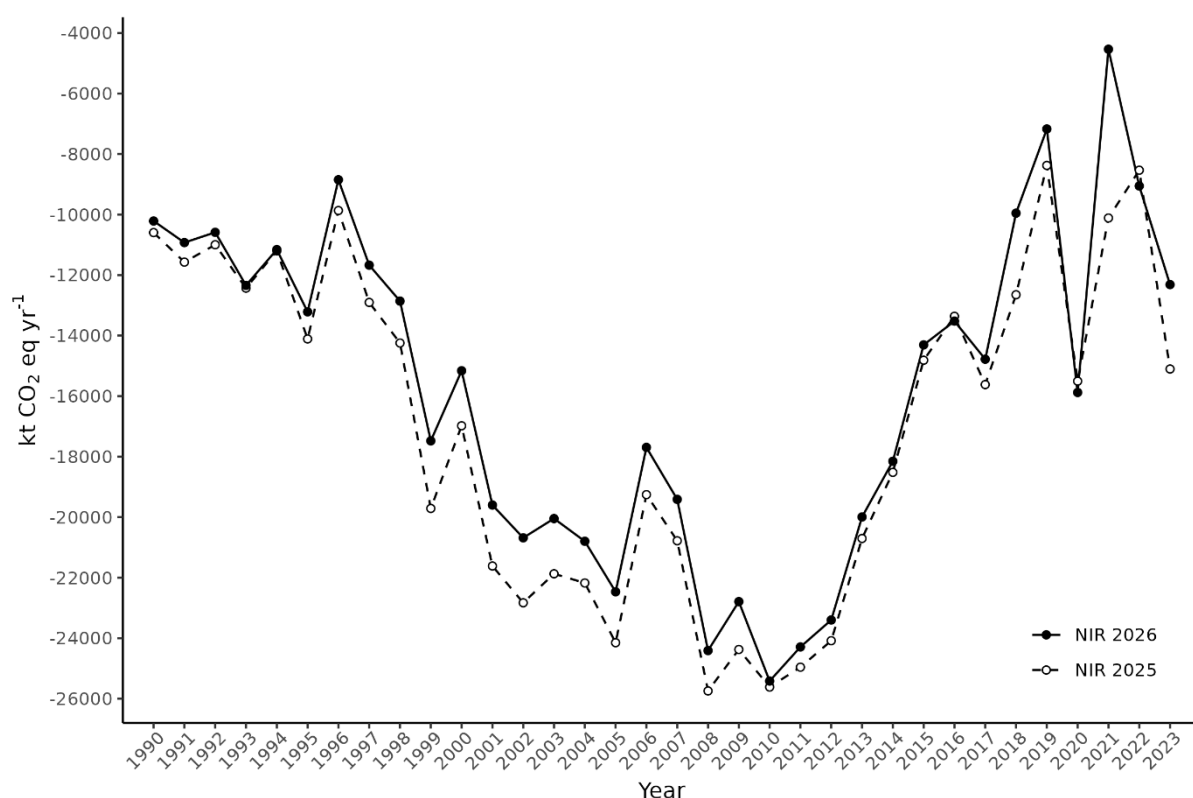


Figure 10.2: Recalculations illustrated for total emissions (kt CO₂ equivalents per year) estimated for the LULUCF sector in the latest submission compared to the previous submission

Table 10-2: Recalculated GHG emissions (kt CO₂ equivalents yr⁻¹) for 2023 per land-use category in the LULUCF sector.

Land-use category	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	

	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			
4.A Forest land	-16 377.0	-19 325.8	2 948.9	decreased net removals
4.B Cropland	2 348.6	2 349.5	-0.9	decreased net emissions
4.C Grassland	18.9	-25.6	44.5	from net removals to net emission
4.D Wetlands	370.0	383.4	-13.5	decreased net emissions
4.E Settlements	1 492.1	1 949.1	-457.0	decreased net emissions
4.F Other land	0.0	0.0	0.0	no change
4.G HWP	-167.3	-434.8	267.5	decreased net removals
Total sum	-12 314.7	-15 104.2	2 789.5	decreased net removals

The reasons for the recalculations within each land-use category and sink/source category and the effects for the last recalculated year of the inventory are described below.

10.1.1.4.1 Forest Land

10.1.1.4.1.1 4A1 Forest land remaining forest land

There has been a decrease in net removals of 2 942 kt CO₂ (from – 18 709 kt CO₂ to - 15 767 kt CO₂) for forest land remaining forest land.

Table 10-3: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for forest land remaining forest land. Ordered by descending absolute difference.

	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			
Carbon pool	NID 2026	NID 2025	difference	change description
litter	-3 235.8	-5 255.9	2 020.1	decreased net removals
living biomass	-12 556.5	-13 456.5	900.0	decreased net removals
dead wood	-979.6	-1118.9	139.3	decreased net removals
mineral soil	-214.7	-88.8	-125.9	increased net removals
organic soil	1 219.5	1 210.7	8.8	increased net emissions

- The large recalculation for tree living biomass have occurred due to updates in the extrapolation. The changes are especially large for losses. The methodology is the same for all tree living biomass estimates. However, the largest changes are observed for forest land remaining forest land. The NFI observation are conducted annually, but with only 1/5th of the plot observed each year. As such, interpolation is used to gap-fill between two observations, and extrapolation is used to gap fill the last years without observation. Remote sensing is used to improve the extrapolation gap-filling related to clearcut harvest. Extrapolation for all other forms of living biomass estimates are estimated using the trend for the last 5 years. Regardless of the remote sensing gap-filling improvements implemented since the 2024 submission, recalculations are still expected for every new

submission. However, the deviations have been greatly reduced due to improved gap-filling.

- Litter, deadwood, and mineral soil have been recalculated for the whole time-series. The main reason has been updates to the soil model for decomposition of litter and dead wood input. Previous model was Yasso07. In current submission we use the most recent version of the model Yasso20. Overall, this has resulted in a reduction in the net removals of dead wood, litter, and mineral soil combined.
- Drained organic soil emissions have been recalculated for the entire time-series. This is due to updates to the registrations in the NFI database.

10.1.1.4.1.2 4A2 Land converted to forest land

There has been a decrease in net removals of 4 kt CO₂ (from - 830 kt CO₂ to - 826 kt CO₂) for land converted to forest land.

Table 10-4: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for land converted to forest land. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
living biomass	-155.8	-168.8	13.0	decreased net removals
litter	-624.9	-615.2	-9.7	increased net removals
organic soil	24.1	17.2	6.9	increased net emissions
dead wood	-49.1	-45.8	-3.3	increased net removals
mineral soil	-19.9	-16.9	-2.9	increased net removals

- For all sources changes have occurred in the last four years due to updated area extrapolation. Some reclassifications of the plots (whole and split) in the database occur, which can cause recalculations for the whole time series.

10.1.1.4.2 Cropland

10.1.1.4.2.1 4B1 Cropland remaining cropland

There has been an increase in net emissions of 20 kt CO₂ (from 1 734 kt CO₂ to 1 754 kt CO₂) for cropland remaining cropland.

Table 10-5: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for cropland remaining cropland. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
organic soil	1 774.2	1 753.3	20.9	increased net emissions
mineral soil	-20.0	-19.4	-0.6	increased net removals
living biomass	-0.3	-0.2	-0.1	increased net removals
dead organic matter	0	0	0	no change

- For all sources, changes occurred in the last four years due to updated area extrapolation. Additionally, reclassifications of the plots (whole and split) in the database occur, which can cause recalculations for the whole time series. This is particularly the case for mineral and organic soil. By default, all soil is mineral unless observation from the National Soil Survey indicates differently. Since the National Soil Survey database has been updated, some land previously classified as mineral soil is now classified as organic soil. This has minimal implications for the emissions from mineral soil but results in significant increase in emissions for organic soil.
- The area of drained organic soil in cropland remaining cropland has been updated in the database with most recent observations, resulting in increased organic soil area, and therefore increased emissions.
- Other deviations are due to area extrapolation recalculations.

10.1.1.4.2.2 4B2 Land converted to cropland

There has been a decrease in net emissions of -22 kt CO₂ (from 504 kt CO₂ to 482 kt CO₂) for land converted to cropland.

Table 10-6: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for land converted to cropland. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
living biomass	82.1	93.6	-11.6	decreased net emissions
dead organic matter	237.9	246.2	-8.4	decreased net emissions
mineral soil	57.2	59.2	-2.0	decreased net emissions
organic soil	104.7	104.7	0.0	no change

- For all sources, changes have occurred in the last four years due to updated area extrapolation. Some reclassifications of the plots (whole and split) in the database occur, which can cause recalculations for the whole time series.

10.1.1.4.3 Grassland

10.1.1.4.3.1 4C1 Grassland remaining grassland

There has been an increase in net removals of -21 kt CO₂ (from -468 kt CO₂ to -489 kt CO₂) for grassland remaining grassland.

Table 10-7: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for grassland remaining grassland. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
living biomass	-579.7	-559.6	-20.2	increased net removals
mineral soil	20.6	21.8	-1.3	decreased net emissions
dead organic matter	0.0	0.0	0.0	no change
organic soil	70.1	70.1	0.0	no change

- SOCref was updated from the 2006 guideline values to the 2019 guideline refinement values. SOCref changed from 85 to 128, 71 to 51, 115 to 128, and 95 to 81 tonnes of C ha⁻¹ for wetland, sandy, spodic and HAC soils respectively.
- For all sources, changes have occurred in the last four years due to updated area extrapolation. Some reclassifications of the plots (whole and split) in the database occur, which can cause recalculations for the whole time series.

10.1.1.4.3.2 4C2 Land converted to grassland

There has been an increase in net emissions of 66 kt CO₂ (from 426 kt CO₂ to 492 kt CO₂) for land converted to grassland.

Table 10-8: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for land converted to grassland. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
dead organic matter	368.8	331.6	37.1	increased net emissions
living biomass	102.7	73.3	29.4	increased net emissions
mineral soil	-12.7	-12.2	-0.5	increased net removals
organic soil	32.8	32.8	0.0	no change

- The vast majority of the recalculation is related to tree living biomass loss for the last four years (extrapolation period). As new data is available in the NFI database and from Global Forest Change, loss from harvest or deforestation will be updated.
- In addition, there are some changes in the land use classification, which results in changes in the area, living biomass, DOM, mineral, and organic soil estimates. Most of these major changes are for forest land to grassland.

10.1.1.4.4 Wetlands

10.1.1.4.4.1 4D1 Wetlands remaining wetlands

There has been an increase in net emissions of 6.5 kt CO₂ (from 251 kt CO₂ to 257 kt CO₂) for wetlands remaining wetlands.

Table 10-9: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for wetlands remaining wetlands. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
organic soil	336.4	320.9	15.5	increased net emissions
living biomass	-78.9	-70.0	-8.9	increased net removals

- Overall, there are some land use reclassifications for other wetlands remaining other wetlands, which results in minor recalculations in the living biomass for the whole time series. In addition, updated extrapolation results in recalculations for the last four common years of other wetlands remaining other wetlands.

10.1.1.4.4.2 4D2 Land converted to wetlands

There has been a decrease in net emissions of -22 kt CO₂ (from 91 kt CO₂ to 68 kt CO₂) for land converted to wetlands.

Table 10-10: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for land converted to wetlands. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
living biomass	27.7	52.6	-24.8	decreased net emissions
dead organic matter	30.3	27.9	2.4	increased net emissions
organic soil	10.3	10.3	0.0	no change

- The recalculations for all estimates were due to updated extrapolation for the last four common years (although no change was observed for organic soil for this year's submission).

10.1.1.4.5 Settlements

10.1.1.4.5.1 4E1 Settlements remaining settlements

There has been a decrease in net emissions of -8.1 kt CO₂ (from 183 kt CO₂ to 174 kt CO₂) for settlements remaining settlements.

Table 10-11: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for settlements remaining settlements. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
organic soil	174.5	182.6	-8.1	decreased net emissions

- Recalculations for organic soils were due to NFI database updates. This relates both to updates in the amount of area which is classified as settlements remaining settlements, and classification of the type of settlement, which affects the emission factors.

10.1.1.4.5.2 4E2 Land converted to settlements

There has been a decrease in net emissions of -446 kt CO₂ (from 1 694 kt CO₂ to 1 248 kt CO₂) for land converted to settlements.

Table 10-12: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each carbon pool for land converted to settlements. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
living biomass	285.5	594.4	-308.9	decreased net emissions
dead organic matter	451.3	629.6	-178.4	decreased net emissions
organic soil	408.3	354.9	53.5	increased net emissions
mineral soil	102.9	114.9	-12.0	decreased net emissions

- It has been discovered that 6 plots had incorrect estimates of living biomass stock change for forest to settlements for the year 2023 in the previous submission. This has been corrected in the current submission.

- There has been a reclassification of plots from deforestation (forest to settlements) to harvest (forest remaining forest). That led to a reduction in the DOM in comparison to the previous reporting year.
- Major recalculations also derive from the extrapolation recalculations of living biomass and area.
- Settlement type reclassification also occurs which affects the stock change factors used for mineral soil.

10.1.1.4.6 Other Land

10.1.1.4.6.1 4F1 Other land remaining other land

There have been no recalculations performed for this source category this year.

10.1.1.4.6.2 4F2 Land converted to other land

There have been no recalculations performed for this source category this year.

10.1.1.4.7 Harvested wood products

There has been a decrease in net removals of 267 kt CO₂ (from - 435 kt CO₂ to - 167 kt CO₂) for Harvested Wood Products.

Table 10-13: Recalculated CO₂ emissions (kt CO₂ yr⁻¹) for 2023 for each HWP. Ordered by descending absolute difference.

Carbon pool	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
Domestic Sawnwood	137.8	-94.3	232.1	from net removals to net emission
Domestic Paper and paperboard	-201.5	-32.3	-169.2	increased net removals
Export Paper and paperboard	249.1	81.0	168.1	increased net emissions
Domestic Wood panels	172.1	88.6	83.5	increased net emissions
Export Sawnwood	-444.1	-404.0	-40.1	increased net removals
Export Wood panels	-80.8	-73.9	-6.9	increased net removals

- Each year, when the new activity data are added from the FAO database, the activity data for the previous five years are checked and updated, if needed.
- Based on feedback from the EU review for the 2025 submission, a misinterpretation of the implementation of equations 12.2 and 12.4 – Box 12.1 (IPCC 2019 guidance) was identified. “Annual change in stock” for year i, has been calculated as ‘C(i) - C(i-1)’. And “losses” has been calculated as ‘losses(i) = gains (i-1) - (C(i) - C(i-1))’. The correct calculation, ref. IPCC 2019 guidance box 12.1, for “Annual change in stock” for year i is ‘C(i+1) - C(i)’. And the correct calculation for “losses” is ‘losses(i) = gains (i) + C(i) - C(i+1)’. As a result of applying the correct formulas, the historical net CSC estimates are shifted one year earlier in the time series.

10.1.1.4.8 4(I) Direct and Indirect N₂O emission from fertilizers

There have been negligible changes in the recalculations for N₂O emissions from fertilized soils.

Table 10-14: Recalculated N₂O emissions (kt CO₂ eq yr⁻¹) for 2023 for fertilized land uses. Ordered by descending absolute difference.

			Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			
Land-use change	type of fertilizer	type of emission	NID 2026	NID 2025	difference	change description
Forest land remaining forest land	Inorganic	Direct	2.0	2.1	-0.1	negligible change
Forest land remaining forest land	Inorganic	Indirect (leaching)	0.3	0.3	0.0	negligible change
Forest land remaining forest land	Inorganic	Indirect (atm. deposition)	0.1	0.1	0.0	negligible change
Settlements remaining Settlements	Organic	Indirect (leaching)	1.5	1.5	0.0	negligible change
Settlements remaining Settlements	Organic	Indirect (atm. deposition)	1.7	1.7	0.0	negligible change
Settlements remaining Settlements	Organic	Direct	3.5	3.5	0.0	negligible change

10.1.1.4.9 4(II) Emissions and removal from drainage of organic soils

There has been an increase in net emissions of 3 kt CO₂ eq (from 389 kt CO₂ eq to 392 kt CO₂ eq) for drained organic soil non- CO₂ GHG.

Table 10-15: Recalculated non-CO₂ GHG emissions (kt CO₂ eq yr⁻¹) for 2023 for drained organic soil. Ordered by descending absolute difference.

		Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			
Land use	GHG	NID 2026	NID 2025	difference	change description
Wetlands	N ₂ O	32.2	30.3	1.9	increased net emissions
Settlements	N ₂ O	15.3	16.6	-1.2	decreased net emissions
Cropland	CH ₄	99.9	98.7	1.2	increased net emissions

		Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			
Land use	GHG	NID 2026	NID 2025	difference	change description
Forest land	N ₂ O	149.2	148.1	1.1	increased net emissions
Settlements	CH ₄	20.7	21.5	-0.7	decreased net emissions
Wetlands	CH ₄	10.3	9.8	0.5	increased net emissions
Forest land	CH ₄	55.1	54.7	0.4	increased net emissions

- All observed changes were contributed by updates in the NFI database and extrapolation. Additionally, the improvements to the backcasting correction contributes to minor changes during the period 1990-2009
- Updates in the classification of settlement type have resulted in change in emission factor composition.

10.1.1.4.10 4(III) Direct and Indirect N₂O emissions from N mineralization and immobilisation

There has been a decrease in net emissions of -1.5 kt CO₂ eq (from 26.1 kt CO₂ eq to 24.6 kt CO₂ eq) for direct and indirect N₂O emissions.

Table 10-16: Recalculated N₂O emissions (kt CO₂ eq yr⁻¹) from N mineralization/immobilization for 2023. Ordered by descending absolute difference.

Land-use change	type of emission	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
		NID 2026	NID 2025	difference	
Lands converted to settlements	Direct	12.3	13.1	-0.8	decreased net emissions
Lands converted to cropland	Direct	6.0	6.3	-0.3	decreased net emissions
Lands converted to settlements	Indirect (leaching)	2.3	2.4	-0.1	decreased net emissions
Grasslands remaining grasslands	Direct	2.2	2.3	-0.1	decreased net emissions
Lands converted to cropland	Indirect (leaching)	1.1	1.2	-0.1	decreased net emissions
Grasslands remaining grasslands	Indirect (leaching)	0.4	0.4	0.0	Negligible change
Forest land remaining forest land	Direct	0.2	0.2	0.0	Negligible change
Lands converted to forest land	Direct	0.2	0.2	0.0	Negligible change

- Observed changes were partly due to updates of the NFI area and extrapolation.
- Additionally, updates in the soil model for forest rem. forest land (Yasso07 to Yasso20), resulted in minor changes in the N-mineralization for mineral soil with carbon loss.

10.1.1.4.11 4(IV) Biomass burning

There have been negligible changes in the recalculations for biomass burning non-CO₂ GHG.

Table 10-17: Recalculated non-CO₂ GHG emissions (kt CO₂ eq yr⁻¹) for 2023 forest land wildfires. Ordered by descending absolute difference.

GHG	Emissions for 2023 (kt CO ₂ equivalents yr ⁻¹)			change description
	NID 2026	NID 2025	difference	
CH ₄	3.1	3.1	0.0	Negligible change
N ₂ O	1.6	1.6	0.0	Negligible change

10.1.1.5 Waste

10.1.1.5.1 5A Managed waste disposal sites

Updated activity data. The amount of landfilled biological waste and recovered amounts of methane has been updated for 2022 and 2023. The updated activity data has only led to minor reductions in the CH₄ emissions.

10.1.1.5.2 5C Waste incineration

Revised emission factor. The emission factor for fossil CO₂ from waste incineration has been updated in the period of 2019-2023. See section 10.1.1.1.2 for further explanation.

Reallocation. The allocation of emissions between 5C and 1A1A have been corrected for the entire time series. This gives minor changes in emissions, only detectable for N₂O in 1990.

10.1.1.5.3 5D Domestic wastewater

Correction of errors. There has been an underestimation of emissions of N₂O from plants for the entire time series as reported emissions from large treatment plants with nitrogen removal had been removed from the calculation by mistake. The emissions are included from 1994 in the present submission and result in an increase in the N₂O emissions of the order of 30% yearly over the past decade. Prior to 1994 there were no treatment plant with nitrogen removal in Norway. An illustration of the effect of the correction is given in Figure 10.3.

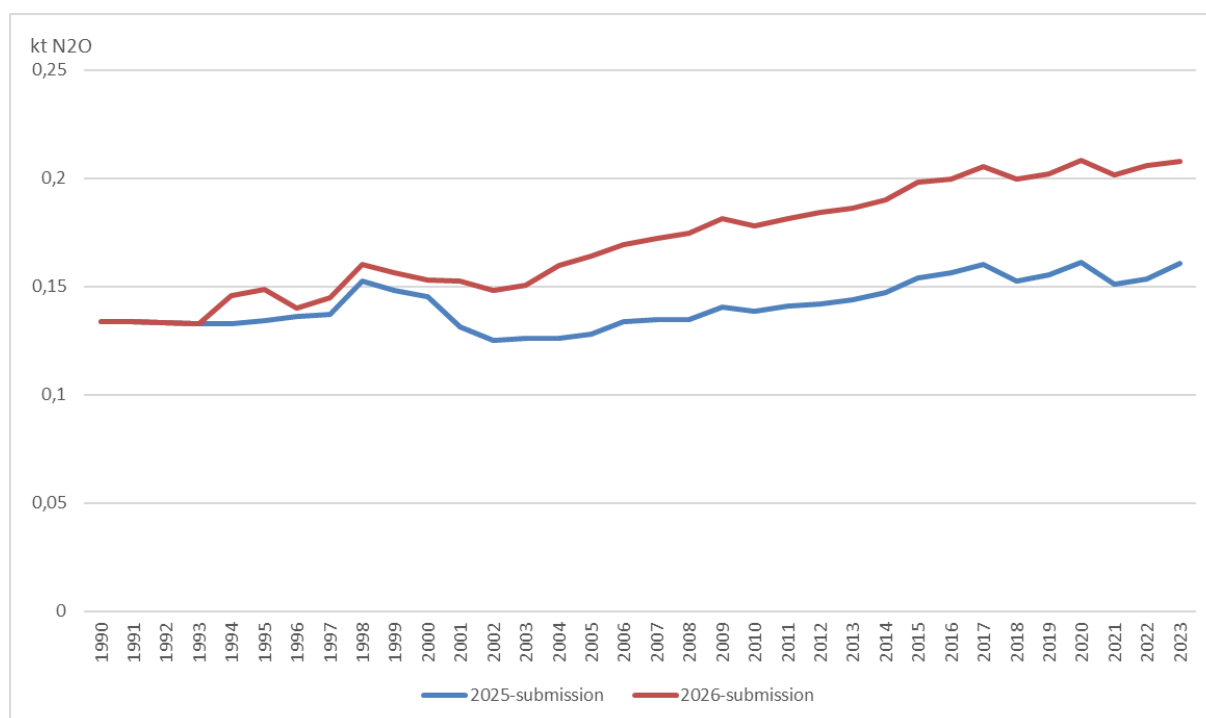


Figure 10.3: Comparison of N₂O emissions from domestic wastewater between the 2025- and 2026-submissions.

10.2 Implications for emission and removal levels

The overall impact of recalculations without the LULUCF-sector, was minor, adding up to a decrease of -0.30% (152 ktonnes CO₂ equivalents) in 1990 and a decrease of 0.26% (123 ktonnes) in 2023. See Table 1-18.

Recalculations in the LULUCF sector resulted in changes in the total level of greenhouse gas emissions with LULUCF for all years in the time series. According to the most recent estimates, the emissions in 1990 were 3.6% higher (about 384 ktonnes CO₂ equivalents) than in the previous submission and 18.47% higher (2 789 ktonnes) in 2023. See chapter 10.1.1.1.4 for more information on the recalculations in the LULUCF-sector.

Table 10-18 shows the effects of recalculations on the total emission figures for CO₂ equivalents for the period 1990-2022.

Table 10-18 Implications of recalculations for total emissions (including and excluding LULUCF). 1000 tonnes CO₂ equivalents.

Year	Without LULUCF			With LULUCF		
	Previous submission	Latest submission	Difference due to recalculations	Previous submission	Latest submission	Difference due to recalculations
1990	51 348	51 196	-152	40 752	40 983	232
1991	48 987	48 833	-154	37 415	37 907	492
1992	47 450	47 295	-155	36 452	36 708	256
1993	49 379	49 230	-149	36 947	36 890	-58
1994	51 331	51 167	-164	40 134	40 009	-125
1995	51 741	51 575	-165	37 630	38 361	731
1996	54 641	54 474	-167	44 774	45 625	851
1997	54 618	54 460	-157	41 714	42 789	1 075
1998	54 693	54 534	-159	40 448	41 674	1 226
1999	55 696	55 543	-153	35 984	38 064	2 080
2000	55 091	54 931	-160	38 111	39 770	1 659
2001	56 341	56 181	-161	34 727	36 581	1 853
2002	55 031	54 874	-157	32 202	34 191	1 989
2003	55 653	55 484	-169	33 781	35 438	1 657
2004	56 026	55 876	-150	33 851	35 079	1 228
2005	54 895	54 745	-150	30 746	32 278	1 532
2006	54 868	54 729	-138	35 612	37 035	1 423
2007	56 546	56 415	-131	35 766	37 003	1 237
2008	55 024	54 896	-128	29 281	30 486	1 205
2009	52 538	52 401	-138	28 165	29 610	1 444
2010	54 853	54 713	-140	29 238	29 296	58
2011	53 846	53 704	-141	28 888	29 415	527
2012	53 256	53 118	-138	29 173	29 719	546
2013	53 479	53 334	-145	32 774	33 340	566
2014	53 876	53 739	-136	35 357	35 587	230
2015	54 408	54 282	-125	39 594	39 976	382
2016	53 523	53 394	-128	40 161	39 873	-289
2017	52 836	52 676	-160	37 217	37 896	678
2018	52 986	52 839	-147	40 336	42 886	2 550
2019	51 219	51 086	-133	42 842	43 915	1 072
2020	49 521	49 373	-149	34 016	33 493	-522
2021	49 372	49 177	-195	39 259	44 641	5 382
2022	48 986	48 825	-161	40 452	39 769	-682
2023	46 675	46 552	-123	31 571	34 237	2 666

Table 10-19 to Table 10-24 show the effects of recalculations on the total emission figures for CO₂, CH₄, N₂O, HFCs, PFCs and SF₆.

Table 10-19: Implications of recalculations for CO₂ emissions (kt, including and excluding LULUCF).

Year	Excluding LULUCF			Including LULUCF		
	Previous submission	Latest submission	Difference due to recalculation	Previous submission	Latest submission	Difference due to recalculation
1990	34 546	34 992	446	23 539	24 376	837
1991	32 962	33 450	487	20 976	22 115	1 139
1992	33 800	34 385	585	22 387	23 389	1 002
1993	35 282	35 930	648	22 438	23 183	745
1994	37 158	37 843	686	25 548	26 278	729
1995	37 707	38 449	742	23 183	24 826	1 643
1996	40 766	41 519	753	30 484	32 258	1 775
1997	40 856	41 623	767	27 532	29 534	2 002
1998	41 052	41 816	765	26 384	28 537	2 153
1999	41 784	42 589	805	21 647	24 688	3 041
2000	41 245	42 111	866	23 839	26 526	2 686
2001	42 588	43 501	913	20 547	23 475	2 928
2002	41 788	42 553	765	18 529	21 441	2 912
2003	43 277	43 892	615	20 974	23 415	2 441
2004	43 715	44 241	527	21 110	23 014	1 904
2005	42 872	43 261	389	18 292	20 362	2 071
2006	43 533	43 845	312	23 839	25 711	1 872
2007	45 296	45 596	300	24 082	25 748	1 666
2008	44 471	44 687	215	18 285	19 831	1 546
2009	42 901	43 087	186	18 088	19 853	1 766
2010	45 489	45 641	152	19 427	19 776	348
2011	44 628	44 753	125	19 225	20 016	791
2012	44 119	44 235	116	19 589	20 386	798
2013	44 390	44 513	123	23 238	24 069	831
2014	44 796	44 959	163	25 829	26 357	528
2015	45 340	45 518	178	30 077	30 761	684
2016	44 529	44 703	174	30 708	30 719	11
2017	44 034	44 165	130	27 954	28 921	967
2018	44 302	44 441	139	31 190	34 024	2 834
2019	42 706	42 845	138	33 872	35 212	1 341
2020	41 113	41 224	112	25 149	24 885	-264
2021	40 922	40 970	49	30 347	35 970	5 623

Year	Excluding LULUCF			Including LULUCF		
	Previous submission	Latest submission	Difference due to recalculation	Previous submission	Latest submission	Difference due to recalculation
2022	40 707	40 796	89	31 719	31 284	-435
2023	38 757	38 876	120	23 196	26 103	2 907

Table 10-20: Implications of recalculations for CH₄ emissions (including LULUCF).

Year	CH ₄ emissions (kt)			CH ₄ emissions (kt CO ₂ eq.)		
	Previous submission	Latest submission	Difference due to recalculation	Previous submission	Latest submission	Difference due to recalculation
1990	251	246	-5	7 038	6 894	-143
1991	245	240	-5	6 866	6 720	-146
1992	249	243	-5	6 958	6 812	-146
1993	253	248	-5	7 095	6 955	-140
1994	257	252	-6	7 201	7 045	-156
1995	258	252	-6	7 221	7 064	-157
1996	258	252	-6	7 221	7 066	-155
1997	258	253	-5	7 237	7 091	-146
1998	250	244	-5	6 989	6 842	-147
1999	248	243	-5	6 952	6 809	-143
2000	249	243	-5	6 960	6 811	-149
2001	248	243	-6	6 949	6 794	-155
2002	242	236	-5	6 763	6 611	-152
2003	240	234	-6	6 717	6 563	-155
2004	235	230	-5	6 593	6 444	-149
2005	228	222	-5	6 373	6 225	-148
2006	222	217	-5	6 219	6 079	-140
2007	225	221	-5	6 312	6 175	-137
2008	218	214	-5	6 118	5 978	-139
2009	218	213	-5	6 109	5 965	-144
2010	217	212	-5	6 066	5 928	-138
2011	209	204	-5	5 849	5 714	-135

Year	CH ₄ emissions (kt)			CH ₄ emissions (kt CO ₂ eq.)		
	Previous submission	Latest submission	Difference due to recalculation	Previous submission	Latest submission	Difference due to recalculation
2012	207	202	-5	5 798	5 666	-132
2013	204	200	-5	5 724	5 590	-134
2014	203	198	-5	5 677	5 540	-137
2015	203	197	-5	5 671	5 525	-146
2016	201	196	-5	5 639	5 490	-149
2017	198	193	-5	5 555	5 409	-146
2018	195	190	-5	5 463	5 325	-138
2019	187	182	-5	5 242	5 109	-132
2020	187	182	-5	5 227	5 094	-133
2021	187	182	-5	5 222	5 094	-129
2022	185	181	-5	5 189	5 056	-134
2023	179	175	-4	5 013	4 887	-126

Table 10-21: Implications of recalculations for N₂O emissions (including LULUCF).

Year	N ₂ O emissions (kt)			N ₂ O emissions (kt CO ₂ eq.)		
	Previous submission	Latest submission	Difference due to recalculations	Previous submission	Latest submission	Difference due to recalculations
1990	15	15	0	4 031	3 918	-113
1991	15	13	-2	3 900	3 439	-461
1992	13	14	1	3 421	3 612	190
1993	15	15	0	4 049	3 920	-129
1994	15	13	-2	3 918	3 442	-476
1995	13	14	1	3 439	3 615	175
1996	14	14	0	3 612	3 669	57
1997	14	14	0	3 662	3 702	40
1998	14	14	0	3 695	3 720	25
1999	14	14	0	3 715	3 715	0
2000	14	14	0	3 709	3 796	88
2001	14	15	1	3 790	3 961	171
2002	15	14	-1	3 954	3 793	-161
2003	14	14	0	3 786	3 705	-81

Year	N ₂ O emissions (kt)			N ₂ O emissions (kt CO ₂ eq.)		
	Previous submission	Latest submission	Difference due to recalculations	Previous submission	Latest submission	Difference due to recalculations
2004	14	15	1	3 693	3 925	232
2005	15	14	0	3 913	3 802	-111
2006	14	15	1	3 789	3 934	144
2007	15	15	0	3 918	4 007	89
2008	15	14	-1	3 991	3 710	-281
2009	14	13	-1	3 693	3 559	-134
2010	13	12	-1	3 541	3 160	-382
2011	12	10	-2	3 141	2 644	-497
2012	10	10	0	2 625	2 547	-78
2013	10	10	0	2 529	2 579	50
2014	10	10	0	2 560	2 577	17
2015	10	10	0	2 558	2 552	-6
2016	10	10	0	2 533	2 579	46
2017	10	10	0	2 561	2 617	56
2018	10	10	0	2 597	2 563	-35
2019	10	9	0	2 543	2 513	-30
2020	9	9	0	2 493	2 499	6
2021	9	10	0	2 479	2 532	53
2022	9	9	0	2 512	2 482	-30
2023	9	9	0	2 462	2 493	31

Table 10-22: Implications of recalculations for HFC emissions (including LULUCF).

Year	HFC emissions (kt CO ₂ eq.)		
	Previous submission	Latest submission	Difference due to recalculations
1990	0	0	0
1991	1	1	0
1992	3	3	0
1993	33	33	0
1994	50	50	0
1995	92	92	0
1996	123	123	0

	HFC emissions (kt CO ₂ eq.)		
Year	Previous submission	Latest submission	Difference due to recalculations
1997	187	187	0
1998	247	247	0
1999	310	310	0
2000	357	357	0
2001	453	453	0
2002	489	489	0
2003	491	491	0
2004	504	504	0
2005	520	520	0
2006	555	555	0
2007	593	593	0
2008	649	649	0
2009	695	695	0
2010	761	761	0
2011	816	816	0
2012	856	856	0
2013	909	909	0
2014	900	899	0
2015	872	872	0
2016	871	871	0
2017	878	878	0
2018	850	850	0
2019	833	833	0
2020	808	808	0
2021	793	793	0
2022	753	753	0
2023	768	768	0

Table 10-23: Implications of recalculations for PFC emissions (in CO₂ eq. including LULUCF).

	PFC emissions (kt CO ₂ eq.)		
Year	Previous submission	Latest submission	Difference due to recalculations
1990	3 500	3 500	0
1991	3 106	3 106	0
1992	2 369	2 369	0
1993	2 379	2 379	0
1994	2 104	2 104	0
1995	2 079	2 079	0
1996	1 893	1 893	0
1997	1 691	1 691	0
1998	1 538	1 538	0
1999	1 437	1 437	0
2000	1 364	1 364	0
2001	1 376	1 376	0
2002	1 490	1 490	0
2003	945	945	0
2004	914	914	0
2005	858	858	0
2006	772	772	0
2007	855	855	0
2008	805	805	0
2009	394	394	0
2010	214	214	0
2011	236	236	0
2012	180	180	0
2013	163	163	0
2014	161	161	0
2015	132	132	0
2016	167	167	0
2017	118	118	0
2018	133	133	0
2019	157	157	0
2020	145	149	4
2021	223	225	2
2022	122	123	1

	PFC emissions (kt CO ₂ eq.)		
Year	Previous submission	Latest submission	Difference due to recalculations
2023	94	94	0

Table 10-24: Implications of recalculations for SF₆ emissions (in CO₂ eq. including LULUCF).

	SF ₆ emissions (kt CO ₂ eq.)		
Year	Previous submission	Latest submission	Difference due to recalculations
1990	2 163	2 163	0
1991	2 044	2 044	0
1992	693	693	0
1993	725	725	0
1994	863	863	0
1995	598	598	0
1996	564	564	0
1997	570	570	0
1998	714	714	0
1999	859	859	0
2000	919	919	0
2001	778	778	0
2002	234	234	0
2003	222	222	0
2004	269	269	0
2005	306	306	0
2006	209	209	0
2007	73	73	0
2008	63	63	0
2009	58	58	0
2010	70	70	0
2011	55	55	0
2012	54	54	0
2013	57	57	0
2014	50	50	0
2015	69	69	0

	SF ₆ emissions (kt CO ₂ eq.)		
Year	Previous submission	Latest submission	Difference due to recalculations
2016	63	63	0
2017	58	58	0
2018	55	55	0
2019	70	70	0
2020	76	76	0
2021	72	66	-6
2022	71	59	-12
2023	71	52	-19

Table 10-25 to Table 10-29 show the effects of recalculations for CO₂ equivalents per sector.

Table 10-25: Implications of recalculations for emissions in the energy sector (in kt CO₂ eq.).

Year	Previous submission	Latest submission	Difference due to recalculations
1990	28 339	28 337	-2
1991	27 243	27 240	-3
1992	28 289	28 285	-4
1993	29 382	29 378	-4
1994	30 973	30 969	-4
1995	31 404	31 400	-5
1996	34 456	34 451	-5
1997	34 208	34 204	-5
1998	34 178	34 174	-5
1999	35 158	35 153	-4
2000	34 239	34 235	-5
2001	35 967	35 962	-5
2002	35 791	35 787	-4
2003	37 050	37 047	-3
2004	36 835	36 832	-3
2005	36 379	36 376	-3
2006	37 239	37 237	-2
2007	38 985	38 983	-2

Year	Previous submission	Latest submission	Difference due to recalculations
2008	37 696	37 694	-2
2009	37 676	37 675	-2
2010	39 239	39 235	-5
2011	38 093	38 091	-2
2012	37 665	37 663	-3
2013	37 749	37 743	-6
2014	37 990	37 993	3
2015	38 460	38 469	9
2016	37 691	37 704	13
2017	37 118	37 121	2
2018	37 249	37 259	10
2019	35 644	35 653	8
2020	33 890	33 888	-2
2021	33 659	33 631	-28
2022	33 391	33 462	71
2023	32 071	32 130	59

Table 10-26: Implications of recalculations for emissions in the IPPU sector (in kt CO₂ eq.).

Year	Previous submission	Latest submission	Difference due to recalculations
1990	14 815	14 701	-115
1991	13 685	13 584	-101
1992	11 054	10 951	-104
1993	11 838	11 734	-104
1994	12 167	12 055	-112
1995	12 027	11 918	-109
1996	11 921	11 807	-115
1997	12 232	12 120	-112
1998	12 538	12 425	-113
1999	12 593	12 484	-110
2000	12 885	12 779	-105
2001	12 490	12 385	-105
2002	11 632	11 525	-108
2003	11 058	10 949	-109
2004	11 780	11 669	-111

Year	Previous submission	Latest submission	Difference due to recalculations
2005	11 326	11 225	-100
2006	10 588	10 495	-93
2007	10 555	10 462	-94
2008	10 509	10 420	-89
2009	8 138	8 063	-75
2010	8 887	8 797	-90
2011	9 010	8 918	-92
2012	8 924	8 828	-96
2013	9 031	8 934	-97
2014	9 070	8 956	-114
2015	9 162	9 064	-98
2016	9 066	8 971	-94
2017	9 051	8 929	-122
2018	9 104	8 988	-116
2019	9 113	9 021	-92
2020	9 184	9 068	-116
2021	9 336	9 191	-145
2022	9 357	9 151	-206
2023	8 612	8 451	-161

Table 10-27: Implications of recalculations for emissions in the agriculture sector (in kt CO₂ eq).

Year	Previous submission	Latest submission	Difference due to recalculations
1990	5 060	4 928	-132
1991	4 996	4 861	-135
1992	4 968	4 834	-134
1993	4 948	4 821	-128
1994	4 959	4 816	-144
1995	5 006	4 862	-145
1996	5 046	4 903	-143
1997	4 989	4 856	-134
1998	4 977	4 842	-135
1999	4 973	4 842	-132
2000	4 824	4 687	-137
2001	4 763	4 619	-144

Year	Previous submission	Latest submission	Difference due to recalculations
2002	4 744	4 602	-141
2003	4 827	4 682	-145
2004	4 790	4 650	-140
2005	4 808	4 668	-140
2006	4 716	4 583	-133
2007	4 717	4 586	-131
2008	4 695	4 562	-133
2009	4 658	4 521	-137
2010	4 565	4 431	-135
2011	4 571	4 439	-132
2012	4 578	4 449	-129
2013	4 623	4 492	-131
2014	4 725	4 591	-134
2015	4 787	4 644	-143
2016	4 833	4 687	-146
2017	4 803	4 661	-143
2018	4 809	4 677	-132
2019	4 759	4 632	-127
2020	4 772	4 643	-128
2021	4 826	4 699	-126
2022	4 716	4 584	-132
2023	4 530	4 405	-125

Table 10-28: Implications of recalculations for emissions in the LULUCF sector (in kt CO₂ eq).

Year	Previous submission	Latest submission	Difference due to recalculations
1990	-10 596	-10 212	384
1991	-11 571	-10 926	645
1992	-10 998	-10 587	411
1993	-12 432	-12 340	92
1994	-11 197	-11 158	39
1995	-14 111	-13 215	896
1996	-9 867	-8 849	1 018
1997	-12 904	-11 672	1 232
1998	-14 244	-12 860	1 385

Year	Previous submission	Latest submission	Difference due to recalculations
1999	-19 712	-17 479	2 233
2000	-16 980	-15 161	1 819
2001	-21 614	-19 600	2 014
2002	-22 830	-20 683	2 146
2003	-21 872	-20 046	1 825
2004	-22 175	-20 797	1 378
2005	-24 149	-22 467	1 682
2006	-19 255	-17 694	1 561
2007	-20 780	-19 412	1 368
2008	-25 743	-24 410	1 334
2009	-24 373	-22 791	1 582
2010	-25 615	-25 417	198
2011	-24 957	-24 289	668
2012	-24 083	-23 399	684
2013	-20 705	-19 994	710
2014	-18 519	-18 153	366
2015	-14 814	-14 307	508
2016	-13 361	-13 522	-161
2017	-15 619	-14 780	838
2018	-12 650	-9 953	2 697
2019	-8 376	-7 171	1 205
2020	-15 506	-15 879	-373
2021	-10 113	-4 536	5 577
2022	-8 534	-9 055	-521
2023	-15 104	-12 315	2 789

Table 10-29: Implications of recalculations for emissions in the waste sector (in kt CO₂ eq.).

Year	Previous submission	Latest submission	Difference due to recalculations
1990	2 670	2 670	0
1991	2 559	2 559	0
1992	2 536	2 536	0
1993	2 544	2 544	0
1994	2 527	2 531	3
1995	2 541	2 545	4

Year	Previous submission	Latest submission	Difference due to recalculations
1996	2 444	2 445	1
1997	2 399	2 402	2
1998	2 213	2 215	2
1999	2 147	2 149	2
2000	2 256	2 258	2
2001	2 190	2 196	6
2002	2 081	2 088	6
2003	2 076	2 083	6
2004	2 079	2 087	9
2005	1 975	1 985	9
2006	1 999	2 009	9
2007	1 980	1 990	10
2008	1 904	1 915	11
2009	1 869	1 880	11
2010	1 991	2 001	10
2011	2 024	2 035	11
2012	1 949	1 961	11
2013	1 925	1 937	11
2014	1 912	1 923	11
2015	1 823	1 835	12
2016	1 763	1 775	12
2017	1 702	1 713	12
2018	1 659	1 671	12
2019	1 546	1 556	10
2020	1 526	1 534	7
2021	1 423	1 430	8
2022	1 399	1 403	4
2023	1 355	1 357	2

10.3 Implications for emission and removal trends, including time-series consistency

The national emissions without LULUCF decreased by 9.1% between base year (1990) and 2023, which is equal to the figure in the previous submission. When including LULUCF in the national totals, the trend between 1990 and 2023 is -16.5% in the latest submission, while it was -22.5% in the previous submission, See Table 10-30.

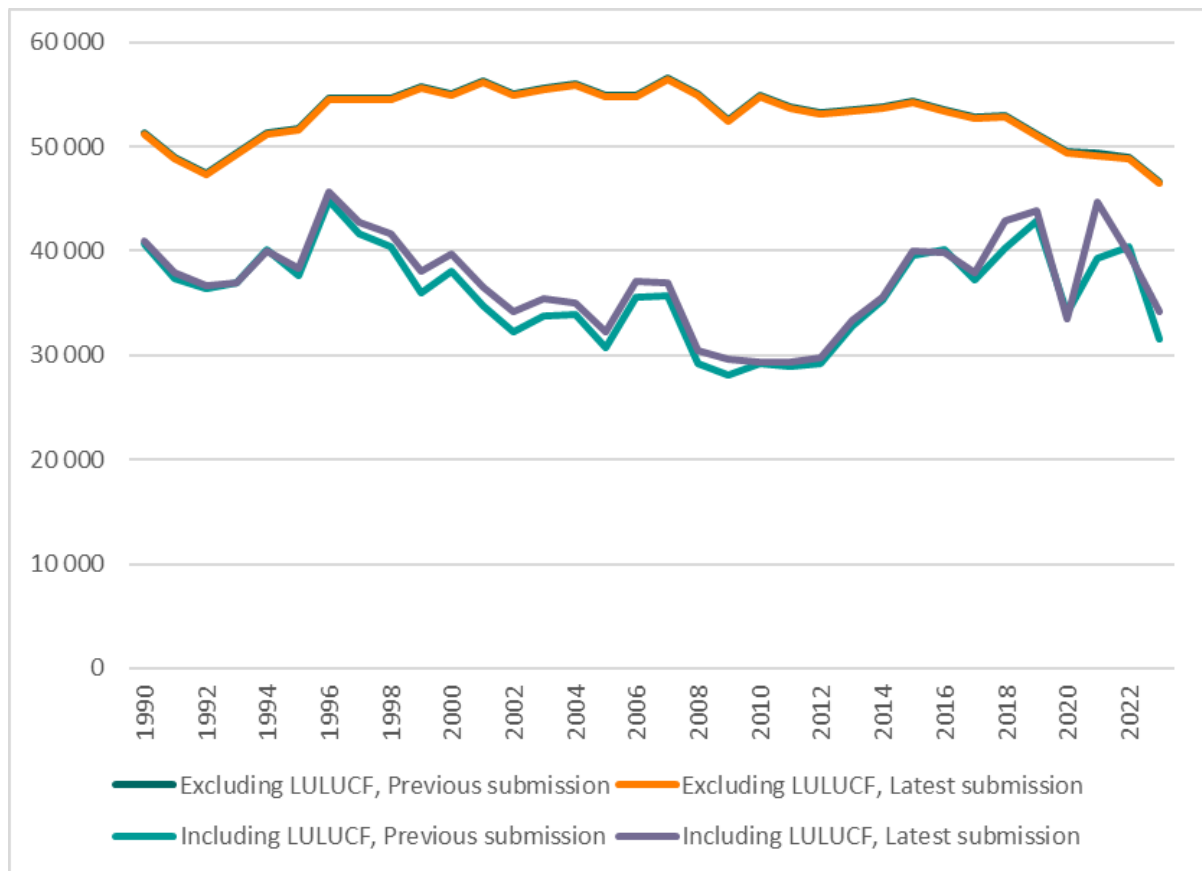


Figure 10.4: Total emissions with and without LULUCF. Previous and latest submission. 1000 tonnes CO₂ equivalents.

Table 10-30: Total emissions with and without LULUCF for 1990 and 2023. Previous and latest submission. 1000 tonnes CO₂ equivalents and per cent.

	Without LULUCF			With LULUCF		
	Previous submission	Latest submission	Difference due to recalculations	Previous submission	Latest submission	Difference due to recalculations
Emissions 1990	51 348	51 196	-152	40 752	40 983	232
Emissions 2023	46 675	46 552	-123	31 571	34 237	2 666
Trend ktonnes	-4 673	-4 644	29	-9 181	-6 746	2 435
Trend per cent	-9,1	-9,1	0,0	-22,5	-16,5	6

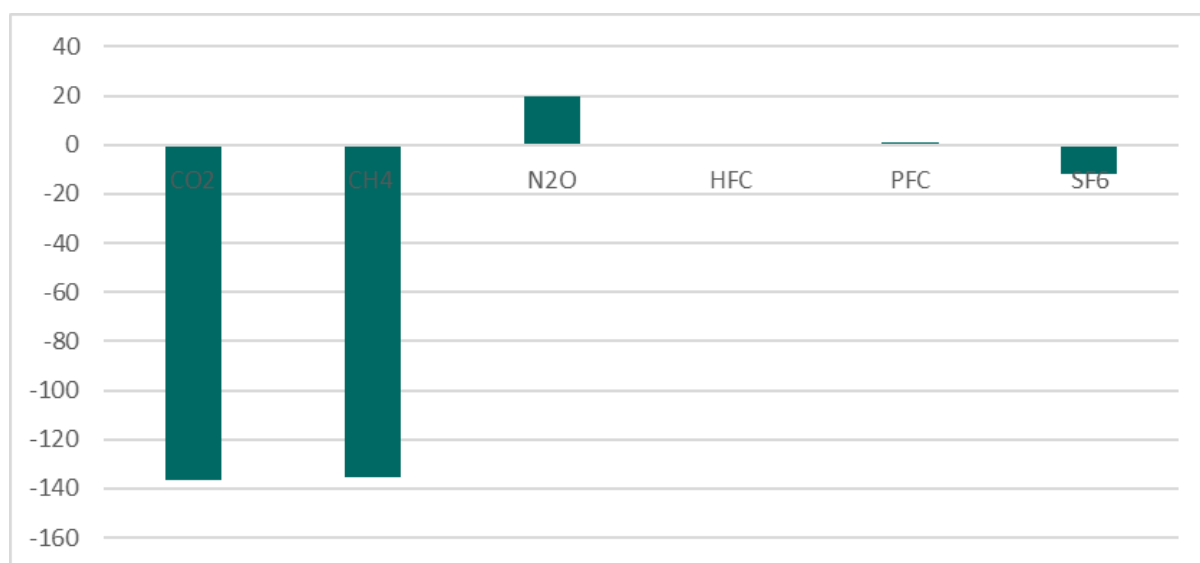


Figure 1-4: Difference in total emissions for 2023 per gas, excluding LULUCF, between latest and previous submission. 1000 tonnes CO₂ equivalents.

10.4 Areas of improvement and/or capacity building in response to the review process

The Norwegian Environment Agency coordinates the development and improvements of the inventory's different sectors. The technical expert review (TER) process has identified areas of improvements, and these have been recorded in a spread sheet together with the needs recognized by the Norwegian inventory experts to form an annual inventory improvement plan. Needs identified by use of the data for purposes other than reporting are also included. The overall aim of inventory improvement is to improve the accuracy and reduce uncertainties associated with the national inventory estimates. Each issue is assigned to a sector/theme and the improvement plan tracks where the issue has originated from and the organization/person responsible for following up the recommendations and other improvements. The improvement plan is discussed by the institutions in the national inventory system and each issue is given a priority and a timeframe. All three institutions in the national inventory system therefore have a shared responsibility for the development of the inventory. The issues are prioritized based on the recommendations from the TER and available human and financial resources.

This NID2026 is Norway's third GHG inventory reported under the Paris Agreement. Norway's GHG inventory reported in 2024 was reviewed in April 2025 and the review report was published in March 2026. Table 10-31 provides information on the status of implementation of the areas of improvement given in the most recently published UNFCCC review report.

Table 10-31: Status of implementation for areas of improvement identified through the technical expert review process.

Sector	CRT category / issue	Review recommendation/encouragement	Finding	Status of implementation	Chapter/section in the NID or CRT tables
General	Completeness	The TERT recommends that Norway, to the extent it is possible in the ETF reporting tool, make efforts to submit its CRTs ensuring that information is complete.	2.G.1	Addressed. Efforts have been made to ensure that the information in the CRT tables is complete. The examples in the review report are addressed.	CRT tables
Energy	1. General (energy sector) – all fuels – CO ₂	The TERT encourages Norway to report the reasons for the significant discrepancy resulting from the comparison of the reference approach and the sectoral approach in its NID and, where feasible, take steps to reduce the difference.	3.E.1	Addressed. The differences between the RA and the SA regarding CO ₂ are described in the NID.	Section 3.2.1 and Annex 3.
Energy	1.A Fuel combustion – sectoral approach – biomass – CO ₂ , CH ₄ , N ₂ O	The TERT recommends that Norway disaggregate the AD for the combustion of waste into biogenic and non-biogenic fractions in CRTs 1.A(a)s1 and 1.A(a)s2, and report CO ₂ , CH ₄ and N ₂ O emissions from the non-biogenic fraction under the relevant fuel category, while the biogenic fraction, report it under biomass, with CH ₄ and N ₂ O accounted for in the inventory and CO ₂ reported as an information item	3.E.2	Addressing: Norway has started a project in 2026 that will address this issue.	
Energy	1.A.3.b Road transportation – liquid fuels – CO ₂	The TERT recommends that Norway report the methods applied, including the rationale for their selection, to calculate the CO ₂ EFs for gasoline and diesel in accordance with good practice as elaborated in the 2006 IPCC Guidelines, and provide the underlying assumptions, data sources and references, clarifying how the continued use of constant EFs derived from a 1993 study remains representative of current fuel compositions, with a view to enhancing the transparency of the emission estimates for fossil fuel combustion in the road transport sector, which is a key category.	3.E.3	Addressing. Norway is currently evaluating the validity of the CO ₂ emission factors and researching sources for other relevant factors.	
Energy	1.A.3.d Domestic navigation – liquid fuels,	The TERT recommends that Norway include in its NID a detailed description of the methodology applied to allocate	3.E.4	Addressed. A more detailed description on both methodology and	Section 3.2.9

Sector	CRT category / issue	Review recommendation/encouragement	Finding	Status of implementation	Chapter/section in the NID or CRT tables
	gaseous fuel, biomass – CO ₂ , CH ₄ and N ₂ O	fuel consumption between domestic and international navigation, including data sources, classification procedures, and verification steps to ensure energy statistics consistency, and to document any quality checks, cross-references or expert judgment applied to validate assumptions for reseller and end-user sales.		activity data is updated in NID.	
Energy	1.B.2.a Oil – gaseous fuel – CO ₂	The TERT recommends that Norway estimate CO ₂ emissions from exploration for oil and gas (categories 1.B.2.a.1 and 1.B.2.b.1) using tier 1 methods and default parameters provided in the 2006 IPCC Guidelines (vol. 2, chap. 4). While estimation is not possible, the TERT recommends that Norway apply the appropriate notation key (“NE”) and provide a detailed explanation in the NID outlining data gaps, planned improvements, and the timeline for incorporating exploration emissions in the inventory.	3.E.5	Addressing. Norway has started work to establish a time series for fugitive emissions of CO ₂ from exploration.	
Energy	1.B.1.a Coal mining and handling – CH ₄	The TERT recommends that Norway use an appropriate method for key categories in accordance with the 2006 IPCC Guidelines. While this is not possible, the recommends that the Party document in the NID the reasons for not following the relevant decision tree from the 2006 IPCC Guidelines	3.E.6	Addressing. Norway has started work to establish a country specific emission factor for CH ₄ from coal mining and handling.	
IPPU	2D3	The TERT recommends that Norway reallocate indirect CO ₂ emissions from category 2.D.3 (Other) to CRT table 6 in accordance with paragraph 52 of the MPGs to ensure that national totals in CRT Summary ² are presented both with and without indirect CO ₂ emissions, in accordance with paragraph 52 of the MPGs	4.I.1	Addressed. The indirect CO ₂ emissions from 2.D.3.a (solvent use) and 2.D.3.b (road paving with asphalt) are now reallocated to CRT table 6.	NID chapters 4.5.3, 4.5.4 and 10 + the CRT tables.
IPPU	2.F Product uses as substitutes for ozone-depleting substances – HFCs	The TERT recommends that Norway improve the transparency and consistency of the methodological description in the NID by clarifying the approach applied, namely that recovery and disposal emissions for stand-alone commercial applications and domestic refrigeration are estimated using both end-of-life EF and AD from gas destruction. The TERT also recommends that the Party update the NID to remove outdated statements, and include	4.I.2	Addressed. The NID is updated.	NID chapter 4.7

Sector	CRT category / issue	Review recommendation/encouragement	Finding	Status of implementation	Chapter/section in the NID or CRT tables
		recovery efficiency values for stand-alone commercial applications and domestic refrigeration in table 4-46			
IPPU	2.F.1 Refrigeration and air conditioning – HFCs	The TERT recommends that Norway review the methodological approach applied for estimating emissions from leakage from category 2.F.1.e (mobile air conditioning) in accordance with the 2006 IPCC Guidelines, ensuring that the same method is used across the full time series.	4.I.3	Addressed. Documentation is included in the NID.	NID chapter 4.7
LULUCF	4. General (LULUCF) – CO ₂	The TERT encourages Norway to use the 2013 Wetlands Supplement, which considers off-site CO ₂ emissions from waterborne carbon loss, to estimate CO ₂ emissions from drained organic soils under categories 4.A-E.	6.L.1	Addressing. Norway plans to include off-site CO ₂ emissions from drained organic soils in all land-use categories where it occurs, following the methodology provided in the 2013 IPCC Wetlands Supplement. Implementation of this improvement is planned for the NID2027 submission. The work is documented in the NID2026 under the “Planned Improvements” sections of land-use categories 4.A–4.E.	All “Planned improvement” chapters from land-use categories 4A-E (remaining and conversions)
LULUCF	4. General (LULUCF) – CO ₂ , CH ₄ , N ₂ O	The TERT recommends that Norway use an appropriate method for key categories in accordance with the 2006 IPCC Guidelines. While this is not possible, The TERT recommends that the Party document in the NID why the methodological choice was not in line with the corresponding decision tree of the 2006 IPCC Guidelines.	6.L.2	Addressing. Norway acknowledges the recommendation to improve the estimation of emissions from drained organic soils. Work is currently underway to prepare a roadmap for the development and implementation of Tier 2 emission factors for Cropland, Forest Land and Grassland. The need for specific emission factors for drained organic soils Wetlands and Settlements will be evaluated at a later stage. As a first step on the plan, Norway	Chapters 6.4.1.5; 6.4.2.5; 6.5.1.5; 6.5.2.5; 6.6.1.5 and 6.6.2.5.

Sector	CRT category / issue	Review recommendation/encouragement	Finding	Status of implementation	Chapter/section in the NID or CRT tables
				is currently revising the classification of organic soils by adopting a single, consistent definition across all land-use categories. This work is expected to improve the identification and distribution of mineral and organic soils across NFI plots and will provide a stronger basis for the development of Tier 2 emission factors. In parallel, Norway is also assessing the feasibility of developing regional emission factors in collaboration with other Nordic countries. Implementation of these improvements will be considered in future reporting cycles. The plan is described in the relevant "Planned improvements" sections of the NID.	
LULUCF	4.A.1 Forest land remaining forest land – CO ₂ , CH ₄ , N ₂ O	The TERT recommends that Norway describe in its NID the rationale for the methodological choice and assumptions used to estimate carbon stock changes in drained mineral soils under forest land remaining forest land, including the applicability and limitations of the Yasso07 model, and provide a discussion of the potential effects of drainage status, legacy effects and national soil classification differences on the reported estimates, in line with the 2006 IPCC Guidelines.	6.L.3	"Addressing. No specific method is provided in the 2006 IPCC Guidelines for estimating carbon stock changes (CSC) in drained mineral forest soils. Therefore, CSC in all mineral soils under Forest Land Remaining Forest Land are estimated using the Yasso model, regardless of drainage status. This approach assumes that decomposition processes in mineral soils with drainage ditches are reasonably represented by the model structure and parameterization of Yasso, which is	Chapters 6.4.1.1.3 and 6.4.1.5

Sector	CRT category / issue	Review recommendation/encouragement	Finding	Status of implementation	Chapter/section in the NID or CRT tables
				based on data from mineral soils across a wide range of climatic conditions globally.	
LULUCF	Land representation – CO ₂ , CH ₄ , N ₂ O	The TERT recommends that Norway improve transparency in its NID by clearly describing how emissions and removals concerning emissions of organic soils under forest land, cropland and grassland were estimated where land-use changes occurred between these categories, specifically by explaining how the hierarchical soil classification approach is applied in practice to ensure consistency across the time series, and any assumptions or limitations that may affect the accuracy and comparability of soil carbon stock change estimates	6.L.4	However, Norway is currently revising the classification of organic and mineral soils (see Planned Improvements, Section 6.4.1.5). This work is expected to substantially reduce the number of NFI plots currently classified as mineral soils with drainage ditches. Following the implementation of this improvement, the need for a specific methodological approach to treat these areas will be re-evaluated."	Chapters 6.3.3 and 6.4.1.5
Waste	5.A Solid waste disposal on land – CH ₄	The TERT encourages Norway to consider applying updated waste-type-specific DOCf values as provided in the 2019 Refinement to the 2006 IPCC Guidelines with a view to improving the accuracy of CH ₄ emission estimates from SWDS.	7.W.1	Addressed. The NID has been revised to improve the description of stratification to soil classes across land-use categories. The updated section explains how the hierarchical approach is applied in practice, including in cases of land-use change between forest land, cropland and grassland. Visual schemes have been added to illustrate how the hierarchy of data sources is applied, and how the best available information is prioritized and applied consistently throughout the time series in cases of land-use change. It should be noted that Norway is currently revising the classification of organic soils by adopting a single, consistent definition	Chapter 6.3.3

Sector	CRT category / issue	Review recommendation/encouragement	Finding	Status of implementation	Chapter/section in the NID or CRT tables
				across all land-use categories (see Planned Improvements, Section 6.4.1.5). Once implemented, the hierarchical approach currently used to ensure consistency in land-use changes will no longer be required.	
Waste	5.A.1 Managed waste disposal sites – CH ₄	The TERT recommends that Norway ensure that the information provided in the NID on the amounts of CH ₄ recovered from landfills, flared, and used for energy purposes under categories 5.A.1 and 5.C.1 is consistent and coherent. The TERT further recommends the Party to clearly distinguish and separately report the quantities of biogas from other sources to avoid cross-category aggregation	7.W.2	Addressing. Norway has evaluated the impact of applying waste-type-specific DOCf values from 2019 Rf. Initial analysis show that this will impact emission values significantly, and Norway will initiate a project to implement the adjusted waste-specific DOCf values. This requires some adjustments to the waste accounting, specifically to the wood category, where park and garden waste must be accounted for separately. Norway is investigating methodology to do so.	
Waste	5.B.1 Composting – CH ₄ , N ₂ O	The TERT recommends that Norway use an appropriate method for key categories for estimating CH ₄ and N ₂ O emissions from category 5.B.1 (composting) in accordance with the 2006 IPCC Guidelines.	7.W.3	Addressed. Norway has updated the relevant table in the NID, such that numbers flared landfill gas presented under 5C are in accordance with the numbers for presented under 5A.	
Waste	5.D.1 Domestic wastewater – CH ₄	The TERT recommends that Norway include in its NID the AD on sludge removed from wastewater treatment plant and its subsequent management pathway across all relevant categories in kt dm for relevant years of the time series, in tabular format. The TERT also recommends that the Party describe in the NID the conversion	7.W.4	Addressing. Norway has applied a tier 2 method from 2017 and onwards, and adjustments has been done to years prior 2017 for a consistent time series. Activity data prior to 2017 is currently not	CRT tables

Sector	CRT category / issue	Review recommendation/encouragement	Finding	Status of implementation	Chapter/section in the NID or CRT tables
		factors applied between sludge dry mass, nitrogen and DC units, specifying the factors used for each wastewater treatment type.		sufficient to apply the method to the entire time series. Norway is working with collecting activity data prior to 2017 from composting facilities in order to apply the tier 2 method prior 2017 as well.	
IPPU	2.F Product uses as substitutes for ozone-depleting substances – HFCs	The TERT recommends that Norway improve the transparency and consistency of the methodological description in the NID by clarifying the approach applied, namely that recovery and disposal emissions for stand-alone commercial applications and domestic refrigeration are estimated using both end-of-life EF and AD from gas destruction. The TERT also recommends that the Party update the NID to remove outdated statements, and include recovery efficiency values for stand-alone commercial applications and domestic refrigeration in table 4-46	4.I.2	Adressed. The NID is updated.	NID chapter 4.7

- Add Novatech AS (2016a): Cold venting and Fugitive Emissions from Norwegian Offshore Oil and Gas Activities - Module 3A report - Best available technique (BAT) assessments. , M-665/2016.: Norwegian Environment Agency.
- Add Novatech AS (2016b): Cold Venting and Fugitive Emissions from Norwegian Offshore Oil and Gas Activities. Module 1. Surveying installations to identify potential emission sources., M-664/2016: Norwegian Environment Agency
- Add Novatech AS (2016c): Summary report. Cold venting and fugitive emissions from Norwegian offshore oil and gas activities. , M 515/2016.: Norwegian Environment Agency
- AEA (2007): *UK's national atmospheric inventory* Available at: <http://naei.defra.gov.uk/>
- Agency, N. E. (2021): Oppdrag om utslipp fra skipsfart: Norwegian Environment Agency. 58 pp
- Andrén, O., Kätterer, T. & Karlsson, T. (2004): ICBM regional model for estimations of dynamics of agricultural soil carbon pools. *Nutrient Cycling in Agroecosystems*, 70 (2): 231-239
- Aquateam COWI AS (2014): Forbruk av annen organisk gjødsel for å beregne utslipp av N₂O fra jordbruket. *Commissioned report by Norwegian Environment Agency (Miljødirektoratet)*, Report nr: 14041. Project nr: O-14110. 29 pp
- Aspeholen Åby, B., Wetlesen, M. & Aass, L. (2017): Enteric methane emissions from beef cows and sheep in Norway. Method description. Greenhouse Gas Emissions 1990-2017, Annexes to NIR 2019. (Norwegian Environment Agency). Department of Animal and Aquacultural Sciences, Norwegian University of Life Sciences.
- Aspeholen Åby, B., Samsonstuen, S. & Aass, L. (2018): Nex and VS from beef cows in Norway. Method description. Greenhouse Gas Emissions 1990-2017.: Norwegian University of Life Sciences
- Bakken, L. R., Marsteng, A. K. & Nadeem, S. (2012): Emissions of N₂O, CH₄, and CO₂ from VEAS waste water treatment plant: Department of Plant and Environmental Sciences, Norwegian University of Life Sciences
- Bang, J. R. (1993): Utslipp fra dieseldrevne anleggsmaskiner, arbeidsredskaper, traktorer og lokomotiver (Emissions from diesel-powered construction machinery, tools, tractors and locomotives). Oslo: National Institute of Technology (TI-Teknologisk institutt)
- Bárcena, T. G., Dalsgaard, L., Strand, L. T., Mohr, C. W., Bjørkelo, K., Eriksen, R. & Søgaard, G. (2021): *A Tier 1 methodology for estimating changes in soil organic carbon after land use change on mineral soil*: NIBIO
- Bechmann, M., Greipsland, I., Riley, H. & Eggestad, H. (2012): Nitrogen losses from agricultural areas - a fraction of applied fertilizer and manure. 31 pp
- Berg, B., Johansson, M.-B., Nilsson, Å., Gundersen, P. & Norell, L. (2009): Sequestration of carbon in the humus layer of Swedish forests — direct measurements. *Canadian Journal of Forest Research*, 39 (5): 962-975
- Berge, G. & Mellem, K. B. (2013): Kommunale avløp. Ressursinnsats, utslipp, rensing og slamdisponering 2012. Gebyrer 2013. Oslo: Statistics Norway
- Bergfald & Co AS (2000): Metangassutslipp fra Norsk og Russisk gruvedrift på Svalbard (Emissions of methane from coal mining at Svalbard). Oslo: Bergfald & Co AS
- Bjønnes, K. L. (2013): Emissions of HFCs and PFCs from product use in Norway. Documentation of methodologies: Statistics Norway, Documents 24/2013. <http://www.ssb.no/en/natur-og-miljo/artikler-og-publikasjoner/attachment/126338?ts=13f85bebb88>
- Björketun, U. & Nilsson, G. (2007): Skaderisker för motorcyklister (The risk of injury to motorcyclists), VTI report 566. Linköping: The Road Traffic Inspectorate (Vägtrafikinspektionen)

- Boldrin, A., Andersen, J. K. & Christensen, T. H. (2009): Environmental assessment of garden waste management in Århus Kommune (Miljøvurdering af haveaffald i Århus kommune) Technical University of Denmark - Miljø 3R
(<https://www.aarhus.dk/~media/Subsites/AVA/Om-AVA/Bibliotek/Rapporter-og-undersogelser/Aarhus-haveaffald-engelsk-rapport.pdf>)
- Bonesmo, H. & Gjerlaug-Enger, E. J. (2022): Estimating yearly numbers of animals, and enteric methane emissions, for pigs Methodologies for the Norwegian national inventory of GHG emissions *NIBIO REPORT*
- Borgen, S. K., Grønlund, A., Andrén, O., Kätterer, T., Tveito, O. E., Bakken, L. R. & Paustian, K. (2012): CO₂ emissions from cropland in Norway estimated by IPCC default and Tier 2 methods. *Greenhouse Gas Measurement and Management*, 2 (1): 1-17
- Breidenbach, J., Antón-Fernández, C., Petersson, H., McRoberts, R. E. & Astrup, R. (2014): Quantifying the model-related variability of biomass stock and change estimates in the Norwegian National Forest Inventory. *Forest Science*, 60 (1): 25-33
- Breidenbach, J., Granhus, A., Hysten, G., Eriksen, R. & Astrup, R. (2020): A century of National Forest Inventory in Norway – informing past, present, and future decisions. . *Forest Ecosystems*, 7(1): 46.
- Bruggen, C. v., Bannink, A., Groenestein, C. M., Huijsmans, J. F. M., Lagerwerf, L. A., Luesink, H.H., van der Sluis, S. M., Velthof, G. L. and Vonk, J. (2018): missions into the atmosphere from agricultural activities in 2016. Calculations using the NEMA model. *WOt-technical report*: Wageningen, The Statutory Research Tasks Unit for Nature and the Environment. 124 pp
- Brunner, I., Bakker, M. R., Björk, R. G., Hirano, Y., Lukac, M., Aranda, X., Børja, I., Eldhuset, T. D., Helmisaari, H. S., Jourdan, C., et al. (2013): Fine-root turnover rates of European forests revisited: an analysis of data from sequential coring and ingrowth cores. *Plant Soil*, 362 (1-2): 357-372
- Canada's National Forest Inventory (2008): *Documentation- Ground Plot Guidelines*. Available at: https://nfi.nfis.org/en/ground_plot
- Carbon Limits (2020a): Calculation of atmospheric nitrogen emissions from manure in Norwegian agriculture.
- Technical description of the revised model., M-1848: Norwegian Environment Agency. 36 pp
- Carbon Limits (2020b): Greenhouse gas emissions from biogas production from manure in Norwegian agriculture.
- Technical description of the revised model., M-1849: Norwegian Environment Agency
- Carbon Limits (2021): Methane emissions from enteric fermentation in Norwegian agriculture. Technical description of the revised model, M-2123
- Carbon Limits (2023): Calculation of atmospheric nitrogen emissions from crop residues in Norwegian agriculture. Technical description of the revised model.
- Carbon Limits (2024): Calculation of atmospheric nitrogen emissions from crop residues in Norwegian agriculture
- CMR (2011): Måle- og beregningsprogram for bestemmelse av utslipp av NMVOC I forbindelse med bøyelasting. Only in Norwegian
- Dalsgaard, L., Astrup, R., Antón-Fernández, C., Borgen, S. K., Breidenbach, J., Lange, H., Lehtonen, A. & Liski, J. (2016): Modeling Soil Carbon Dynamics in Northern Forests: Effects of Spatial and Temporal Aggregation of Climatic Input Data. *PLOS ONE*
- Dalsgaard, L., Kjønaas, O. J. & Lange, H. (2017): Forest soil carbon changes from measurements and models. Site-specific comparisons and implications for UNFCCC reporting. Ås: Norwegian Institute for Bioeconomy Research. 112 pp
- Dalsgaard, L., Hagenbo, A., Mohr, C. W., Kjønaas, O. J., Clarke, N., Søgaard, G. & Timmerman, V. (Unpublished manuscript): Simulated and measured soil carbon stocks and decadal changes in six boreal and north temperate forests.

- de Wit, H. A., Palosuo, T., Hylen, G. & Liski, J. (2006): A carbon budget of forest biomass and soils in southeast Norway calculated using a widely applicable method. *Forest Ecology and Management*, 225 (1–3): 15-26
- DeAngelis, D. L., Gardner, R. H. & Shugart Jr, H. H. (1981): Productivity of forest ecosystems studied during IBP: the woodlands data set. In Reichle, D. E. (ed.) *Dynamic properties of Forest Ecosystems*, pp. 567-672. Cambridge: Cambridge University Press
- Directorate for Health and Social Affairs (2013): Utviklingen i norsk kosthold 2012, Matforsyningsstatistikk og Forbruksundersøkelser. 12/2103. IS-2116, http://helsedirektoratet.no/publikasjoner/utviklingen-i-norsk-kosthold-langversjon-2013/Publikasjoner/IS-2116%20_langversjon.pdf
- DSB. (2016). *Personal communication with Reidun Mo* The Norwegian Directorate for Civil Protection.
- Daasvatn, L., Flugsrud, K., Høie, H., Rypdal, K. & Sandmo, T. (1992): Modell for beregning av nasjonale utslipp til luft. Dokumentasjon (Model for calculation of national air emissions. Documentation), Interne notater 92/17: Statistics Norway (SSB-Statistisk sentralbyrå)
- Daasvatn, L., Flugsrud, K., Hunnes, O. K. & Rypdal, K. (1994): Beregning av regionaliserte utslipp til luft. Beskrivelse av modell og metoder for estimering (Calculation of emissions to air on a regional basis. Description of a model and estimation methods), Notater 94/16: Statistics Norway (SSB-Statistisk sentralbyrå)
- EBA (2014): Expert judgement by Contractors Association - Building and Construction (EBA), Oslo, Norway.
- EEA (2001): EMEP/CORINAIR Atmospheric Emission Inventory Guidebook - 3rd edition, Technical report No 30: EEA-European Environment Agency
- EEA (2007): EMEP/CORINAIR Atmospheric Emission Inventory Guidebook - 2007, Technical report No 16/2007: EEA-European Environment Agency
- EEA (2013): EMEP-EEA air pollutant emission inventory guidebook, <http://www.eea.europa.eu/publications/emep-eea-guidebook-2013> (aviation factors in section 1.A.3.a Aviation annex.zip).
- EEA (2019): EMEP/EEA air pollutant emission inventory guidebook - 2019, <https://www.eea.europa.eu/publications/emep-eea-guidebook-2019>.
- EEA (2023): EMEP/EEA air pollutant emission inventory guidebook 2023. Technical guidance to prepare national emission inventories. .
- Emmett, B. A., Reynolds, B., Chamberlain, P. M., Rowe, E., Spurgeon, D., Brittain, S. A., Frogbrook, Z., Hughes, S., Lawlor, A. J., Poskitt, J., et al. (2007): Countryside Survey: Soils Report from 2007, CS Technical Report No. 9/07
- European Commission *Monitoring, reporting and verification of EU ETS emissions*. climate.ec.europa.eu. Available at: https://climate.ec.europa.eu/eu-action/eu-emissions-trading-system-eu-ets/monitoring-reporting-and-verification-eu-ets-emissions_en
- Exxonmobile (2009). Available at: http://www.oil.ie/files/documents/Product_Catalogue_Esso-Mobil_2009_No_Restriction.pdf
- FAO (2006): Global Forest Resource Assessment 2005: Progress Toward Sustainable Forest Management. *FAO Forestry Paper* (147)
- FAO (2012): Global ecological zones for FAO forest reporting: 2010 Update. *Forest Resources Assessment* FAO
- FAO. (Annually). FAOSTAT - Forestry Production and Trade. Available at: <http://www.fao.org/faostat/en/#data/FO>.
- Fedoryshyn, N. (2015): Beregning av CO₂-faktor for utslipp fra fossil del av avfall brent i forbrenningsanlegg. Dokumentasjon av metode. (Calculation of CO₂ factor for emissions from fossil fraction of incinerated waste. Documentation of method). Statistics Norway
- Finér, L., Ohashi, M., Noguchi, K. & Hirano, Y., (2011): Factors causing variation in fine root biomass in forest ecosystems. *Forest Ecology and Management*, 261 (2): 265-277

- Finstad, A., Flugsrud, K. & Rypdal, K. (2002): Utslipp til luft fra norsk luftfart 1989-2000 (Emissions to Air from Norwegian Air Traffic 1989-2000), Reports 2002/08: Statistics Norway (SSB-Statistisk sentralbyrå). 32 pp
- Flugsrud, K., Hoem, B. & Aasestad, K. (2010): Utslipp til luft av NO_x fra innenriks sjøfart og fiske (NO_x emissions to air from domestic navigation and fishing), Report 40/2010: Statistics Norway (SSB-Statistisk sentralbyrå). 46 pp
- Flugsrud, K. & Hoem, B. (2011): Uncertainties in the Norwegian greenhouse gas emission inventory, Reports 35/2011: Statistics Norway (SSB-Statistisk sentralbyrå). 51 pp
- Geir Husdal, Lene Osenbroch & Özlem Yetkinoglu (2016): Cold Venting and Fugitive Emissions from Norwegian Offshore Oil and Gas Sub-report 3B Abatement opportunities and reduction potentials. *Cold Venting and Fugitive Emissions from Norwegian Offshore Oil and Gas*, M-1772. 34 pp
- Grønlund, A., Sturite, I., Riley, H., Fystro, G. & Lunnan, T. (2014): Nitrogen i restavlinger. 18 pp
- Grönroos, J., Munther, J. & Luostarinen, J. (2017): Reports Of The Finnish Environment Institute, 37: Finnish Environment Institute, Centre for Sustainable Consumption and Production
- Grådahl, S., Johansen, S. T., Ravary, B., Andresen, B. & Tveit, H. (2007): Reduction of emissions from ferroalloy furnaces. In *Innovations in the Ferro Alloy Industry*, pp. 479-488. India: Macmillan
- Gundersen, G. I. & Rognstad, O. (2001): Lagring og bruk av husdyrgjødsel (Storage and use of manure), Reports 2001_39: Statistics Norway (SSB-Statistisk sentralbyrå)
- Gundersen, G. I. & Heldal, J. (2015): Bruk av gjødselressurser i jordbruket 2013. Metodebeskrivelse og resultater fra en utvalgsbasert undersøkelse (Use of inorganic and organic fertilisers in agriculture 2013). 84 pp
- Gundersen, G. I., Hoem B, Løkkevik P., Spilde D. (2005): Gjennomgang av metoder og datakilder i energiregnskapet. 49 pp
- Gustafsson, T. (2005): Improved structures for uncertainty analysis in the Swedish Greenhouse Gas Emission Inventory. *Commissioned report by the Swedish Environmental Protection Agency*, SMED Report No 69 2005: SMED-Swedish Methodology for Environmental Data
- Hans Oonk, C. L., Intars Cakars, Miroslav Havránek (2017): GREENHOUSE GAS EMISSIONS FROM BIOLOGICAL TREATMENT OF WASTE - OVERVIEW OF EXISTING MEASUREMENTS. 18 pp
- Hansen, K. L. (2007): Emission from consumption of HFCs, PFCs and SF₆ in Norway, Documents 2007/8: Statistics Norway (SSB-Statistisk sentralbyrå). 48 pp
- Hansen, M. C., Potapov, P. V., Moore, R., Hancher, M., Turubanova, S. A., Tyukavina, A., Thau, D., Stehman, S. V., Goetz, S. J., Loveland, T. R., et al., (2013): High-Resolution Global Maps of 21st-Century Forest Cover Change. *Science*, 342 (6160): 850-853
- Hansson, K., Helmisaari, H.-S., Sah, S. P. & Lange, H. (2013): Fine root production and turnover of tree and understory vegetation in Scots pine, silver birch and Norway spruce stands in SW Sweden. *Forest Ecology and Management*, 309: 58-65
- Hohle, E. E. (ed.) (2005): *Bioenergi. Miljø, teknikk og marked (Bio energy. Environment, technology and market)*, vol. 2. Brandbu: Energy Farm (Energigården-Senter for Bioenergi)
- Holmengen, N. & Kittilsen, M. O. (2009): Estimating emissions of NMVOC from solvent and other product use. Revised model, Reports 2009/14: Statistics Norway (SSB-Statistisk sentralbyrå). 77 pp
- Holmengen, N. & Fedoryshyn, N. (2015): Utslipp fra veitrafikken i Norge. Dokumentasjon av beregningsmetoder, data og resultater (Emissions from road traffic in Norway. Documentation of estimation methodologies, data and results): Statistics Norway
- Hovland, I. (2020): Handbok for driftsplanlegging 2020/2021.: NIBIO 254 pp
- Husdal, G., Osenbroch, L., Yetkinoglu, Ö. & Østebrøt, A. (2016): Cold venting and fugitive emissions from Norwegian offshore oil and gas activities Sub-report 2 Emission estimates and quantification methods, M-1771 | 2020: Add Novatech AS. 76 pp

- Härkönen, S., Lehtonen, A., Eerikäinen, K., Peltoniemi, M. & Mäkelä, A. (2011): Estimating forest carbon fluxes for large regions based on process-based modelling, NFI data and Landsat satellite images. *Forest Ecology and Management*, 262 (12): 2364-2377
- IAI (2005): The aluminium sector greenhouse gas protocol: International Aluminium Institute, IAI
- IMC (2000): Seam Gas Content Analysis: Technical Services Limited
- INFRAS (2022): *Handbook emission factors for road transport (HBEFA), Version 4.2*
- IPCC (2003): Good Practice Guidance for Land Use, Land-Use Change and Forestry: [Penman, J., M.Gytarsky, T. Hiraishi, T. Krug, D. Kruger, R. Pipatti, L. Buendia, K. Miwa, T. Ngara, K. Tanabe and F. Wagner (eds.)]. IPCC National Greenhouse Gas Inventories Programme. Institute for Global Environmental Strategies, Hayama, Kanagawa, Japan
- IPCC (2006): 2006 IPCC Guidelines for National Greenhouse Gas Inventories: Prepared by the National Greenhouse Gas Inventories Programme, Eggleston H.S., Buendia L., Miwa K., Ngara T. and Tanabe K. (eds). Published: IGES, Japan
- IPCC (2014): 2013 Supplement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories: Wetlands. In Hiraishi, T., Krug, T., Tanabe, K., Srivastava, N., Baasansuren, J., Fukuda, M. & Troxler, T. G. (eds) vol. wetlands supplement *Revised 1996 IPCC Guidelines for National Greenhouse Gas Inventories*
- IPCC (2019): 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories
- IVAM (2005): VOC emissions from cosmetics and cleaning agents. Amsterdam, the Netherlands: IVAM research and consultancy on sustainability
- Johansson L. Solvoll, K. (1999): Landsomfattende kostholdsundersøkelse blant menn og kvinner i alderen 16-79 år, Norkost 1997, Rapport nr. 2/1999: Statens råd for ernæring og fysisk aktivitet
- Karlengen, I. J., Svihus, B., Kjos, N. P. & Harstad, O. M. (2012): Husdyrgjødsel; oppdatering av mengder gjødsel og utskillelse av nitrogen, fosfor og kalium. Sluttrapport. (Manure; an update of amounts of manure and excretion of nitrogen, phosphorus and potassium. Final report). Ås: Departement of Animal and Aquacultural Sciences, Norwegian University of Life Sciences (Institutt for husdyr- og akvakulturvitenskap, NMBU-Norges miljø- og biovitenskapelige universitet)
- Karlsson, S. & Rodhe, L. (2002): Översyn av Statistiska Centralbyråns beräkning av ammoniakavgången i jordbruket – emissionsfaktorer för ammoniak vid lagring och spridning av stallgödsel (Review of Statistics Sweden's calculation of ammonia emissions from agriculture - emission factors for ammonia in storage and spreading of manure). Uppsala, Sweden: JTI – Institutet för jordbruks- och miljöteknik
- Kittilsen, M. O., Moe, S. H. & Ffedorshyn, N. (2018): Energy account and energy balance. Documentation of statistics production since statistics year 1990. *Documents 2018*, 46. <https://www.ssb.no/en/energi-og-industri/artikler-og-publikasjoner/energy-account-and-energy-balance>: Statistics Norway. 54 pp
- Kjos, N. P. (2023): Excretion of Dry Matter (DM) and Nitrogen (N) in Manure (Faeces and Urine) from pigs in Norway Norwegian University of Life Sciences (NMBU)
- Kjønaas, O. J., Økland, T., Andreassen, K., Stuanes, A., Nordbakken, J.-F., Røsberg, I., Lange, H. & Hylen, G. (2017): Repeated Sampling of two Tree Species Experiments in S.E. Norway. In *Forest soil carbon changes from measurements and models. Site-specific comparisons and implications for UNFCCC reporting*, pp. 18-59. Ås: Norwegian Institute for Bioeconomy Research
- Kjønaas, O. J., Bárcena, T. G., Hylen, G., Nordbakken, J. F. & Økland, T. (2021): Boreal tree species change as a climate mitigation strategy: impact on ecosystem C and N stocks and soil nutrient levels. *Ecosphere*, 12 (11): e03826

- Kjønaas, O. J., Clarke, N., Petrovičová, L. & Světlík, J. (2025): Assessing carbon stocks, C stock changes, and sensitivity analyses of factors affecting estimated C stocks in six Norwegian forest soils. *Scandinavian Journal of Forest Research*, 40 (7-8): 321-356
- Kjønaas, O. J., Skre, O., Strand, L. T., Børja, I., Clarke, N., de Wit, H. A., Eldhuset, T. D. & Lange, H. (Unpublished manuscript): Understorey vegetation matters: Above- and belowground carbon and nitrogen pools and accumulation rates in a Norwegian Norway spruce forest chronosequence. .
- Kolle, S. O. & Oguz-Alper, M. (2020): Bruk av gjødselressurser i jordbruket 2018. Metoder og resultater fra en utvalgsbasert undersøkelse Statistics Norway
- Kurz, W. A., Dymond, C. C., White, T. M., Stinson, G., Shaw, C. H., Rampley, G. J., Smyth, C., Simpson, B. N., Neilson, E. T., Trofymow, J. A., et al. (2009): CBM-CFS3: A model of carbon-dynamics in forestry and land-use change implementing IPCC standards. *Ecological Modelling*, 220 (4): 480-504
- Kvingedal, E., Tornsjo, B., Holtskog, S., G., H. & Rypdal, K. (2000): Verification of the Norwegian Emission Inventory. Comparing emission intensity values with similar countries, TA-1736/00: Norwegian Pollution Control Authority (SFT-Statens forurensingstilsyn), Statistics Norway (SSB-Statistisk sentralbyrå)
- Legg, C. (1995): *Heathland dynamics: A matter of scale*. Heaths and moorland: Cultural landscapes. Edinburgh: HMSO
- Lehtonen, A., Sievänen, R., Mäkelä, A., Mäkipää, R., Korhonen, K. T. & Hokkanen, T. (2004): Potential litterfall of Scots pine branches in southern Finland. *Ecological Modelling*, 180 (2-3): 305-315
- Limberakis, E., Vay, J. & Gronberg, S. (1987): Ferroalloy industry particulate emissions: Source category report, EPA/600/S7-86/039. Washington, D.C: U.S. Environmental Protection Agency, EPA
- Liski, J., Palosuo, T., Peltoniemi, M. & Sievänen, R. (2005): Carbon and decomposition model Yasso for forest soils. *Ecological Modelling*, 189 (1-2): 168-182
- Liski, J., Tuomi, M. & Rasinmäki, J. (2009): Yasso07 user-interface manual: Finnish Environment Institute (SYKE-Suomen ympäristökeskus/ Finlands miljöcentral). 14 pp
- Lone, K. R., Haugedal, S. R. & Mikkelsen, E. (2025): Utslippsfaktor for CO₂ fra avfallsforbrenning 2025, beregnet fra analyser av avfallssammensetning. Unpublished: Mepex
- Luostarinen, S., Grönroos, J., Hellstedt, M., Nousiainen, J. & Munther, J. (2017): Finnish Normative Manure System: System documentation and first results. Helsinki: Natural Resources Institute Finland. Natural resources and bioeconomy studies.
- Lussana, C., Tveito, O. E., Dobler, A. & Tunheim, K. (2019): seNorge_2018, daily precipitation, and temperature datasets over Norway. . *Earth Syst. Sci. Data* 11, 1531-1551.
- Løken, Ø., Eriksen, R., Astrup, R. & Eid, T. (2012): Den totale biomassen av trær i Norge. En tabellsamling, Ressursoversikt fra Skog og landskap 01/12: IV: Norwegian Forest and Landscape Institute (Norsk institutt for skog og landskap). 37 pp
- Låg, J. (1983). *Jordbunnskart. Nasjonalatlas for Norge, Hovedtema 2, landformer, berggrunn og løsmasser. Kartblad 2.3.1 (Foreløpig utgave)*. : Norges Geografiske Oppmåling.
- Magnussen, S., McRoberts, R. E., Breidenbach, J., Nord-Larsen, T., Ståhl, G., Fehrmann, L. & Schnell, S. (2020): Comparison of estimators of variance for forest inventories with systematic sampling-results from artificial populations. *Forest Ecosystems*: 1-19
- MARINTEK (2010): Emissions factors for CH₄, NO_x, particulates and black carbon for domestic shipping in Norway, revision 1. *Commissioned report by Norwegian Climate and Pollution Agency (Klif-Klima- og forurensningsdirektoratet)*, Report no. 222232.00.02. TA-2746: Authors: Nielsen, J.B. and D. Stenersen, MARINTEK-Norwegian Marine Technology Research Institute. 35 pp

- Marklund, L. G. (1988): Biomassafunktioner för tall, gran och björk i Sverige: biomass functions for pine, spruce and birch in Sweden, Rapport 45: Swedish University of Agricultural Sciences (SLU-Sveriges lantbruksuniversitet, Institutionen för skogstaxering). 73 pp
- Marthinsen, J., Sandberg, K. & Johansen, M. (2010): Fornybar andel i avfall til norske forbrenningsanlegg - oppdatering: Avfall Norge. 6/42 pp
- Martinsen, V., Mulder, J., Austrheim, G. & Myrsetrud, A. (2011): Carbon storage in low-alpine grassland soils: effects of different grazing intensities of sheep. . *European Journal of Soil Science*, 62(6): 822-833.
- Matamala, R., Gonzalez-Meler, M. A., Jastrow, J. D., Norby, R. J. & Schlesinger, W. H. (2003): Impacts of Fine Root Turnover on Forest NPP and Soil C Sequestration Potential. *Science*, 302 (5649): 1385-1387
- MEPEX (2020): Faktor for fossilt CO₂-utslipp ved forbrenning av avfall. 24 pp
- Mepex (2023): Utslippsfaktor for CO₂ fra biomasse, beregnet fra analyser av avfallssammensetning
- Miljødirektoratet (2021): Retningslinjer for rapportering fra petroleumsvirksomhet til havs. <https://www.miljodirektoratet.no/publikasjoner/2014/februar-2014/retningslinjer-for-rapportering-fra-petroleumsvirksomhet-til-havs/>: Norwegian Environment Agency. 24 pp
- Morken, J. & Nesheim, L. (2004): Utnytting og tap av næringsstoff i husdyrgjødsel - framtidige utfordringer. *Grønn kunnskap*, 8 (3): 51-64
- Morken, J., Ayoub, S. & Sapci, Z. (2013): Revision of the Norwegian model for estimating methane emission from manure management, IMT-Rapport 54/2013: Norwegian University of Life Sciences (NMBU-Norges miljø- og biovitenskapelige universitet). 10 pp
- Morten Seljeskog, Franziska Goile & Øyvind Skreiberg (2017): Recommended Revisions of Norwegian Emission Factors for Wood Stoves. *Energy Procedia*, 105: 1022-1028
- Muukkonen, P. & Lehtonen, A. (2004): Needle and branch biomass turnover rates of Norway spruce (*Picea abies*). *Canadian Journal of Forest Research*, 34: 2517-2527
- Muukkonen, P. & Mäkipää, R. (2006): Empirical biomass models of understory vegetation in boreal forests according to stand and site attributes. *Boreal Environment Research*, 11: 355-369
- Muukkonen, P., Mäkipää, R., Laiho, R., Minkkinen, K., Vasander, H. & Finer, L. (2006): Relationship between biomass and percentage cover in understorey vegetation of boreal coniferous forests. *Silva Fennica*, 40 (2): 231-245
- National Oceanic and Atmospheric Administration (2020): *NOAA Solar Calculator*. Available at: <https://www.esrl.noaa.gov/gmd/grad/solcalc/>
- Nave, L. E., Vance, E. D., Swanston, C. W. & Curtis, P. S. (2010): Harvest impacts on soil carbon storage in temperate forests. *Forest Ecology and Management*, 259 (5): 857-866
- NCASI (2004): Critical review of forest products decomposition in municipal solid waste landfills. *Technical Bulletin No. 872*. Research Triangle Park, N.C.: National Council for Air and Stream Improvement, Inc. 71 pp
- NEA (2024): Informative Inventory Report (IIR) 2024. Norway - Air Pollutant Emissions 1990-2023.: Norwegian Environment Agency
- Neste_Oil (2014): <http://www.nesteoil.com/default.asp?path=1,41,535,547,14077,5604> (Products and services/Lubricants and car chemicals/Basic concepts of lubricants).
- NFLI (2008): Landsskogtakseringens feltinstruks 2008, Håndbok fra Skog og landskap 05/2008: Norwegian Forest and Landscape Institute (Norsk institutt for skog og landskap)
- NIBIO. (Annually). *Kilden - Arealinformasjon*.
- Nielsen, O.-K., Lyck, E., Mikkelsen, M. H., Hoffmann, L., Gyldenkerne, S., Winther, M., Nielsen, M., Fauser, P., Thomsen, M., Plejdrup, M. S., et al. (2010): Denmark's National Inventory Report 2010. Emission Inventories 1990-2008 - Submitted under the United Nations Framework Convention on Climate Change and the Kyoto Protocol, NERI Technical Report

- No 784. Aarhus University, Denmark: National Environmental Research Institute of Denmark (DMU-Danmarks Miljøundersøgelser). 1178 pp
- Nilsen, L. S. (2004): Coastal heath vegetation in central Norway; recent past, present state and future possibilities. . Trondheim, Norway.: Norwegian University of Science and Technology. . 40 pp
- Nilsson, M., Sagerfors, J., Buffam, I., Laudon, H., Eriksson, T., Grelle, A., Klemetsson, L., Weslien, P. E. R. & Lindroth, A. (2008): Contemporary carbon accumulation in a boreal oligotrophic minerogenic mire – a significant sink after accounting for all C-fluxes. *Global Change Biology*, 14 (10): 2317-2332
- Norway, S. (2013): Survey of consumer expenditure, 2012. <https://www.ssb.no/en/inntekt-og-forbruk/statistikker/fbu>
- Norway, S. (2018): Energy use in the manufacturing sector. <https://www.ssb.no/en/energi-og-industri/statistikker/indenergi>
- Norwegian Climate and Pollution Agency (2011): CO₂-faktor for fossil del av avfallet som blir brent i avfallsforbrenningsanlegg i Norge (CO₂ emission factor for the fossil part of waste combusted in waste incineration plants in Norway), Note, Eilev Gjerald, 20.01.2011: Norwegian Climate and Pollution Agency (Klif-Klima- og forurensningsdirektoratet)
- Norwegian Environment Agency (2024): *Veiledning Rapportere kvotepliktige utslipp og tildelingsdata*. In Norwegian Environment Agency (ed.). www.miljodirektoratet.no: Norwegian Environment Agency,. Available at: <https://www.miljodirektoratet.no/ansvarsomrader/klima/for-naringsliv/rapportere-kvotepliktige-utslipp-og-tildelingsdata/>
- Norwegian Food Safety Authority (Annually): Mineralgjødselstatistikk: Norwegian Food Safety Authority (Mattilsynet)
- Norwegian Product Register (2007): *Produktdeklarerer - skjema og veiledning: Vedlegg med kodesystem UCN (Guidelines for declaration of chemical products: Appendix on UCN codes)*: Norwegian Environment Agency (Miljødirektoratet). Available at: <http://www.miljodirektoratet.no/no/Tjenester-og-verktoy/Skjema/Produktdeklarerer/> (accessed: 2007)
- Offshore Norge (2023): Anbefalte retningslinjer for utslippsrapportering. 101 pp
- OLF (1993): OLF Environmental Programme. Summary report Phase II. Stavanger: Norwegian Oil Industry Association (OLF-Oljeindustriens landsforening). 134 pp
- OLF (1994): Anbefalte retningslinjer for utslippsberegning. Identifisering, kvantifisering og rapportering av forbruks- og utslippsdata fra aktiviteter i norsk oljevirksomhet (Recommended guidelines for emission calculations. Identification, quantification and reporting of data on consumption and emissions from activities in the Norwegian oil and gas sector). Stavanger: Norwegian Oil Industry Association (OLF-Oljeindustriens landsforening)
- Ortiz, C. A., Liski, J., Gärdenäs, A. I., Lehtonen, A., Lundblad, M., Stendahl, J., Ågren, G. I. & Karlton, E. (2013): Soil organic carbon stock changes in Swedish forest soils—A comparison of uncertainties and their sources through a national inventory and two simulation models. *Ecological Modelling*, 251: 221-231
- Paustian, K., Six, J., Elliott, E. T. & Hunt, H. W. (2000): Management options for reducing CO₂ emissions from agricultural soils. *Biogeochemistry*, 48 (1): 147-163
- Peltoniemi, M., Mäkipää, R., Liski, J. & Tamminen, P. (2004): Changes in soil carbon with stand age – an evaluation of a modelling method with empirical data. *Global Change Biology*, 10 (12): 2078-2091
- Peltoniemi, M., Palosuo, T., Monni, S. & Mäkipää, R. (2006): Factors affecting the uncertainty of sinks and stocks of carbon in Finnish forests soils and vegetation. *Forest Ecology and Management*, 232 (1–3): 75-85

- Petersson, H. & Ståhl, G. (2006): Functions for below-ground biomass of *Pinus sylvestris*, *Picea abies*, *Betula pendula* and *Betula pubescens* in Sweden. *Scandinavian Journal of Forest Research*, 21 (S7): 84-93
- Philippe, F. X. & Nicks, B. (2015): Review on greenhouse gas emissions from pig houses: Production of carbon dioxide, methane and nitrous oxide by animals and manure. . *Agriculture, Ecosystems & Environment*,. 10-25. pp
- Poeplau, C. (2016): Estimating root: shoot ratio and soil carbon inputs in temperate grasslands with the RothC model. *Plant and soil* (407 (1-2)): 293-305
- R Core Team (2015): *R: A language and environment for statistical computing*. Vienna, Austria: R Foundation for Statistical Computing
- Rantakari, M., Lehtonen, A., Linkosalo, T., Tuomi, M., Tamminen, P., Heikkinen, J., Liski, J., Mäkipää, R., Ilvesniemi, H. & Sievänen, R. (2012): The Yasso07 soil carbon model – Testing against repeated soil carbon inventory. *Forest Ecology and Management*, 286: 137-147
- Rasmussen, K., Sippola, J., Urvas, L., Låg, J., Troedsson, T. & Wiberg, M. (1991). *Soil Map of Denmark, Finland, Norway and Sweden, Scale 1:2 000 000*. . Oslo.
- Reimers, E. (1986): Management of wild reindeer in Norway. *Rangifer* 241-246.
- Rivedal, S., Prestvik, A., Aune, A., Hansen, S. & Morken, J. (2019a): Tiltak for å redusere ammoniakkutslepp frå jordbruket (Measures to reduce ammonia emissions from agriculture): NIBIO Report
- Rivedal, S., Strand, E., Møllerhagen, P. J., Pia Heltoft, P. & Guren, G. (2019b). *Praksis for nedmolding av gjødsel til korn, potet og grønnsaker i Norge (Practice for molding down fertiliser to cereals, potatoes and vegetables in Norway)*: NIBIO (Norsk institutt for Bioøkonomi). Unpublished manuscript.
- Rivedal, S. B., Marianne; Kvifte, Åsmund Mikalsen. (2022): Husdyrgjødseltiltak og klimagassutslepp. Vurdering av årlege aktivitetsdata og ein del utsleppsfaktorar, 20: NIBIO
- Roulet, N. T., Lafleur, P. M., Richard, P. J. H., Moore, T. R., Humphreys, E. R. & Bubier, J. (2007): Contemporary carbon balance and late Holocene carbon accumulation in a northern peatland. *Global Change Biology*, 13 (2): 397-411
- Rypdal, K. (1999): Evaluation of uncertainty in the Norwegian emission inventory, SFT-report 99:01. TA-1609/99: Norwegian Pollution Control Authority (SFT-Statens forurensningstilsyn), Statistics Norway (SSB-Statistisk sentralbyrå). 58 pp
- Rypdal, K. & Zhang, L.-C. (2000): Uncertainties in the Norwegian greenhouse Gas Emission Inventory, Reports 2000/13: Statistics Norway (SSB-Statistisk sentralbyrå). 44 pp
- Rypdal, K. & Flugsrud, K. (2001): Sensitivity analysis as a tool for systematic reductions in greenhouse gas inventory uncertainties. *Environmental Science & Policy*, 4 (2–3): 117-135
- Rypdal, K. & Zhang, L.-C. (2001): Uncertainties in Emissions of Long-Range Air Pollutants, Reports 2001/37: Statistics Norway (SSB-Statistisk sentralbyrå). 49 pp
- Rypdal, K., Bloch, V. V. H., Flugsrud, K., Gobakken, T., Hoem, B., Tomter, S. & Aalde, H. (2005): Emissions and removals of greenhouse gases from land use, land-use change and forestry in Norway. *Commissioned report by Norwegian Pollution Control Authority (SFT-Statens Forurensningstilsyn) and Ministry of Agriculture and Food (Landbruks- og matdepartementet)*, NIJOS rapport 11/05: Center for International Climate and Environmental Research (CICERO-Senter for klimaforskning, Norwegian Institute of Land Inventory (NIJOS-Norsk institutt for jord- og skogkartlegging), Statistics Norway (SSB-Statistisk sentralbyrå). 105 pp
- Rösemann, C., Haenel, H.-D., Dämmgen, U., Freibauer, A., Döring, U., Wulf, S., Eurich-Menden, B., Döhler, H., Schreiner, C. & Osterburg, B. (2017): Calculations of gaseous and particulate emissions from German agriculture 1990 – 2015 : Report on methods and data (RMD) Submission 2017. , Thünen Rep 46

- Sanderman, J. & Baldock, J. A. (2010): Accounting for soil carbon sequestration in national inventories: a soil scientist's perspective. *Environmental Research Letters*, 5 (3): 1-6
- Sefick, S. A. (2016): ssefick/StreamMetabolism: StreamMetabolism Update and DOI release (Version v1.1.2).
- SFT (1990): Klimagassregnskap for Norge. Beskrivelse av utslippsmengder, drivhusstyrke og utslippsfaktorer. Bidrag til den interdepartementale klimautredningen (Greenhouse gas inventory for Norway. Emission figures, global warming potentials and emission factors. Contribution to the interministerial climate report). Oslo: Norwegian Pollution Control Authority (SFT-Statens forurensningstilsyn)
- SFT (1996): Utslipp ved håndtering av kommunalt avfall (Emissions from municipal waste management). *Authors: Sandgren J., Heie, A. and Sverud, T.*, SFT-report 96:16. TA-1366/96. Oslo: Norwegian Pollution Control Authority (SFT-Statens forurensningstilsyn)
- SFT (1999a): Beregningsmodell for utslipp av metangass fra norske deponier (Model for estimation of CH₄ from landfills in Norway). *Commissioned report by Norwegian Pollution Control Authority (SFT-Statens forurensningstilsyn). Authors: Jensen, J. E. F., Williksen, T. and Bartnes, J., Norconsult AS*, SFT-report 99:16. TA-1693/99. Oslo. 70 pp
- SFT (1999b): Calculations of emissions of HFCs and PFCs in Norway. Tier 2 method. *Authors: Haukås, H. T. and Holtskog, S. (Statistics Norway), Pettersen, M. V. (Norwegian Pollution Control Authority)*, SFT-report 99:03. Oslo: Norwegian Pollution Control Authority (SFT-Statens forurensningstilsyn)
- SFT (1999c): Materialstrømsanalyse av SF₆. Beregning av potensielt og faktisk utslipp over tid (Material flow analysis of SF₆. Calculation of potential and actual emissions over time), SFT-report 99:14. Oslo: Norwegian Pollution Control Authority (SFT-Statens forurensningstilsyn)
- SFT (1999d): Utslipp fra veitrafikk i Norge. Dokumentasjon av beregningsmetode, data og resultater (Emissions from road traffic in Norway - Method for estimation, input data and emission estimates). *Authors: Bang, J., Flugsrud, K., Haakonsen, G., Holtskog, S., Larssen, S., Maldum, K.O., Rypdal, K. and A. Skedsmo*, SFT-report 99:04 (Updated SFT report 93:12). TA-1622/99. Oslo: Norwegian Pollution Control Authority (SFT-Statens forurensningstilsyn)
- SFT (2005a): Kartlegging av omsetning av enkelte miljøskadelige stoffer i legemidler og kosmetikk (Survey of turnover of some environmentally hazardous substances in pharmaceuticals and cosmetics), TA-2128/05. Oslo: Norwegian Pollution Control Authority (SFT-Statens forurensningstilsyn)
- SFT (2005b): Methane emissions from solid waste disposal sites, TA-2079/05. Oslo: Norwegian Pollution Control Authority (SFT-Statens forurensningstilsyn)
- Shaw, C. H., Bhatti, J. S. & Sabourin, K. J. (2005): An ecosystem carbon database for Canadian forests. . Edmonton, Alberta. : Natural Resources Canada, Canadian Forest Service, Northern Forestry Centre. 113 p. pp
- SINTEF (1995): Round robin test of a wood stove-emissions. *Author: Karlsvik, E.*, SINTEF Report STF12 A95012. Trondheim: SINTEF, Thermal Energy and Fluid Machinery. 62 pp
- SINTEF (1998a): Omregningsfaktorer for CO₂-utslipp fra metallurgisk industri og sementproduksjon. Delprosjekt 3. Produksjon av ferromangan, silikomangan og ferrokrom i Norge (Conversion factors for CO₂ emissions from metal manufacturing and cement production. Part 3. Production of ferro manganese, silicon manganese and ferro chromium in Norway). *Authors: Monsen, B. and Olsen, S.E.*, SINTEF Report STF24 A98548. Trondheim: SINTEF
- SINTEF (1998b): Omregningsfaktorer for CO₂-utslipp fra metallurgisk industri og sementproduksjon. Delprosjekt 4. Utslipp av CO₂ ved produksjon av silisiumkarbid og kalsiumkarbid (Conversion factors for CO₂ emissions from metal manufacturing and cement production. Part 4. CO₂ emissions from production of silicon carbide and calcium

- carbide). *Authors: Raaness, O. and Olsen, S.*, SINTEF Report STF24 A98549. Trondheim: SINTEF
- SINTEF (1998c): Omregningsfaktorer for CO₂-utslipp fra metallurgisk industri og sementproduksjon. Delprosjekt 5. Produksjon av magnesium (Conversion factors for CO₂ emissions from metal manufacturing and cement production. Part 5. Magnesium production). *Authors: Olsen, K., Støre, T. and Tunold, R.*, SINTEF Report STF24 A98574. Trondheim: SINTEF
- SINTEF (2004): Utslipp av klimagasser fra Si-prosessen hos Elkem Thamshavn og Holla Metall med fokus på NO_x reduksjon (Emissions of GHG from Si-process at Elkem Thamshavn and Holla Metall with focus on reduction of emissions of NO_x), SINTEF Report STF24 F03555: SINTEF
- Skullerud, H. (2014): Method for estimation of emissions from air traffic (in Norwegian). Unpublished document Statistics Norway
- Skårman, T., Danielsson, H., Henningsson, E. & Östmann, M. (2006): Revised Method for Estimating Emissions of NMVOC from Solvent and Other Product Use in Sweden. *Commissioned report by the Swedish Environmental Protection Agency*, SMED Report No 75 2006: SMED Report No 75 2006
- Skårman, T., Danielsson, H., Jerksjö, M. & Ifverberg, M. (2016): Swedish method for estimating emissions from solvent use : Further development of the calculation model. *SMED Rapport*, 16538102 (ISSN). 62 pp
- Smith, A., Granhus, A., Astrup, R. (2016): Functions for estimating belowground and whole tree biomass of birch in Norway. *Scandinavian Journal of Forest Research*, 31 (6): 568-582
- Smith, A., Granhus, A., Astrup, R., Bollandås, O.M., Petersson, H., (2014): Functions for estimating aboveground biomass of birch in Norway. *Scandinavian Journal of Forest Research*, 29 (6): 565-578.
- Statistics Norway (2001): Natural resources and the environment 2001, Statistical Analyses 47: Statistics Norway (SSB-Statistisk sentralbyrå). 293 pp
- Statistics Norway (2002): Sample survey of agriculture and forestry 2001: Statistics Norway (SSB-Statistisk sentralbyrå)
- Statistics Norway (2004): Sample survey of agriculture and forestry 2003: Statistics Norway (SSB-Statistisk sentralbyrå)
- Statistics Norway (2007): Sample survey of agriculture and forestry 2006: Statistics Norway (SSB-Statistisk sentralbyrå)
- Statistics Norway (2008): Standard Industrial Classification, NOS report D 383: Statistics Norway. http://www.ssb.no/a/publikasjoner/pdf/nos_d383/nos_d383.pdf (English version: <http://www.ssb.no/en/klasse/#!/klassifikasjoner/6>)
- Statistics Norway (2010): The Norwegian Emission Inventory 2010. Documentation of methodologies for estimating emissions of greenhouse gases and long-range transboundary air pollutants. In Sandmo, T. (ed.), Documents 2010/21: Statistics Norway (SSB-Statistisk sentralbyrå). 236 pp
- Statistics Norway (2014a): The Norwegian Emission Inventory 2014. Documentation of methodologies for estimating emissions of greenhouse gases and long-range transboundary air pollutants. In Sandmo, T. (ed.), Documents 2014/35: Statistics Norway (SSB-Statistisk sentralbyrå). 278 pp
- Statistics Norway. (2014b). Standard Industrial Classification (SIC2007). In *Statistics Norway (SSB-Statistisk sentralbyrå)*. Available at: <http://stabas.ssb.no/ItemsFrames.asp?ID=8118001&Language=en&VersionLevel=ClassVersion>.
- Statistics Norway & SOE Norway (2014): Estimations made in Statistics Norway's hazardous waste statistics, <http://www.ssb.no/en/natur-og-miljo/statistikker/spesavf>, and published on the Internet site of State of the Environment Norway,

- <http://www.miljostatus.no/Tema/Avfall/Farlig-avfall/Spillolje/#D> (click 'Les mer om tallene' below the figure).
- Statistics Norway. (2020). *Personal communication with Trond Amund Steinset*
- Statistics Norway (2021): *Census of Agriculture. 2020*. Available at: <https://www.ssb.no/en/jord-skog-jakt-og-fiskeri/landbrukstelling/statistikk/landbruksteljing>
- Statistics Norway. (2022). *Personal communication with Berit Bjørlo*: Statistics Norway.
- Statistics Norway (2023): *Silviculture*. ssb.no. Available at: <https://www.ssb.no/en/statbank/table/03522/tableViewLayout1/> (accessed: 01. February)
- Statistics Norway (Annually-a): *0694 and 03795: Commercial roundwood removals by species of tree*. ssb.no. Available at: <https://www.ssb.no/en/statbank/table/03795/> (accessed: 01. February)
- Statistics Norway (Annually-b): *0694 and 03795: Commercial roundwood removals by species of tree*. ssb.no. Available at: <https://www.ssb.no/en/statbank/table/03795/> (accessed: 01/02)
- Statistics Norway (Annually-c): *05543: Fertilising of forest. Area and expenditure (C)* Statistics Norway (SSB-Statistisk sentralbyrå). Available at: <https://www.ssb.no/statbank/table/05543/tableViewLayout1/>
- Statistics Norway (Annually-d): *11181: Fuelwood removals (roundwood) by woodgroup*. ssb.no. Available at: <https://www.ssb.no/en/statbank/table/11181> (accessed: 01. February)
- Statistics Norway (Annually-e): *Forest properties*. ssb.no. Available at: <https://www.ssb.no/en/jord-skog-jakt-og-fiskeri/skogbruk/statistikk/skogeiendommer> (accessed: 01. February)
- Statistics Norway (Annually-f): *Production and consumption of energy, energy balance*: Statistics Norway (SSB-Statistisk sentralbyrå). Available at: <https://www.ssb.no/en/energi-og-industri/statistikker/energibalanse/aar-endelige>
- Statistics Norway (Annually-g): *Sales of petroleum products*: Statistics Norway (SSB-Statistisk sentralbyrå). Available at: <http://www.ssb.no/en/energi-og-industri/statistikker/petroleumsalg/aar?fane=arkiv>
- Statistics Norway (Annually-h): *Waste accounts*. Statistics Norway (SSB-Statistisk sentralbyrå). Available at: <http://www.ssb.no/en/natur-og-miljo/statistikker/avfregno/aar/2015-06-16?fane=om#content>
- Statistics Norway (Annually-a): *Energy use in the manufacturing sector*. In Statistics Norway (ed.). Available at: <https://www.ssb.no/en/energi-og-industri/energi/statistikk/energibruk-i-industrien> (accessed: 27 February)
- Statistics Norway (Annually-b): *Road goods transport*: Statistics Norway (SSB-Statistisk sentralbyrå). Available at: http://www.ssb.no/english/subjects/10/12/20/lbunasj_en/
- Storlien, T. M. & Harstad, O. M. (2015): Enteric methane emissions from the cattle population in Norway. Method description. (Included in NIR 2016, Annex IX): Norwegian University of Life Sciences. Department of Animal and Aquacultural Sciences
- Strand, L. T., Callesen, I., Dalgaard, L. & Wit, H. A. d. (2016): Carbon and nitrogen stocks in Norwegian forest soils — the importance of soil formation, climate, and vegetation type for organic matter accumulation. *Canadian Journal of Forest Research*, 46 (12): 1459-1473
- Sundstøl, F. & Mroz, Z. (1988): Utskillelse av nitrogen og fosfor i gjødsel og urin fra husdyr i Norge (Nitrogen and phosphorus in manure and urine from domestic animals in Norway), Report no. 4 from the project "Agricultural policy and environmental management". Ås: Agricultural University of Norway (Norges landbrukshøgskole)
- Svensson, A., Dalen, L. S. & (Eds.) (2025): Bærekraftig skogbruk i Norge: Norsk institutt for bioøkonomi
- Svihus, B. (2015): Production of methane from enteric fermentation in poultry in Norway: Norwegian University of Life sciences. 2 pp
- Swedish Environmental Protection Agency (2011): National inventory report 2011 Sweden - Annexes. Stockholm, Sweden: Swedish Environmental Protection Agency (Naturvårdsverket)

- Søgaard, G., Økseter, R. and Borgen, S.K. (2017): Klimagassutslipp fra torvproduksjon i Norge. Metode, datagrunnlag og utslippfaktorer benyttet i klimagassregnskapet under FNs klimakonvensjon (UNFCCC) *NIBIO rapport 3(78)*. Ås, Norway: NIBIO
- Thornthwaite, C. W. (1948): An Approach toward a Rational Classification of Climate. . *Geographical Review*, 38(1), 55.
- Thovsen, K. (2017). *Documentation of calculation method for emissions and energy use in aviation (in Norwegian)*. : Unpublished document Statistics Norway. Unpublished manuscript.
- Tierney, G. L. & Fahey, T. J. (2002): Fine root turnover in a northern hardwood forest: a direct comparison of the radiocarbon and minirhizotron methods. *Canadian Journal of Forest Research*, 32 (9): 1692-1697
- TINE BA (Annually): Nøkkeltall fra Kukontrollen: TINE
- Tokheim, L. A. (2006): Usikkerhet i utslippsfaktorer ifm. rapportering av CO₂-utslipp, Report 9A-R06-002: Norcem Brevik
- Tolonen, K. & Turunen, J. (1996): Accumulation rates of carbon in mires in Finland and implications for climate change. *The Holocene*, 6 (2): 171-178
- Tornsjø, B. (2001): Utslipp til luft fra innenriks sjøfart, fiske og annen sjøtrafikk mellom norske havner. (Emissions to Air from Fishing Fleet and Sea Traffic between Norwegian Harbours), Reports 2001/6: Statistics Norway (SSB-Statistisk sentralbyrå). 36 pp
- Tuomi, M., Vanhala, P., Karhu, K., Fritze, H. & Liski, J. (2008): Heterotrophic soil respiration—Comparison of different models describing its temperature dependence. *Ecological Modelling*, 211 (1–2): 182-190
- Tuomi, M., Thum, T., Järvinen, H., Fronzek, S., Berg, B., Harmon, M., Trofymow, J. A., Sevanto, S. & Liski, J. (2009): Leaf litter decomposition—Estimates of global variability based on Yasso07 model. *Ecological Modelling*, 220 (23): 3362-3371
- Tuomi, M., Laiho, R., Repo, A. & Liski, J. (2011a): Wood decomposition model for boreal forests. *Ecological Modelling*, 222 (3): 709-718
- Tuomi, M., Rasinmäki, J., Repo, A., Vanhala, P. & Liski, J. (2011b): Soil carbon model Yasso07 graphical user interface. *Environmental Modelling & Software*, 26 (11): 1358-1362
- Turunen, J., Tomppo, E., Tolonen, K. & Reinikainen, A. (2002): Estimating carbon accumulation rates of undrained mires in Finland – application to boreal and subarctic regions. *The Holocene*, 12 (1): 69-80
- Tveito, O. E. & Førland, E. J. (1999): Mapping temperatures in Norway applying terrain information, geostatistics and GIS. . *Norsk Geografisk Tidsskrift - Norwegian Journal of Geography*. 202-212 pp
- Tveraa, T., Fauchald, P., Gilles Yoccoz, N., Anker Ims, R., Aanes, R. & Arild Høgda, K. (2007): What regulate and limit reindeer populations in Norway?. *Oikos* 116(4): 706-715
- UNECE (2014): Guidance document on preventing and abating ammonia emissions from agricultural sources.
- Vibe, N. (1993): Norske reisevaner. Dokumentasjonsrapport for den landsomfattende reisevaneundersøkelsen 1991-92, TØI rapport 183/1993. Oslo: Institute of Transport Economics (TØI-Transportøkonomisk institutt). 67 pp
- Viskari, T., Pusa, J., Fer, I., Repo, A., Vira, J. & Liski, J. (2022): Calibrating the soil organic carbon model Yasso20 with multiple datasets. *Geosci. Model Dev.*, 15 (4): 1735-1752
- Volden, H. (2022): Excretion of nitrogen and organic matter in cattle manure – an evaluation of Nex and VS models from Norwegian dairy cows and growing cattle M-2205: The Norwegian University of Life Sciences (NMBU)
- Volden, H., Niu, P. & Prestløkken, E. (2023): Models to predict enteric methane emission from dairy cows to be used in the Norwegian inventory calculations. Norwegian University of Life Sciences: Faculty of biosciences

- Webb, J. & Misselbrook, T. H. (2004): A mass-flow model of ammonia emissions from UK livestock production. *Atmospheric Environment*, 38 (14): 2163-2176
- Weholt, Ø., Aakre, S. & Dehlin, F. (2010): Utvikling av en modell for å beregne årlig generert mengde spillolje (developing a model for estimating annual generated amounts of waste oil). TA - 2739/2010 (in Norwegian), Norwegian Climate and Pollution Agency (current Norwegian Environment Agency).
- Wetlesen, M. S., Åby, B. A., Vangen, O. & Aass, L. (2018): Suckler cow efficiency – breed by environment interactions in commercial herds under various natural production conditions. *Acta Agriculturae Scandinavica, Section A — Animal Science*, 68 (4): 161-173
- Winther, M. & Nielsen, O.-K. (2006): Fuel use and emissions from non-road machinery in Denmark from 1985-2004 - and projections from 2005-2030, Environmental project no. 1092 2006: National environmental research institute, Danish ministry of the environment
- WRB (2015): World Reference Base for Soil Resources 2014, update 2015 International soil classification system for naming soils and creating legends for soil maps. *World Soil Resources Reports*. Rome
- Yanjiang Cai, Scott X. Chang & Cheng, Y. (2017): Greenhouse gas emissions from excreta patches of grazing animals and their mitigation strategies. *Earth-Science Reviews*, 171 (August 2017): 44-57
- Yara Norge AS. (2013). *Personal communication with Ole Stampe*.
- Yuan, Z. Y. C., H. Y. H. (2010): Fine Root Biomass, Production, Turnover Rates, and Nutrient Contents in Boreal Forest Ecosystems in Relation to Species, Climate, Fertility, and Stand Age: Literature Review and Meta-Analyses. *Critical Reviews in Plant Sciences*, 29 (4): 204-221
- Øyvind Skreiberg, M. S., Franziska Kausch (2023): Revised emission factors for wood stoves: SINTEF
- Ågren, G. I., Hyvönen, R. & Nilsson, T. (2008): Are Swedish forest soils sinks or sources for CO₂—model analyses based on forest inventory data. *Biogeochemistry*, 89 (1): 139-149

Tel.: +47 73 58 05 00
post@miljodir.no
www.miljodirektoratet.no
Postboks 5672 Sluppen,
7485 Trondheim

Visiting address Trondheim:
Brattørkaia 15, 7010 Trondheim

Visiting address Oslo:
Grensesvingen 7, 0661 Oslo



The Norwegian Environment Agency is a government agency under the Ministry of Climate and Environment.

We work for a clean and diverse environment. Our primary tasks are to reduce greenhouse gas emissions, manage Norwegian nature and prevent pollution.